


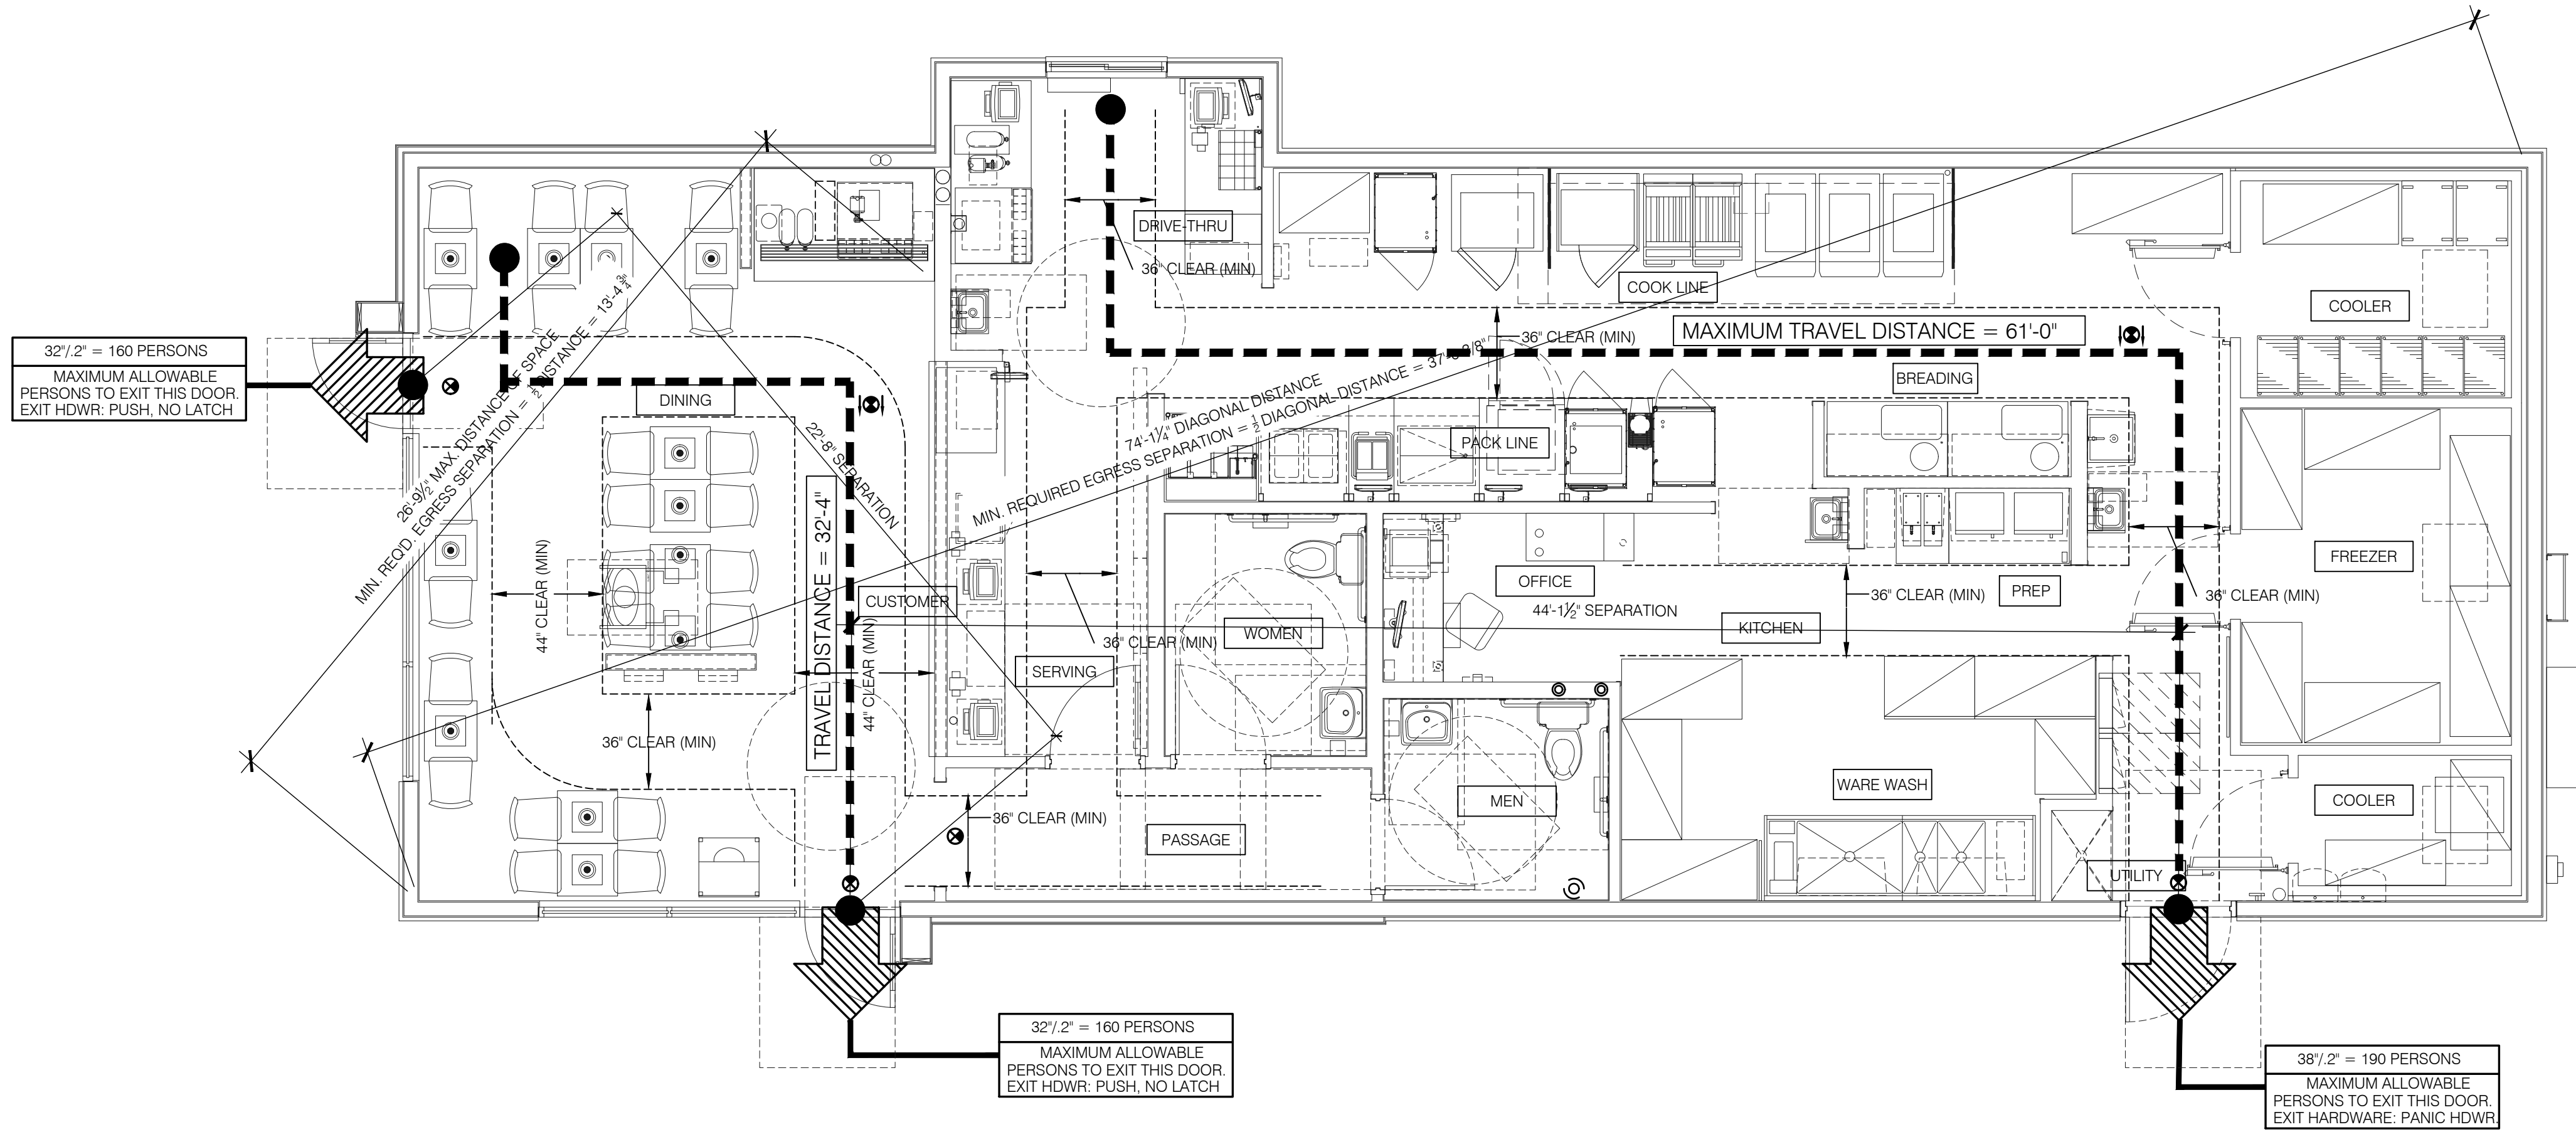

32' / 2' = 160 PERSONS
MAXIMUM ALLOWABLE
PERSONS TO EXIT THIS DOOR.
EXIT HDWR: PUSH, NO LATCH

32' / 2' = 160 PERSONS
MAXIMUM ALLOWABLE
PERSONS TO EXIT THIS DOOR.
EXIT HDWR: PUSH, NO LATCH

38' / 2' = 190 PERSONS
MAXIMUM ALLOWABLE
PERSONS TO EXIT THIS DOOR.
EXIT HARDWARE: PANIC HDWR

LIFE SAFETY PLAN 1/4"=1'-0"

FIRE PROTECTION LEGEND:

EMERGENCY EXIT SIGN

NOTES

1. REFERENCE REFLECTED CEILING PLAN & ELECTRICAL DRAWINGS FOR ADDITIONAL LIFE SAFETY REQUIREMENTS.


2. SEE A1.0 GENERAL NOTE 'A' FOR FIRE EXTINGUISHER REQUIREMENTS.

3. NO FIRE RATED WALLS ARE REQUIRED FOR TYPE VB BUILDINGS.

4. SEE SHEET A1.1 FOR DOOR HARDWARE REQUIREMENTS.

NOT USED C

OCCUPANT LEGEND		
DINING TABLES & CHAIRS 24 SEATS = 24 OCCUPANTS		
EGRESS ADA ACCESSIBILITY / EGRESS SPACE 162 SF NET EGRESS SPACE = NA		
QUEUING CUSTOMER STANDING SPACE 67 SF NET / 5 = 14 OCCUPANTS		
TOILET ROOMS CUSTOMER / EMPLOYEE SPACE 173 SF ACCESSORY SPACE = NA		
KITCHEN EMPLOYEE SPACE 845 SF NET / 200 = 5 OCCUPANTS		
COOLER / FREEZER EQUIPMENT 201 SF NET / 300 = 1 OCCUPANT		
TOTAL OCCUPANT COUNT		44

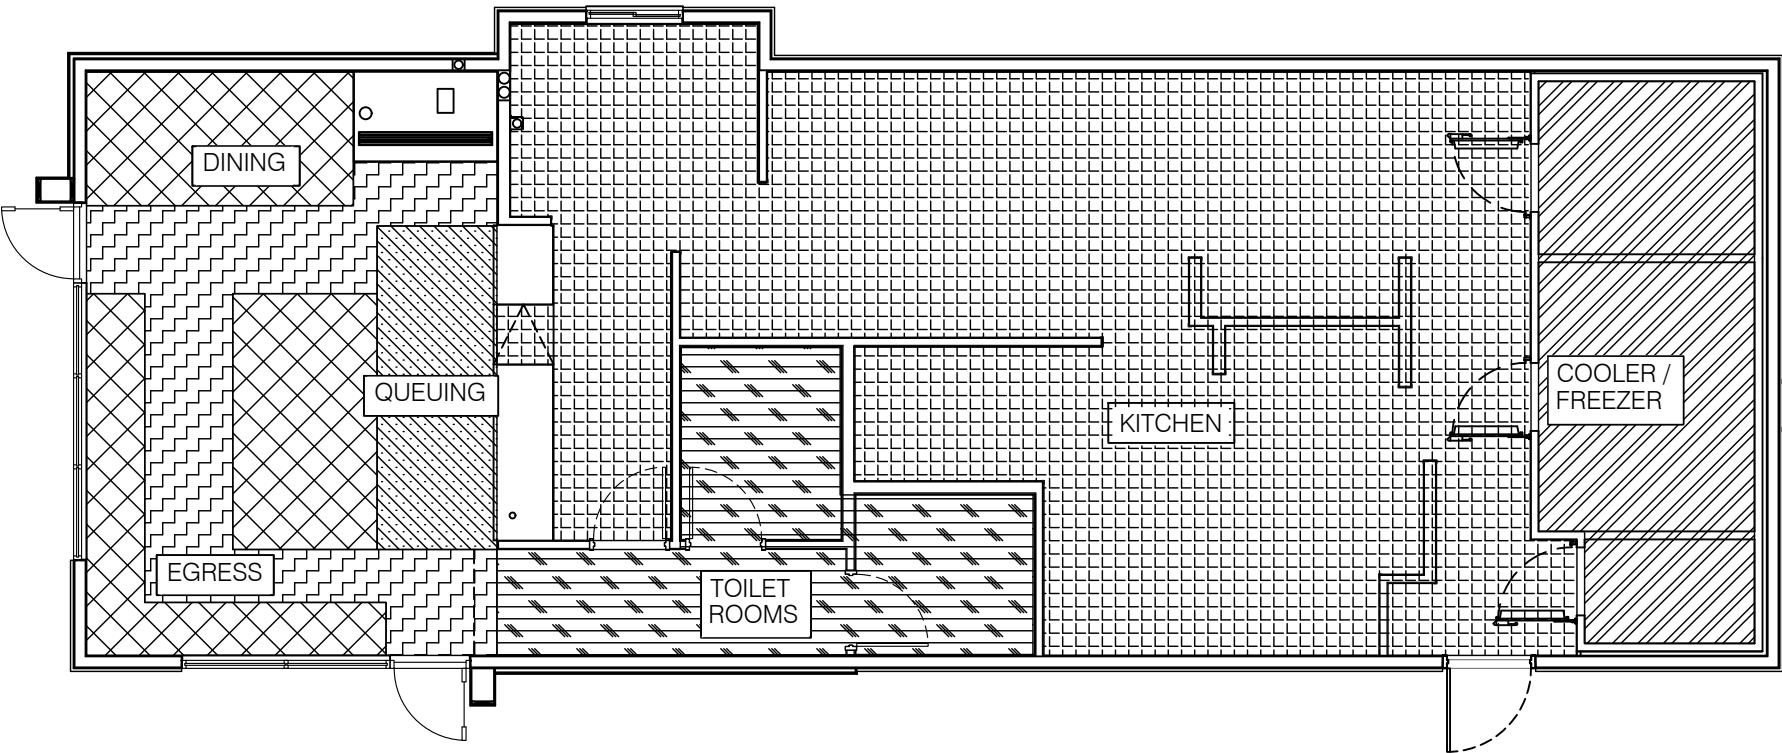

OCCUPANT LOAD KEY PLAN B

JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HIDDLESTON ROAD, SUITE 1000
PEACHTREE CITY, GEORGIA 30269
770-639-9545
JEFFERSONARCHITECTS.COM



PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #:	25-4358
BUILDING TYPE:	DT1800 RED
PLAN VERSION:	1.2
SITE NUMBER:	N/A
ENTITY NUMBER:	N/A
STORE NUMBER:	E320147

KFC
1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028



DT1800 RED

LIFE SAFETY
PLAN

A0.1

PLOT DATE: 19.11.2025

PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #:	25-4358
BUILDING TYPE:	DT1800 RED
PLAN VERSION:	1.2
SITE NUMBER:	N/A
ENTITY NUMBER:	N/A
STORE NUMBER:	E320147


KFC

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028DT1800 RED
FLOOR PLAN
DIMENSIONS
&
WALL TYPES

A1.0

PLOT DATE: 19.11.2025

INTERIOR DIMENSIONS ARE
FROM INSIDE FACE OF
CONCRETE CURB TO FACE OF
STUD AND FROM FACE OF
STUD TO FACE OF STUD.

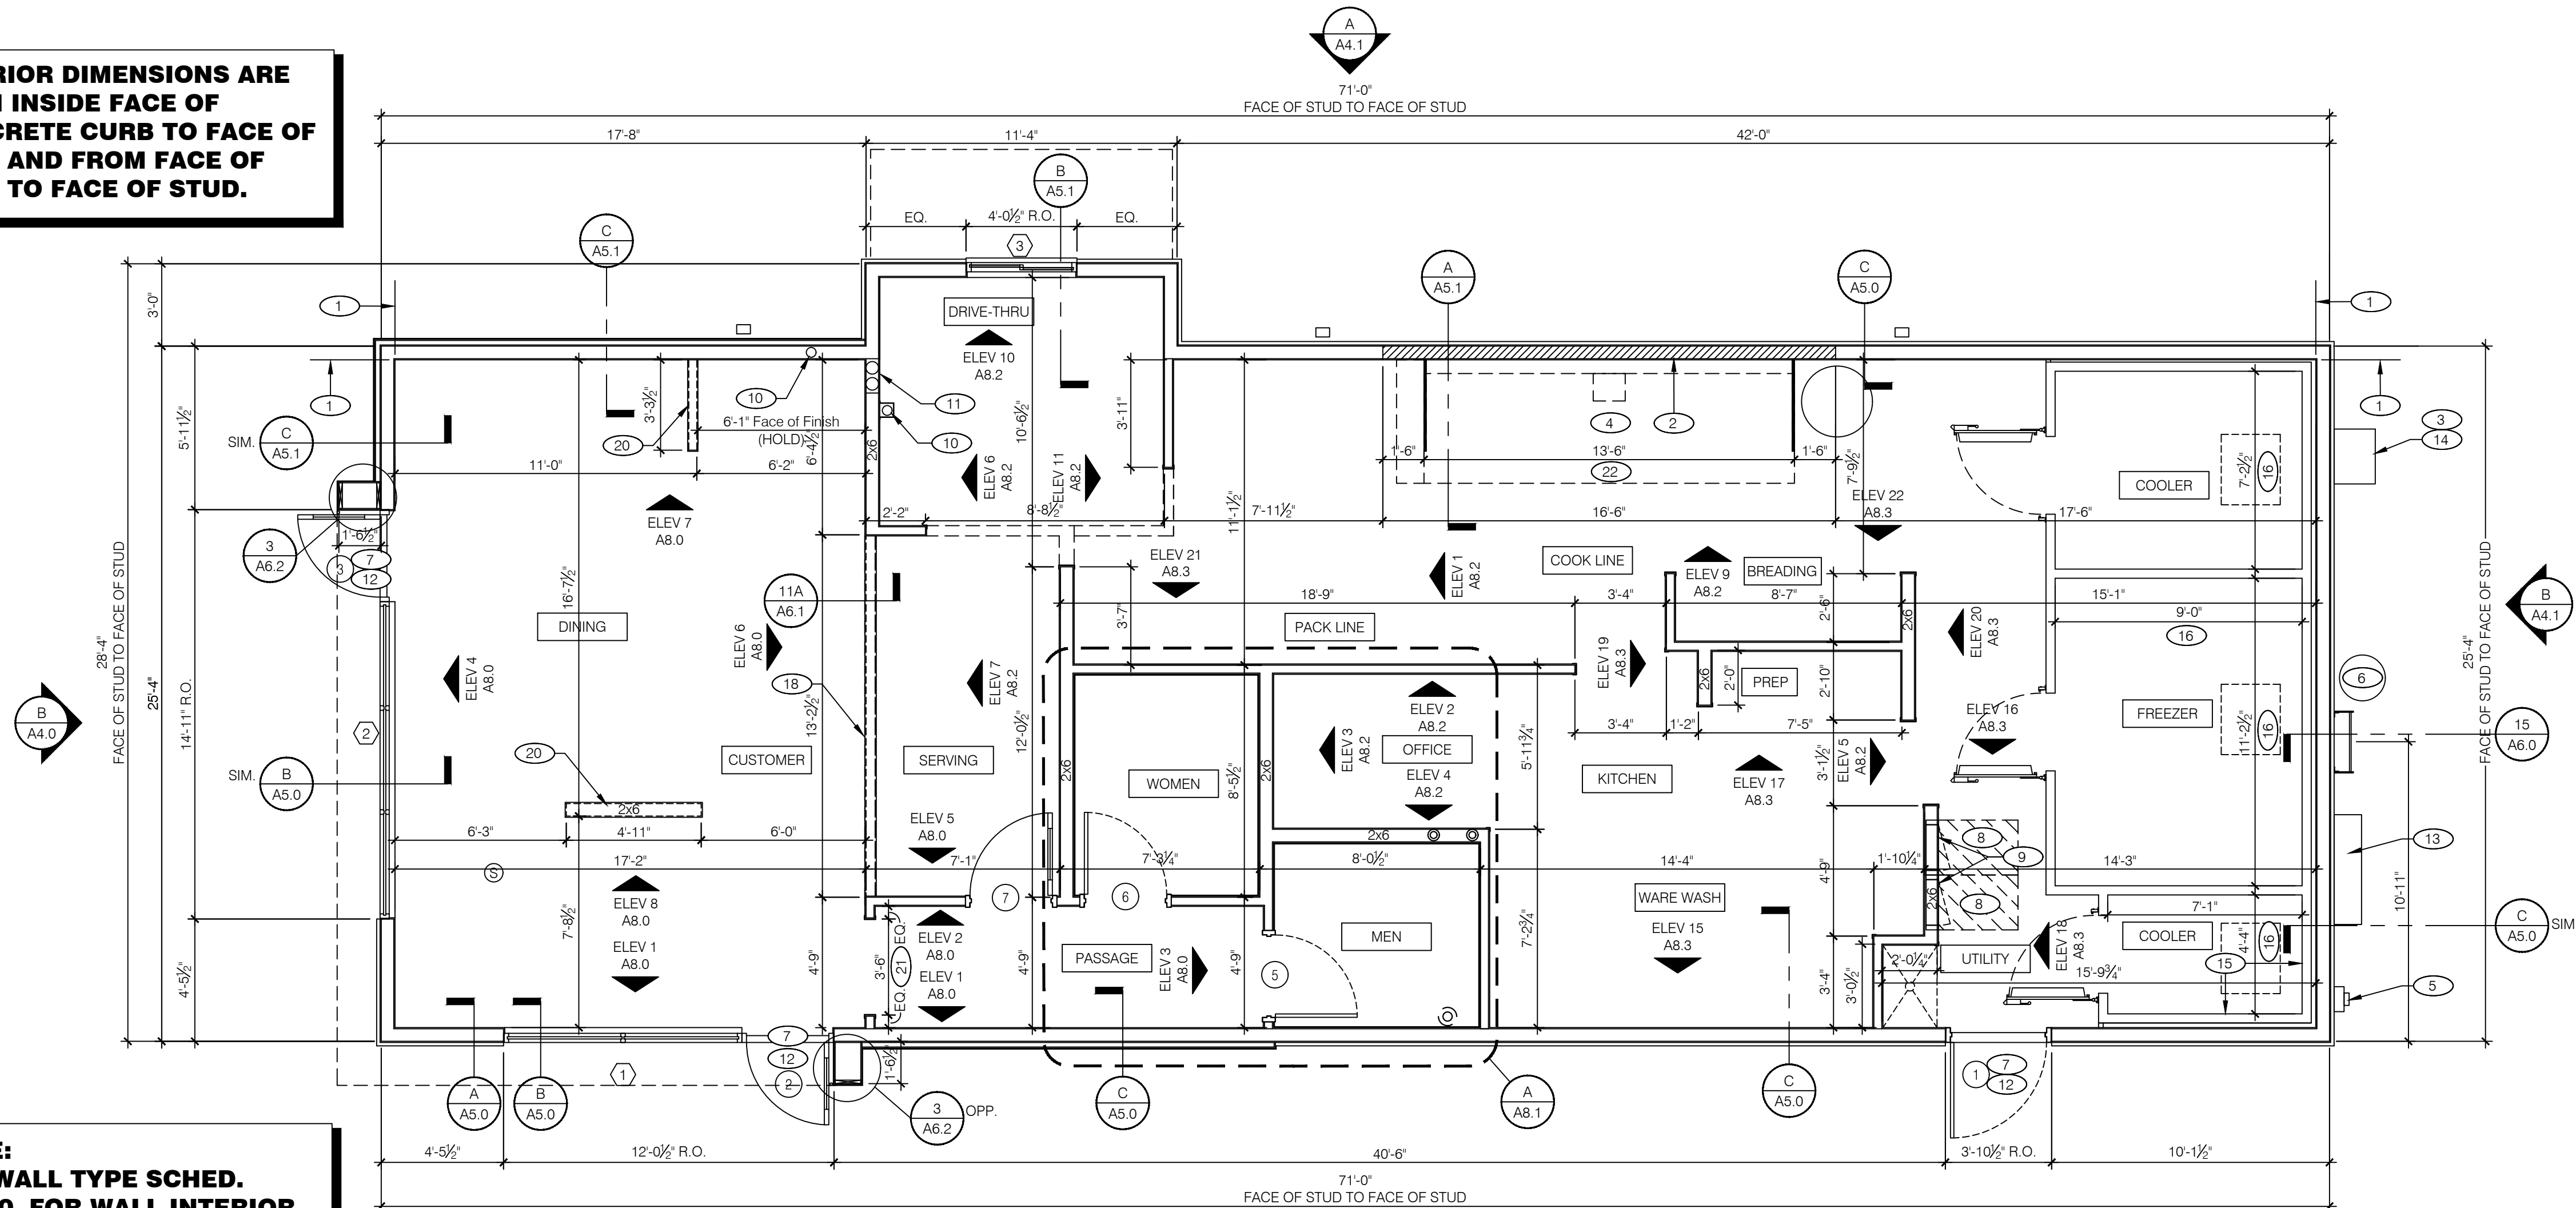

NOTE:
SEE WALL TYPE SCHED.
E/A1.0. FOR WALL INTERIOR
FINISH TYPES. COORDINATE
WALL LOCATIONS BETWEEN
PLAN & SCHEDULES.

FLOOR PLAN 1/4"=1'-0"

A

W-1 INTERIOR WALL:
2x4 (2x6 WHERE NOTED) WOOD STUDS AT 16" O.C., SECURED TO SLAB.
1/2" CEMENT BOARD TO 6" A.F.F., BOTH SIDES.
1/2" GYPSUM BOARD FROM TOP OF CEMENT BOARD TO 2" ABOVE CEILING (DINING ROOM SIDE).
1/2" PLYWOOD FROM TOP OF CEMENT BOARD TO 2" ABOVE CEILING (KITCHEN SIDE).
SEE SHEETS A7.3, A8.0, A8.1, A8.2, A8.3 (INTERIOR FINISHES).
PRESSURE TREATED SILL PLATES AND FRAMING FOR ALL KITCHEN AND RESTROOM WALLS.

W-2 RESTROOM WALL:
2x4 (2x6 WHERE NOTED) WOOD STUDS AT 16" O.C., SECURED TO SLAB.
3-1/2" UN-FACED SOUND BATT INSULATION, FULL HEIGHT of FINISHED WALL.
1/2" CEMENT BOARD FULL HEIGHT BEHIND WALL TILE AREA; 1/2" GYPSUM BOARD AT NON-TILED WALL AREAS (RESTROOM SIDE).
1/2" CEMENT BOARD TO 6" A.F.F. (KITCHEN / DINING ROOM SIDE).
1/2" GYPSUM BOARD FROM TOP OF CEMENT BOARD TO 2" ABOVE CEILING (DINING ROOM SIDE).
1/2" PLYWOOD FROM TOP OF CEMENT BOARD TO 2" ABOVE CEILING (KITCHEN SIDE).
SEE SHEETS A7.3, A8.0, A8.1, A8.2, A8.3 (INTERIOR FINISHES).
PRESSURE TREATED SILL PLATES AND FRAMING FOR ALL KITCHEN AND RESTROOM WALLS.

W-3 ELECTRICAL PANEL WALL:
2x6 WOOD STUDS AT 16" O.C., SECURED TO 6" HIGH x 6" WIDE CONCRETE CURB.
1/2" PLYWOOD FROM TOP OF CURB TO 2" ABOVE CEILING, ONE SIDE.
SEE SHEETS A7.3, A8.0, A8.1, A8.2, A8.3 (INTERIOR FINISHES).

W-4 INTERIOR SHEAR WALL:
REFER TO STRUCTURAL DRAWINGS

W-5 HOOD WALL:
AS APPLICABLE TO EXTERIOR WALLS, SEE WALL SECTIONS, W/ 20 GAGE S.S. PANEL OVER CEMENT BOARD,
OVER 5 3/8" METAL STUDS BEHIND HOOD AND EXTENDED 18" BEYOND HOOD EACH SIDE. SEE ALSO HOOD
DETAIL SHEETS.

NOTE: USE PRESSURE TREATED STUDS & SILLS ON ALL KITCHEN AND RESTROOM WALLS, AND BENEATH
ALL STOREFRONT GLAZING SYSTEMS.

DIMENSIONS:

A. ALL DIMENSIONS ARE FROM INSIDE FACE OF CURB TO FACE OF STUD. REFER TO FOUNDATION PLAN FOR FACE
OF CURB DIMENSIONS. SEE KEYNOTE 1, THIS SHEET.
B. DIMENSIONS NOTED AS "CLEAR" OR "HOLD" ARE MIN. REQ'D. NET CLEARANCE FROM FACE OF WALL FINISH.
C. VERIFY FINAL EQUIPMENT SIZES W/ VENDOR PRIOR TO INT. WALL FRAMING.

WINDOWS / DOORS:

A. SEE SHEET A1.1 FOR WINDOW TYPES AND DOOR SCHEDULE.
B. ALL DOOR AND WINDOW OPENING DIMENSIONS ARE TO ROUGH OPENING.

FINISH SUBSTRATES:

A. PROVIDE 1/2" THICK CEMENT BOARD FROM FLOOR SLAB TO 6" A.F.F., U.O.N.
B. ALL JOINTS, GAPS OR SPACES LEADING TO ALL HOLLOW OR INACCESSIBLE SPACES SHALL BE SEALED WITH
"NSF INTERNATIONAL" APPROVED SEALANTS.
C. ALL BACK OF HOUSE AND OFFICE WALLS SHALL HAVE 1/2" CDX PLYWOOD SUBSTRATE, U.O.N.
D. PROVIDE SOLID BLOCKING FOR WALL SUPPORTED ITEMS.

DECOR:

A. SEE A2.0 FOR SEATING PLAN AND DETAILS.
B. SEE A7.0 FOR FLOOR FINISHES.
C. SEE A8.0, A8.1, A8.2, A8.3 FOR WALL FINISHES.
D. SEE A7.2 FOR CEILING FINISHES.

GENERAL:

A. PROVIDE THREE FIRE EXTINGUISHERS - (2) 10 lb. BC and (1) 10 lb. ABC - TO COMPLY WITH LOCAL FIRE CODE.
LOCATE PER DIRECTION OF FIRE MARSHALL OR LOCAL AUTHORIZING AGENT.
B. DRAWINGS ARE BASED UPON WOOD FRAMING. UTILIZATION OF METAL STUDS ON NON-BEARING INTERIOR
PARTITIONS, BULKHEADS AND SOFFITS IS ACCEPTABLE.
C. COORDINATE FRAMING ABOVE CEILING WITH HVAC DUCT WORK.
D. SEE SHEET A8.1 FOR ENLARGED RESTROOM PLAN.

CRITICAL FINISH OPENINGS:

BUILDING FINISH OPENINGS THAT ARE DESIGNATED AS "CRITICAL", "HOLD" OR "CLEAR" SHALL BE MAINTAINED TO
PROVIDE FOR THE STANDARD INSTALLATION OF STANDARD SIGNAGE / BUILDING ELEMENTS. SEE SHEET A7.3
FOR VENDOR PROVIDED / VENDOR INSTALLED ELEMENTS.

FLOOR PLAN NOTES

D

1 STARTING POINT: ALL SUB-TRADES SHALL USE THIS POINT OF
ORIGIN FOR LAY-OUT (INSIDE CORNER OF CONCRETE CURB).

INSIDE FACE OF CURB TO FACE OF CURB DIMENSIONS:
> 24'-4" (SIDE TO SIDE KITCHEN), 24'-4" (SIDE TO SIDE DINING)
> 70'-0" (FRONT TO BACK). FIELD VERIFY.

2 20 GA. S.S. PANEL BEHIND HOOD. REFER TO MECHANICAL
DRAWINGS.

3 PIPE BOLLARDS; REFER TO SITE DRAWINGS. COORDINATE WITH
LOCATION OF GAS METER.

4 HOOD WALL, SEE WALL LEGEND. COORDINATE WITH HOOD
LOCATION; SEE SHEET M2.0. REFER TO COOK LINE ELEVATION,
SHEET A8.2 and HOOD SECTIONS IN MECHANICAL DRAWINGS.

5 ELECTRICAL CT CABINET AND METER. REFER TO ELECTRICAL
DRAWINGS.

6 CO2 FILL LINE RUN UNDERGROUND TO BUILDING.

7 METAL THRESHOLD.

8 36" MIN. CLEARANCE IN FRONT OF ELECTRICAL PANELS.

9 ELECTRICAL PANELS; REFER TO ELECTRICAL DRAWINGS.

10 REFRIGERATION LINES IN CHASE WALL (DINING) AND SS
WALL-MOUNTED CHASE (DRIVE-THRU).

11 8" x 12" HORIZONTAL OPENING FOR SYRUP TUBES.
COORDINATE WALL OPENING WITH DRINK STATION EQUIPMENT
SUPPLIER. SEE DETAILS 1 AND 6 / A6.1.
REFER TO ELEVATION 7 / A8.0 and 6 / A8.2.

12 PROVIDE HORIZONTAL DOOR SWEEPS AT ALL EXTERIOR
DOORS. SEE SHEET A1.1.

13 ELECTRICAL SWITCHGEAR.

14 GAS METER

15 COOLER PANELS (MAINTAIN 2" AIR GAP BETWEEN
PANELS AND WALL)

16 CONFIRM AND COORDINATE WALK-IN DIMENSIONS
WITH VENDOR.

17 NOT USED.

18 LOW WALL BENEATH SERVING COUNTER. SEE INTERIOR
ELEVATIONS FOR FINISH INFORMATION. SEE DETAIL
11/A6.1.

19 6'-0" HIGH PVC FENCE BY BUFFTECH OR EQUAL. SEE
EXTERIOR ELEVATIONS.

20 GO-BUILT LOW WALL, 5'-0" FINISH HT. WITH WALL CAP
AND SUPPORT COLUMN BOLTED INTO SLAB; CLARK
DIETRICH LGPW-36 OR EQUAL AT NON-SUPPORTED
END(S). SEE INTERIOR ELEVATIONS FOR FINISH
INFORMATION. SEE DETAIL 15/A6.1.

21 CASED OPENING. SEE INTERIOR ELEVATIONS.

22 COORDINATE WITH HOOD INFORMATION ON
MECHANICAL SHEETS, M3.X.

KEY NOTES

B

NOT USED

F

WALL TYPES

E

CLIMATE ZONE	4A
	ROOFS
INSULATION ENTIRELY ABOVE ROOF DECK	R30 CI ENTIRELY ABOVE ROOF DECK
	WALLS, ABOVE GRADE
WOOD FRAMED	R-20
	SLAB-ON-GRADE FLOORS
UNHEATED SLABS	R10 FOR 24" BELOW

CLIMATE ZONE	4A			
VERTICAL FENESTRATION				
U-FACTOR				
FIXED FENESTRATION	0.38			
OPERABLE FENESTRATION	0.45			
ENTRANCE DOORS	0.77			
SHGC				
ORIENTATION	SEW	N		
PF < 0.2	0.36	0.48		
0.2 ≤ PF < 0.5	0.43	0.53		
PF ≥ 0.5	0.58	0.58		

- (D) LOW-E COATING.**

HAMILTON PARKER
THOMAS LEE
1865 LEONARD AVE.
COLUMBUS, OH 43219
C:614-935-1465 O:614.358.7887
TLEE@HAMILTONPARKER.COM

4

- 1

8


7



9


** LESS THAN DOOR WIDTH


2



3

PLOT DATE: 19.11.2023

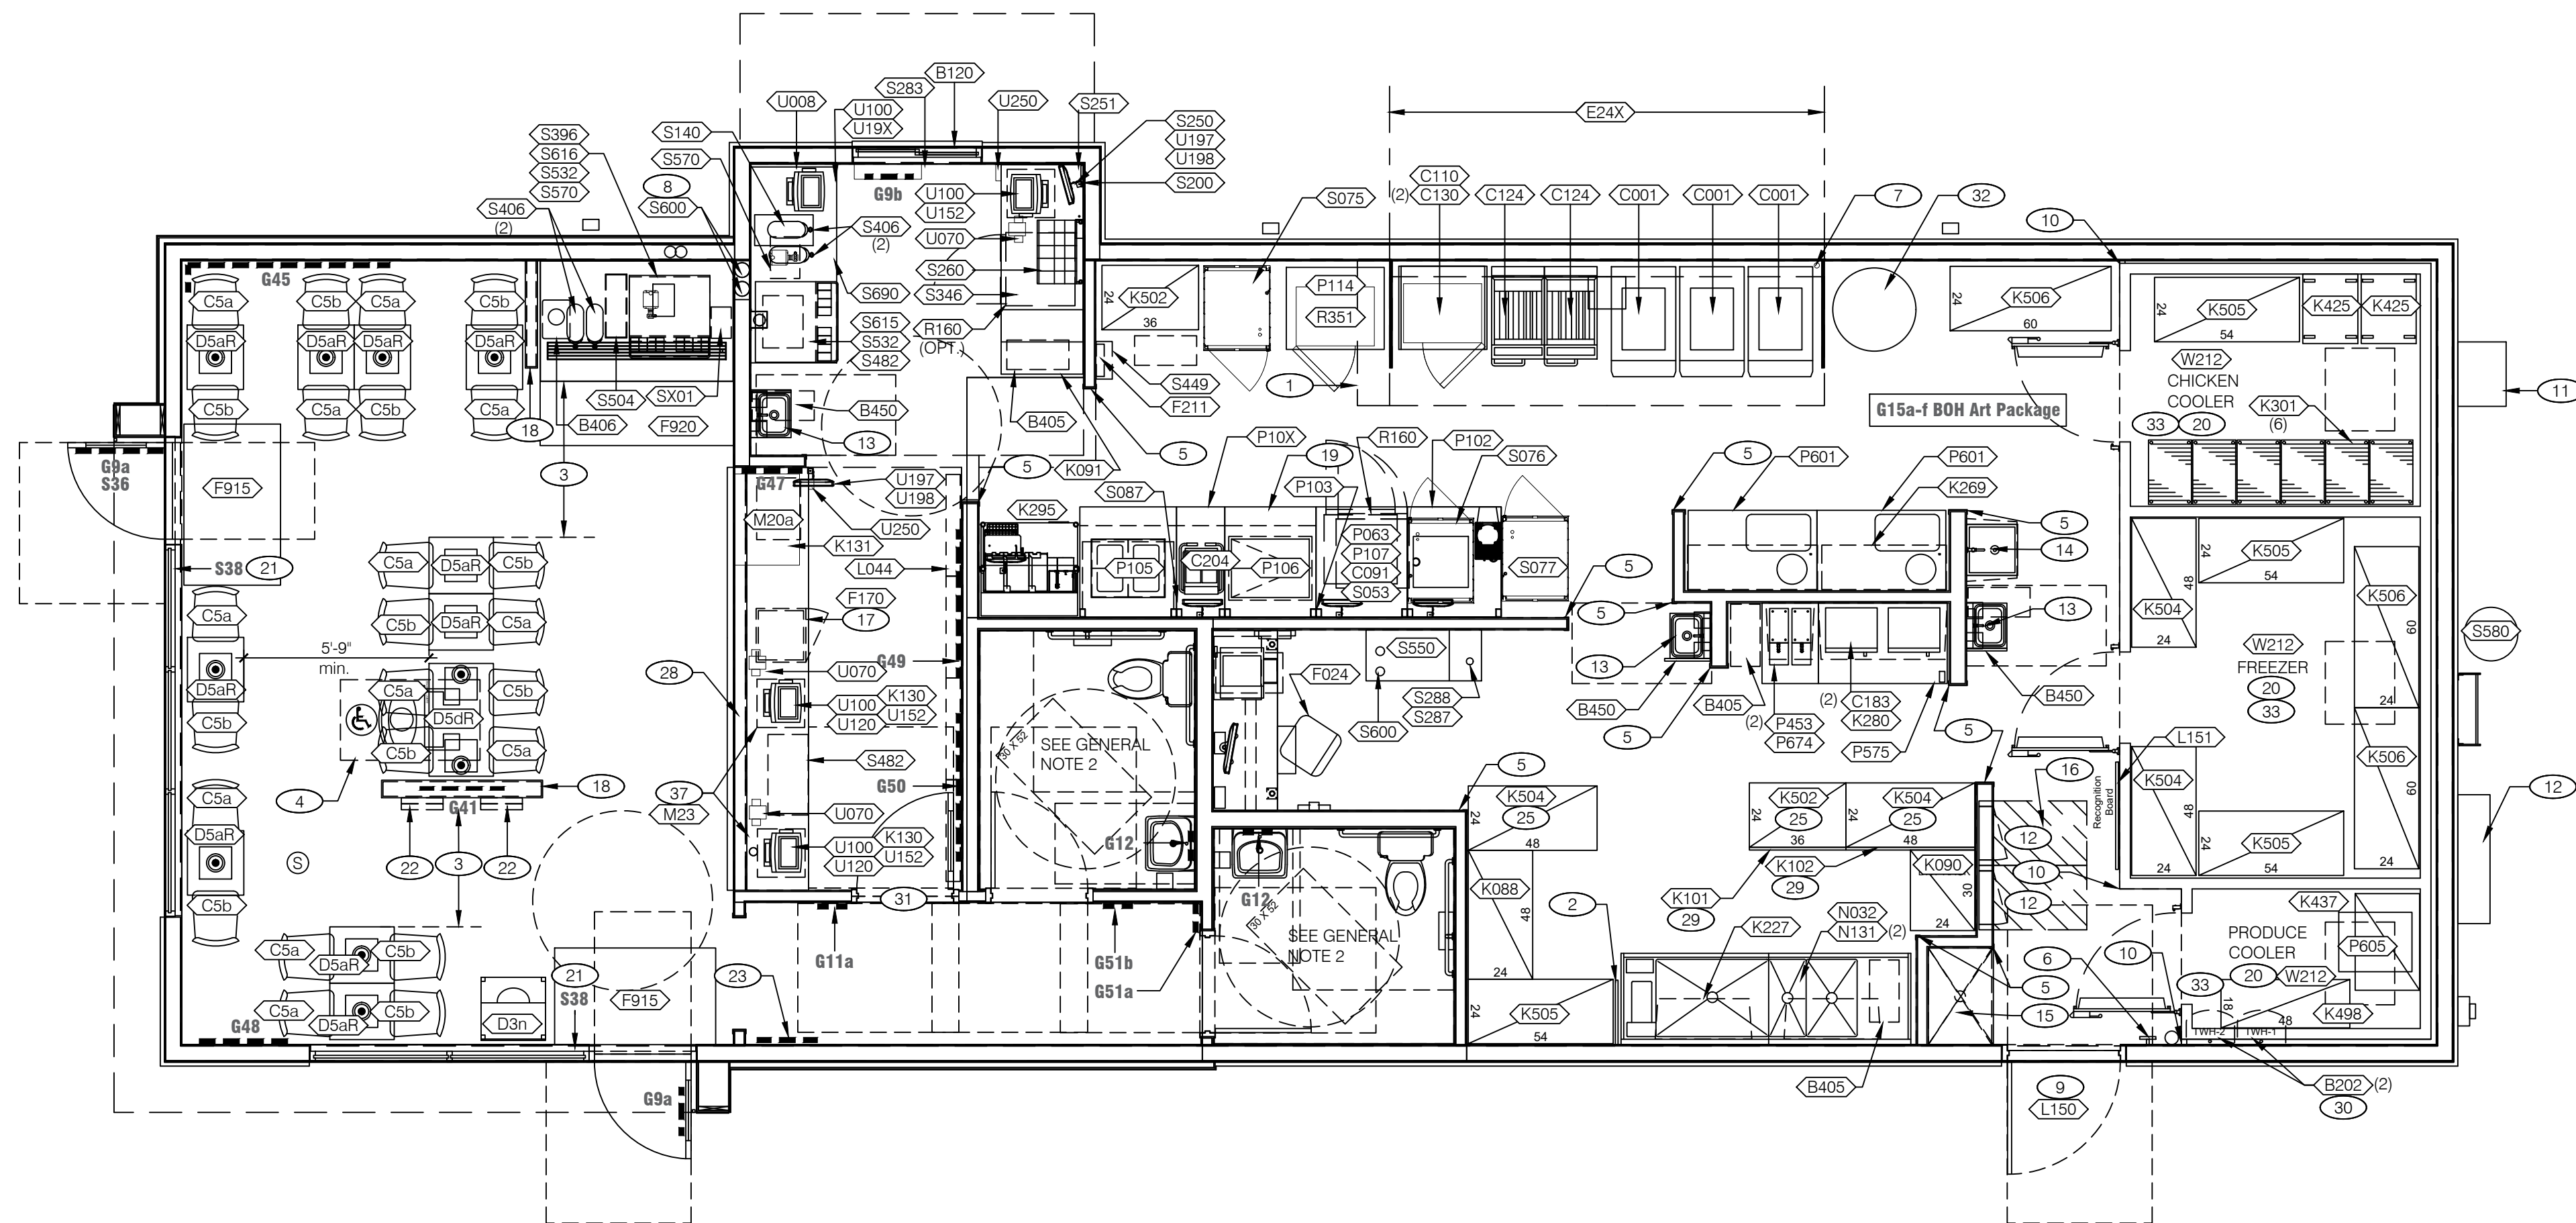**EQUIPMENT / SEATING PLAN** 1/4" = 1'-0"

TAG	QTY.	DESCRIPTION	VENDOR/MANUF.	ITEM/DECOR VENDOR #	FURNISH/INSTALL	IMAGE
C5a	10	DINING CHAIR	ORDER THRU RSCS	DARK WOOD / RED TIE	RSCS / GC	
C5b	10	DINING CHAIR	ORDER THRU RSCS	LIGHT WOOD / BLACK TIE	RSCS / GC	
D5a-R	8	2-TOP TABLE 24x21	ORDER THRU RSCS	WOOD TOP / RED BANDING	RSCS / GC	
D5d-R	1	4-TOP TABLE (ACCESSIBLE) 24x42	ORDER THRU RSCS	WOOD TOP / RED BANDING	RSCS / GC	
D3n	1	TRASH UNIT - SINGLE 24x24x46	ORDER THRU RSCS		RSCS / GC	
M20a	1	PICK-UP SHELF, COUNTERTOP	ORDER THRU RSCS	34" X 24" X 36"H W/ ADJUSTABLE DIVIDERS	RSCS / GC	
M23	1	POS SHROUD	ORDER THRU RSCS	25" x 17" x 17"H	RSCS / GC	

SEATING PACKAGE LEGEND - BY DECOR VENDOR U.O.N. (TOTAL SEATS = 20)

1. REFER TO RESPONSIBILITIES SCHEDULE ON SHEETS T1.1 & T1.2.
2. SEE SHEET A8.1 FOR ENLARGED RESTROOM PLAN.
3.  - SYMBOL INDICATES AN ACCESSIBLE TABLE.
4.  - SYMBOL INDICATES CORE DRILL LOCATION (FOR REFERENCE ONLY). SEE DETAILS SHW.1.
C.C. DRILLS SHALL BE LOCATED FROM APPROVED DECOR VENDOR SHOP DRAWINGS AND FIELD COORDINATION WITH G.C. DO NOT LOCATE PER THESE DRAWINGS.
5. REFER TO DESIGN REFERENCE MANUAL (PLANS.YUM.COM) FOR FINISHES, DIMENSIONS AND DETAILS OF DECOR VENDOR SUPPLIED ITEMS. SEE SEATING PACKAGE LEGEND, THIS SHEET.
6. REFER TO SHEET A2.1 FOR EQUIPMENT TAG REFERENCES.
7. PROVIDE 2x4 WOOD BLOCKING FOR SHELVING AND HAND SINKS (TYP.).
8. REFER TO SHEET A7.2 FOR INTERIOR GRAPHICS; REFER TO GRAPHICS PACKAGE FOR ADDITIONAL INFORMATION.

* THE NUTRITION MATERIALS (ACRYLIC HOLDER, NUTRITION POSTER AND BRAND NUTRITION BROCHURES) ARE PART OF A NEW RESTAURANT'S GRAND OPENING KIT AND ARE PROVIDED BY YUM FORMS.

- | | | | |
|----|--|----|---|
| 1 | HOOD FIRE SUPPRESSION SYSTEM; SEE MECHANICAL DRAWINGS. | 26 | NOT USED. |
| 2 | SPLASH GUARD at 3-COMP; SEE DETAIL 5 / A6.1. | 27 | NOT USED. |
| 3 | MAINTAIN 36" MIN CLEAR AISLE EGRESS PATHS TO EXIT DOORS. | 28 | GC BUILT KNEE WALL FOR ORDER COUNTER AND PICKUP COUNTER. SEE DETAIL 11/A6.1. |
| 4 | 30" x 52" CLEAR FLOOR SPACE FOR DISABLED ACCESS. BOUNDARY EXTENDS 2'-9" PAST EDGE OF TABLE. | 29 | SPLASH PROTECTION BACK PANEL ATTACHED TO SHELVING UNIT, EXTENDING FROM BOTTOM SHELF TO 70" A.F.F. |
| 5 | S.S. CORNERGUARD / WALL CAP. TYPICAL AT ALL CORNERS FROM REAR WALL TO KITCHEN SIDE OF SERVICE COUNTER. SEE DETAIL 2 / A6.1. | 30 | WATER HEATERS ABOVE CEILING ON WALL SURFACE. LOCATE BETWEEN TRUSSES. SEE PLUMBING DRAWINGS. |
| 6 | PULL STATION @ 3'-8" A.F.F. | 31 | OPTIONAL DOOR. PROVIDE CASED OPENING IF DOOR IS NOT USED. |
| 7 | GAS LINE DOWN TO EQUIPMENT; SEE PLUMBING DRAWINGS. | 32 | WASTE OIL STORAGE TANK. FRANCHISEE PROVIDED, G.C. INSTALLED. MAHONEY CLEARVIEW UCO 200. 31" DIAMETER TANK. 110V 20 AMP NON-GFCI DEDICATED CIRCUIT AT 76" A.F.F. |
| 8 | PVC CHASE (QTY. 2) FOR INSULATED SYRUP / FILTERED WATER TUBE BUNDLE. COORDINATE W/ 8" x 12" WALL OPENING IN DINING AND DRIVE-THRU; SEE ELEVATIONS 7 / A8.0 and 6 / A8.2. | 33 | WALK-IN COOLER SHALL COMPLY WITH 2018 NORTH CAROLINA BUILDING CODE SECTION 2603.4.1.3. |
| 9 | SEE SHEET A1.1 FOR SECURITY DOOR PACKAGE. | | <ul style="list-style-type: none"> FOAM PLASTIC SHALL HAVE A THICKNESS THAT DOES NOT EXCEED 4" AND A MAXIMUM FLAME SPREAD INDEX OF 75 WHERE AGGREGATE FLOOR AREA DOES NOT EXCEED 400 SQUARE FEET AND FOAM PLASTIC IS COVERED BY A METAL FACING NOT LESS THAN 0.032 INCHES THICK ALUMINUM OR CORROSION-RESISTANT STEEL HAVING A BASE METAL THICKNESS OF 0.016 INCH. |
| 10 | CLOSURES AND CORNER PROTECTION BY WALK-IN VENDOR. | | |
| 11 | GAS METER. REFER TO PLUMBING DRAWINGS | | |
| 12 | SWITCHGEAR / ELECTRIC PANELS; REFER TO ELECTRICAL DRAWINGS. | | |
| 13 | B241 B251 B290 B405 N920 | | |
| 14 | B620 N024 | | |
| 15 | B599 N071 | | |
| 16 | CLEAR FLOOR AREA IN FRONT OF ELECTRICAL PANELS; VERIFY MINIMUM ALLOWABLE CLEARANCE WITH LOCAL CODE. | | |
| 17 | SAFE ON LOW PLATFORM. SEE DETAIL 3/A6.1. | | |
| 18 | GC-BUILT LOW WALL. SEE SHEET A1.0. | | |
| 19 | SINGLE-SIDED PACK-LINE (M-LINE). COORDINATE EQUIPMENT ORDER WITH EQUIPMENT VENDOR. | | |
| 20 | ONE REFRIGERATED UNIT. DIVIDED TO CREATE THREE UNITS- (1) CHICKEN COOLER, (1) PRODUCE COOLER & (1) FREEZER. | | |
| 21 | WINDOW SAFETY DECALS ON ALL STOREFRONT GLAZING IN THE DINING AREA. SEE SHEET A8.0. | | |
| 22 | ORDER KIOSK WITH WALL BRACKET. SEE RESPONSIBILITIES SCHEDULE ON SHEETS T1.1 & T1.2. | | |
| 23 | KFC FOUNDATION ARTWORK POSTER IN FRAME. | | |
| 24 | NOT USED (RTI GREASE DISPOSAL SYSTEM.) | | |
| 25 | FREESTANDING SHELVING UNITS: PROVIDE SEISMIC POSTS, FOOT PLATES & SWAY BARS IN SEISMIC ZONES | | |

KEYNOTES

GENERAL NOTES		C	KEYNOTES		B	PLOT DATE: 21.11.2025
----------------------	--	----------	-----------------	--	----------	-----------------------

NOTE: To find detailed equipment specifications, search using the A&E number and/or model number at https://customerportal.rscs.com/. IF AN A&E NUMBER/DESCRIPTION/OLD MODEL DOESN'T MATCH A SEARCH IN THE RSCS WEBSITE, PLEASE ADVISE: datasupport@rscs.com FOR ANY UPDATES REQ'D.

EQUIPMENT SCHEDULE									
A&E	QTY	G.C. INST.	ITEM DESCRIPTION	MFR. & MODEL NUMBER	PLUMB	ELECT	GAS	REMARKS	NO.
B CONTRACTOR BUILDING ELEMENTS									
B120	1	X	DRIVE-THRU WINDOW	QUIKSERV #SC4030CRCA				CLEAR ANODIZED	B120
B202	2	X	WATER HEATER - TANKLESS (SUPPLIED BY OWNER)	RINNAI TANKLESS-199,900BTU	X	X	X	CONDENSING, NG, 2" PVC VENTING	B202
B241	5	X	SOAP DISPENSER (WALL MOUNT)	BY VENDOR				SURFACE MOUNTED	B241
B251	5	X	SANITIZER DISPENSER	BY VENDOR				SURFACE MOUNTED	B251
B265	2	X	MIRROR, 18" X 36"	BOBRICK #B-165-1836				SURFACE MOUNTED	B265
B275	2	X	TOILET PAPER DISPENSER	BOBRICK #B-2890				SURFACE MOUNTED	B275
B290	0	X	PAPER TOWEL DISPENSER	BOBRICK #B-262				SURFACE MOUNTED	B290
B294	0	X	TRASH RECEPTACLE	BOBRICK #B-3644				SEMI-RECESSED	B294
B300	2	X	GRAB BAR 1-1/2"DIA X 36" S.S. FIN.	BOBRICK #B6806X36				SURFACE MOUNTED	B300
B305	2	X	GRAB BAR 1-1/2"DIA X 42" S.S. FIN.	BOBRICK #B6806X42				SURFACE MOUNTED	B305
B310	2	X	GRAB BAR 1-1/2"DIA X 18" S.S. FIN.	BOBRICK #B6806X18				SURFACE MTD	B310
B400	2	X	WASTE BASKET - 32 GALLON	RUBBERMAID #2632 (GREY)					B400
B405	6	X	WASTE BASKET	RUBBERMAID SLIM JIM #3541 (GREY)					B405
B406	1	X	WASTE BASKET	RUBBERMAID 28 QT #2956 (BLACK)					B406
B410	1	X	SANITARY NAPKIN RECEPTACLE	RUBBERMAID #6140				INCLUDES ACCESSORY KIT & MOUNTING HARDWARE	B410
B450	3	X	SIDE SPLASH GUARD FOR SS HAND SINKS	AERO #S-96-H				9-1/4"x14-3/4", STAINLESS STL., MOUNTS TO SIDE(S) OF SINK.	B450
B599	1	X	MOP SINK STATION	ISS #WST806Y					B599
B620	1	X	CHICKEN SINK STATION	ISS #MOPCHICKMB					B620
C COOKING EQUIPMENT									
C001	3	X	8 HEAD GAS PRESURE FRYER	HENNY PENNY #PFG690		X	X	USE WITH GAS HOSE KIT C503	C001
C005	0	X	6 HEAD FRYER	HENNY PENNY #OFG390			X	COMES WITH GAS HOSE KIT	C005
C018	0	X	DUAL OPEN FRYER W/ CONTROLLER	PITCO #KF-SFSSH75-2		X	X	COMES WITH GAS HOSE KIT	C018
C091	1	X	BUN TOASTER 22" x 21" x 17"	AJ ANTUNES & CO - GOLD STANDARD #9211004		X		ADDITIONAL TOASTER IS OPTION FOR TOTAL OF (2)	C091
C110	1	X	CONVECTION OVEN TABLE W/STAND	CTBR-AP DOUBLE		X			C110
C124	2	X	SINGLE OPEN FRYER W/ CONTROLLER (OPTIONAL)	PITCO #KF-SFSSH75		X	X	COMES WITH GAS HOSE KIT. VERIFY WITH OWNER	C124
C125	0	X	CONVECTION OVEN (KGC) STAND	RATIONALE #60.74.884US					C125
C126	0	X	CONVECTION OVEN (KGC)	RATIONALE #CB1ERKF.0002880	X	X			C126
C127	0	X	8 HEAD ELECTRIC PRESSURE FRYER	HENNY PENNY #PXE-100 (Velocity)		X	X	W/ RACK KIT, ACCESSORY KIT	C127
C130	2	X	CONVECTION OVEN W/ CONTROLLER	BLODGETT #CTBR-AP		X			C130
C183	2	X	MICROWAVE OVEN 2100 W	SHARP #R-25JTF		X			C183
C204	1	X	SPLIT TOP GRILL	STAR 9DPSC14DTBCUL		X			C204
C375	1	X	FRYER LANDING TABLE 24.5' X 36.5'	ISS #536FRYACOMBA					C375
C503	0	X	GAS HOSE KIT 3/4"	DORMONT 1675BPQBS48				FOR C001	C503
E EXHAUST HOODS/FIRE SUPP.									
E24X	1	X	13'-6" WIDE CANOPY HOOD	ACCUREX		X		SEE HOOD MFR. DRAWINGS M3.X	E24X
F OFFICE/EMPLOYEE/MUSIC/MISC.									
F006	1	X	FILE CABINET (2 DRAWER HIGH)	LOUISVILLE MILL - HON R512PL					F006
F024	1	RSCS/GC	CHAIR - OFFICE (MANAGER)	PRM-4141					F024
F030	0	X	COAT HOOKS	ISS #HOOK246R2Y					F030
F040	1		OFFICE COMPUTER	POS VENDOR PROVIDED		X			F040
F060	1		MONITOR-OFFICE	KFC					F060
F080	1		OFFICE PRINTER	POS VENDOR PROVIDED		X			F080
F131	1		MUSIC SYSTEM	MOOD MEDIA		X			F131
F180	1	SEE SHT T1.1	MANUAL DROP SAFE	LOOMIS - SAFEPOINT TITAN S		X			F180
F211	2	X	CLOCK	B&B SYSTEMS #02060475					F211
F262	0	X	LOCKERS (6 OPENINGS) 12"W x 18"D x 12"H	LYON # 5362 (UN-ASSEMBLED)					F262
F270	1	X	FIRST AID KIT	SWIFT #68-UFPCC					F270
F500	1	X	HIGH CHAIR	KOALA KARE #KB103 'CLASSIC' (GREY)					F500
F915	2	X	FLOOR MAT 3' x 5'	ENTRANCE, INC. #41150012				RUBBERIZED	F915
F920	1	X	FLOOR MAT 2' x 7'-6"	CREST #249614 ANTISLIP				RUBBERIZED	F920
FX01	1	RSCS/GC	EMPLOYEE MICROWAVE	BLACK & DECKER EM720CB7 OR EQUAL		X		700W, 0.7 CU.FT., CHILD SAFETY LOCK, PUSH BUTTON DOOR	FX01
FX02	1	RSCS/GC	EMPLOYEE TABLE 60" LONG						FX02
FX03	2	RSCS/GC	EMPLOYEE CHAIR						FX03
K WORKSTATIONS/SHELVING/CARTS									
K088	1	X	24" X 48" X 74" 4-TIER CANTILEVER SHELIVING UNIT	SPG #FSMS742448E					K088
K090	1	X	DRY RACK SHELIVING UNIT 24" x 30" x 74" (6 TIER)	SPG #WST1906E					K090
K091	1	X	24" X 30" OPEN BASE WORKSTATION	SPG #WTO2430Y					K091
K101	1	X	PANEL KIT FOR SHELIVING UNIT 36" X 70"	#RPK3670A				2 UPPER AND 2 LOWER PANELS, 1 HANGER RAIL, 1 LEDGE	K101
K102	1	X	PANEL KIT FOR SHELIVING UNIT 48" X 70"	#RPK4870A				2 UPPER AND 2 LOWER PANELS, 1 HANGER RAIL, 1 LEDGE	K102
K130	2	X	MOBILE FRONT COUNTER CART 18"x24"	ISS #FC18242MYA					K130
K131	1	X	MOBILE CONDIMENT CART	ISS #CONDDPSS					K131
K198	0	X	PREP SINK WORKSTATION 36"L	ISS #WST756E					K198
K227	1	X	3 COMP. SINK WORKSTATION, 96"L	ISS #WST808E					K227
K269	1	X	BREADING WORKSTATION (DOUBLE) 18" x 48"	ISS #WST758Y					K269
K280	1	X	48" MICROWAVE WORKSTATION	ISS #WST760E					K280
K295	1	X	POST PACK WORKSTATION-SINGLE	FRANKE #796761					K295
K301	6	X	CHICKEN DOLLY	YESS #VLMLDP101					K301
K416	0	X	FRYER ACCESSORY WORKSTATION, 24"x30"	ISS #WST761YA					K416
K425	2	X	BAKERS RACK 20.5" x 26" x 69"	NEW AGE INDUSTRIAL #1331					K425
K437	1	X	VEGGIE STAGING UNIT MODULE 36" X 24" X 74"	ISS #WST1139					K437
K484	0	X	SHELIVING UNIT 18" x 72" x 74"H (4 TIER)	ISS #SU187274Y					K484
K495	0	X	SHELIVING UNIT 18" X 30" X 74"H (4 TIER)	ISS #SU1830-7-4Y					K495
K496	0	X	SHELIVING UNIT 18" X 36" X 74"H (4 TIER)	ISS #SU1836-7-4Y					K496
K498	1	X	SHELIVING UNIT 18" x 48" x 74"H (4 TIER)	ISS #SU184874Y					K498
K501	0	X	SHELIVING UNIT 24" X 30" X 74"H (4 TIER)	ISS #SU243074Y					K501
K502	2	X	SHELIVING UNIT 24" X 36" X 74"H (4 TIER)	ISS #SU243074Y					K502
K503	0	X	SHELIVING UNIT 24" X 42" X 74"H (4 TIER)	ISS #SU244274Y					K502
K504	4	X	SHELIVING UNIT 24" X 48" X 74"H (4 TIER)	ISS #SU244874Y					K502
K505	4	X	SHELIVING UNIT 24" x 54" x 74"H (4 TIER)	ISS #SU245474Y					K506
K506	3	X	SHELIVING UNIT 24" x 60" x 74"H (4 TIER)	ISS #SU246074Y					K506
K507	0	X	SHELIVING UNIT 24" x 66" x 74"H (4 TIER)	ISS #SU246674Y					K507
K512	0	X	SHELIVING UNIT 18" x 60" x 74"H (4 TIER)	ISS #SU186074Y					K512
L LIGHTING/SIGNAGE/MENUBOARDS									
L044	1	X	INTERIOR MAGNETIC MENU BOARD	POSTERLOID # PSTR7PANELHWDKIT				INCLUDES MOUNTING RAILS AND BRACKETS.	L044
L150	1	X	SECURITY DOOR DANGER SIGN	ADVERCO#ADVCUSTOM				ORDERED DIRECT FROM YRFS	L150
L151	1	X	CHAMPS BOARD 31"W x 23"H					ORDERED DIRECT FROM YRFS	L151

EQUIPMENT SCHEDULE										
A&E	QTY	G.C. INST.	ITEM DESCRIPTION	MFR & MODEL NUMBER	PLUMB	ELECT	GAS	REMARKS	NO.	
			N SINKS/DISHWASHERS							
N024	1	X	CHICKEN DIP SINK 19 1/2' x 19 1/4'	AERO MANUFACTURING CO., INC. #LB-1616	X			INCLUDES BASE, FAUCET & FOOT PEDAL DUAL CONTROL	NX01	
N032	1	RSCS/GC(a)	3-COMP POWER SOAK 108"L x 34"D	POWERSOAK #200PSS108R1P-KFC	X	X		W/ T & S B-2466 FAUCET & SPRAY RINSE	N032	
N071	1	X	MOP SINK FAUCET	T&S #B-2465	X				N071	
N131	2	X	PRE-RINSE KIT	T&S B-2466	X			FOR N-014	N131	
N202	0	X	MOP SINK 24' x 24' FLOOR MOUNT SINK	AERO MANUFACTURING CO., INC. #3MP-2121-6	X			INCLUDES (2) 24"x36" WALL PANELS	N202	
N920	3	X	HAND SINK (KITCHEN)	AERO #HSK1MX	X			INCLUDES KNEE VALVES, FAUCET, SPOUT & BASKET	N920	
			P FOOD PREPARATION							
P063	1	X	WARMER, FRY, CRISP N HOLD	#CNH28LP208V/ 60HZ		X			P063	
P10X	1	X	GRILL TABLE TOP 12"	DELFIELD #				DELFIELD SINGLE M-LINE	P10X	
P102	1	X	BASE UNIT 35"	DELFIELD #160S35				DELFIELD SINGLE M-LINE	P102	
P103	1	RSCS/GC	ELECTRICAL OUTLETS	DELFIELD		X		DELFIELD SINGLE M-LINE	P189	
P105	1	RSCS/GC(a)	HOT WELL TABLE 36" WIDE	DELFIELD #20NP36	X	X		DELFIELD SINGLE M-LINE	P105	
P106	1	RSCS/GC(a)	COLD WELL TABLE 34" WIDE	DELFIELD #20NP34		X		DELFIELD SINGLE M-LINE	P106	
P107	1	RSCS/GC(a)	FRY DUMP TABLE 35" WIDE	DELFIELD #20NP34				DELFIELD SINGLE M-LINE	P107	
P114	1	X	FRYER LANDING TABLE 30.5"D X 36.5"W X 35"H	ISS #WTO3036Y W/ OPEN BASE					P114	
P453	2	RSCS/GC(a)	5 GAL HOT WATER MACHINE	BUNN HSX, 43600.0028	X	X			P453	
P535	0	X	SHORTENING SHUTTLE	AERO #SSA-9211					P535	
P575	1	X	CAN OPENER	EDLUND EDL16100					P575	
P601	2	X	BREADING TABLE (SINGLE), 48"L x 30"W x 36"H	AYRKING #BBS-U-4830-BPC		X			P601	
P605	1	X	SALAD / COLESLAW DOLLY	FALCON FABRICATORS - UNDERSHELF #66-145				WITH 2 BINS 27-1/4" x 22-1/8" x 42", INCLUDES (4) CASTERS	P605	
P674	1	X	WORK STATION FOR HOT WATER 18"W x 30"D x 76"H	ISS #WST790E				HOT WATER DISPENSER STATION	P674	
P184	1	RSCS/GC(a)	WARMER, FRY, CRISP N HOLD DOUBLE LANE 18.5"	MERCO CRISPYMAX MCG1827NNN		X		120V 1900W 15.9A	P184	
			R REFRIGERATION							
R002	0	X	SINGLE SPLIT DOOR FREEZER	TRAULSEN G12001		X			R002	
R160	1	X	1/2 HT. REFRIGERATOR (RH) 2.75" CASTERS	BEVERAGE AIR UCF27AHC-104		X			R160	
R350	0	X	1/2 HT. FREEZER (RH) 3" CASTERS	BEVERAGE AIR UCF27AHC-23		X			R350	
R351	1	X	1/2 HT. FREEZER (LH) 3" CASTERS	BEVERAGE AIR UCF27AHC-24-23		X			R351	
			S SERVING/DRIVE-THRU							
S075	1	X	FULL-HEIGHT HOLDING CABINET W/ GLASS DOORS	WINSTON HOV7-14SP-KFC	X	X		L/H FRONT w/GLASS DOORS	S075	
S076	1	X	HALF-HEIGHT HOLDING CABINET W/ FLIP DOORS	WINSTON HOV7-05SP	X	X		L/H FRONT w/ FLIP DOORS	S076	
S077	1	X	FULL-HEIGHT HOLDING CABINET W/ FLIP DOORS	WINSTON HOV7-14SP-KFC	X	X		L/H FRONT w/ FLIP DOORS	S077	
S053	1	X	SIDES HOLDING CABINET	CARTER HOFFMAN KFCFVOSH208	X			SLIDING DOOR ACCESS ON BOTH SIDES	S053	
S087	1	X	INFRARED HOLDING BIN	PRINCE CASTLE DHB2PT33KFCB	X			FLIP DOOR ACCESS ON BOTH SIDES	S087	
S200	1		DRIVE-THRU TIMER	ERC #DTT-KFCNT		X			S200	
S250	1		DUAL OUTPUT VEHICLE DETECTOR	ERC #9172		X			S250	
S251	1		DRIVE-THRU TIMER DISPLAY UNIT	ERC TM-05		X			S251	
S260	1	X	DRIVE THRU CONDIMENT TOWER	ISS #CONDOTOW24L					S260	
S283	1	X	DRIVE THRU DRINK STAGER	ISS #WST789E					S283	
S287	1		WATER FILTER SYSTEM	SELECTO #BFCS, PART #66-6145LFM	X			PROVIDED and INSTALLED BY PEPSI	S287	
S288	1	X	WATER FILTER SYSTEM	SELECTO #SMFIC614, PART #80-6140	X			PROVIDED BY OWNER / INSTALLED BY G.C.	S288	
S346	1	X	PICK-UP DRIVE-THRU COUNTER (30' x 54')	ISS #WST1140Y					S346	
S396	1	X	SELF SERVE DRINK COUNTER	CARTER HOFFMANN #CH3-TDS72N42					S396	
S406	4	X	TEA URN	BUNN #39600.0001 (3.5 GALLON)					S406	
S140	1	X	BUNN TEA BREWER	BUNN TB3Q, 29" TRUNK					S140	
S449	1	X	TIME TAG SYSTEM	FRANKE #27800400					S449	
S482	2	X	CUP DISPENSER 30-1/16" x 15-1/16" x 23-3/4"D	A.J. ANTUNES #DAC560					S482	
S504	1	X	LID AND STRAW DISPENSER	DISPENSE-RITE #DMP TLD-3BT-2STR					S504	
S532	2		BEVERAGE DISPENSER (SELF SERVE / DRIVE THRU)	CORNELIUS #ED 250	X	X			S532	
S550	1		BAG-N-BOX SYRUP RACK	CORNELIUS/REMCOR BNB12B8P	X			FLO-3REG-2CRB, PROVIDED and INSTALLED BY PEPSI	S550	
S570	2		CARBONATOR	CORNELIUS/REMCOR	X	X		LOCATED ON SHELF BENEATH DRINK MACHINE	S570	
S580	1		CO2 (BULK) TANK (LOCATED OUTSIDE OF BUILDING)	MVE #11805373				WITHOUT IMPURITY RING / INSTALL IN SERVICE YARD	S580	
S600	2		BUNDLED SYRUP LINES	CORNELIUS/REMCOR TUBE BUNDLE	X			PROVIDED and INSTALLED BY PEPSI	S600	
S615	1		ICE CUBER - DRIVE-THRU	MANITOWOC #IYF0600C-161	X	X			S615	
S616	1		ICE CUBER - DINING ROOM	MANITOWOC #IYT0500A-161	X	X			S616	
S690	1	X	D/T BEVERAGE COUNTER (32' x 61")	DELFIELD #TB002434					S690	
Sx01	1	X	NAPKIN TOWER	EXPRESSNAP 32XS5P				DRINK, FRONT COUNTER, DT	Sx01	
			U SECURITY/COMM./FIRE PROT./POS							
U008	1	X	BASE STATION - D/T COMM. SYSTEM w/ HEADSET RACK	ION IQ 6A10 SYSTEM; HME #C30000-6-HS-YUM		X		6 COMMUNICATORS & BATTERY CHARGER, +7-0" A.F.F.	U008	
U013	2	X	VIEWSONIC LCD DISPLAY	VA705B		X			U013	
U031	1	RSCS/GC(a)	CCTV DVR & MONITOR	ENVISION INSIGHT ENVR 8 T / R		X			U031	
U050	1	X	SECURITY SYSTEM	ADT #E53200155		X			U050	
U070	3		RECEIPT PRINTER	POS VENDOR PROVIDED				2 FOR F/C AND 1 D/T	U070	
U100	4		POS/ORDER ENTRY TERMINAL	POS VENDOR PROVIDED		X			U100	
U120	2		CASH DRAWER HOLDER	POS VENDOR PROVIDED				SEE RESPONSIBILITIES SCHEDULE	U120	
U152	3		CASH DRAWER	POS VENDOR PROVIDED				SEE RESPONSIBILITIES SCHEDULE	U152	
U197	1	POS/GC	MONITOR WALL BRACKET	POS VENDOR PROVIDED					U197	
U198	2	POS/GC	15" MONITOR (FLAT SCREEN)	POS VENDOR PROVIDED		X		SEE RESPONSIBILITIES SCHEDULE	U198	
U19X	2	GC/GC	POS WALL MOUNTING BRACKET	ESSINTIAL		X			U19X	
U199	4	X	MONITOR BRACKET	POS VENDOR PROVIDED				SEE RESPONSIBILITIES SCHEDULE	U199	
U250	4		BUMP BAR	POS VENDOR PROVIDED					U250	
			W WALK-IN COOLERS/FREEZERS							
W212	3	X	WALK-IN COOLER / FREEZER	SEE DISTRIBUTOR EQUIPMENT MODEL	X	X			W212	
NOTES: 1.) ITEMS NOTED AS "CURRENTLY UNDER A FIELD VALIDATION PROGRAM" ARE PART OF A LARGE SCALE EVALUATION AND MAY NOT BE APPROVED FOR CONTINUING USE FOLLOWING COMPLETION OF THE EVALUATION. PLEASE CONTACT YOUR DISTRIBUTOR IF YOU HAVE ANY QUESTIONS. 2.) A&E = ARCHITECTURAL AND ENGINEERING NUMBER. (a) GC SHALL PLACE, AND SUPPLIER / OPS TEAM SHALL BE COORDINATED BY GC TO COMMISSION IT. (b) SUPPLIER SHALL BRING TO SITE - LOCATION SHALL BE READY TO TAKE THE TANKS INTO STORE. (c) GC SHALL HAVE READY, AND SUPPLIER / OPS TEAM SHALL BE COORDINATED BY GC TO COMMISSION IT. (d) GC OR SUPPLIER - GC MUST VERIFY (e) SEE T1.1 FOR MORE INFORMATION.										
B.	D/T CLEARANCE BAR, SECURITY DOOR, WATER HEATER, D/T WINDOW, RESTROOM ACCESSORIES, AIR DOOR/CURTAIN, MOP SINK, HAND SINK ACC., CORNER GUARDS, MATS			N.	POWERSOAK, KITCHEN HAND SINKS, PREP. SINKS, DISHWASHERS					
C.	FRYERS, OVENS, GRILLS, RETHERMALIZERS, TOASTERS, MICROWAVES			P.	M.A.P.S. LINES, I-LINES, PACK LINES, BREADERS, MARINATORS, HOT WATER, WORK TABLES, CHEESE MELTERS					
E.	KITCHEN EXHAUST HOODS, FIRE SUPPRESSION EQUIPMENT			R.	REFRIGERATORS AND FREEZERS (NOT WALK-IN)					
F.	SAFE, OFFICE EQUIPMENT, EMPLOYEE STORAGE/BREAK			S.	DRINK SYSTEMS & EQUIP., HEAT CABINETS, STAGERS, WARMERS, SERVING EQUIP., D/T EQUIP.					
K.	SHELVING, WORKSTATIONS, CARTS, RACKS, DOLLIES			U.	SECURITY SYSTEM, LOCKS, CCTV, D/T COMMUNICATIONS/POS SYSTEM, POS EQUIP.					
L.	SITE LIGHTING, SIGNAGE, MENUBOARDS			W.	WALK-IN COOLERS/FREEZERS					



PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC


1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028

DT1800 RED

ROOF PLAN

A3.0


PLOT DATE: 19.11.2025

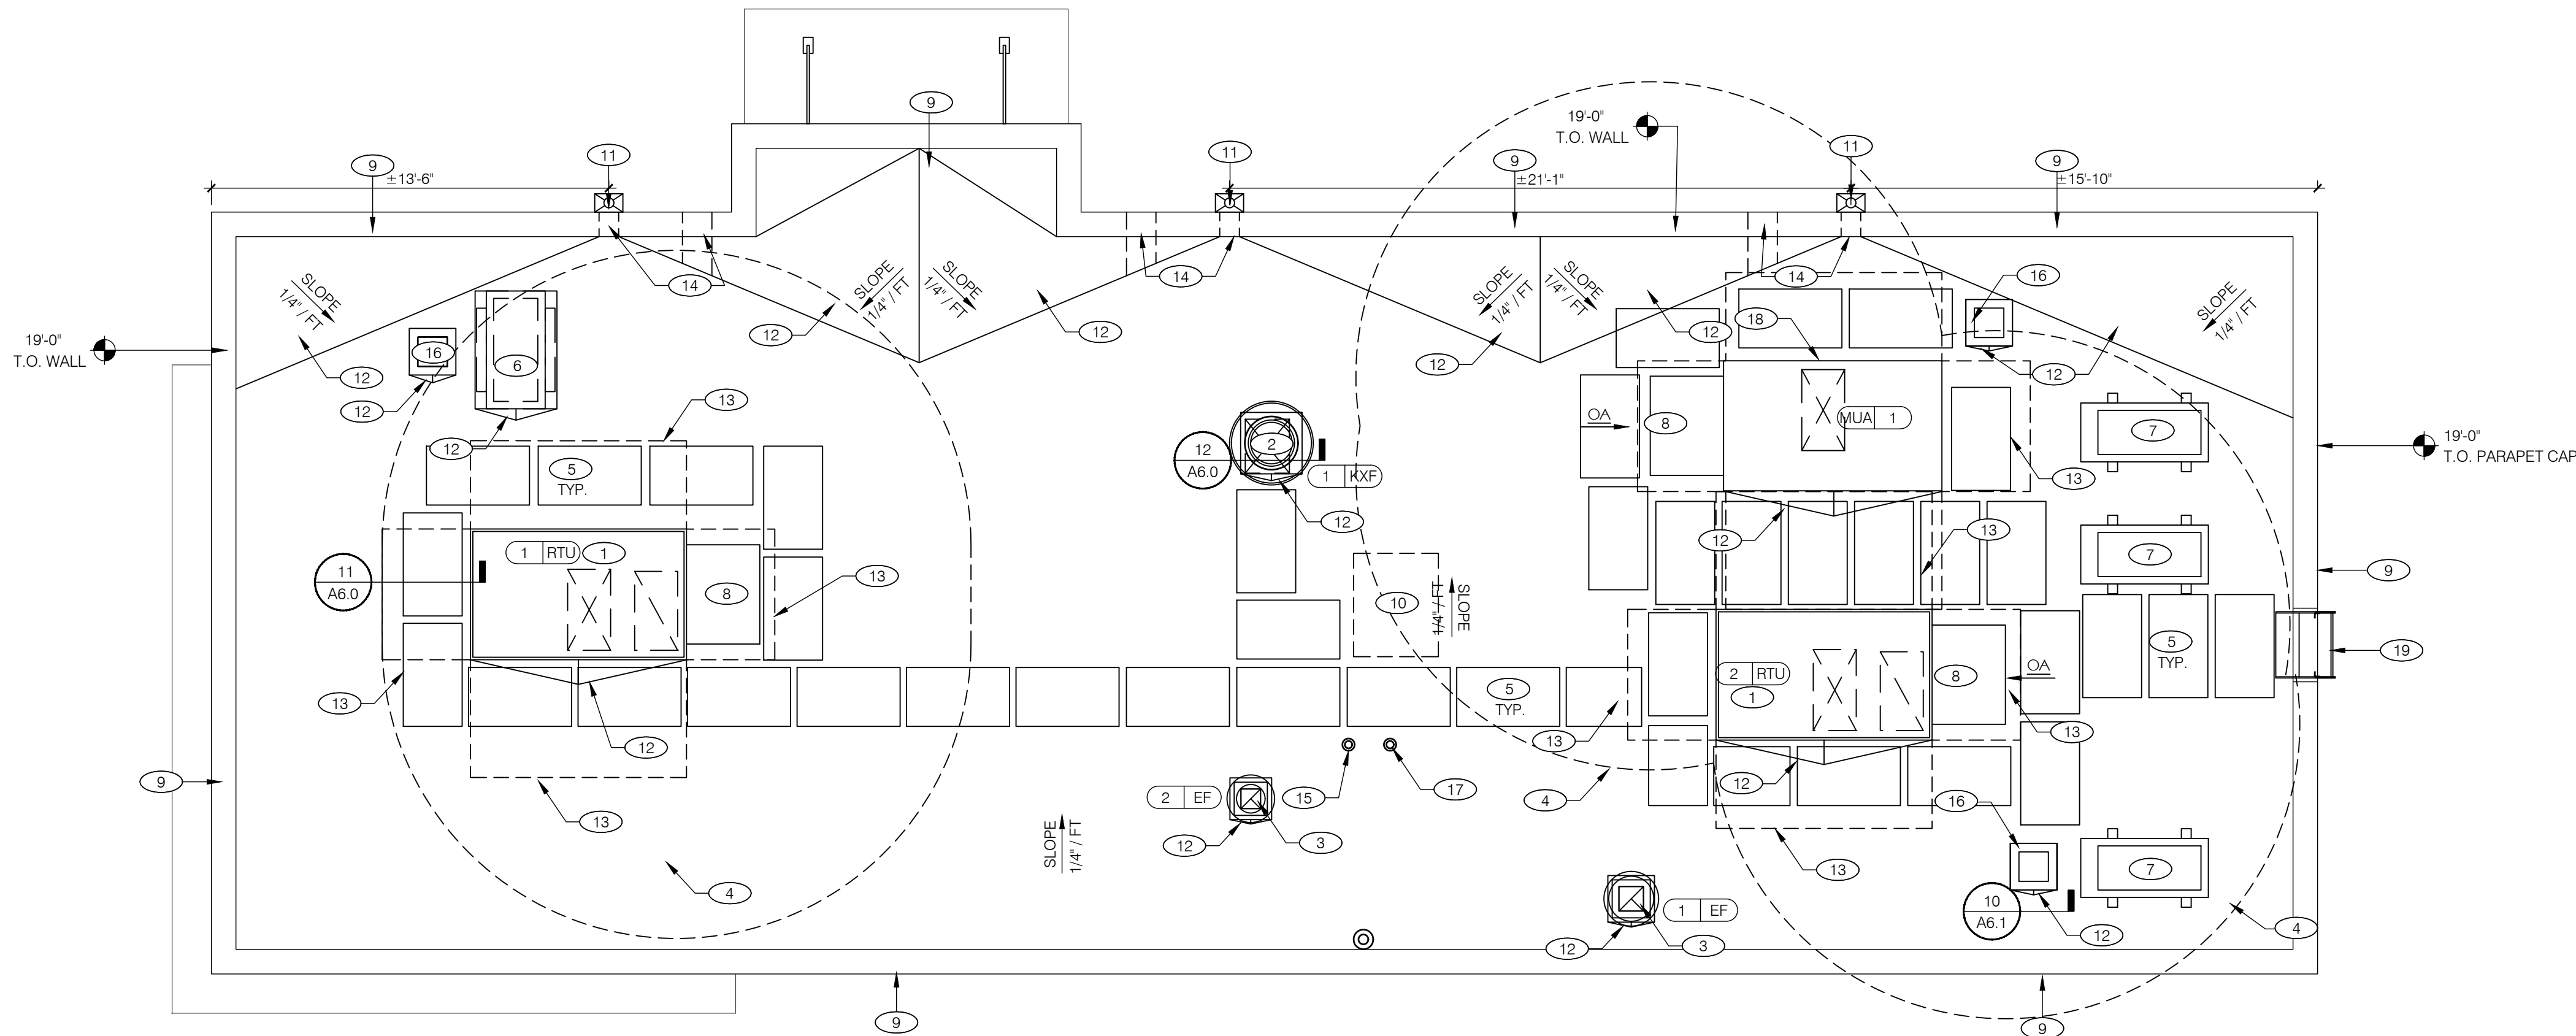

**SEE REFLECTED CEILING PLAN
SHEET A7.3 FOR PARAPET
LIGHTING LOCATIONS.**

ROOF PLAN 1/4"=1'-0"

A

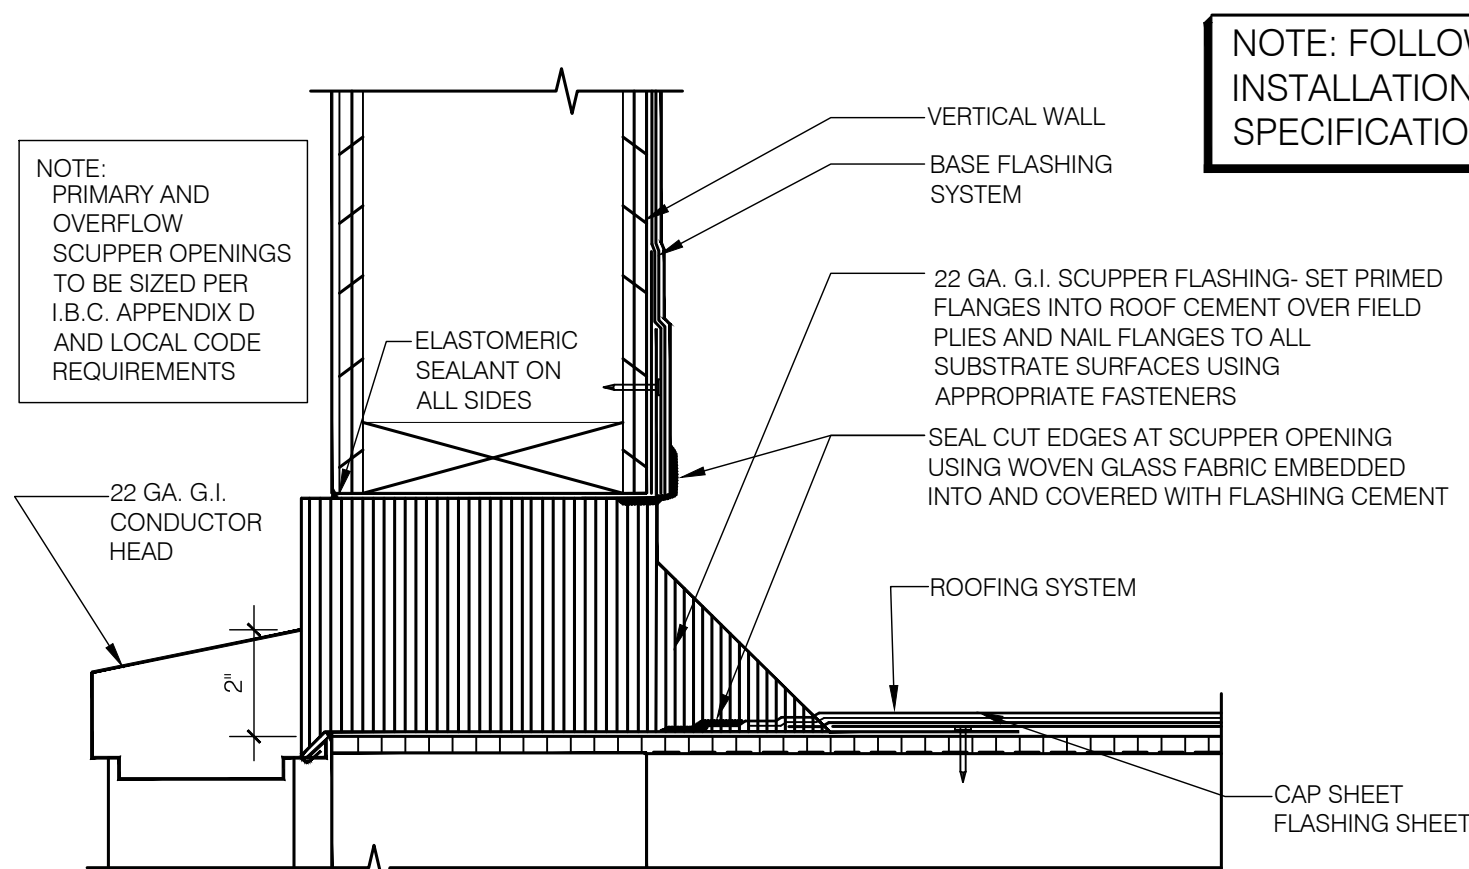

SCUPPER FLASHING

E

WATERPROOFING:

- A. TOP NAILING AT PARAPET CAP FLASHING WILL NOT BE ACCEPTED.
B. PENETRATIONS IN ROOFING MEMBRANE AND FLASHING SHALL ONLY BE MADE AS INDICATED ON THE DRAWINGS.

- C. ALL SHEET MTL FLASHING SHALL BE 22 GA MIN.

MISCELLANEOUS:

- A. ROOF PENETRATIONS CLOSER THAN 12" FROM ANOTHER WILL NOT BE ALLOWED.
B. EXHAUST FANS MIN. 10'-0" AWAY FROM ALL AIR INTAKE / SUPPLY.

ROOF INSULATION:

- A. RIGID BOARD, INSULATION TYPE 3. COMPLY WITH MFRS. WRITTEN SPECIFICATIONS AND INSTALLATION INSTRUCTIONS.
B. BOARD THICKNESS TO BE MINIMUM R-30 CI:
1" MINIMUM (PER ROOFING SYSTEM STANDARD).

ROOFING SYSTEM:

- A. DURO-LAST SINGLE-PLY SYSTEM. COMPLY WITH MFRS. WRITTEN SPECIFICATIONS AND INSTALLATION INSTRUCTIONS.
B. G.C. SHALL COORDINATE ALL INSTALLATION REQUIREMENTS.

ALTERNATE ROOFING SYSTEM:

- A. MODIFIED BITUMEN MEMBRANE SYSTEM. COMPLY WITH MFRS. WRITTEN SPECIFICATIONS AND INSTALLATION INSTRUCTIONS.
B. G.C. SHALL COORDINATE ALL INSTALLATION REQUIREMENTS.

ROOF CRICKETS:

- A. CRICKETS @ ROOFTOP EQUIPMENT SHALL BE FORMED WITH TAPERED INSULATION TO SUCH AN EXTENT AS TO PROVIDE A POSITIVE MIN. 1/2" SLOPE TO THE VALLEY.

ROOF PLAN NOTES

D

- 1 HVAC UNIT. INSTALL PLUMB AND LEVEL.

- 2 KITCHEN HOOD EXHAUST FAN. REFER TO MECHANICAL DRAWINGS AND DETAIL 12 / A6.0.

- 3 RESTROOM & 3-COMP SINK EXHAUST FAN VENT PIPES. SEE MECHANICAL DRAWINGS. COORDINATE LOCATION WITH RTU-2 AIR INTAKE; SEE KEYNOTE 8, THIS SHEET.

- 4 CLEAR ROOF AREA AROUND RTU AIR INTAKE. NO BUILDING / EQUIPMENT EXHAUST PERMITTED WITHIN THIS AREA.

- 5 ROOF WALK MATS. REFER TO ROOF MFRS. SPECIFICATIONS.

- 6 ICE MACHINE CONDENSERS.

- 7 WALK-IN COOLER / FREEZER CONDENSERS. SEE RESPONSIBILITIES SCHEDULE ON SHEETS T1.1 & T1.2.

- 8 OUTSIDE AIR INTAKE FOR HVAC UNIT AND MUA. MAINTAIN MIN. 10'-0" SEPARATION FROM PLUMBING VENTS, FLUES AND BUILDING EXHAUST.

- 9 PARAPET CAP. SEE DETAIL 17 / A6.2.

- 10 PREFERRED LOCATION FOR SATELLITE DISH SLED. SEE RESPONSIBILITIES SCHEDULE ON SHEET A7.3.

- 11 COLLECTOR HEAD AND DOWNSPOUT.

- 12 ROOF CRICKET; MINIMUM SLOPE = 1/2" per FT.

- 13 CLEAR ROOF WORK AREA AROUND RTU.

- 14 SCUPPERS. SEE DETAIL E, THIS SHEET. TOP OF OVERFLOW SCUPPER TO BE SET 2" ABOVE TOP OF ROOF DRAIN

- 15 COORDINATE LOCATION OF VENT PIPES WITH PLUMBING DRAWINGS.

- 16 PIPE HOOD FOR SATELLITE DISH and/or REFRIGERANT LINES. COORDINATE LOCATION. SEE DETAIL 10 / A6.1.

- 17 WATER HEATER EXHAUST. SEE MECHANICAL DRAWINGS.


- 18 MAKE-UP AIR UNIT. REFER TO MECHANICAL DRAWINGS.

- 19 WALL MOUNTED SHIP'S LADDER. SEE DETAIL 15/A6.0 FOR MORE INFORMATION.

REFER TO MEP DRAWINGS FOR ROOFTOP EQUIPMENT, VENT PIPES, ETC.

KEY NOTES

B

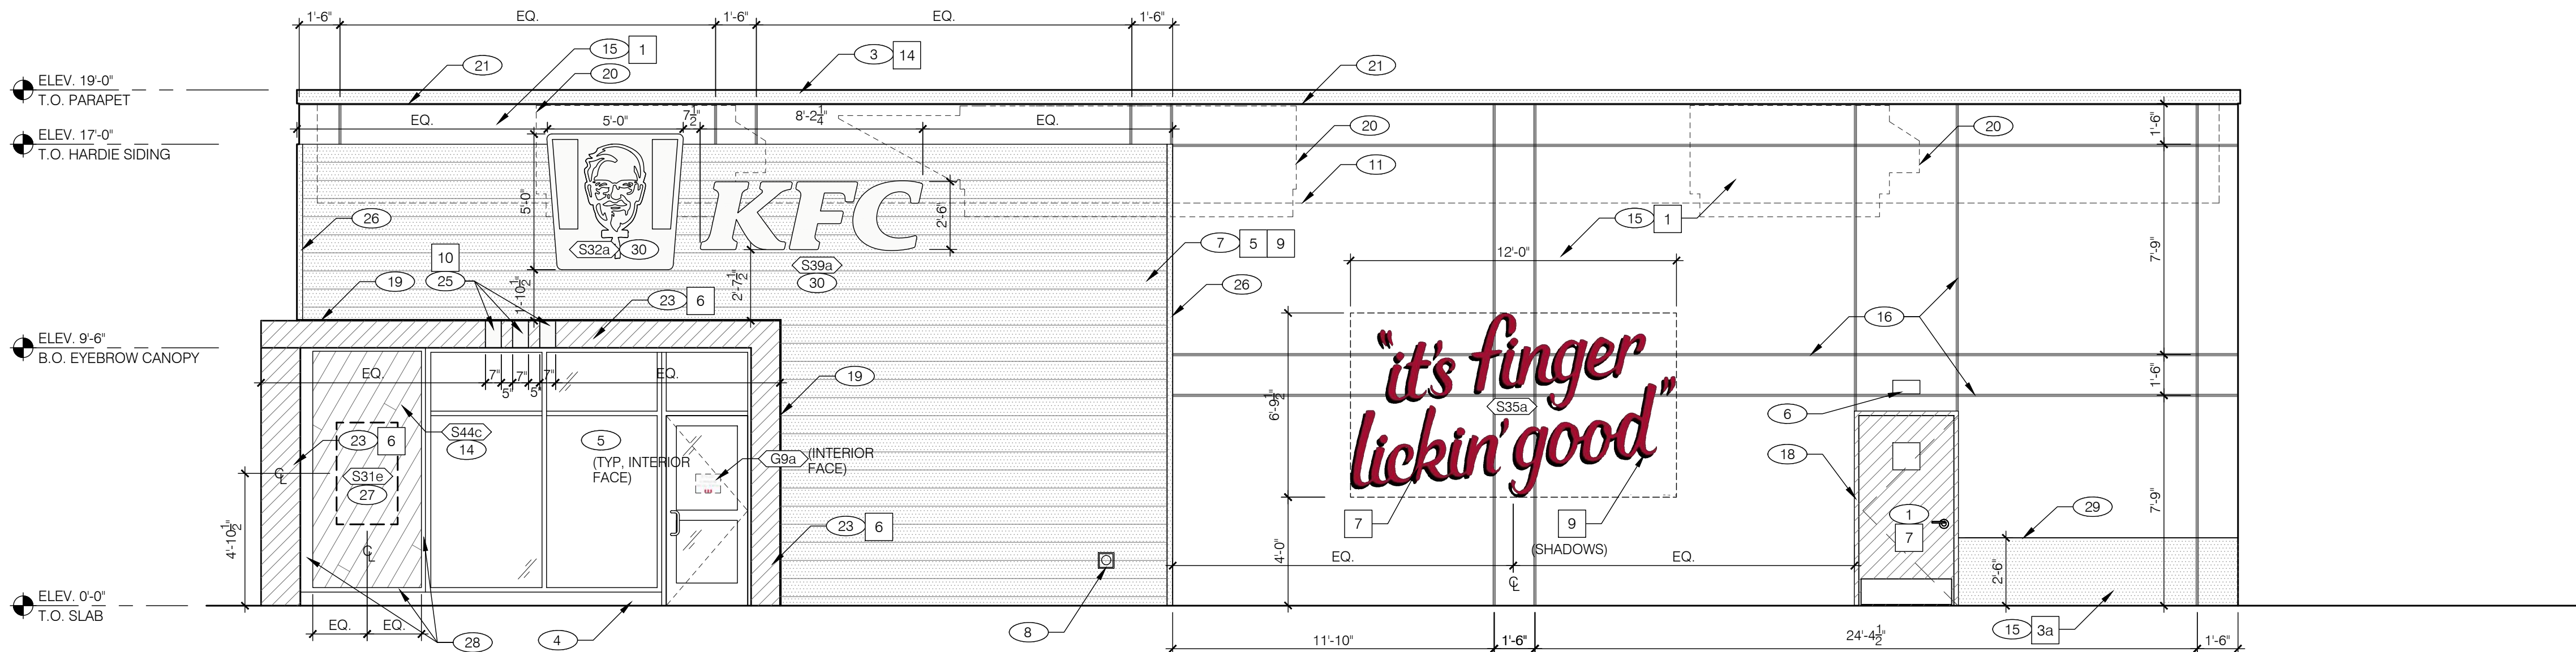NOTE:
SIGNAGE AND BUILDING ELEMENTS ARE SHOWN FOR REFERENCE ONLY.
REFER TO "VENDOR SUPPLIED / INSTALLED ELEMENTS" GENERAL NOTE; THIS SHEET.

MAIN ENTRY ELEVATION 1/4"=1'-0"

A

SYMBOL	EXTERIOR WALL AREA	MANUFACTURER	DESCRIPTION	NOTES
EIFS				
1 ef-1	GREY EIFS 1.5"	STO CORP.	MATCH BM PAPER WHITE 1590	
2 ef-2	RED EIFS 1.5"	STO CORP.	MATCH BM EXOTIC RED 2086-10	
3a ef-3a	BLACK EIFS 1.5"	STO CORP.	MATCH BM BLACK JACK 2133-20	
3b ef-3b	BLACK EIFS 3" (ALTERNATE)	STO CORP.	MATCH BM BLACK JACK 2133-20	EIFS ALTERNATE FOR 1c-1 PROVIDE 3/4" HOIZONTAL V-GROOVE SCORING 9' APART.
EXTERIOR CLADDING				
5 fc-1	FIBER CEMENT SIDING - HORIZ. SHIPLAP ON 2x2 FURRINGS W/ 1/2" PLYWOOD	JAMES HARDIE	ARTISAN SHIPLAP SIDING WITH MATCHING 2.5" TRIM PAINTED p-9	www.jameshardie.com Hardie Artisan Siding - Shiplap 9' Exposure
6 ac-1	ACM PANELS	ALPOLIC	MATCH BM EXOTIC RED 2086-10	
PAINT				
7 p-1	RED EXTERIOR PAINT	BENJAMIN MOORE	BM EXOTIC RED 2086-10	
8	NOT USED			
9 p-9	BLACK EXTERIOR PAINT	BENJAMIN MOORE	BM BLACK JACK 2133-20	
10 p-10	GREY EXTERIOR PAINT	BENJAMIN MOORE	BM PAPER WHITE 1590	
WOOD				
11	NOT USED			
12	NOT USED			
13	NOT USED			
METAL TRIM				
14 m-3	EXTERIOR METAL TRIM (BLACK)		MATCH BM BLACK JACK 2133-20	
15 m-1	EXTERIOR METAL TRIM (RED)		MATCH BM EXOTIC RED 2086-10	
EXTERIOR FINISH SCHEDULE				F

- SECURITY DOOR. OWNER-SUPPLIED / G.C. INSTALL.
- DRIVE-THRU WINDOW. SEE SHEET A2.1
- PARAPET FASCIA CAP. COLOR AS NOTED. SEE 17/A6.2.
- CONCRETE CURB WITH BRAKEMETAL TO MATCH STOREFRONT. SEE DETAIL 1/A6.2.
- ALUMINUM STOREFRONT WINDOW / DOOR SYSTEM. SEE SHEET A1.1.
- WALL LIGHTING. SEE SHEET E4.0 AND T1.1.
- FIBER CEMENT SHIPLAP SIDING.
- HOSE BIB - REFER TO PLUMBING DRAWINGS.
- SCUPPER, COLLECTOR AND DOWNSPOUT 6" MIN. PAINT TO MATCH ADJACENT BUILDING COLOR.
- SWITCHGEAR.
- INDICATES TOP OF ROOF DECK.
- OVERFLOW SCUPPER.
- GAS EQUIPMENT. DO NOT PAINT METER.
- ACM PANEL. SEE DETAILS 14 & 15 / A6.2 AND FINISH SCHEDULE ON SHEET A7.3.
- 1.5" EIFS - COLOR AS NOTED.
- 3/4" EIFS V-GROOVE, TYP. SEE DETAIL 13/A6.0.
- VENDOR SUPPLIED CANOPY. SEE DETAIL 2/A6.2.
- STAINLESS STEEL CORNER GUARDS.
- CONTINUOUS LINEAR ACCENT LIGHT FIXTURE - RED. REFER TO ELECTRICAL.
- ROOFTOP EQUIPMENT - SHOWN DASHED FOR REFERENCE
- CONTINUOUS LINEAR ACCENT LIGHT FIXTURE - WHITE. REFER TO ELECTRICAL.
- ALIGN SIGN WITH EDGE OF CANOPY.
- EYEBROW CANOPY AND VERTICAL ELEMENT WITH ACM PANELS. SEE DETAIL 6/A6.2.
- VINYL FENCE: BUFTTECH - HYDE PARK OR EQUAL. COLOR: MATTE BLACK. SEE T-1.1.
- PAINTED STRIPING AS INDICATED.
- 2.5" FIBER CEMENT TRIM TO MATCH PLANKS.
- BLACK POWDER COATED POSTER FRAME. SEE RESPONSIBILITY SCHEDULE ON SHEET T1.1. PROVIDE BLOCKING IN WALL TO ACCOMODATE BRACKETS.
- 2" AND 6" METAL TRIM TO MATCH P-5 BY ACM PANEL VENDOR. SEE 14/A6.2.
- 1/4" CONTROL JOINT AT EIFS COLOR CHANGE.
- SEE SHEET A4.3 FOR GUIDANCE ON KFC SIGN AND BUCKET PLACEMENT.

NOTE: NOT ALL KEY NOTES APPLY TO THIS SHEET

KEY NOTES

G

MISCELLANEOUS:

A. SEE SHEET A1.1 "WINDOW TYPES" FOR WINDOW ELEVATIONS.

B. SEE FINISH SCHEDULE ON SHEET A7.3 FOR MORE INFORMATION.

SEALERS:

A. PROVIDE SEALANT PER MFRS SPECIFICATIONS AT ALL WALL AND ROOF PENETRATIONS.


B. PROVIDE SEALANT PER MFRS SPECIFICATIONS AT ALL STOREFRONT, STOREFRONT DOOR, WINDOW AND SERVICE DOOR FRAMES @ HEAD AND JAMB ONLY. DO NOT SEAL SILL AT WINDOWS.

VENDOR SUPPLIED / INSTALLED ELEMENTS:

GC TO COORDINATE WITH VENDOR PROVIDED / VENDOR INSTALLED SIGNAGE AND BUILDING ELEMENTS.

GENERAL NOTES

E

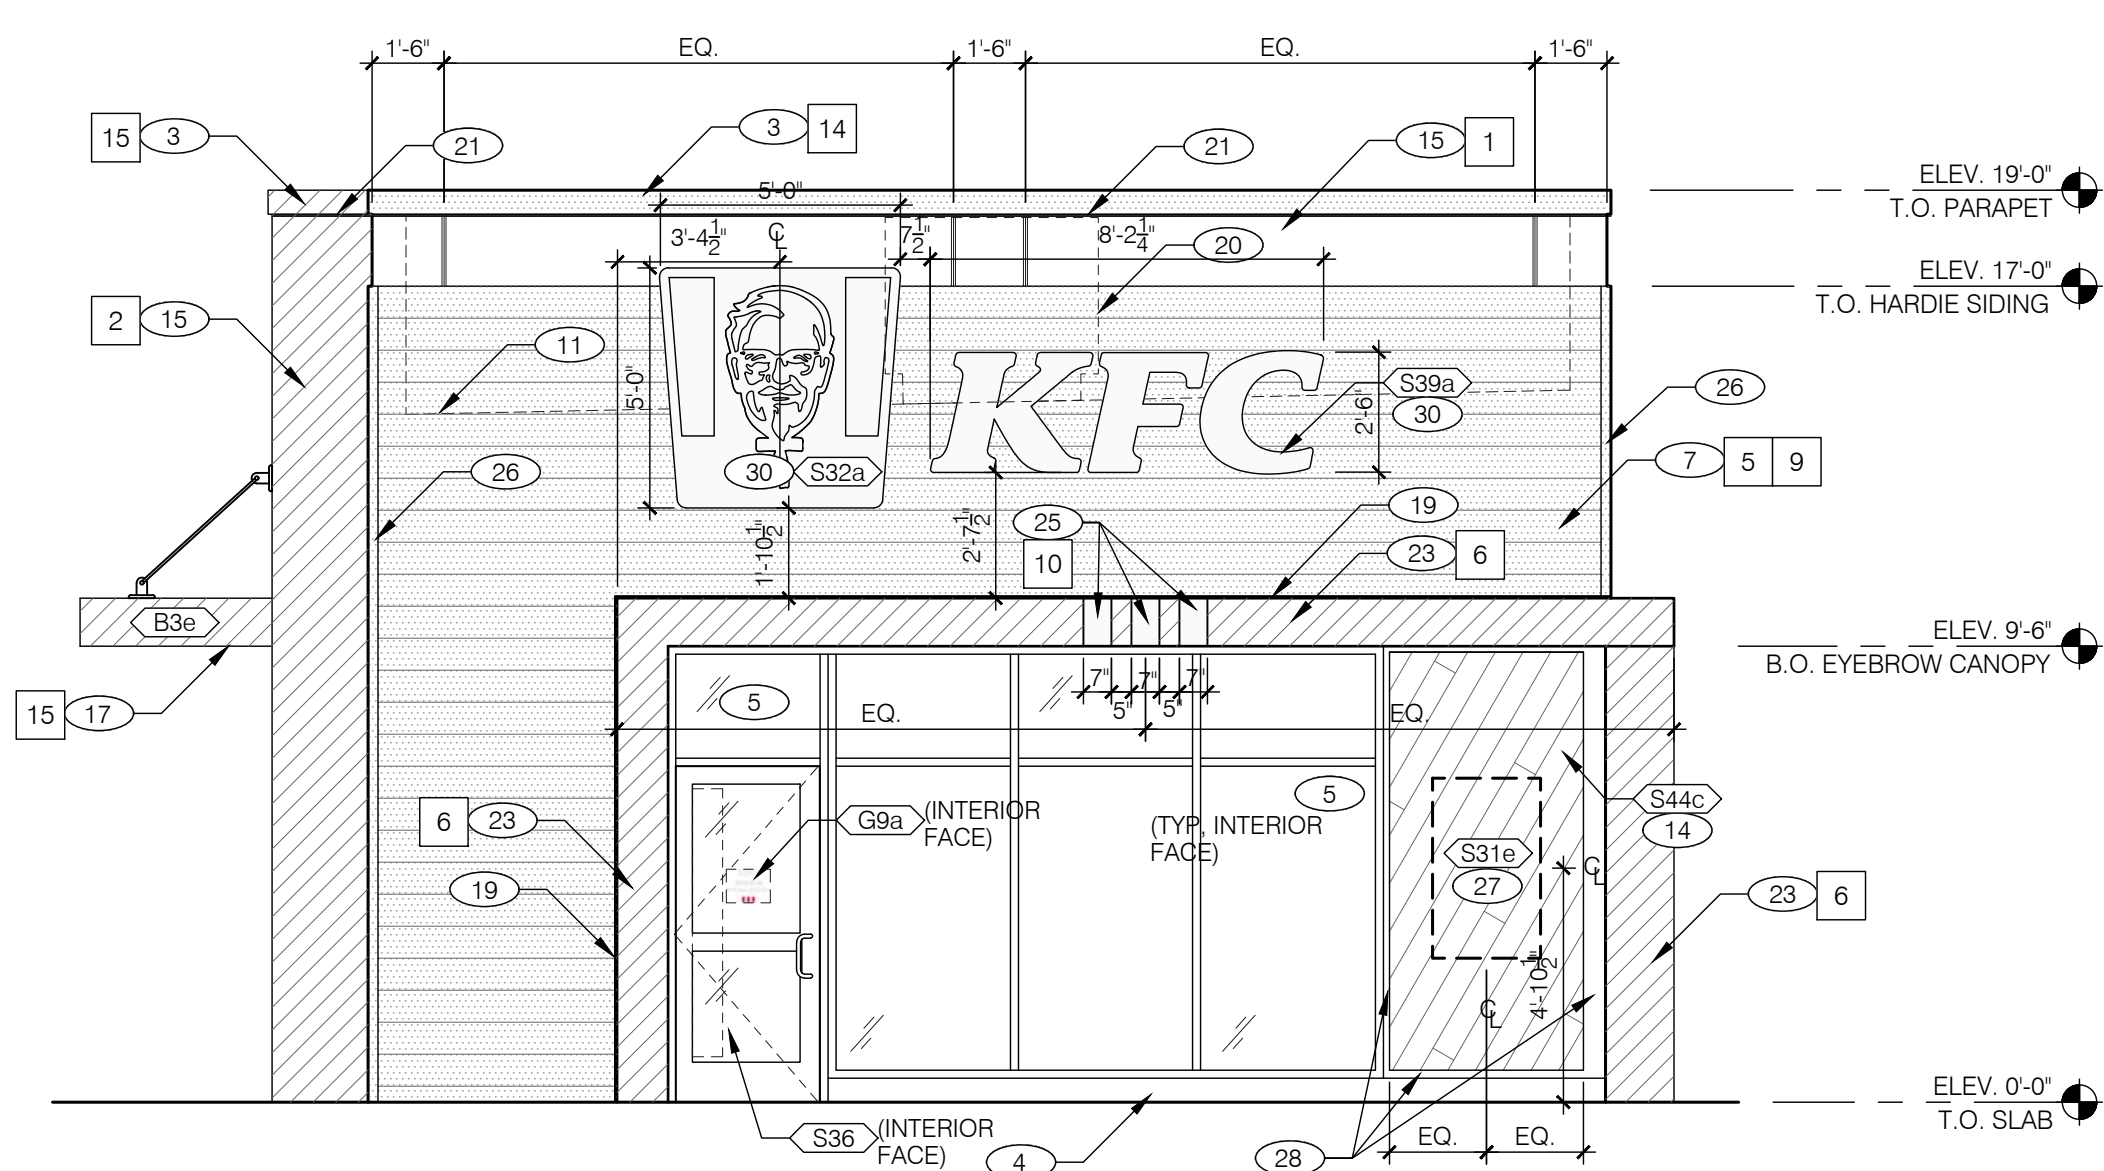

FRONT ELEVATION 1/4"=1'-0"

B

TAG	ITEM DESCRIPTION	SIGNAGE DIMENSIONS	SIGN AREA	FURNISH / INSTALL	ELEC
B3e	DT WINDOW CANOPY (SIGNAGE VENDOR).	N/A	N/A	RSQS / SIGNAGE VENDOR **	YES*
S30a	30" HIGH KENTUCKY FRIED CHICKEN WHITE STACKED LETTERS	5'-0"H X 12'-2"W	61 S.F.	RSQS / GC OR SUBCONTRACT DECOR INSTALLER	NO
S31e	POSTER FRAME - ON DISPLAY	45"H X 27"W	8.44 S.F.	RSQS / GC OR SUBCONTRACT DECOR INSTALLER	NO
S32a	ILLUMINATED BUCKET WITH COLONEL ONLY (STANDARD)	60" X 60"	25 S.F.	RSQS / SIGNAGE VENDOR	YES*
S32b	ILLUMINATED BUCKET WITH COLONEL ONLY (ALTERNATE)	48" X 48"	16 S.F.	RSQS / SIGNAGE VENDOR	YES*
S35a	IT'S FINGER LICKIN' GOOD STENCIL (RED LETTERS/BLACK SHADOW)	6'-9-1/2"H X 12'-0" W	81.5 S.F.	RSQS / GC OR SUBCONTRACT DECOR INSTALLER	NO
S39a	KFC CHANNEL LETTERS - WHITE (USE PROPORTIONAL SIZED BUCKET 60")	2'-6"H X 8'-2.3"W	20.5 S.F.	RSQS / SIGNAGE VENDOR	YES*
S39b	KFC CHANNEL LETTERS - WHITE (ALTERNATE - USE PROPORTIONAL SIZED BUCKET 48")	2'-0"H X 6'-6.6"W	13.1 S.F.	RSQS / SIGNAGE VENDOR	YES*
S44c	ACM PRINTED WOOD PANEL (EXTERIOR)	108"H X 55-1/2" W	42 S.F.	RSQS / SIGNAGE VENDOR	NO
S47a	12 FT - SECRET RECIPE - RED SECRET RECIPE	9'-3 1/2"H X 12'-0" W	111.4 S.F.	RSQS / GC OR SUBCONTRACT DECOR INSTALLER	NO

* GC SHALL ENSURE ELECTRICAL IS TO LOCATION PRIOR TO INSTALL.

** GC SHALL ENSURE BLOCKING IN WALL AND SUBSTRATE IS SUITABLE FOR WEIGHT OF SIGN.

NOTES:

- FOR WINDOW DECALS AND SIGNAGE. REFER TO INTERIOR ELEVATIONS SHEET A8.0 AND SIGNAGE SCHEDULE ON SHEET A7.2.
- REFER TO GRAPHICS PACKAGE FOR ADDITIONAL INFORMATION.

EXTERIOR GRAPHICS / CANOPIES

C

PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358

BUILDING TYPE: DT1800 RED

PLAN VERSION: 1.2

SITE NUMBER: N/A

ENTITY NUMBER: N/A

STORE NUMBER: E320147

KFC


1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028

DT1800 RED

EXTERIOR
ELEVATIONS

A4.0

PLOT DATE: 19.11.2025

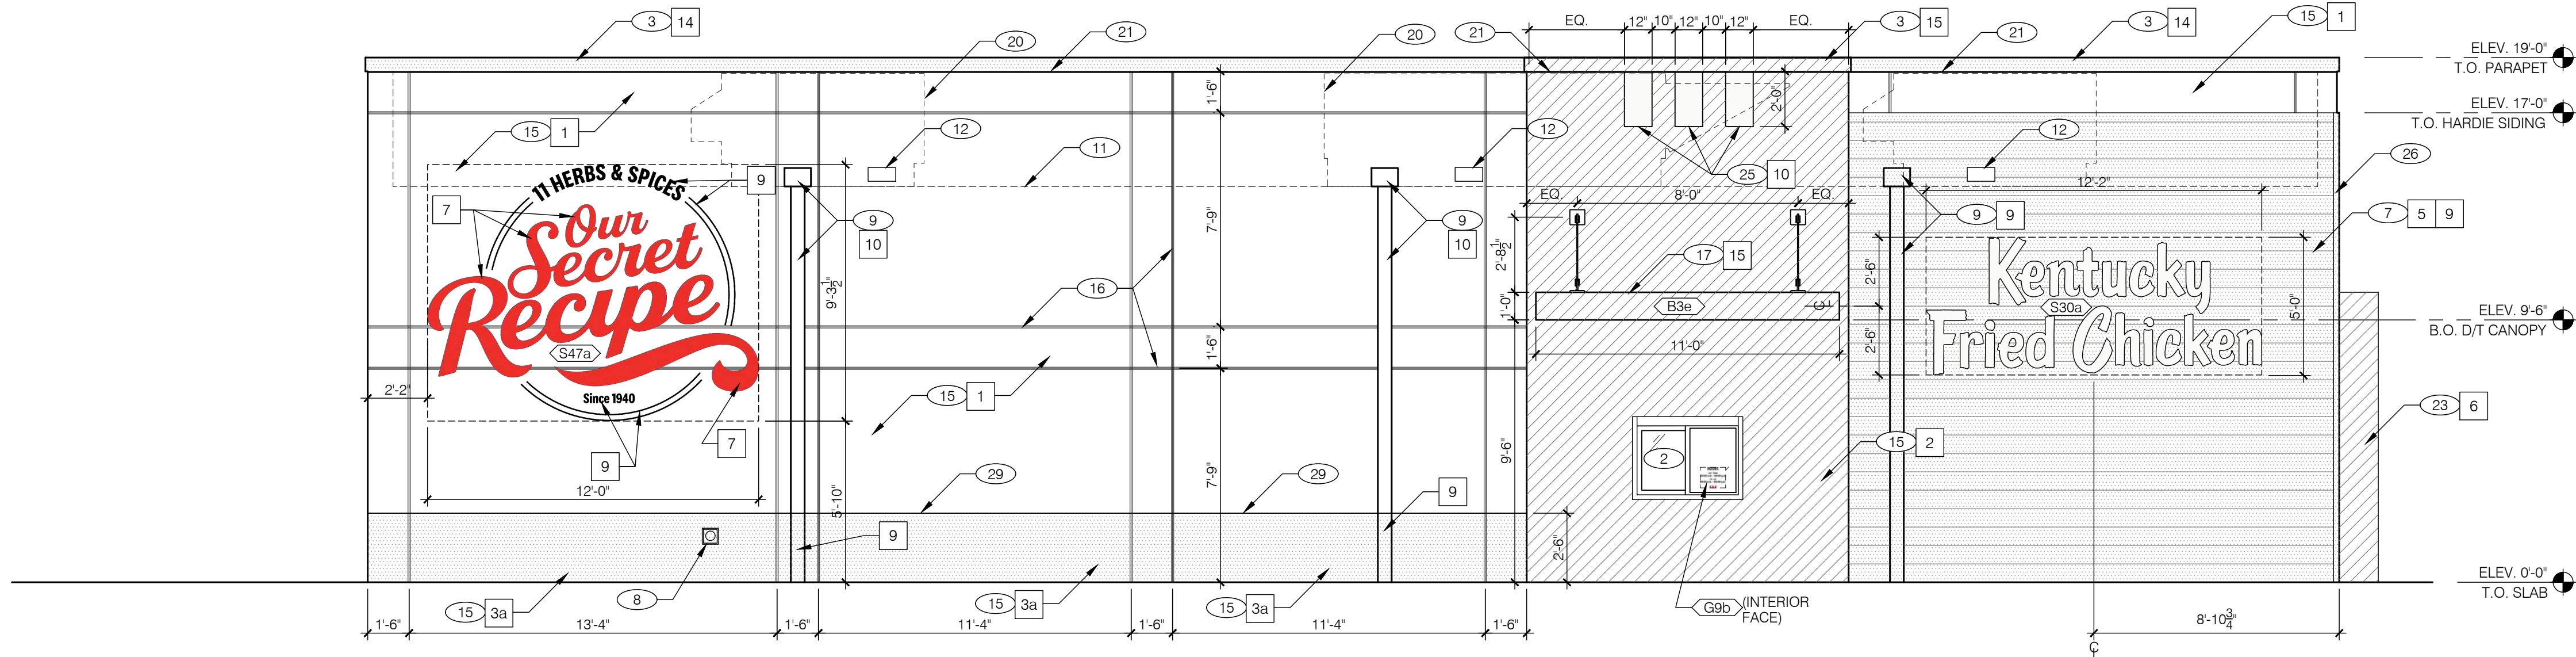NOTE:
SIGNAGE AND BUILDING ELEMENTS ARE SHOWN FOR REFERENCE ONLY.
REFER TO "VENDOR SUPPLIED / INSTALLED ELEMENTS" GENERAL NOTE; THIS SHEET.

DRIVE-THRU ELEVATION 1/4"=1'-0"

A

SYMBOL	EXTERIOR WALL AREA	MANUFACTURER	DESCRIPTION	NOTES
EIFS				
1 ef-1	GREY EIFS 1.5"	STO CORP.	MATCH BM PAPER WHITE 1590	
2 ef-2	RED EIFS 1.5"	STO CORP.	MATCH BM EXOTIC RED 2086-10	
3a ef-3a	BLACK EIFS 1.5"	STO CORP.	MATCH BM BLACK JACK 2133-20	
3b ef-3b	BLACK EIFS 3" (ALTERNATE)	STO CORP.	MATCH BM BLACK JACK 2133-20	EIFS ALTERNATE FOR 1c-1 PROVIDE 3/4" HOIZONTAL V-GROOVE SCORING 9' APART.
EXTERIOR CLADDING				
5 fc-1	FIBER CEMENT SIDING - HORIZ. SHIPLAP ON 2x2 FURRINGS W/ 1/2" PLYWOOD	JAMES HARDIE	ARTISAN SHIPLAP SIDING WITH MATCHING 2.5" TRIM PAINTED p-9	www.jameshardie.com Hardie Artisan Siding - Shiplap 9' Exposure
6 ac-1	ACM PANELS	ALPOLIC	MATCH BM EXOTIC RED 2086-10	
PAINT				
7 p-1	RED EXTERIOR PAINT	BENJAMIN MOORE	BM EXOTIC RED 2086-10	
8	NOT USED			
9 p-9	BLACK EXTERIOR PAINT	BENJAMIN MOORE	BM BLACK JACK 2133-20	
10 p-10	GREY EXTERIOR PAINT	BENJAMIN MOORE	BM PAPER WHITE 1590	
WOOD				
11	NOT USED			
12	NOT USED			
13	NOT USED			
METAL TRIM				
14 m-3	EXTERIOR METAL TRIM (BLACK)		MATCH BM BLACK JACK 2133-20	
15 m-1	EXTERIOR METAL TRIM (RED)		MATCH BM EXOTIC RED 2086-10	
EXTERIOR FINISH SCHEDULE				F

- SECURITY DOOR. OWNER-SUPPLIED / G.C. INSTALL.
- DRIVE-THRU WINDOW. SEE SHEET A2.1
- PARAPET FASCIA CAP. COLOR AS NOTED. SEE 17/A6.2.
- CONCRETE CURB WITH BRAKEMETAL TO MATCH STOREFRONT. SEE DETAIL 1/A6.2.
- ALUMINUM STOREFRONT WINDOW / DOOR SYSTEM. SEE SHEET A1.1.
- WALL LIGHTING. SEE SHEET E4.0 AND T1.1.
- FIBER CEMENT SHIPLAP SIDING.
- HOSE BIB - REFER TO PLUMBING DRAWINGS.
- SCUPPER, COLLECTOR AND DOWNSPOUT 6" MIN. PAINT TO MATCH ADJACENT BUILDING COLOR.
- SWITCHGEAR.
- INDICATES TOP OF ROOF DECK.
- OVERFLOW SCUPPER.
- GAS EQUIPMENT. DO NOT PAINT METER.
- ACM PANEL. SEE DETAILS 14 & 15 / A6.2 AND FINISH SCHEDULE ON SHEET A7.3.
- 1.5" EIFS - COLOR AS NOTED.
- 3/4" EIFS V-GROOVE, TYP. SEE DETAIL 13/A6.0.
- VENDOR SUPPLIED CANOPY. SEE DETAIL 2/A6.2.
- STAINLESS STEEL CORNER GUARDS.
- CONTINUOUS LINEAR ACCENT LIGHT FIXTURE - RED. REFER TO ELECTRICAL.
- ROOFTOP EQUIPMENT - SHOWN DASHED FOR REFERENCE
- CONTINUOUS LINEAR ACCENT LIGHT FIXTURE - WHITE. REFER TO ELECTRICAL.
- ALIGN SIGN WITH EDGE OF CANOPY.
- EYEBROW CANOPY AND VERTICAL ELEMENT WITH ACM PANELS. SEE DETAIL 6/A6.2.
- VINYL FENCE: BUFFTECH - HYDE PARK OR EQUAL. COLOR: MATTE BLACK. SEE T-1.1
- PAINTED STRIPING AS INDICATED.
- 2.5" FIBER CEMENT TRIM TO MATCH PLANKS.
- BLACK POWDER COATED POSTER FRAME. SEE RESPONSIBILITY SCHEDULE ON SHEET T1.1. PROVIDE BLOCKING IN WALL TO ACCOMMODATE BRACKETS.
- 2" AND 6" METAL TRIM TO MATCH P-5 BY ACM PANEL VENDOR. SEE 14/A6.2.
- 1/4" CONTROL JOINT AT EIFS COLOR CHANGE.
- SEE SHEET A4.3 FOR GUIDANCE ON KFC SIGN AND BUCKET PLACEMENT.

NOTE: NOT ALL KEY NOTES APPLY TO THIS SHEET

KEY NOTES

G

MISCELLANEOUS:

A. SEE SHEET A1.1 "WINDOW TYPES" FOR WINDOW ELEVATIONS.

B. SEE FINISH SCHEDULE ON SHEET A7.3 FOR MORE INFORMATION.

SEALERS:

A. PROVIDE SEALANT PER MFRS SPECIFICATIONS AT ALL WALL AND ROOF PENETRATIONS.


B. PROVIDE SEALANT PER MFRS SPECIFICATIONS AT ALL STOREFRONT, STOREFRONT DOOR, WINDOW AND SERVICE DOOR FRAMES @ HEAD AND JAMB ONLY. DO NOT SEAL SILL AT WINDOWS.

VENDOR SUPPLIED / INSTALLED ELEMENTS:

GC TO COORDINATE WITH VENDOR PROVIDED / VENDOR INSTALLED SIGNAGE AND BUILDING ELEMENTS.

GENERAL NOTES

E

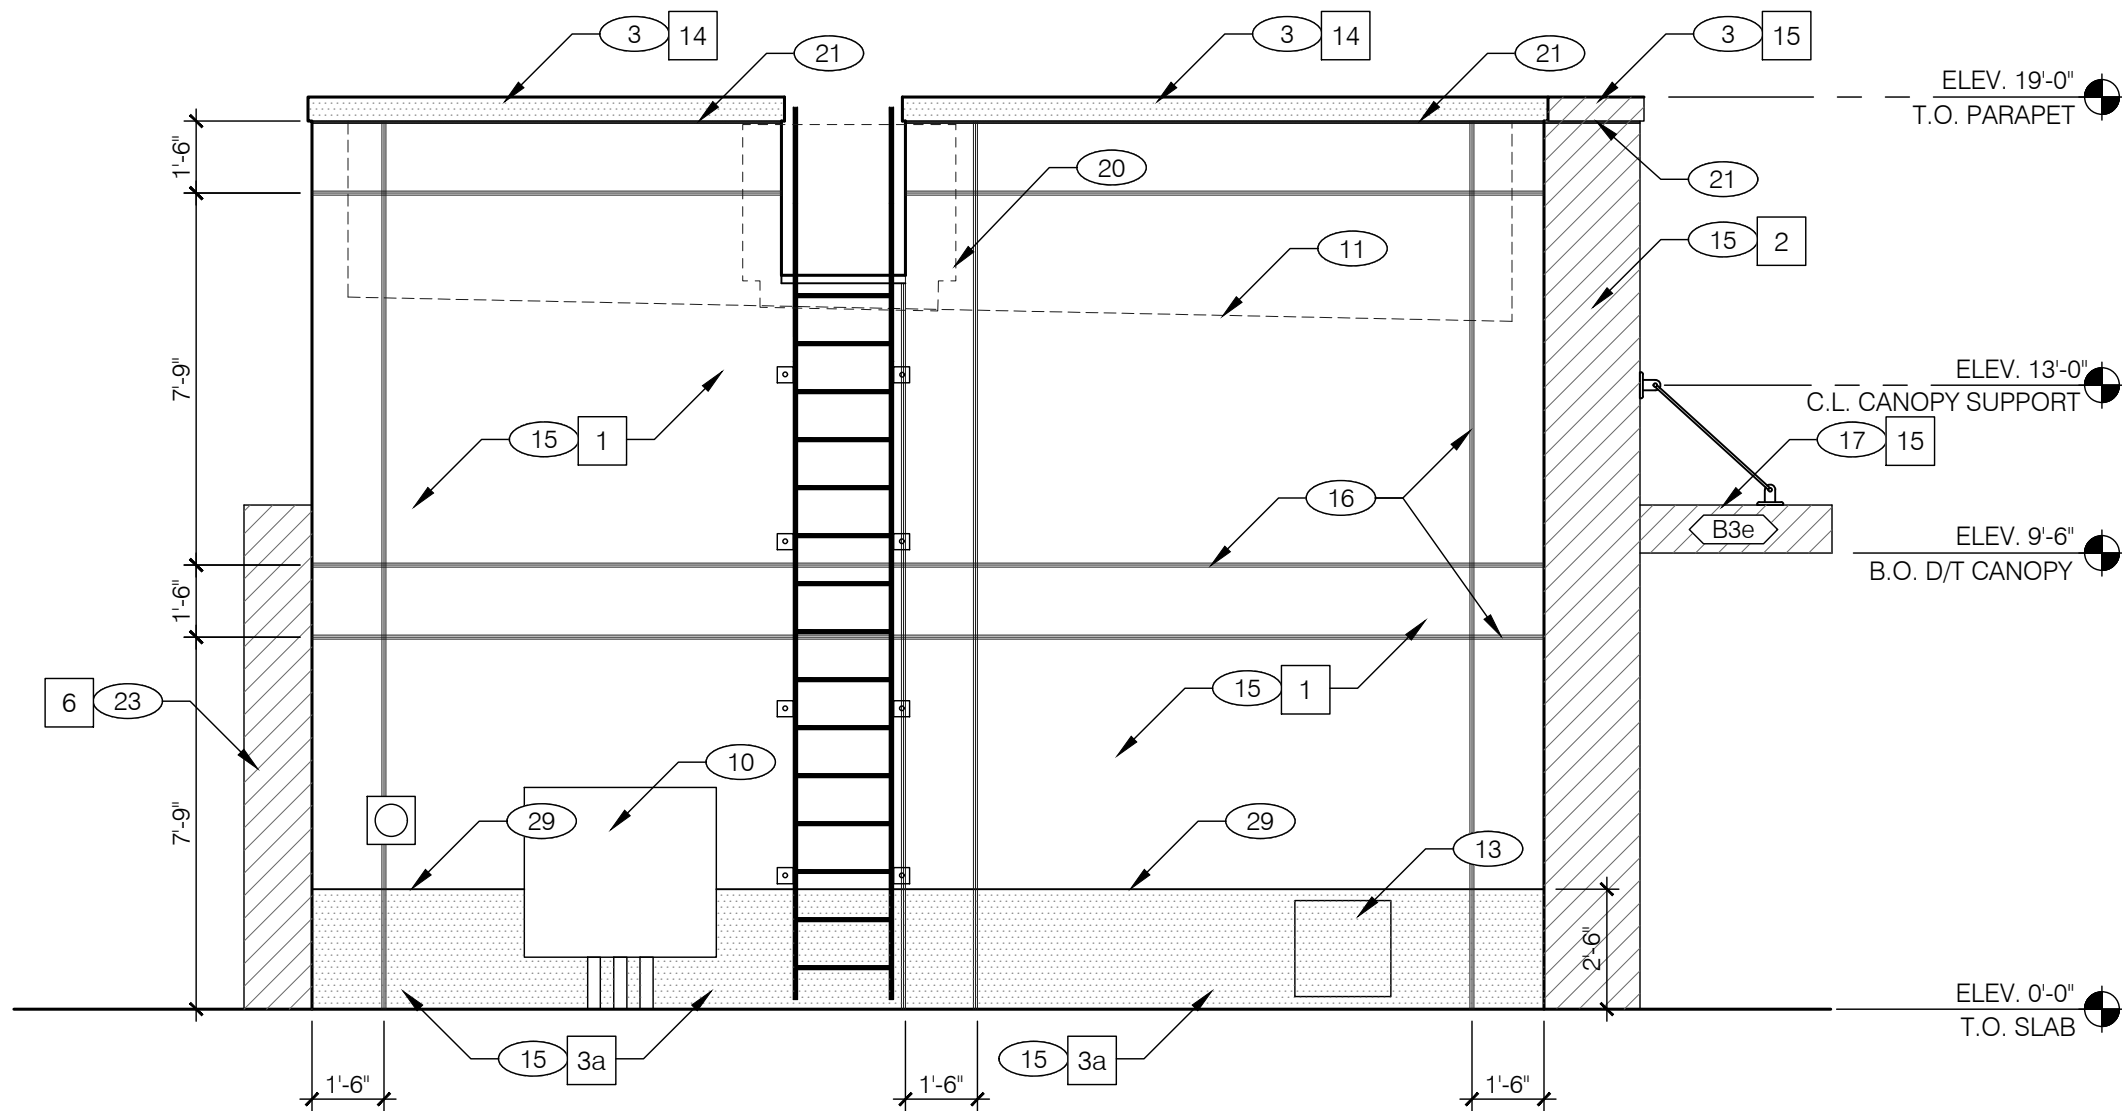

REAR ELEVATION 1/4"=1'-0"

B

TAG	ITEM DESCRIPTION	SIGNAGE DIMENSIONS	SIGN AREA	FURNISH / INSTALL	ELEC
B3e	DT WINDOW CANOPY (SIGNAGE VENDOR).	N/A	N/A	RS CS / SIGNAGE VENDOR **	YES*
S30a	30" HIGH KENTUCKY FRIED CHICKEN WHITE STACKED LETTERS	5'-0"H X 12'-2"W	61 S.F.	RS CS / GC OR SUBCONTRACT DECOR INSTALLER	NO
S31e	POSTER FRAME - ON DISPLAY	45"H X 27"W	8.44 S.F.	RS CS / GC OR SUBCONTRACT DECOR INSTALLER	NO
S32a	ILLUMINATED BUCKET WITH COLONEL ONLY (STANDARD)	60" X 60"	25 S.F.	RS CS / SIGNAGE VENDOR	YES*
S32b	ILLUMINATED BUCKET WITH COLONEL ONLY (ALTERNATE)	48" X 48"	16 S.F.	RS CS / SIGNAGE VENDOR	YES*
S35a	IT'S FINGER LICKIN' GOOD STENCIL (RED LETTERS/BLACK SHADOW)	6'-9-1/2"H X 12'-0" W	81.5 S.F.	RS CS / GC OR SUBCONTRACT DECOR INSTALLER	NO
S39a	KFC CHANNEL LETTERS - WHITE (USE PROPORTIONAL SIZED BUCKET 60")	2'-6"H X 8'-2.3"W	20.5 S.F.	RS CS / SIGNAGE VENDOR	YES*
S39b	KFC CHANNEL LETTERS - WHITE (ALTERNATE - USE PROPORTIONAL SIZED BUCKET 48")	2'-0"H X 6'-6.6"W	13.1 S.F.	RS CS / SIGNAGE VENDOR	YES*
S44c	ACM PRINTED WOOD PANEL (EXTERIOR)	108"H X 55-1/2" W	42 S.F.	RS CS / SIGNAGE VENDOR	NO
S47a	12 FT - SECRET RECIPE - RED SECRET RECIPE	9'-3 1/2"H X 12'-0" W	111.4 S.F.	RS CS / GC OR SUBCONTRACT DECOR INSTALLER	NO

* GC SHALL ENSURE ELECTRICAL IS TO LOCATION PRIOR TO INSTALL.

** GC SHALL ENSURE BLOCKING IN WALL AND SUBSTRATE IS SUITABLE FOR WEIGHT OF SIGN.

NOTES:

- FOR WINDOW DECALS AND SIGNAGE. REFER TO INTERIOR ELEVATIONS SHEET A8.0 AND SIGNAGE SCHEDULE ON SHEET A7.2.
- REFER TO GRAPHICS PACKAGE FOR ADDITIONAL INFORMATION.

EXTERIOR GRAPHICS / CANOPIES

C

PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358

BUILDING TYPE: DT1800 RED

PLAN VERSION: 1.2

SITE NUMBER: N/A

ENTITY NUMBER: N/A

STORE NUMBER: E320147

KFC


1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028

DT1800 RED


EXTERIOR
ELEVATIONS

A4.1


PLOT DATE: 19.11.2025

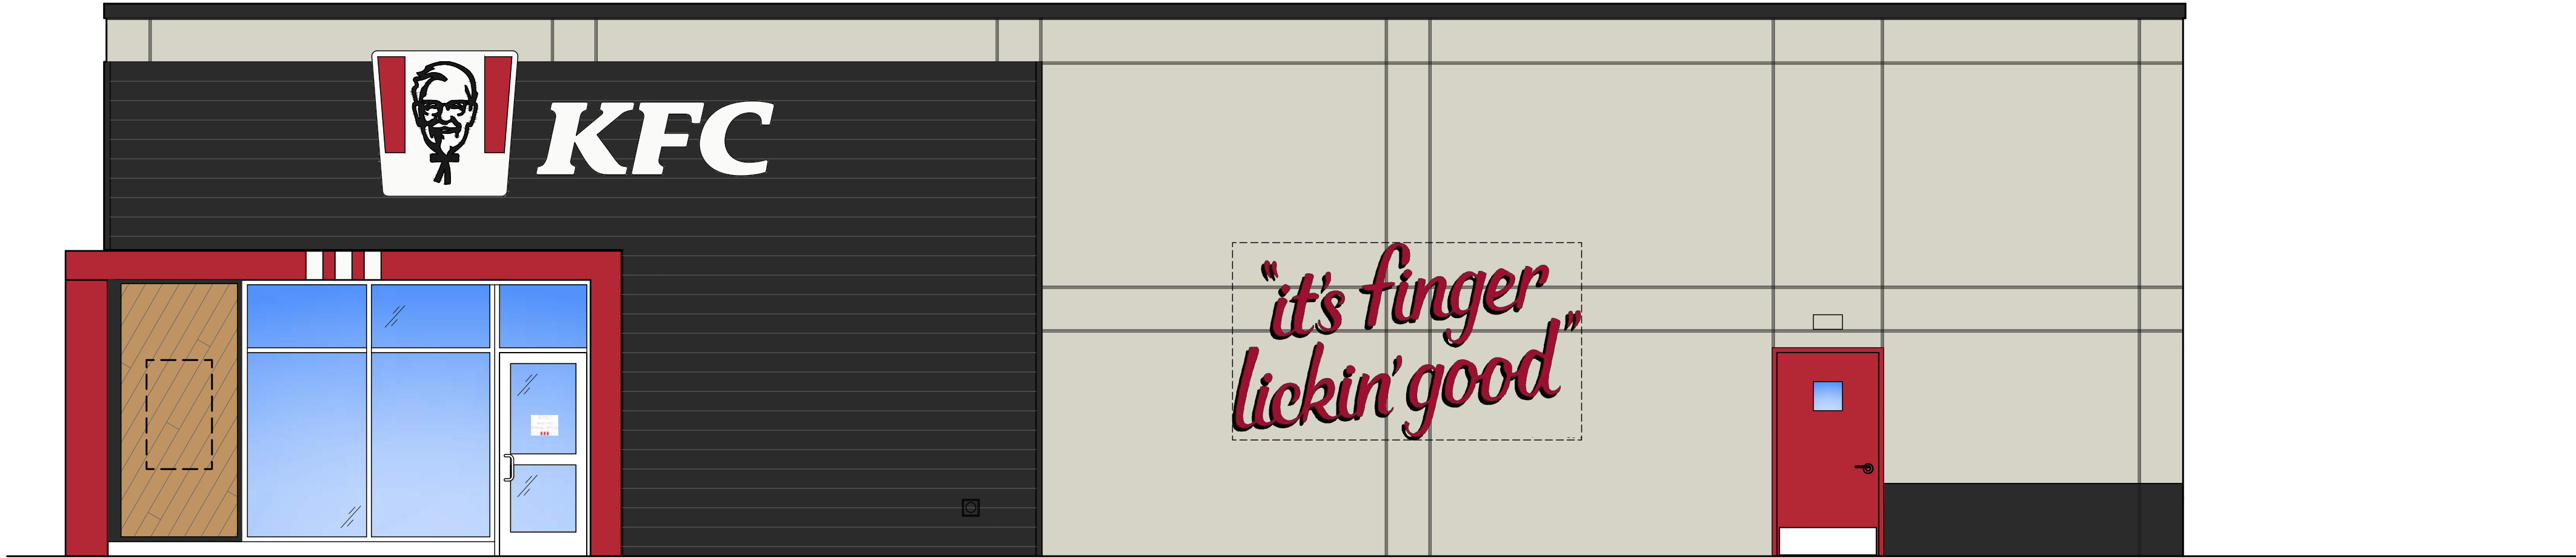

MAIN ENTRY ELEVATION

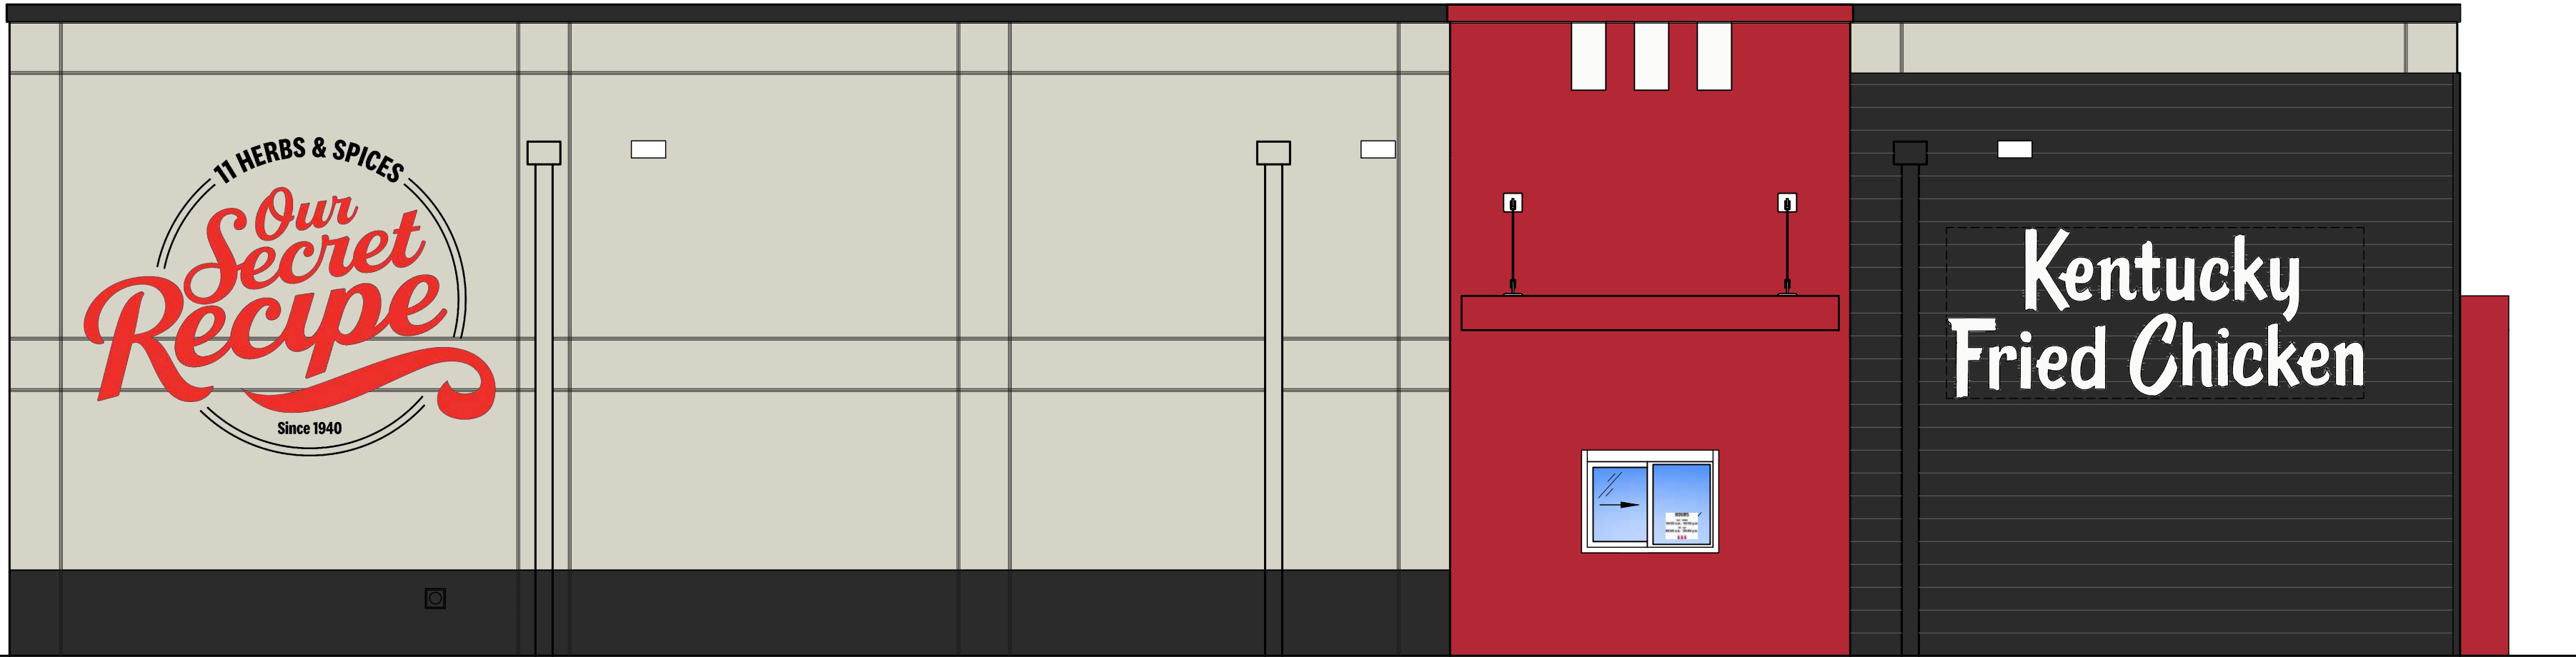

DRIVE-THRU ELEVATION

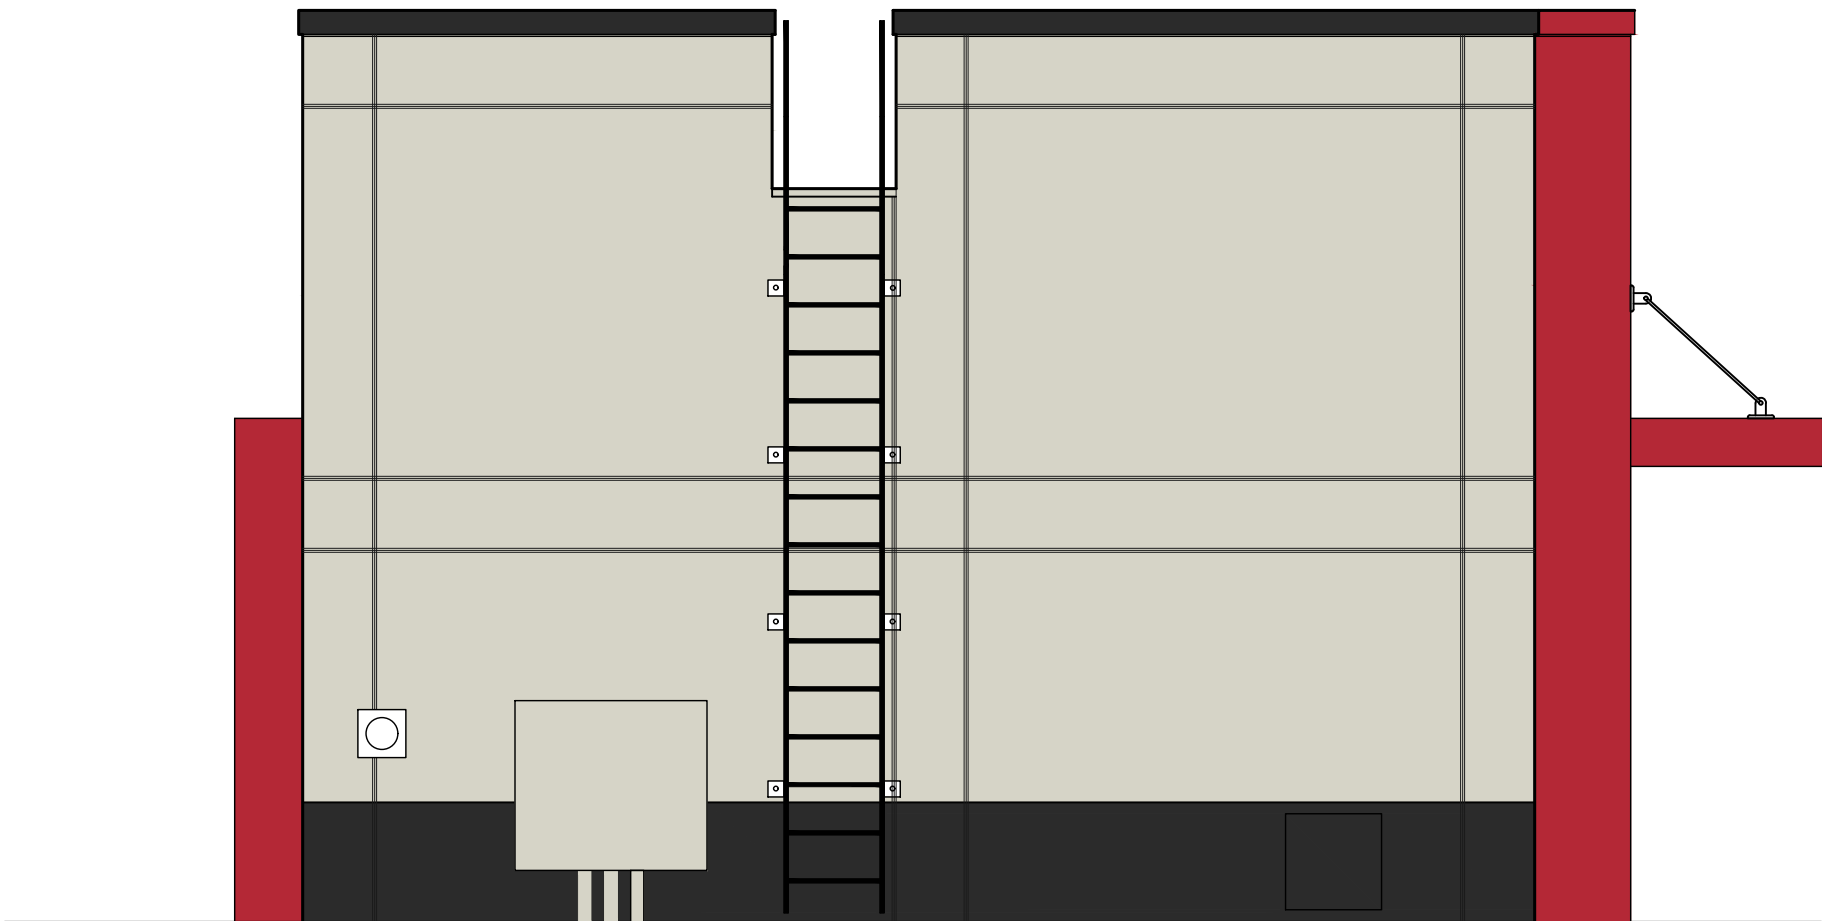

REAR ELEVATION



FRONT ELEVATION

JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HUDDLESTON ROAD, SUITE 1000
PEACHTREE CITY, GEORGIA 30299
770-639-9545
JEFFERSONARCHITECTS.COM



PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC
1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028



DT1800 RED

EXTERIOR
COLORED
ELEVATIONS


A4.2

PLOT DATE: 19.11.2025


Note:
These are the KFC primary building signs. Every new Restaurant opening, or remodel should have one of these signs as per the usage below.

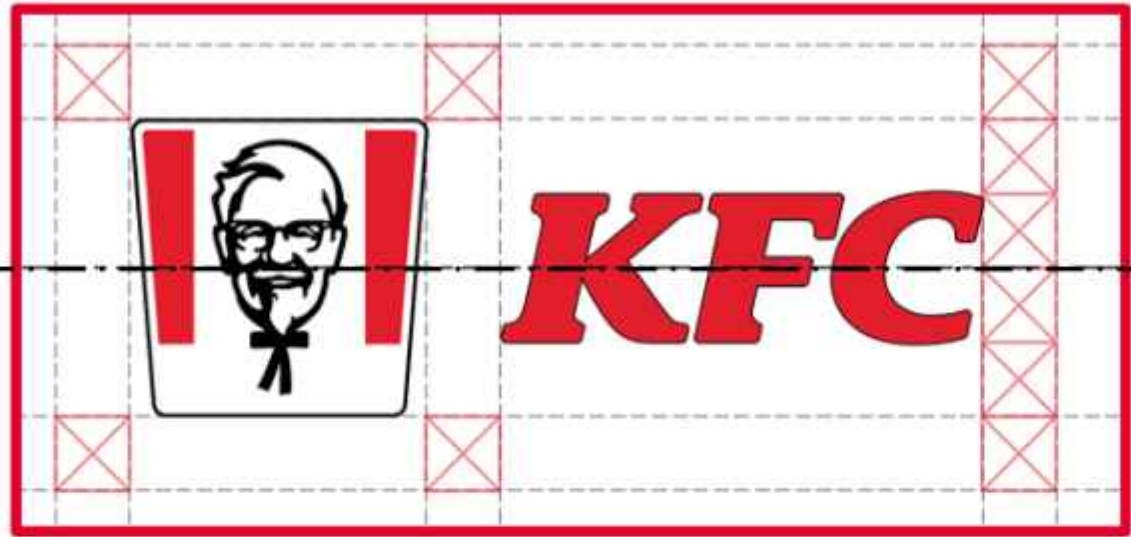


Option 01 : The **preferred primary signs lock up**. To be used in all Restaurant formats.

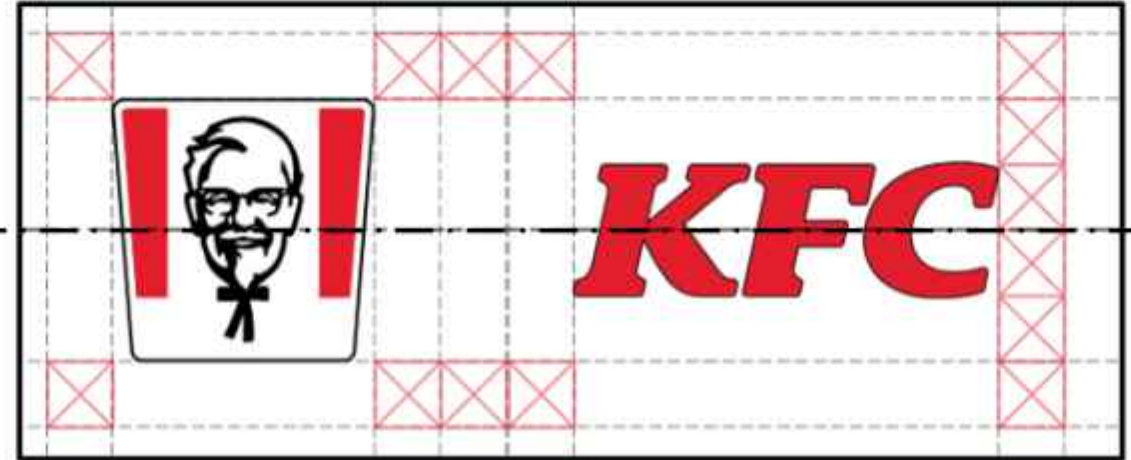

Option 03 : This version to be used **only** when additional space between signs is required. To be used in **inline and Food court asset only**.

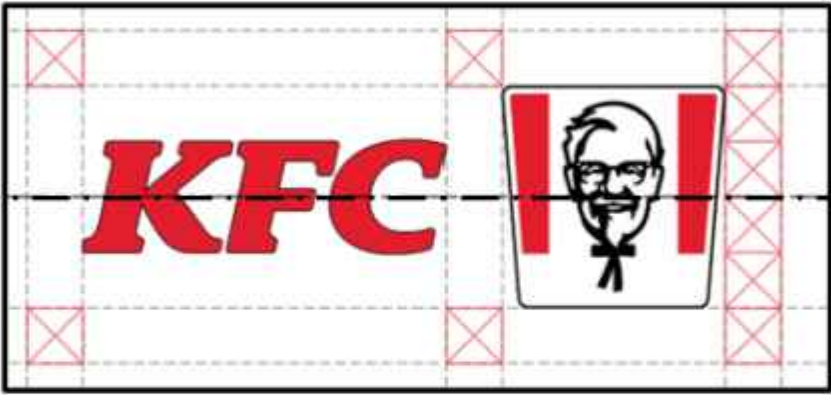

Option 02 : To be used **only** when the bucket can't be placed on the right side due to building restrictions or visibility .

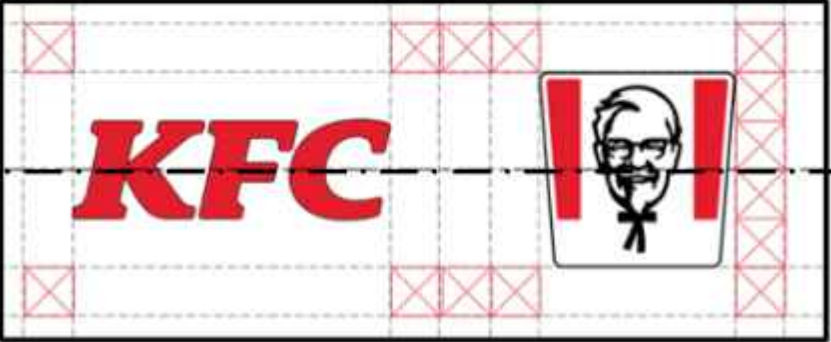

Option 04 : To be used **only** when the bucket can't be placed on the right side due to building restrictions or visibility .

Centered.

Must have:
1- The Bucket height is 2x the KFC letters height.
2- The bucket and the KFC letters must be centered.
3- The “option 01” is the preferred version and it should be used when possible. The other options should be used if it helps to increase the building visibility.



KFC LOGO SIGNAGE LOCK-UP SPECIFICATIONS

PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #:	25-4358
BUILDING TYPE:	DT1800 RED
PLAN VERSION:	1.2
SITE NUMBER:	N/A
ENTITY NUMBER:	N/A
STORE NUMBER:	E320147

KFC

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028



DT1800 RED

**EXTERIOR
SIGNAGE
DETAILS**

A4.3

PLOT DATE: 19.11.2025


JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HUDDLESTON ROAD, SUITE 1000
PEACHTREE CITY, GEORGIA 30269
770-639-9545
JEFFERSONARCHITECTS.COM




NOT USED

NOT USED

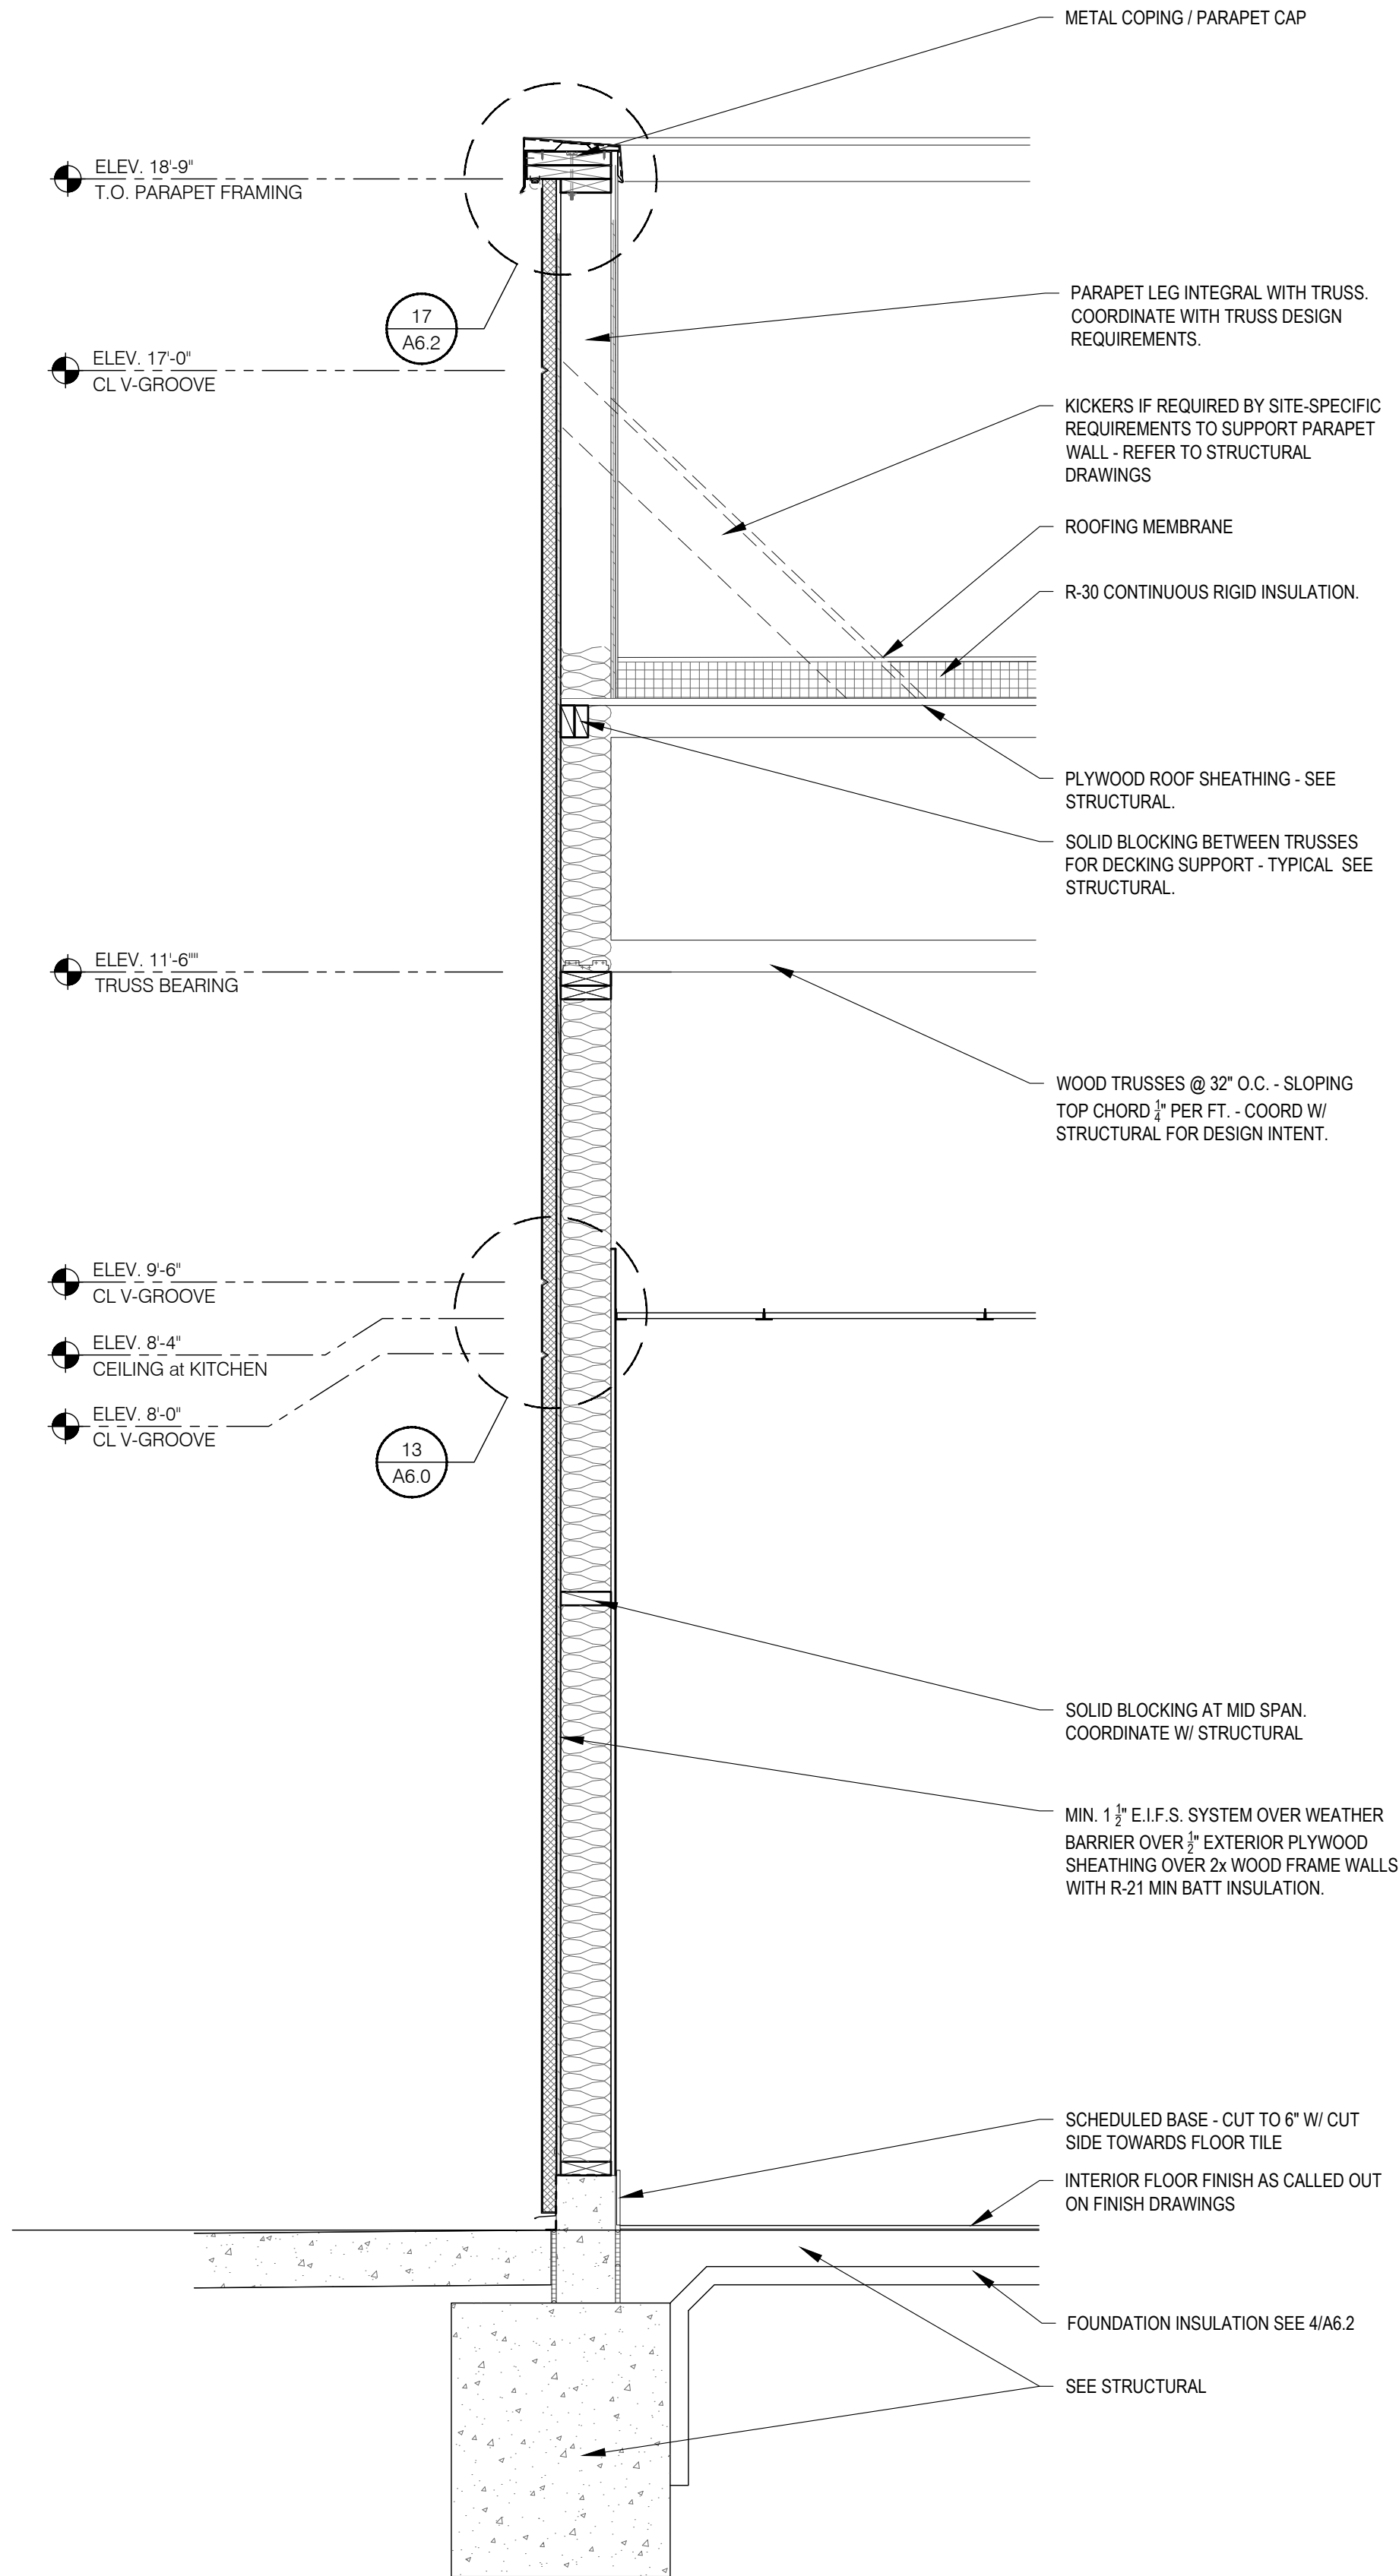


WALL SECTION at SIDE WALL 3/4" = 1'-0" C

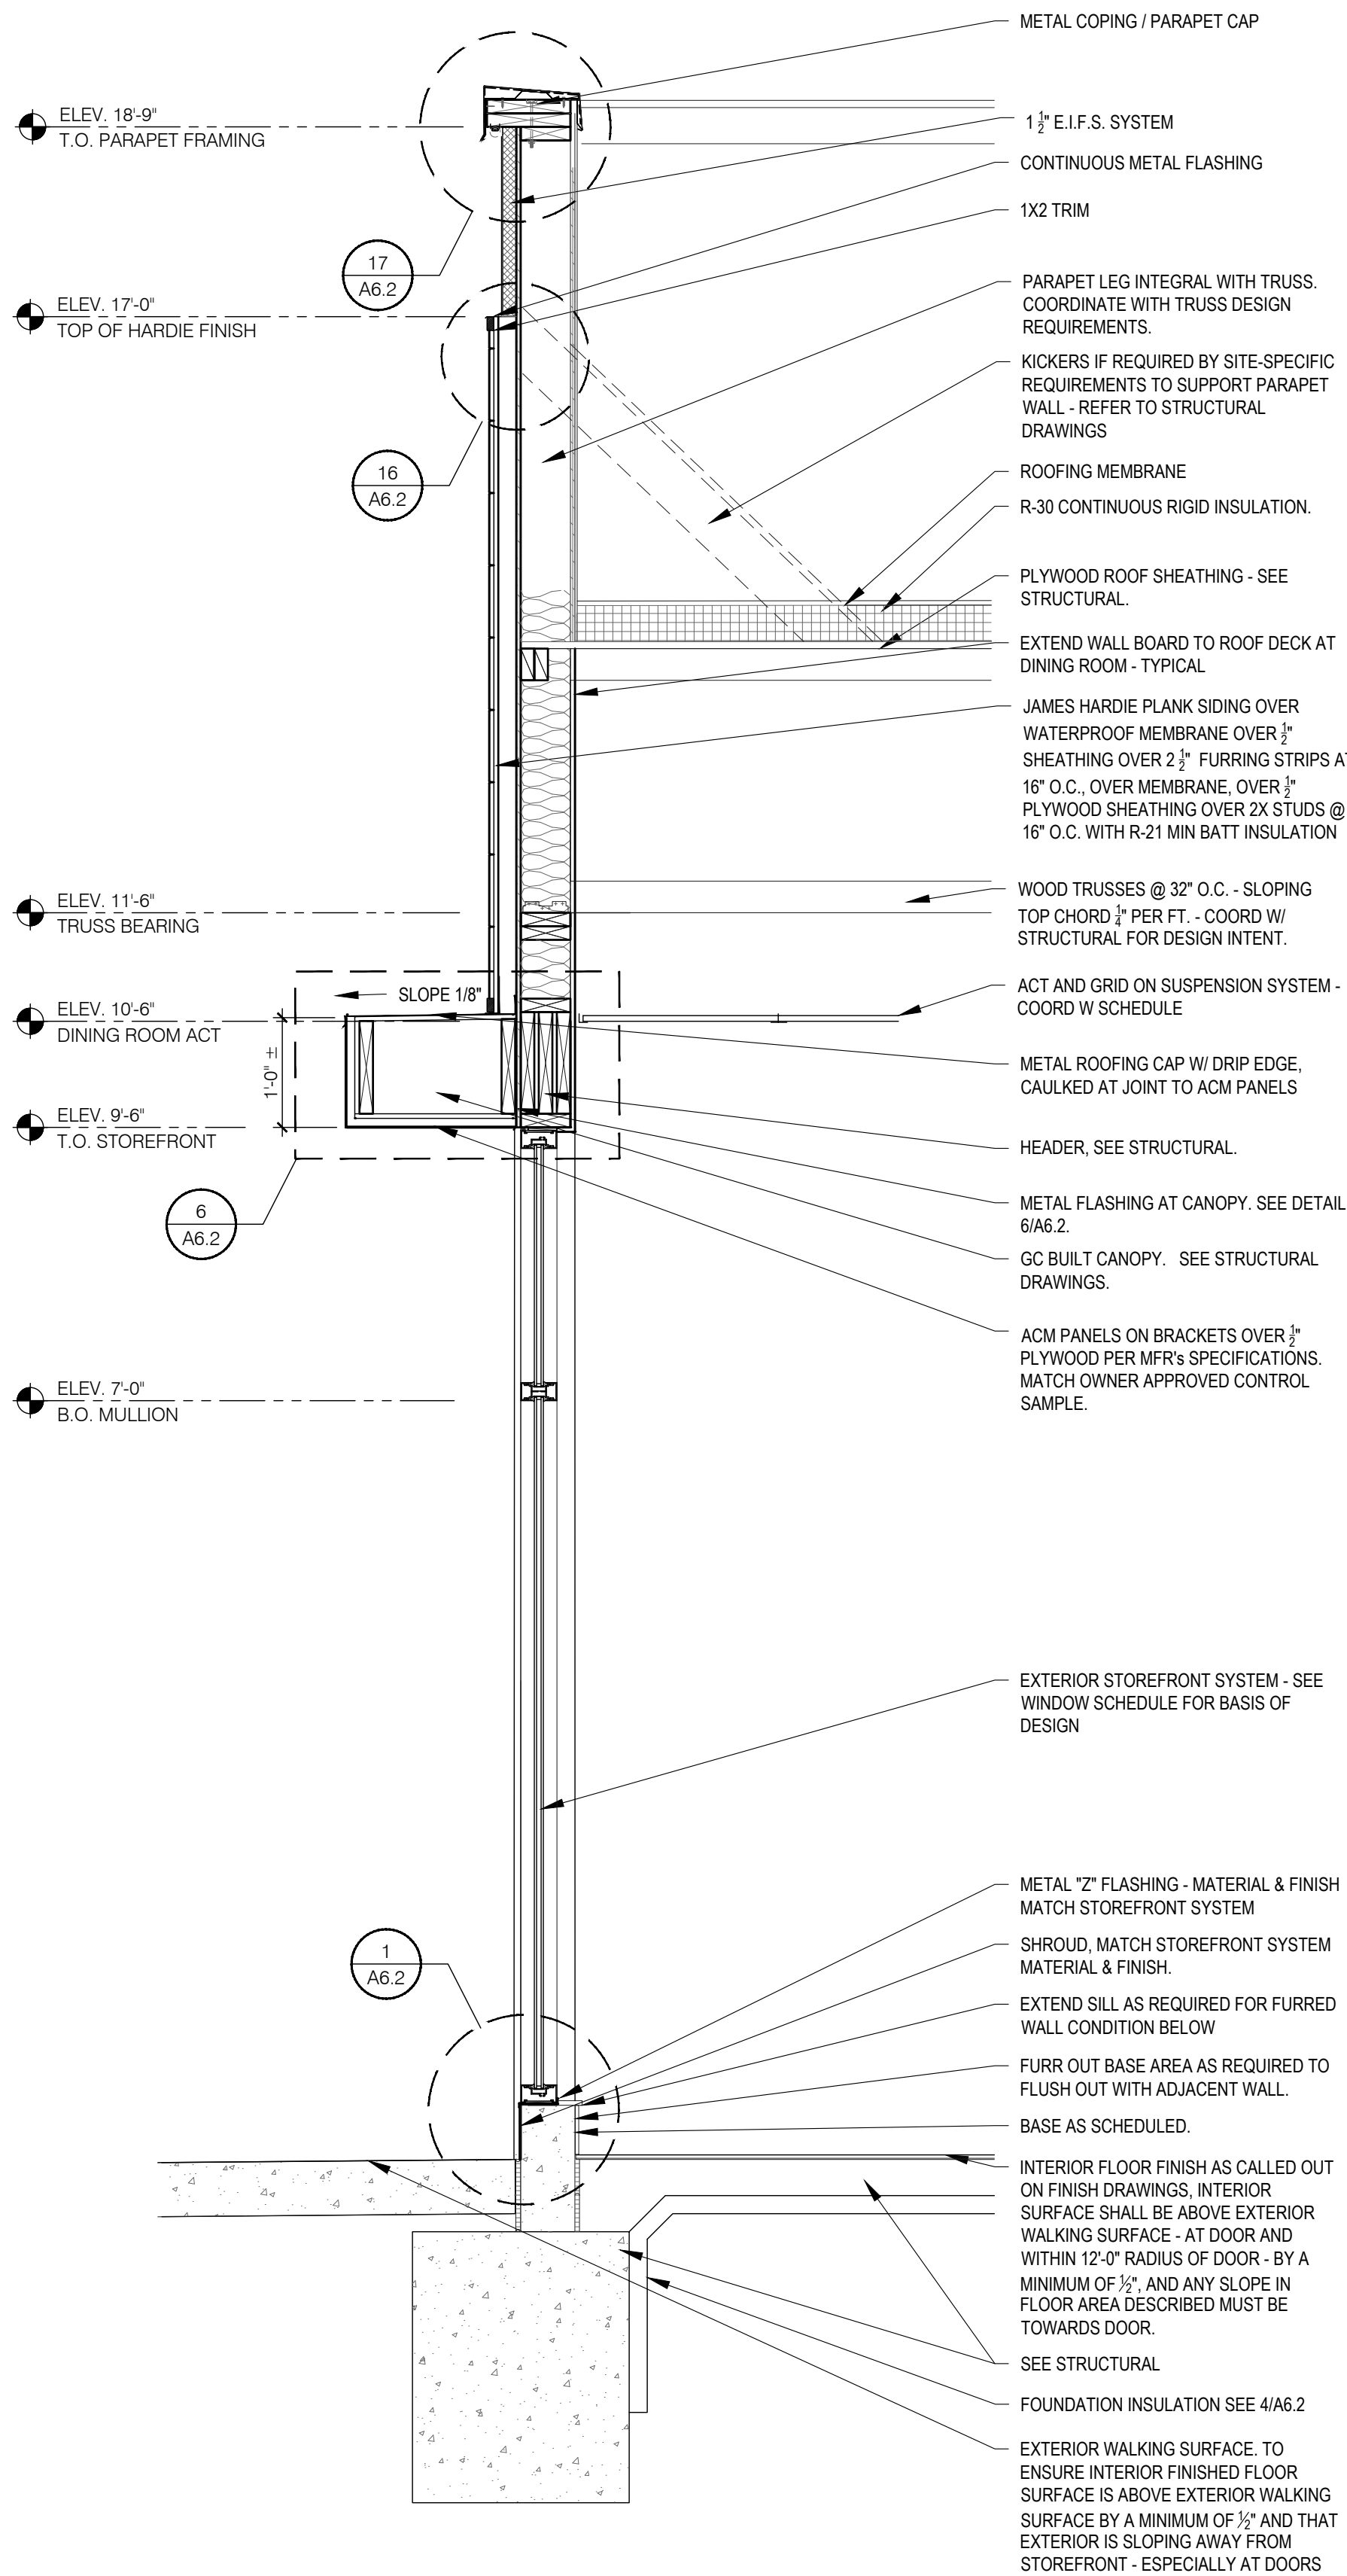

WALL SECTION at DINING SIDE WALL (FRONT WALL SIM.) 3/4" = 1'-0" B


NOTE: UTILIZATION OF 12' LUMBER FOR THE STUDS, WHEN CUT TO 10'-7 1/2" LENGTH, WILL ALLOW THE REMAINDER OF THE LUMBER TO BE USED AS MID-SPAN BLOCKING. THIS ALLOWS FULL UTILIZATION OF EACH STUD WITH NOMINAL WASTE.

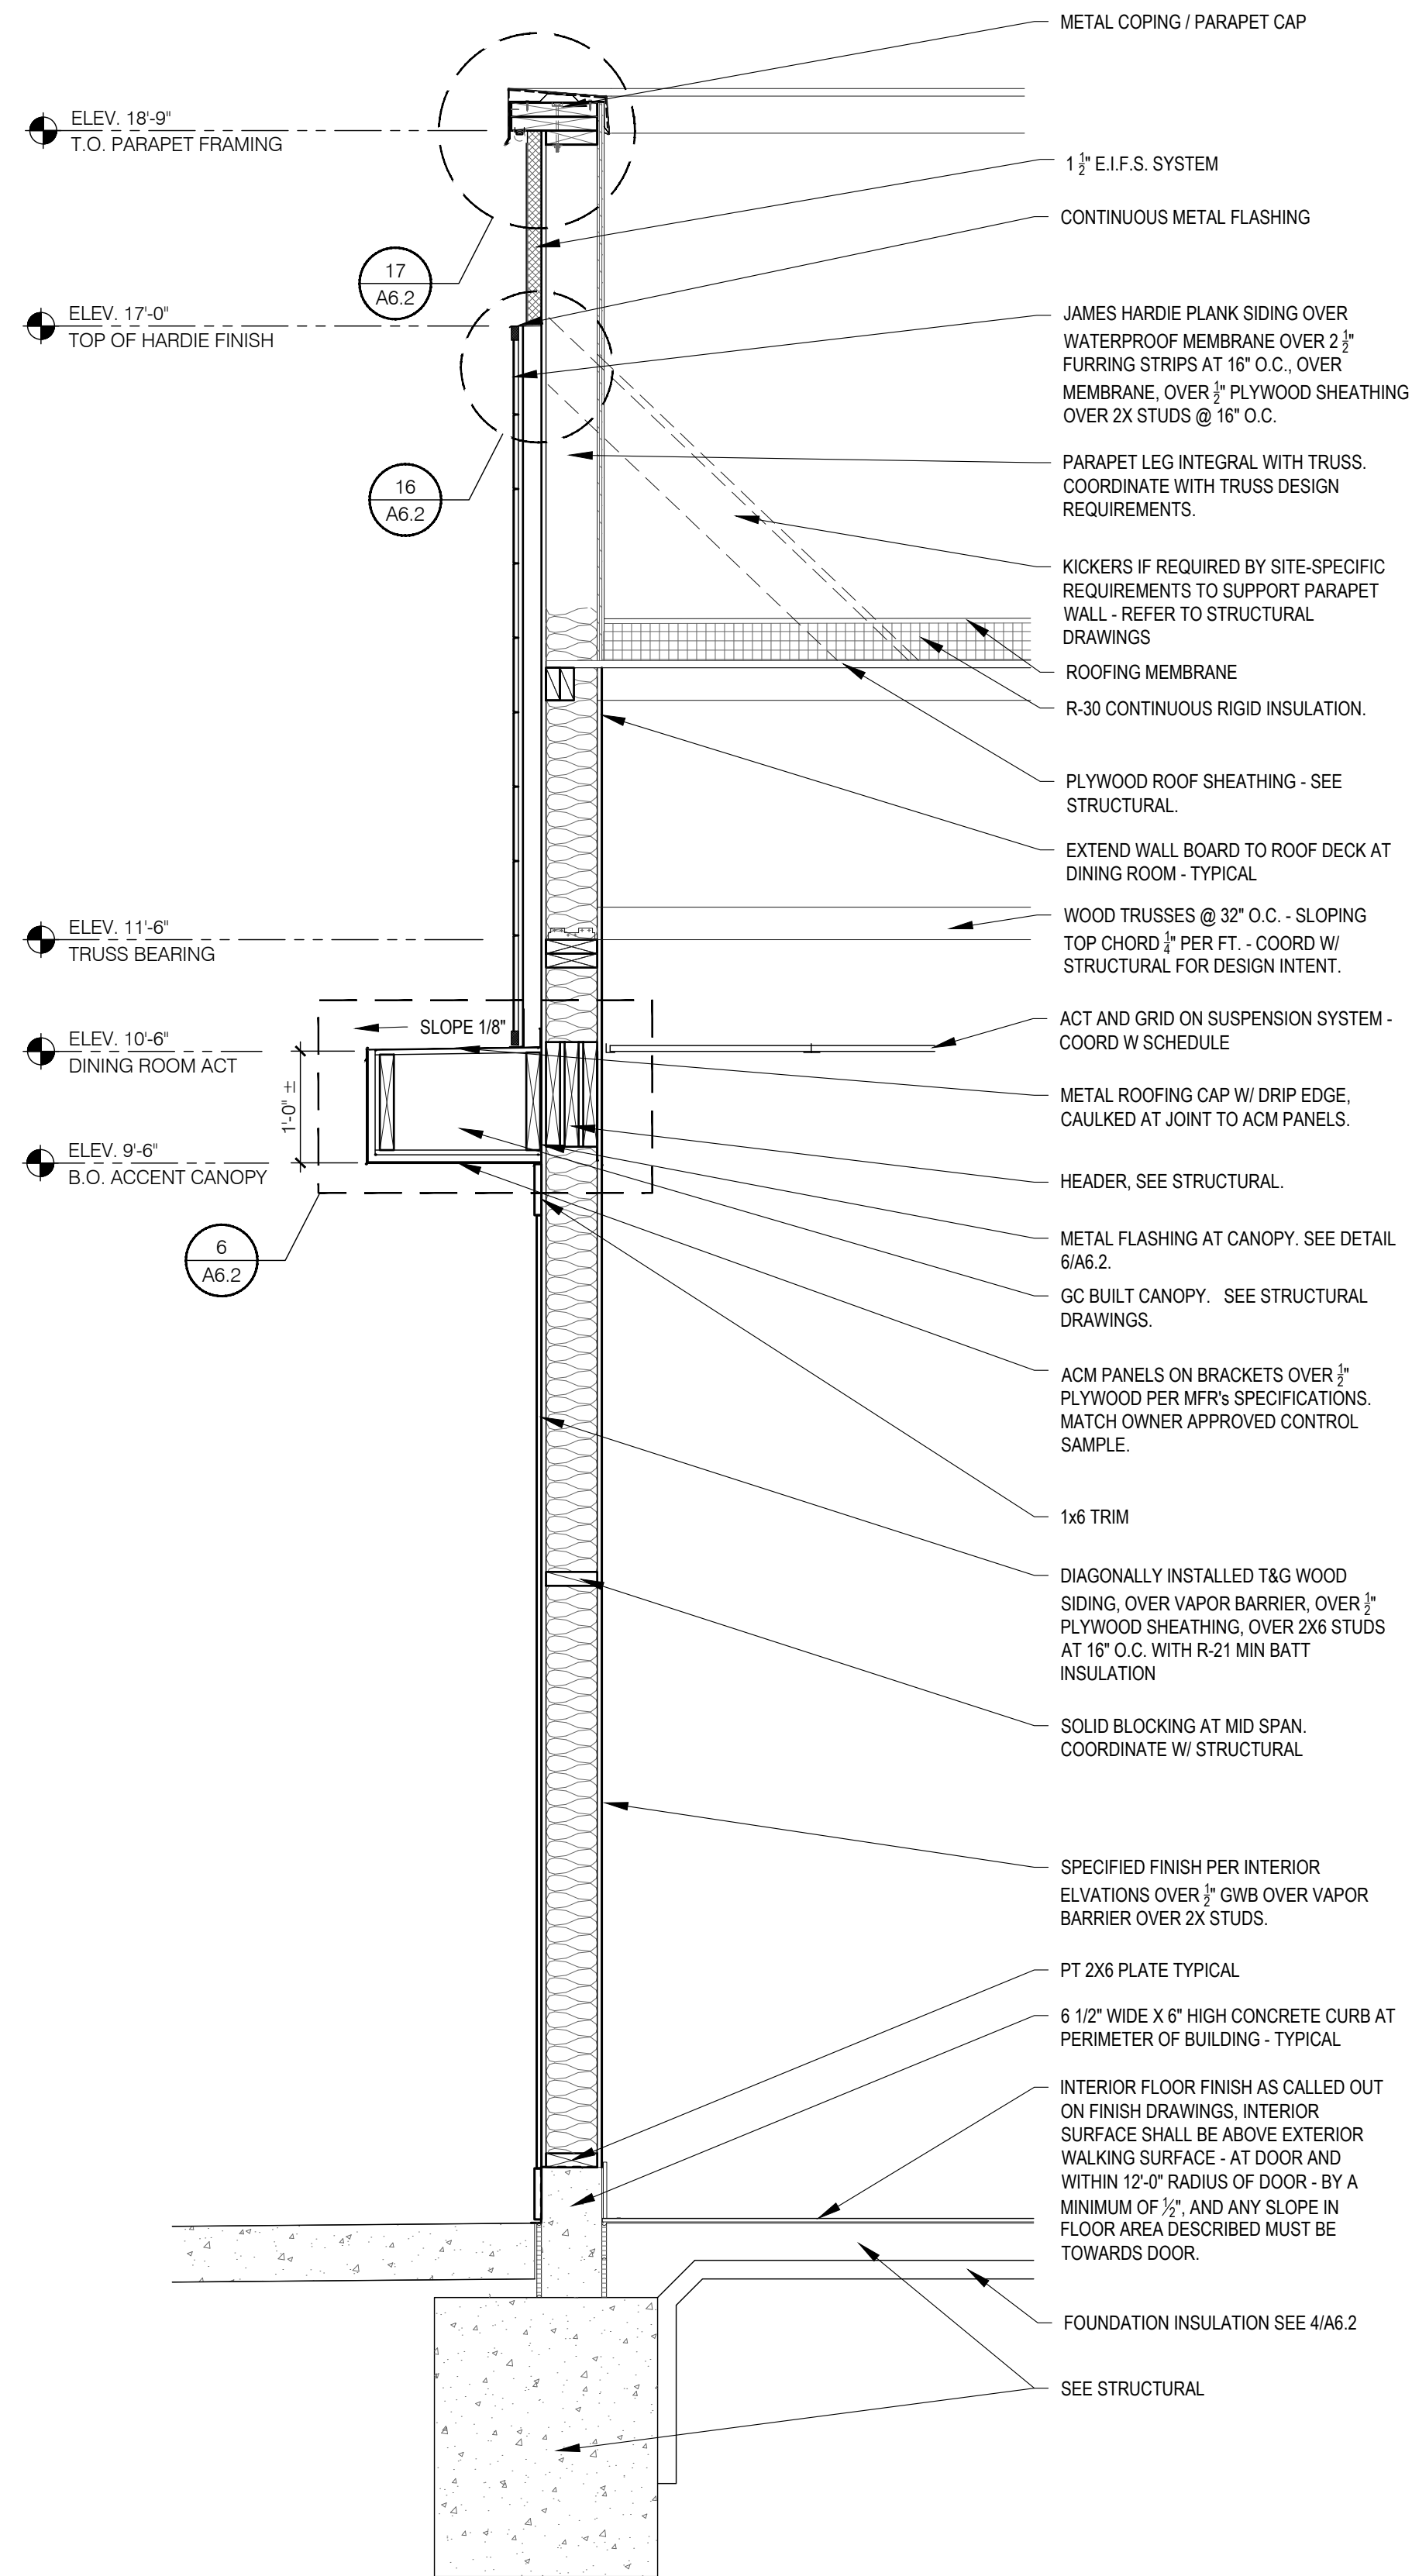

WALL SECTION at DINING (SIDE WALL) 3/4" = 1'-0" A

JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HUDDLESTON ROAD, SUITE 1000
PEACHTREE CITY, GEORGIA 30299
770-639-9545
JEFFERSONARCHITECTS.COM

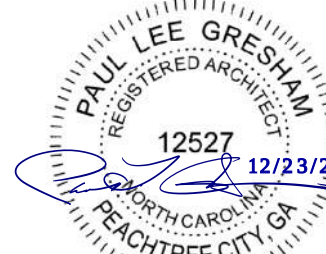

PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028



DT1800 RED

WALL
SECTIONS


A5.0

PLOT DATE: 19.11.2025


ALL BUILDING CANOPIES SHALL COMPLY WITH 2018 NORTH CAROLINA BUILDING CODE SECTION 3105.5 PERMANENT CANOPIES. G.C. SHALL COORDINATE WITH CANOPY VENDOR TO CONFIRM COMPLIANCE AND SHALL BE PREPARED TO PROVIDE STAMPED SHOP DRAWINGS FROM THE CANOPY VENDOR STATING SPECIFIC COMPLIANCE WITH ALL FIVE (5) REQUIREMENTS OF SECTION 3105.5.

PERMANENT CANOPIES ARE PERMITTED TO EXTEND OVER ADJACENT OPEN SPACES, PROVIDED:


- 1) THE CANOPY AND ITS SUPPORTS SHALL BE OF NONCOMBUSTIBLE MATERIAL, FIRE RETARDANT-TREATED WOOD, TYPE IV CONSTRUCTION, OR OF 1-HOUR FIRE-RESISTANCE RATED CONSTRUCTION.
- 2) ANY CANOPY COVERING, OTHER THAN TEXTILES, SHALL HAVE A FLAME SPREAD INDEX NOT GREATER THAN 25 WHEN TESTED IN ACCORDANCE WITH ASTM 384 OR UL 723 IN THE FORM INTENDED FOR USE.
- 3) THE CANOPY SHALL HAVE AT LEAST ONE LONG SIDE OPEN.
- 4) THE WIDTH OF THE CANOPY PERPENDICULAR TO THE BUILDING SHALL NOT EXCEED 15 FEET
- 5) THE FIRE RESISTANCE OF EXTERIOR WALLS SHALL NOT BE REDUCED.

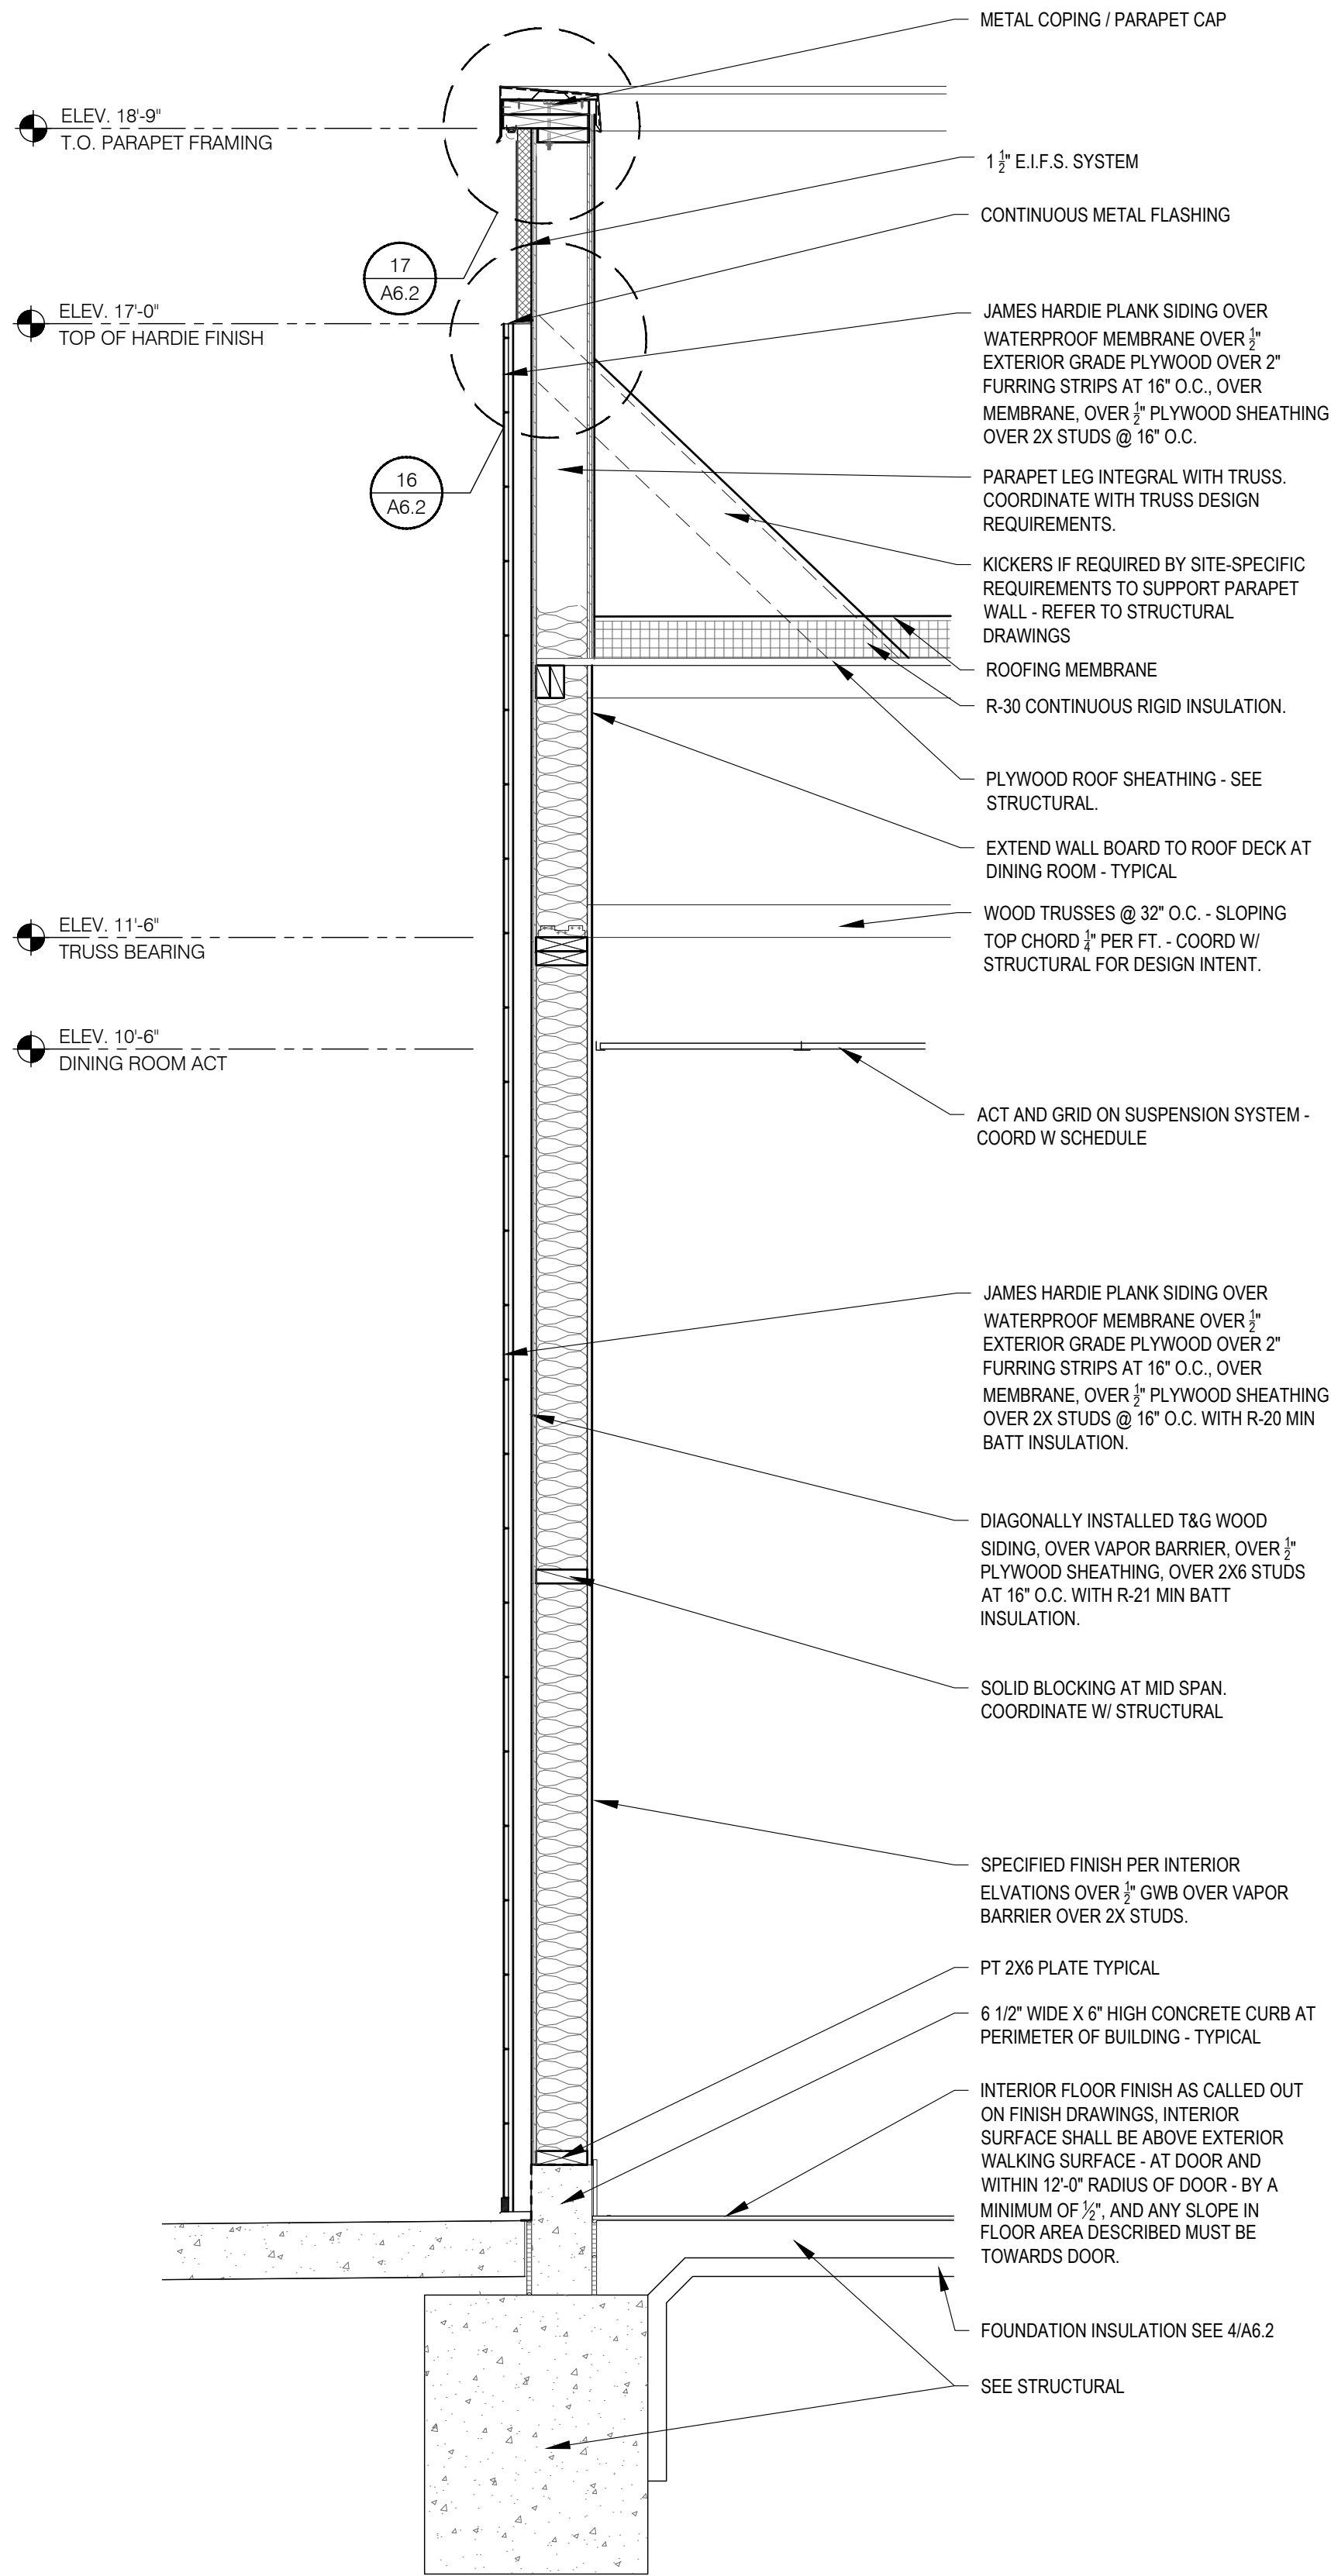

WALL SECTION at DINING (SIDE WALL) 3/4" = 1'-0" C

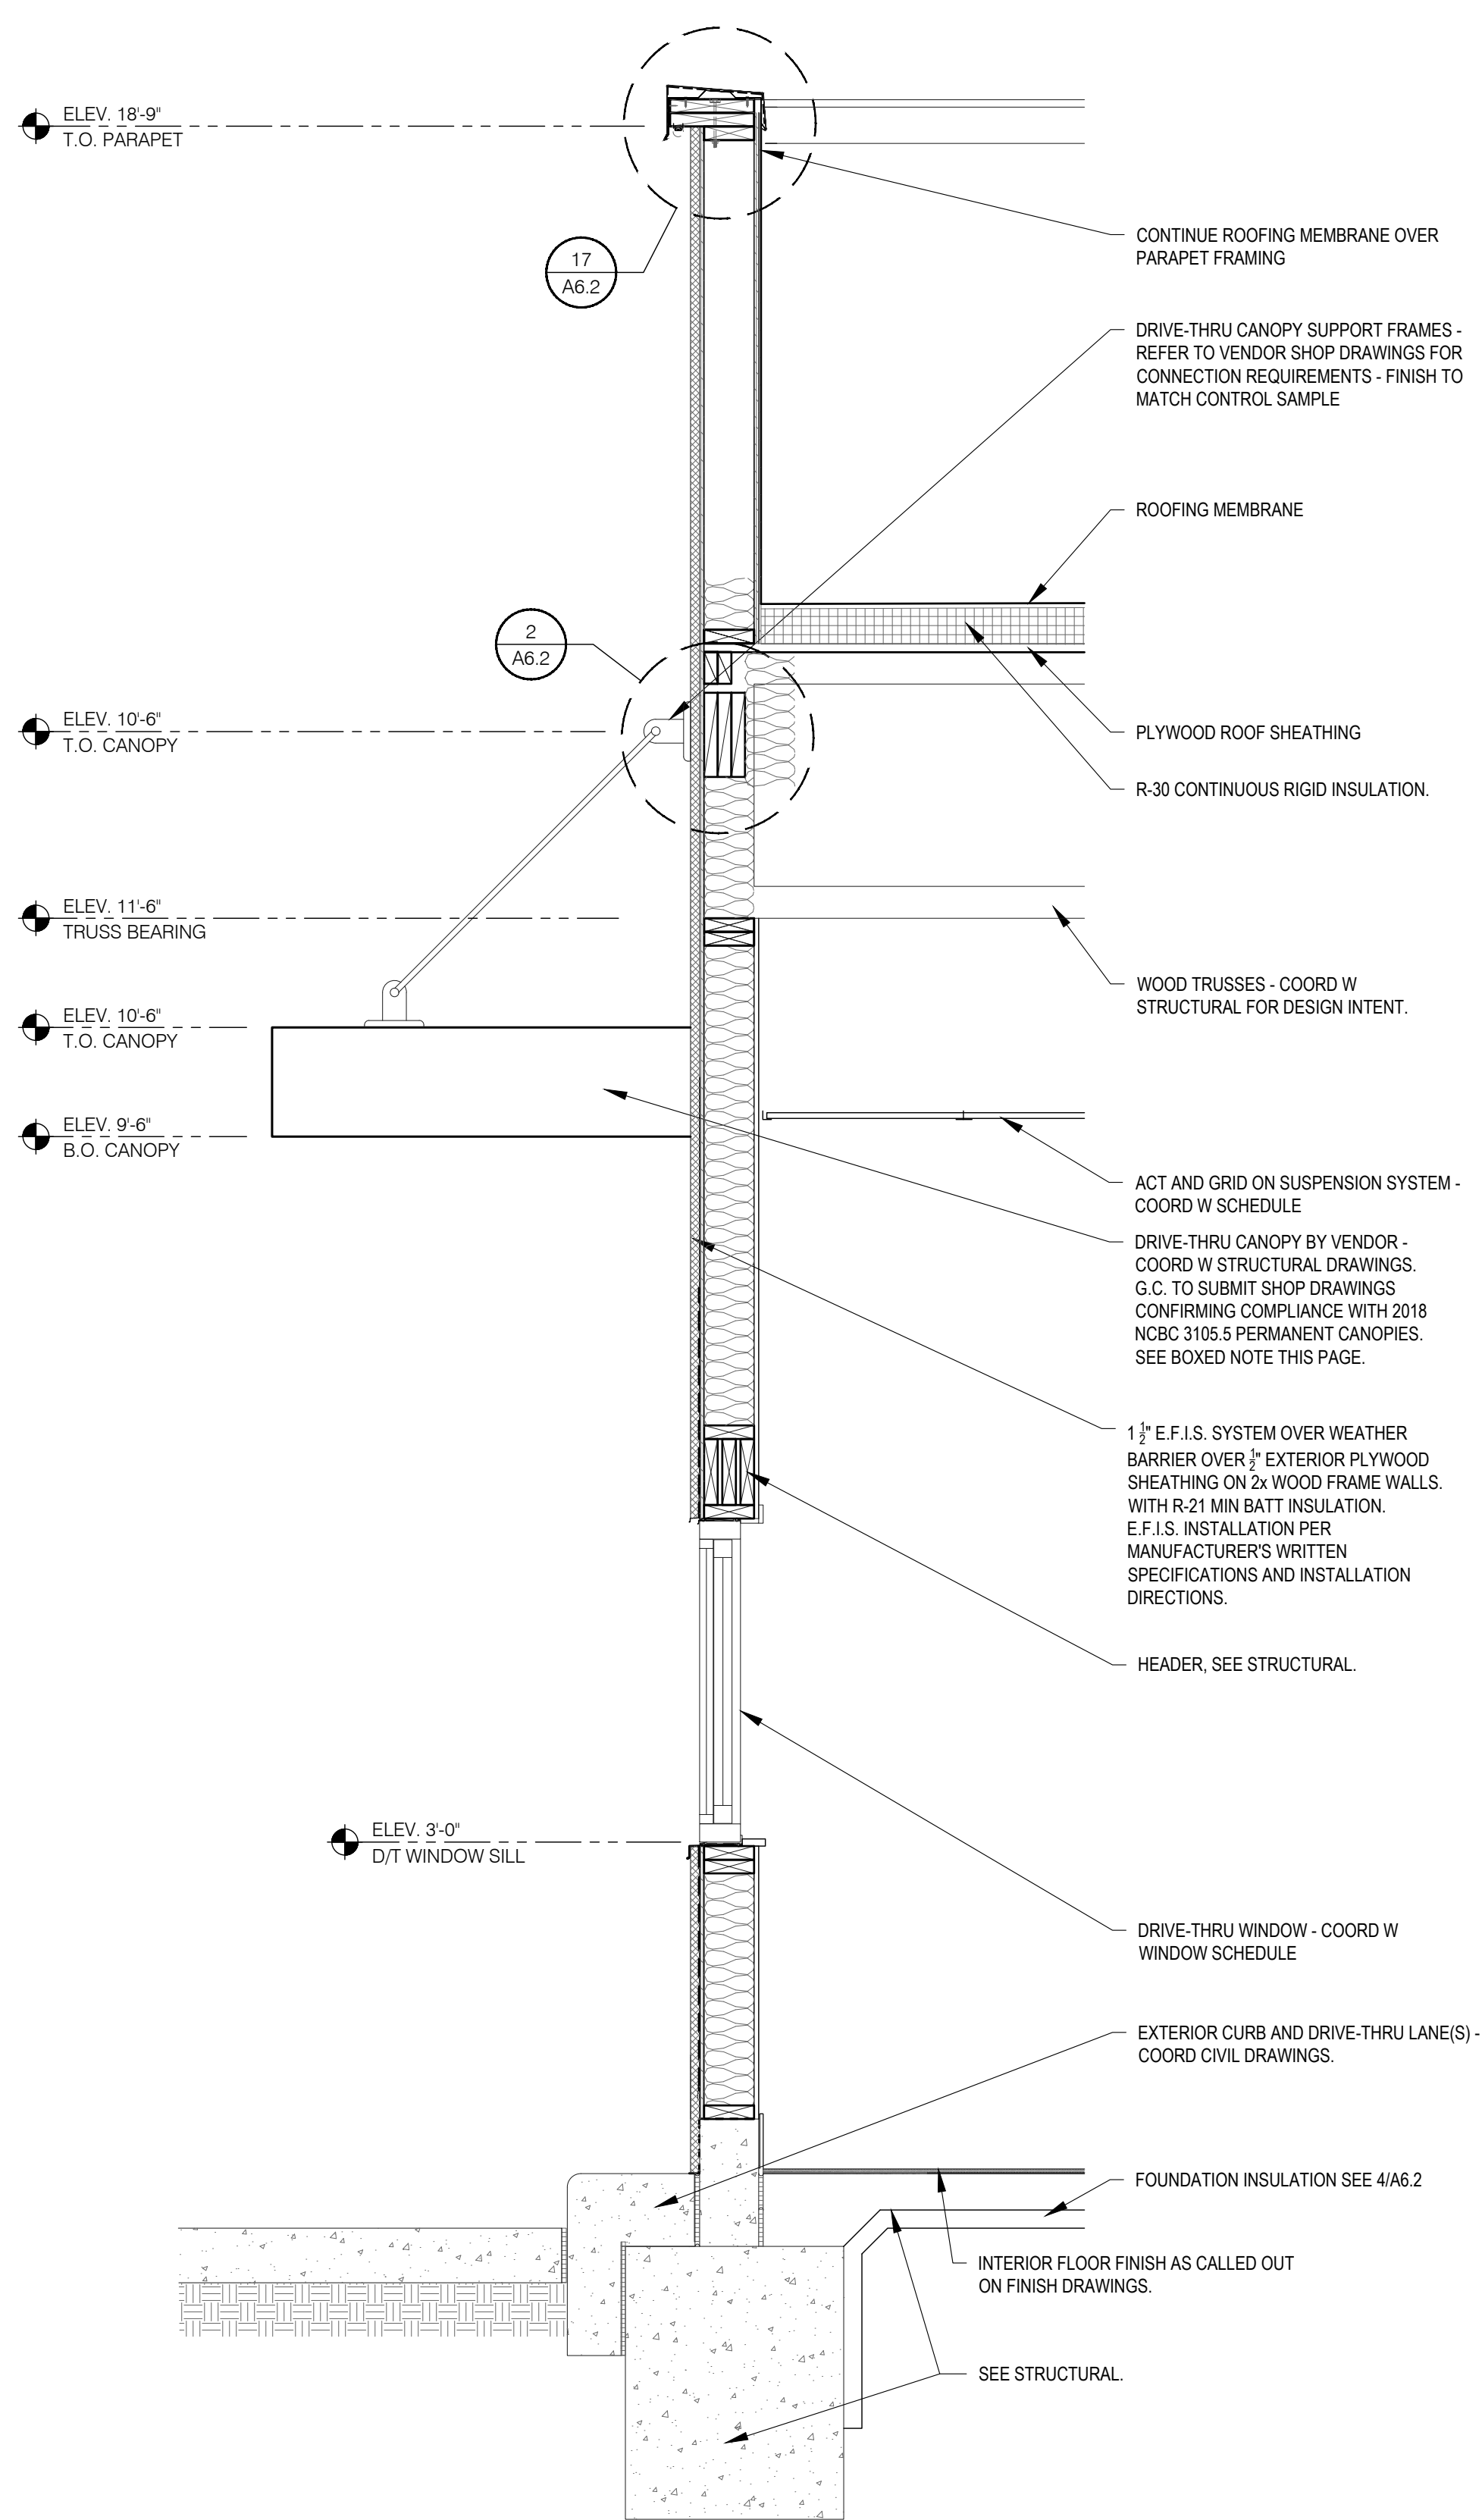


WALL SECTION at DRIVE THRU (SIDE WALL) 3/4" = 1'-0" B

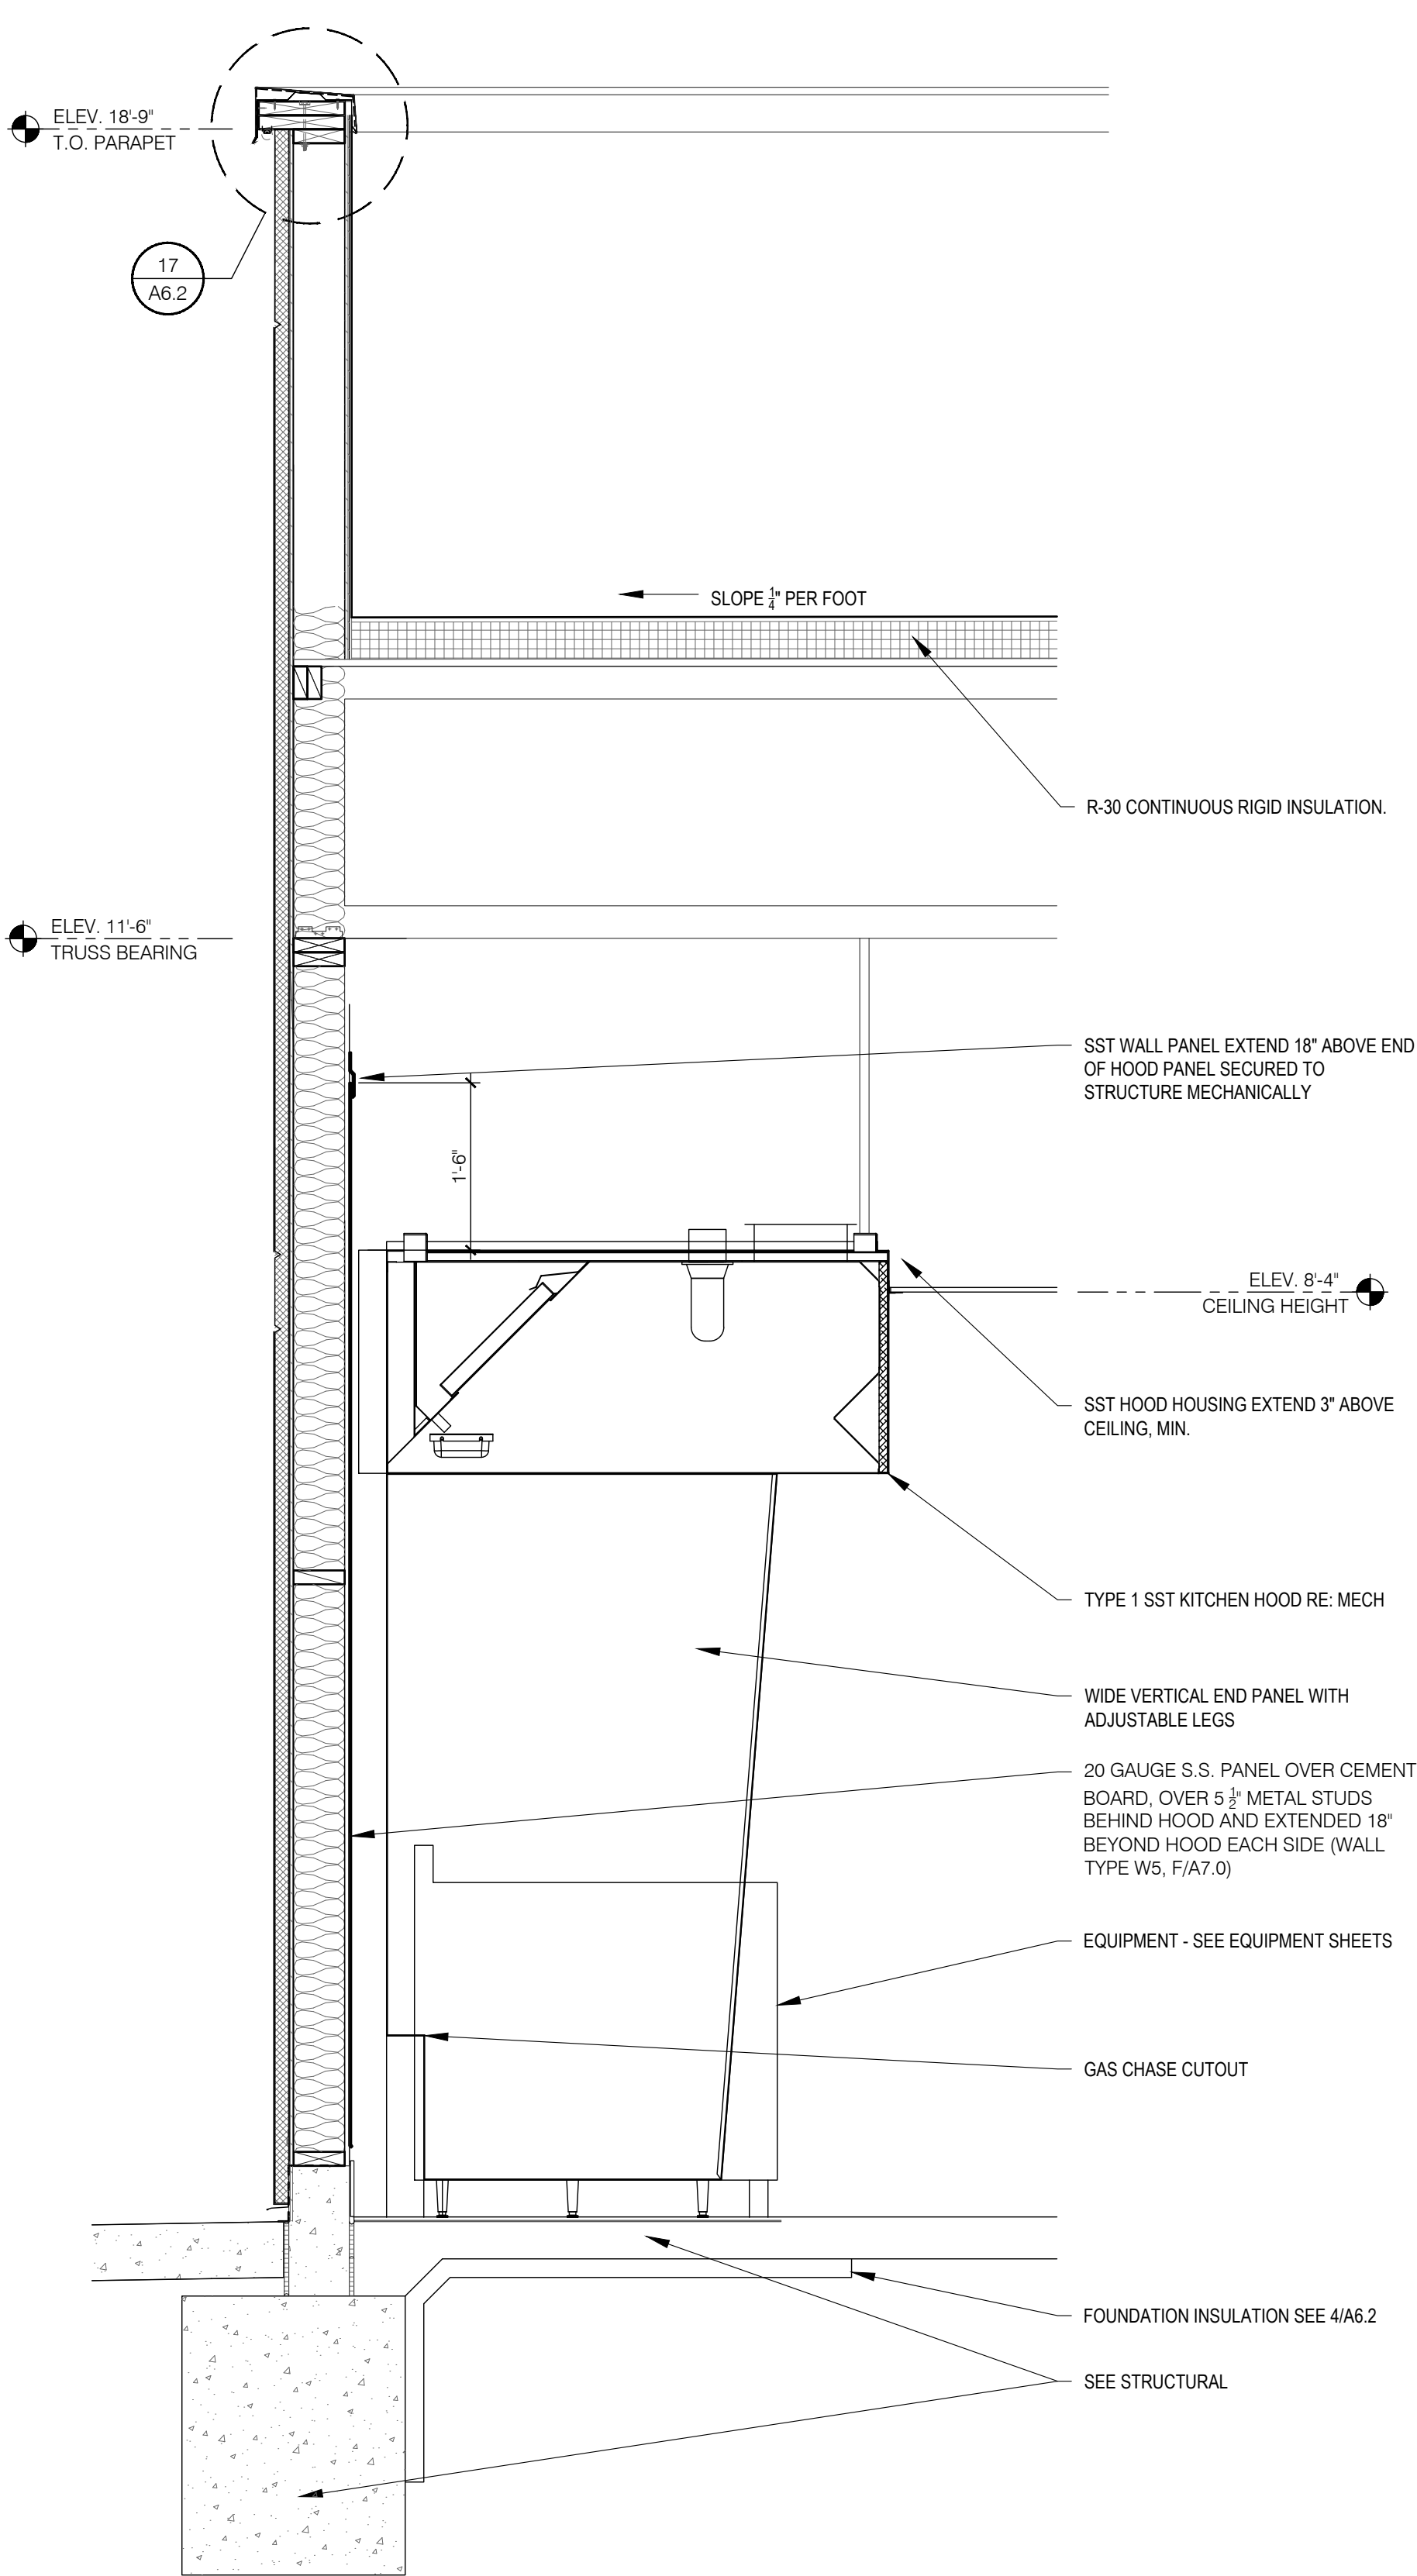

WALL SECTION at COOK LINE (SIDE WALL) 3/4" = 1'-0" A

JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HUDDLESTON ROAD, SUITE 1000
PEACHTREE CITY, GEORGIA 30269
770-639-9545
JEFFERSONARCHITECTS.COM

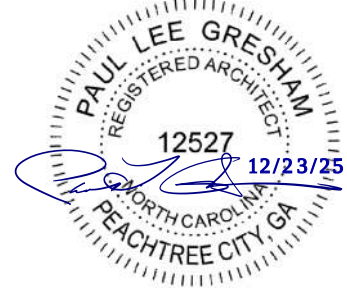

PLAN SET ISSUE / REVISION HISTORY

NO.	DESCRIPTION

ISSUED FOR CONSTRUCTION

ARCH PROJECT #:	25-4358
BUILDING TYPE:	DT1800 RED
PLAN VERSION:	1.2
SITE NUMBER:	N/A
ENTITY NUMBER:	N/A
STORE NUMBER:	E320147

KFC

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028




DT1800 RED

WALL
SECTIONS


A5.1

PLOT DATE: 19.11.2025

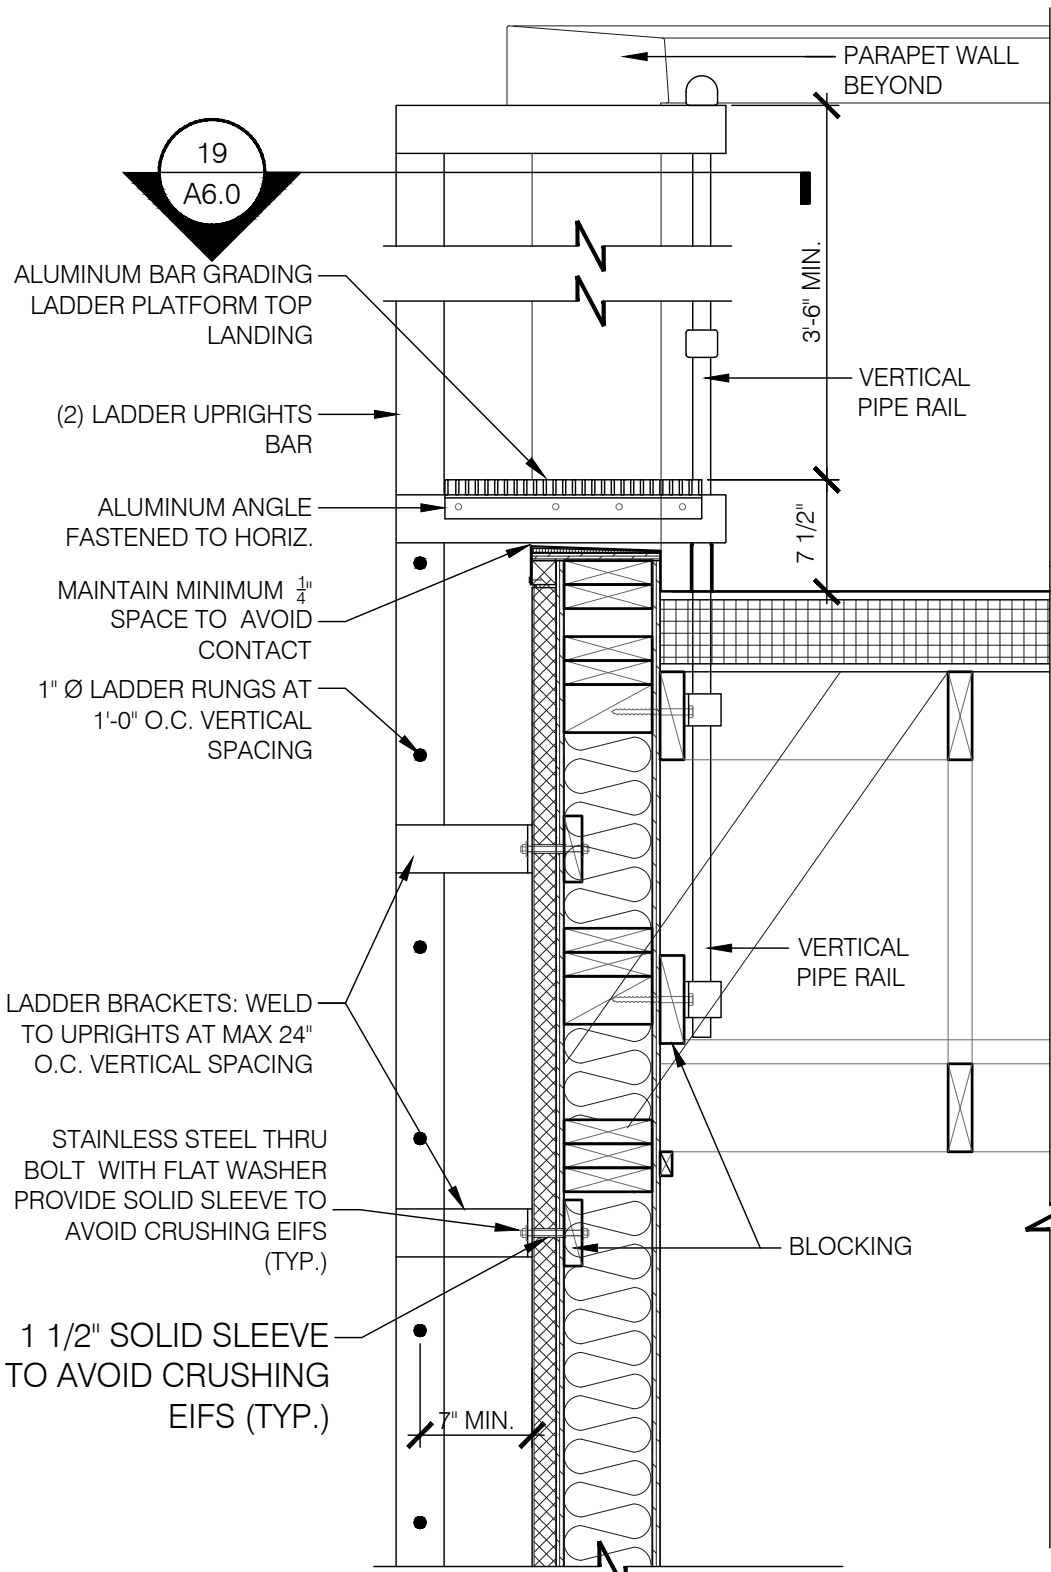


- LADDER NOTES:
- SUBMIT DRAWINGS AND CALCULATIONS IN COMPLIANCE WITH OSHA STANDARDS.
 - MATERIALS: ALUMINUM ALLOY WITH STAINLESS STEEL HARDWARE - GRIND WELDS SMOOTH.
 - RUNGS SHALL BE DESIGNED FOR A SINGLE CONCENTRATED LOAD OF 250 LBS APPLIED IN MIDDLE. RUNGS SHALL BE KNURLED OR PROVIDED WITH A SKID-RESISTANT MATERIAL TO MINIMIZE SLIPPING.
 - LADDER BRACKETS SHALL SUPPORT TWO 250 LB LOADS.


ROOF LADDER 1"=1'-0" 15

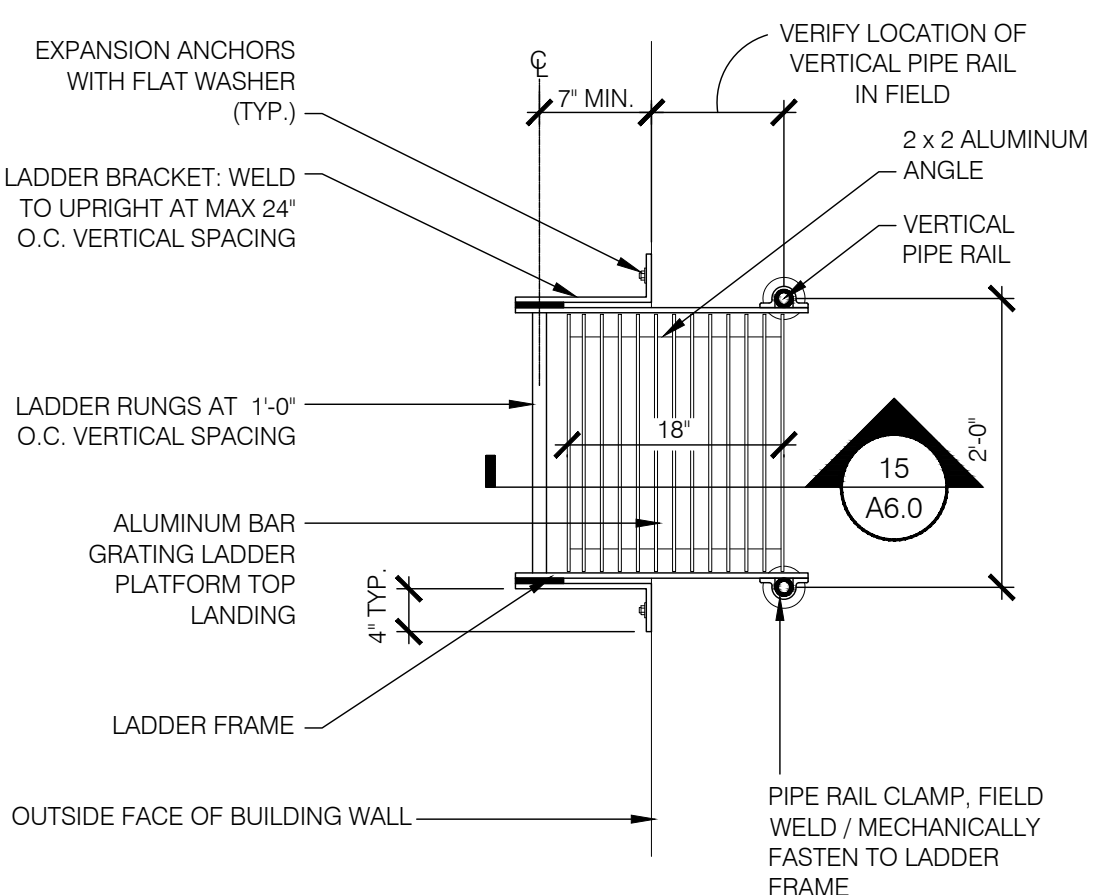


ROOF LADDER 1"=1'-0" 19

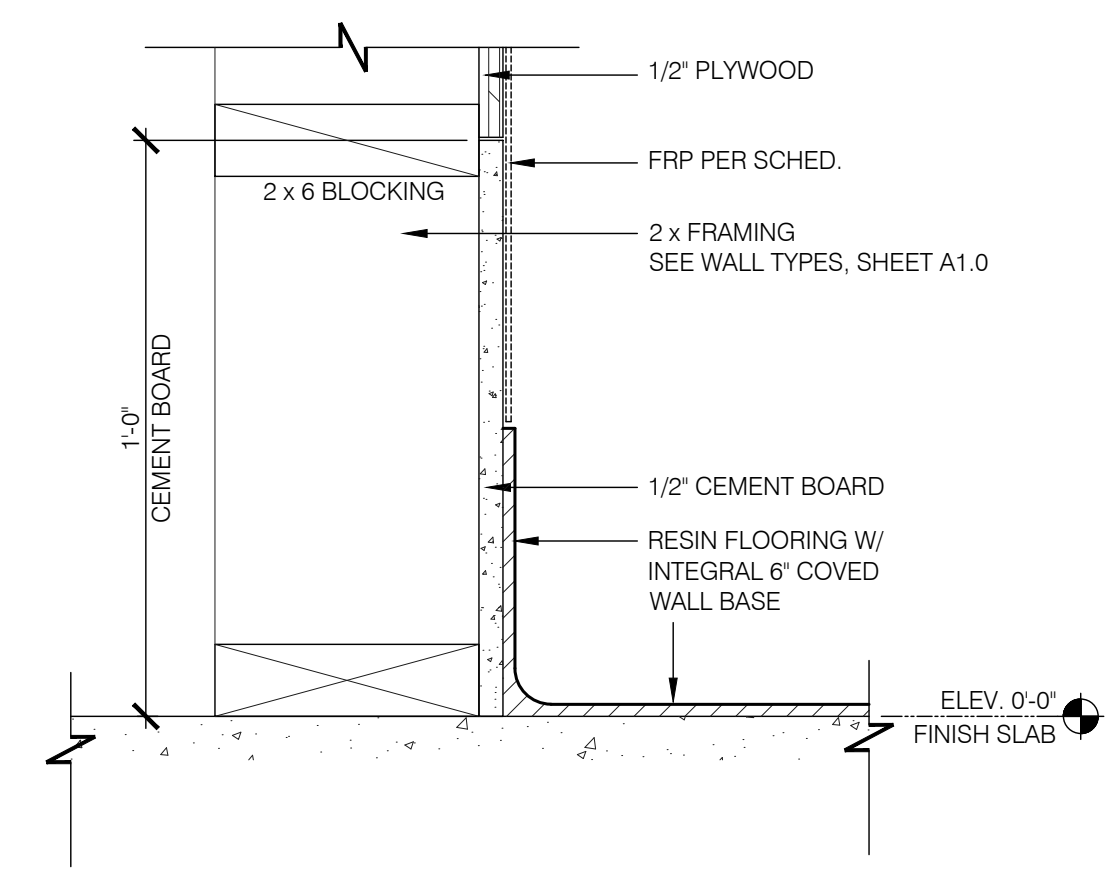


BASE at INT. PARTITION (KITCHEN) 3"=1'-0" 14

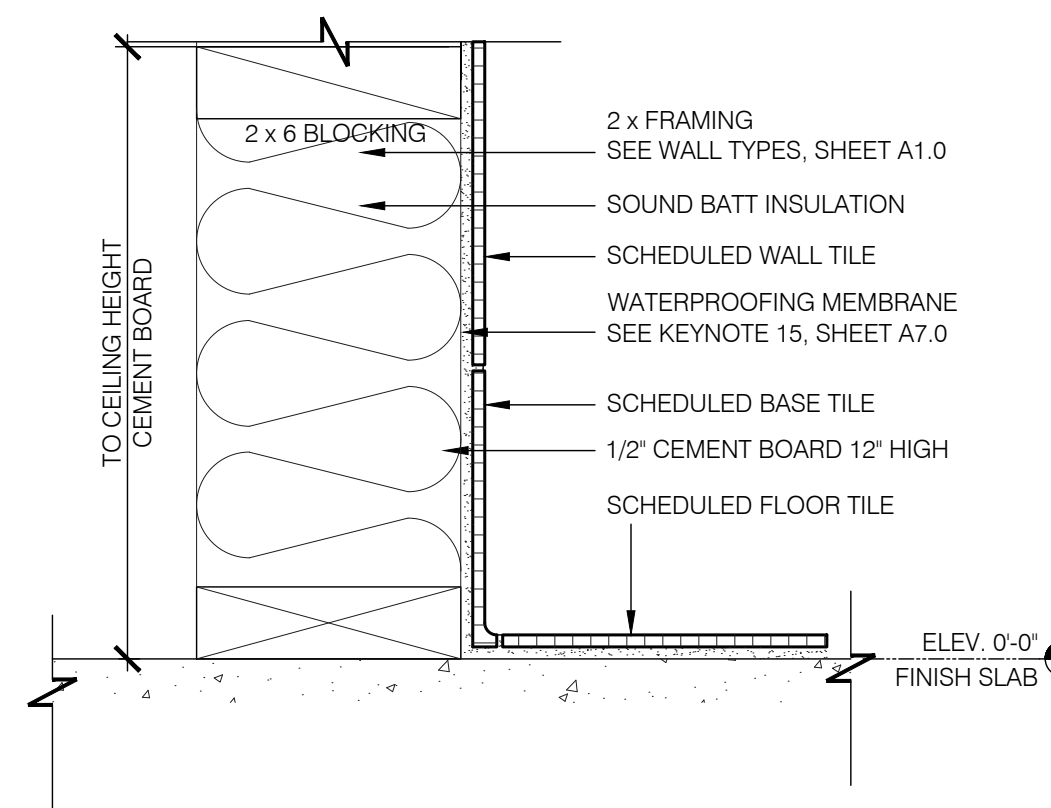


BASE at INT. PARTITION (RR's) 3"=1'-0" 10

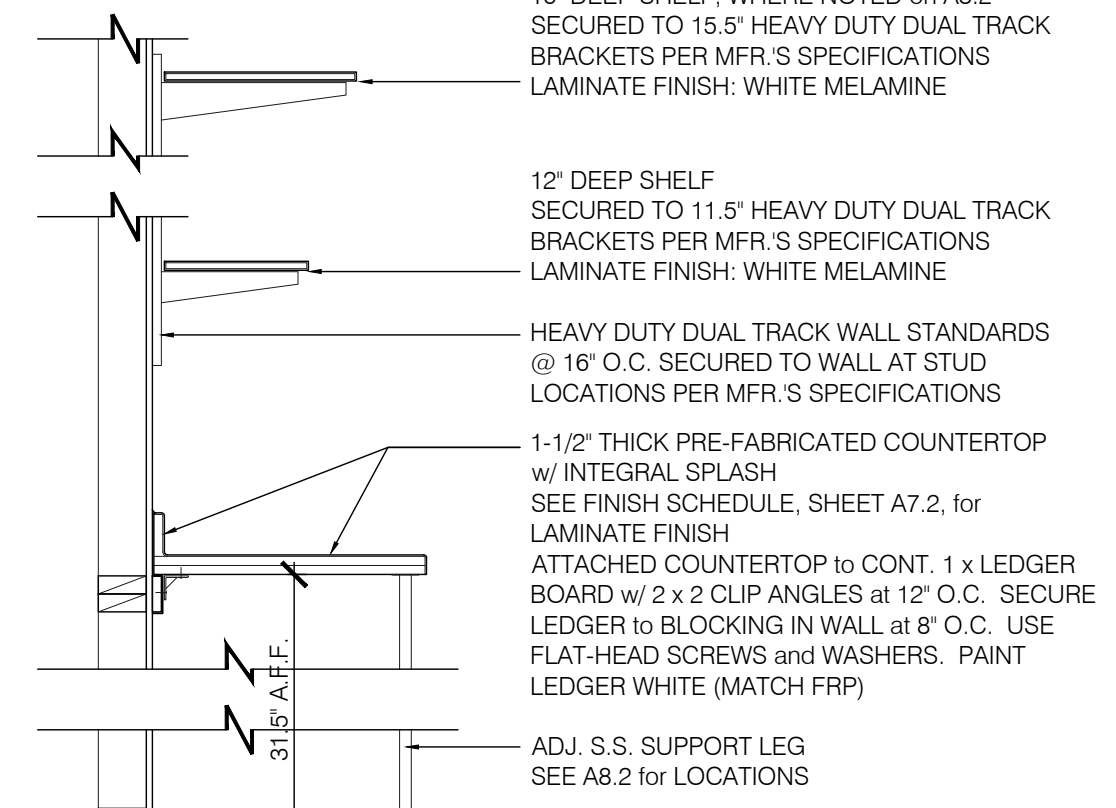


OFFICE COUNTER and SHELVING 3/4"=1'-0" 9

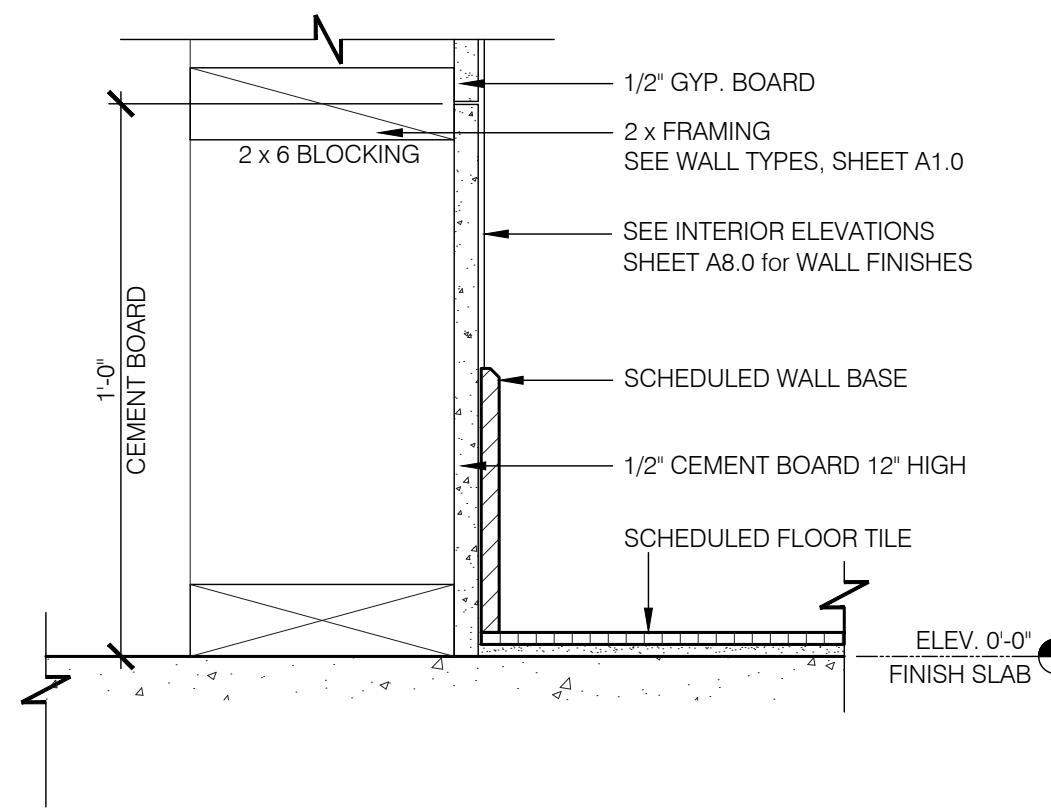


BASE at INT. PARTITION (DINING) 3"=1'-0" 5

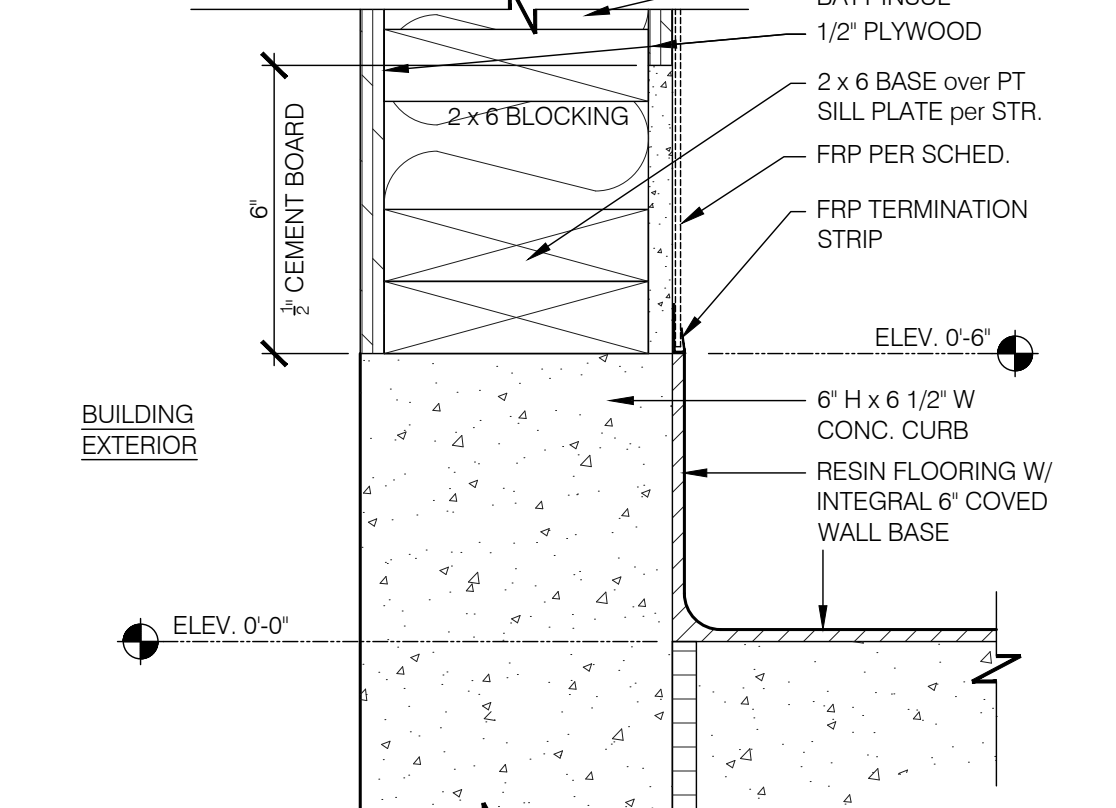


BASE at KITCHEN (SIDE and REAR) 3"=1'-0" 4

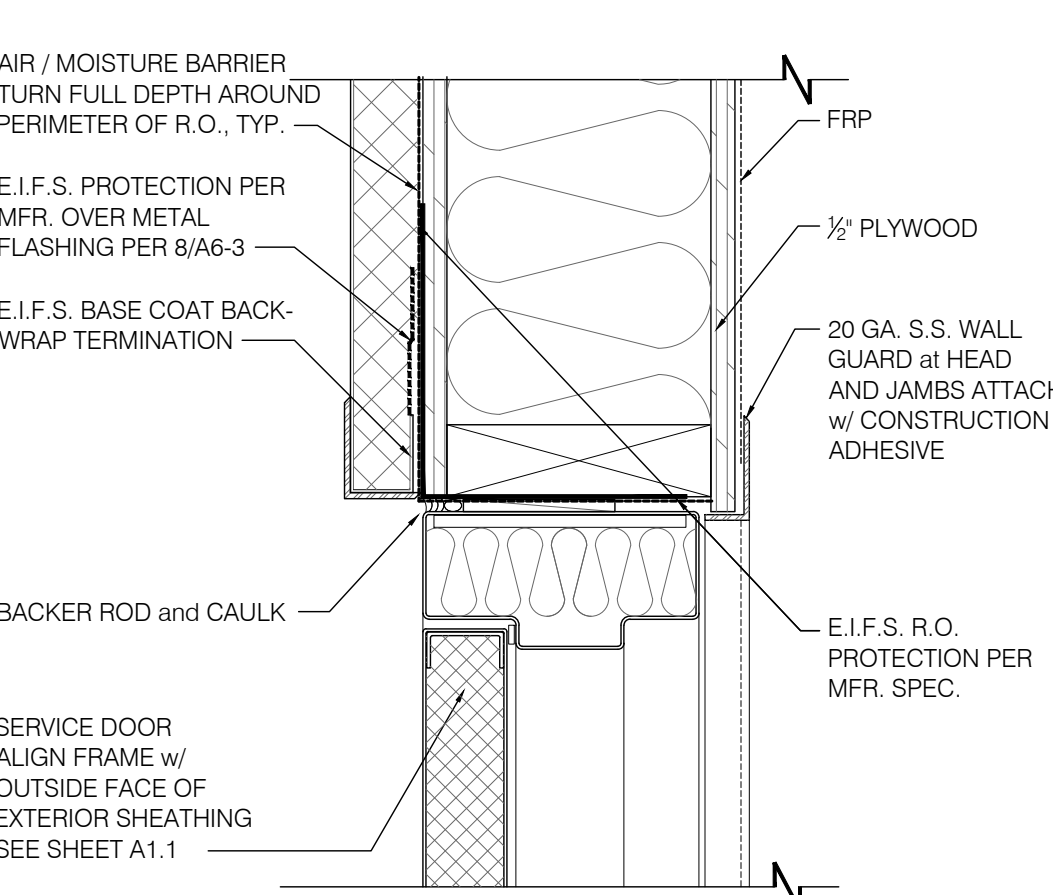


JAMB at SERVICE DOOR 3"=1'-0" 18

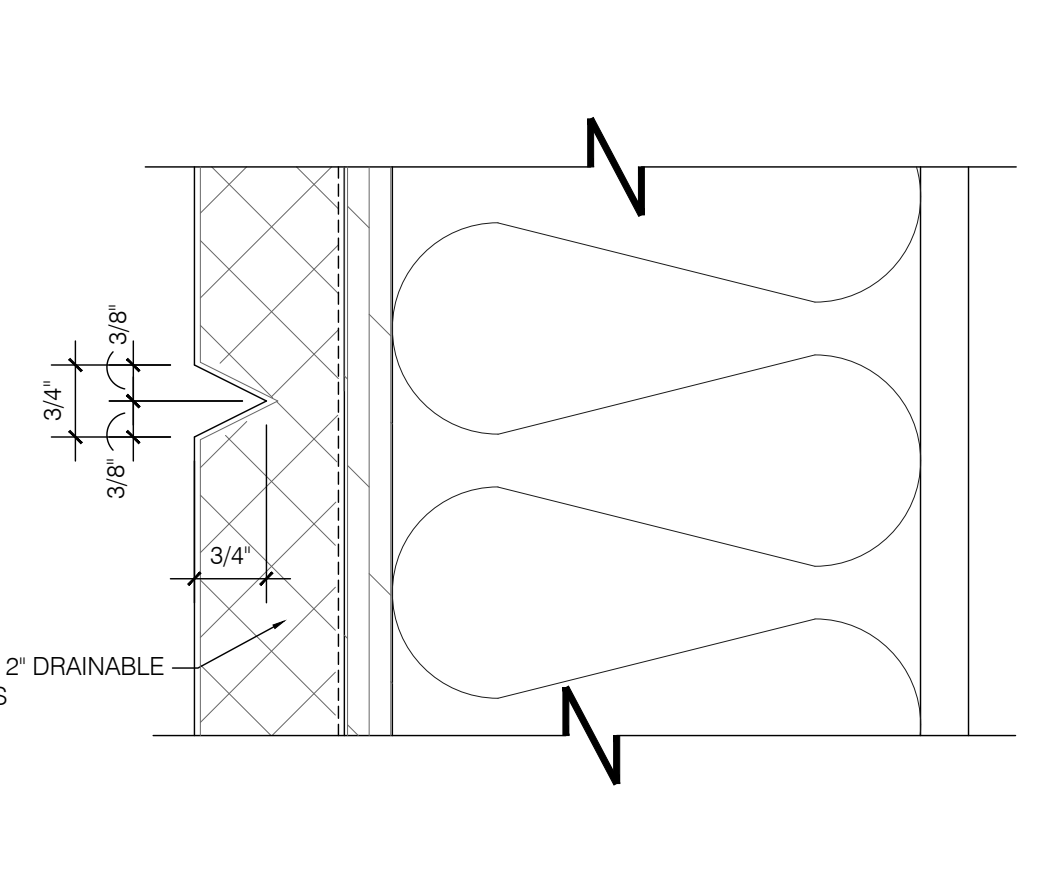


EIFS V-GROOVE 6"-1'-0" 13

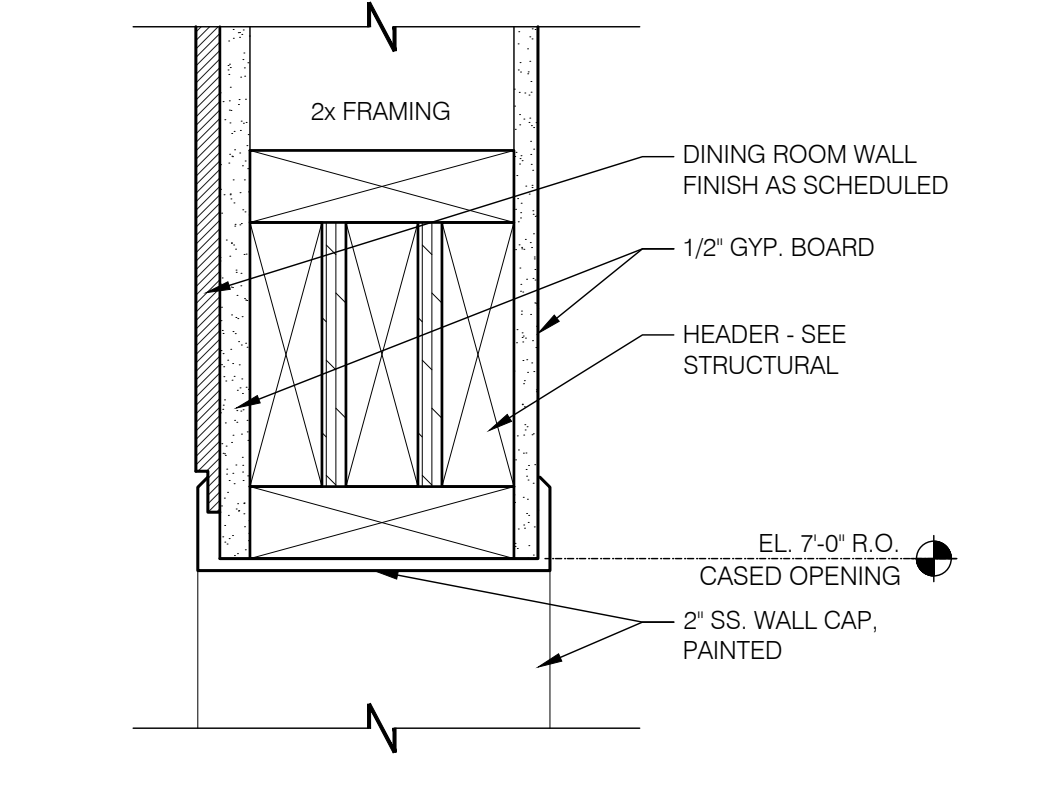


CASED OPENING DETAIL 3"=1'-0" 8

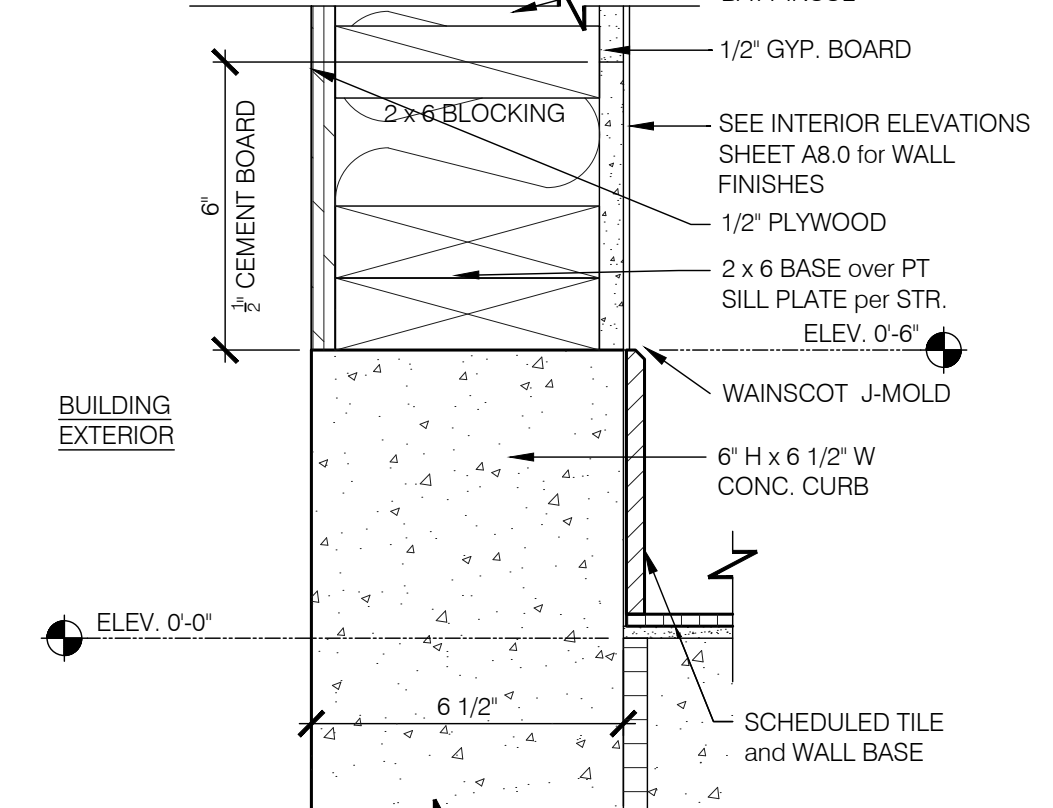


BASE at DINING (SIDE) 3"=1'-0" 3

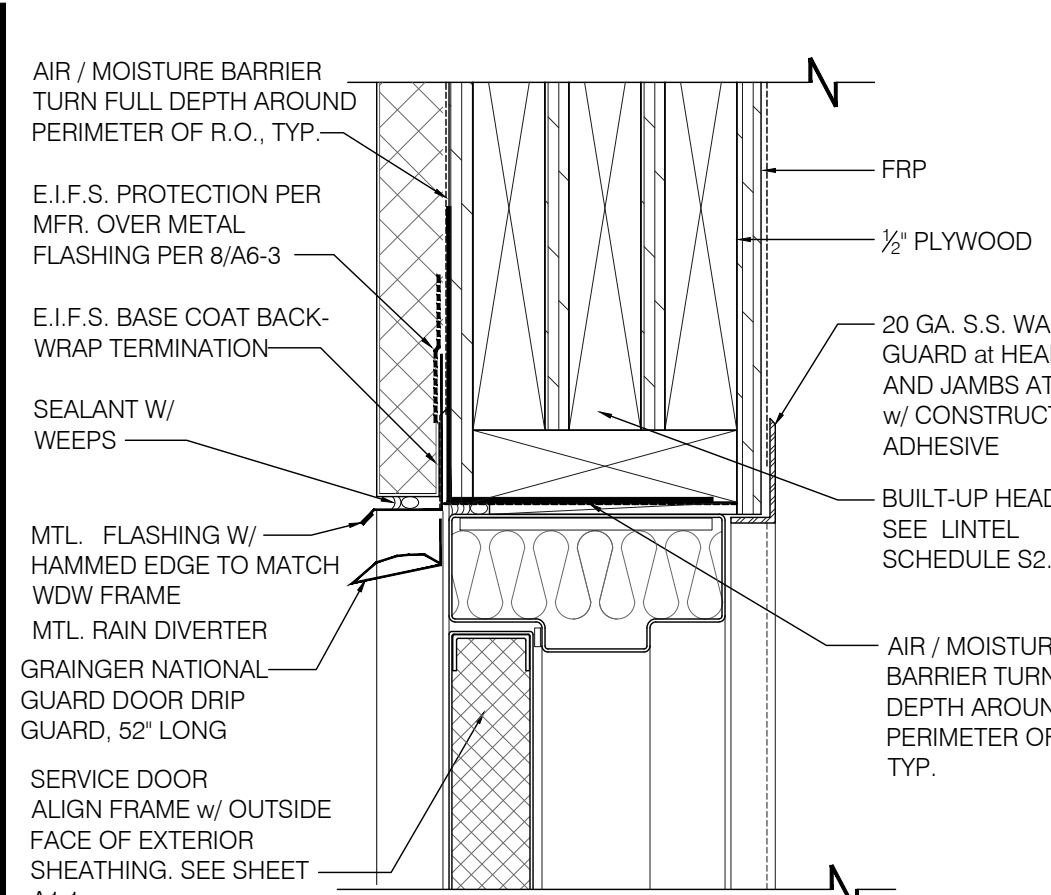


HEAD at SERVICE DOOR 3"=1'-0" 17

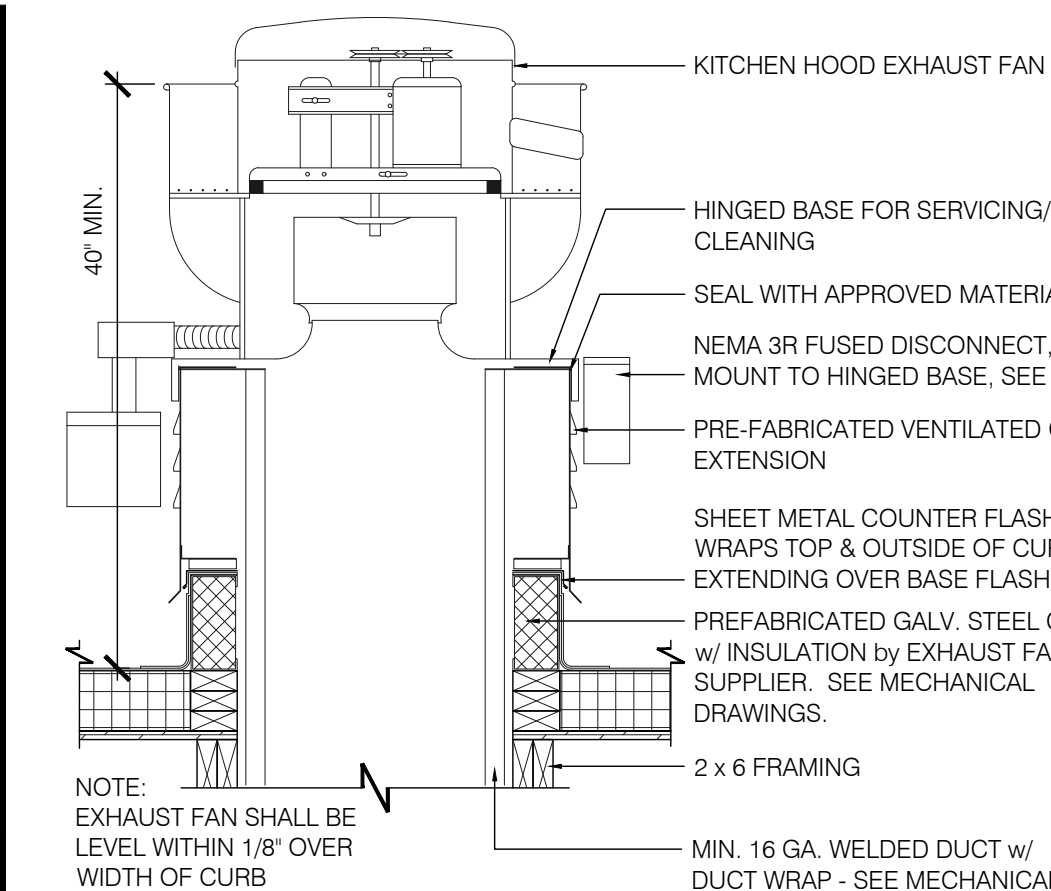


CURB for EXHAUST FANS EF-1 / EF-2 N.T.S. 12

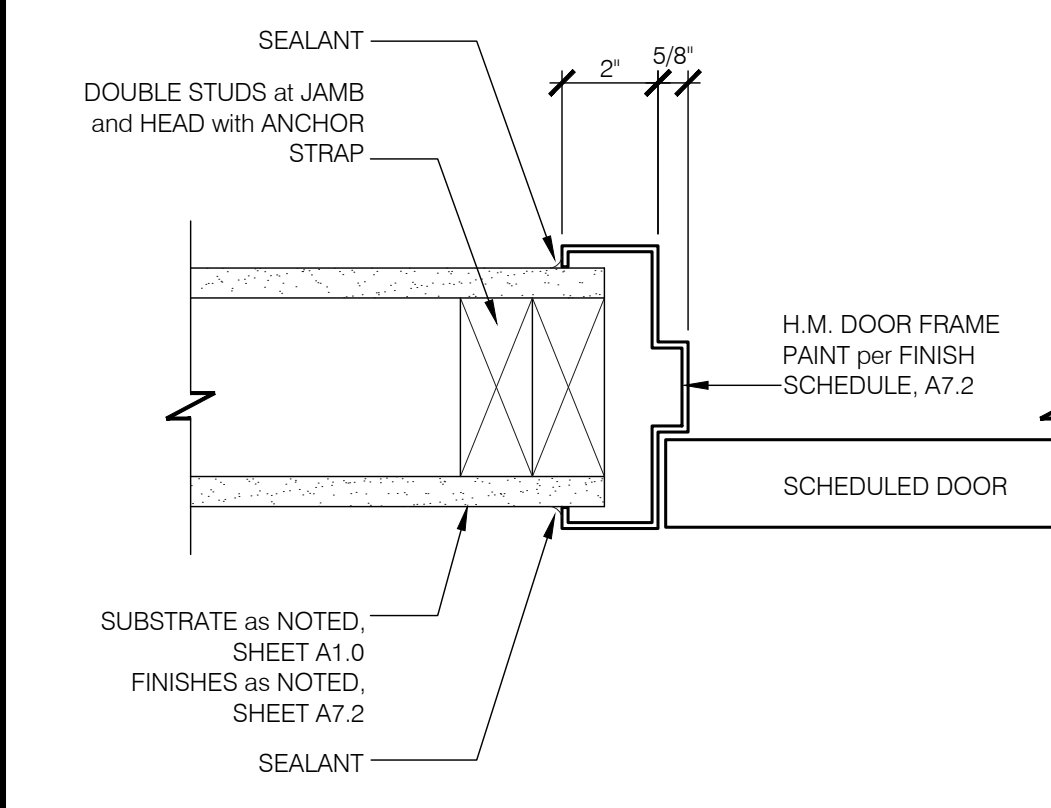


JAMB at INTERIOR. DOOR (HEAD SIM.) 3"=1'-0" 7

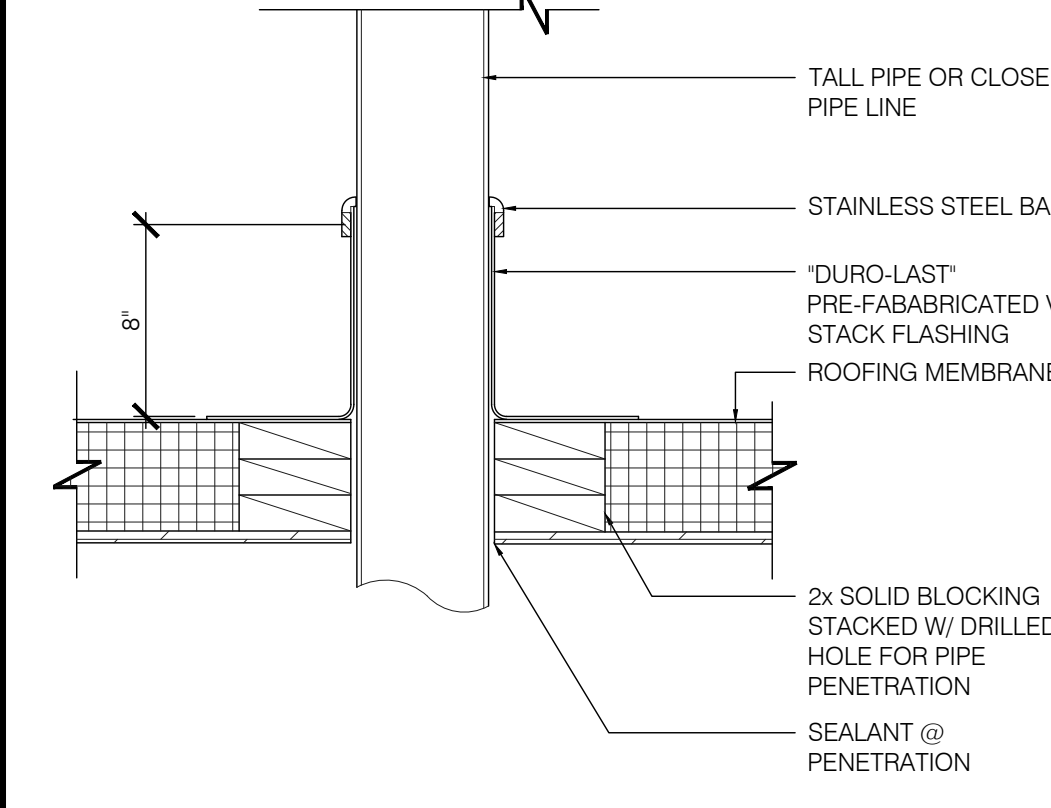


SEALED PIPE FLASHING 1 1/2"=1'-0" 2

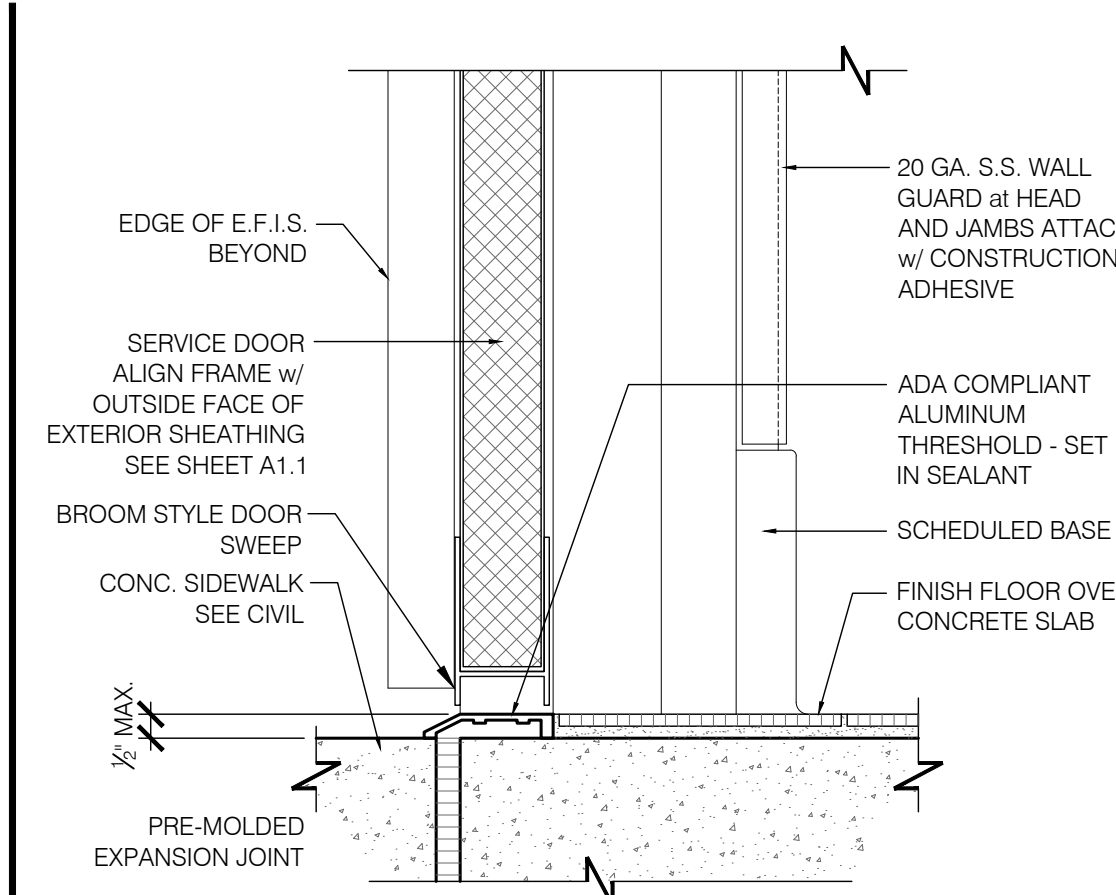


THRESHOLD at SERVICE DOOR 3"=1'-0" 16

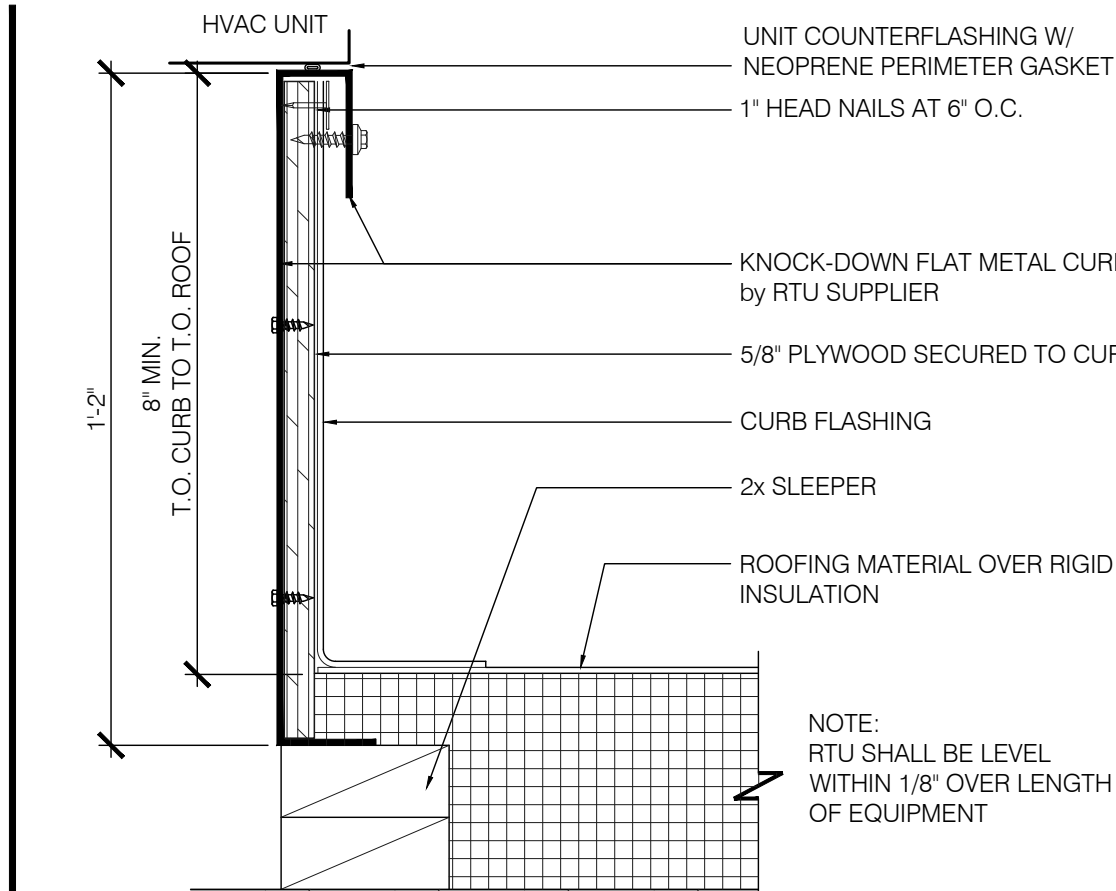


HVAC CURB 3"=1'-0" 11

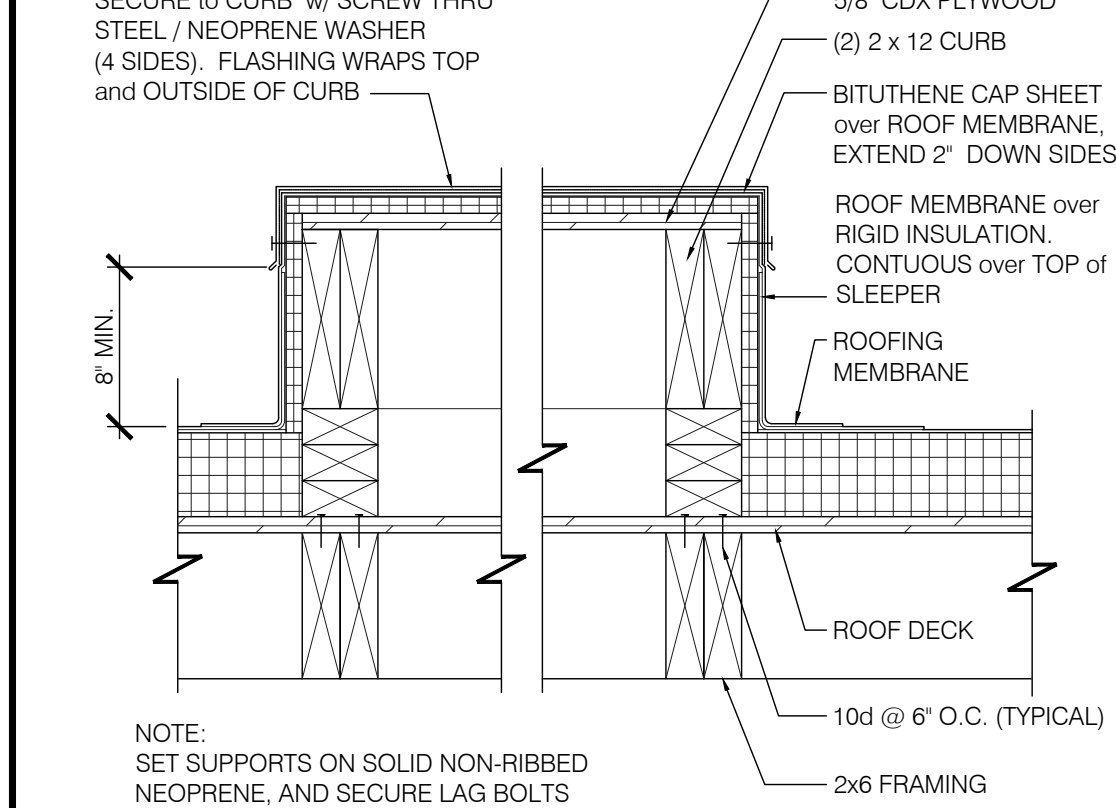


EQUIPMENT PLATFORM (OPTIONAL) 1 1/2"=1'-0" 6

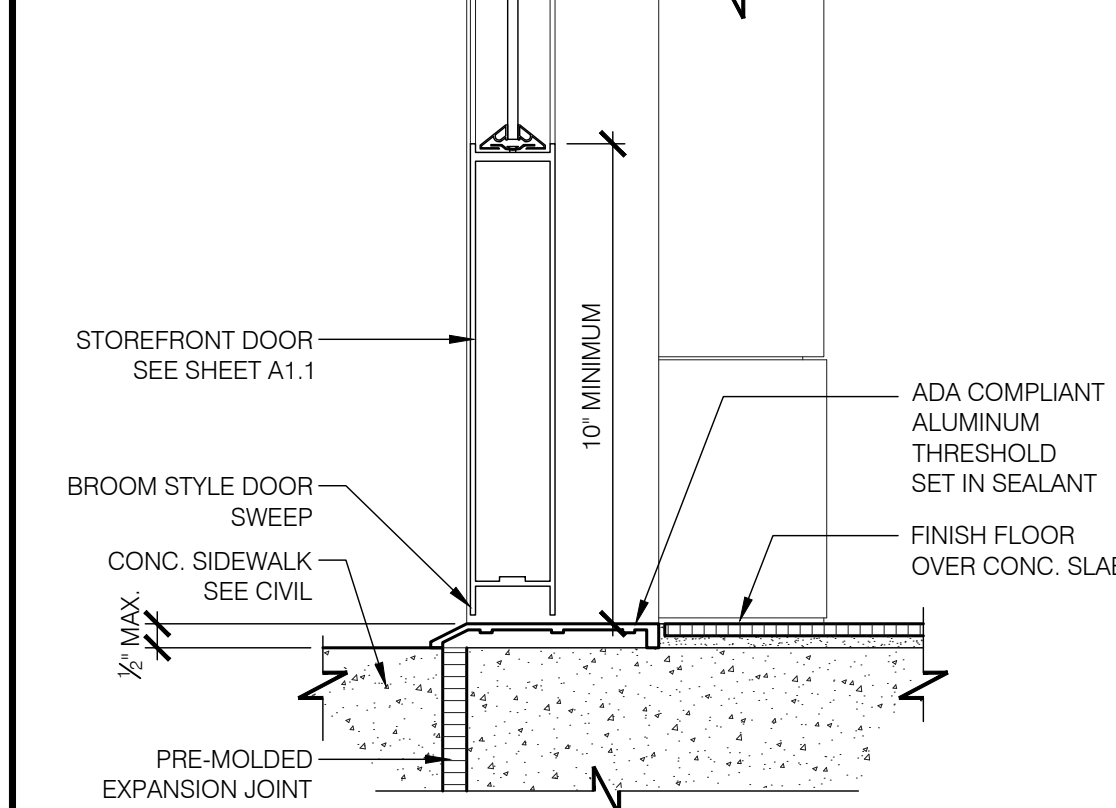

THRESHOLD at STOREFRONT DOOR 3"=1'-0" 1

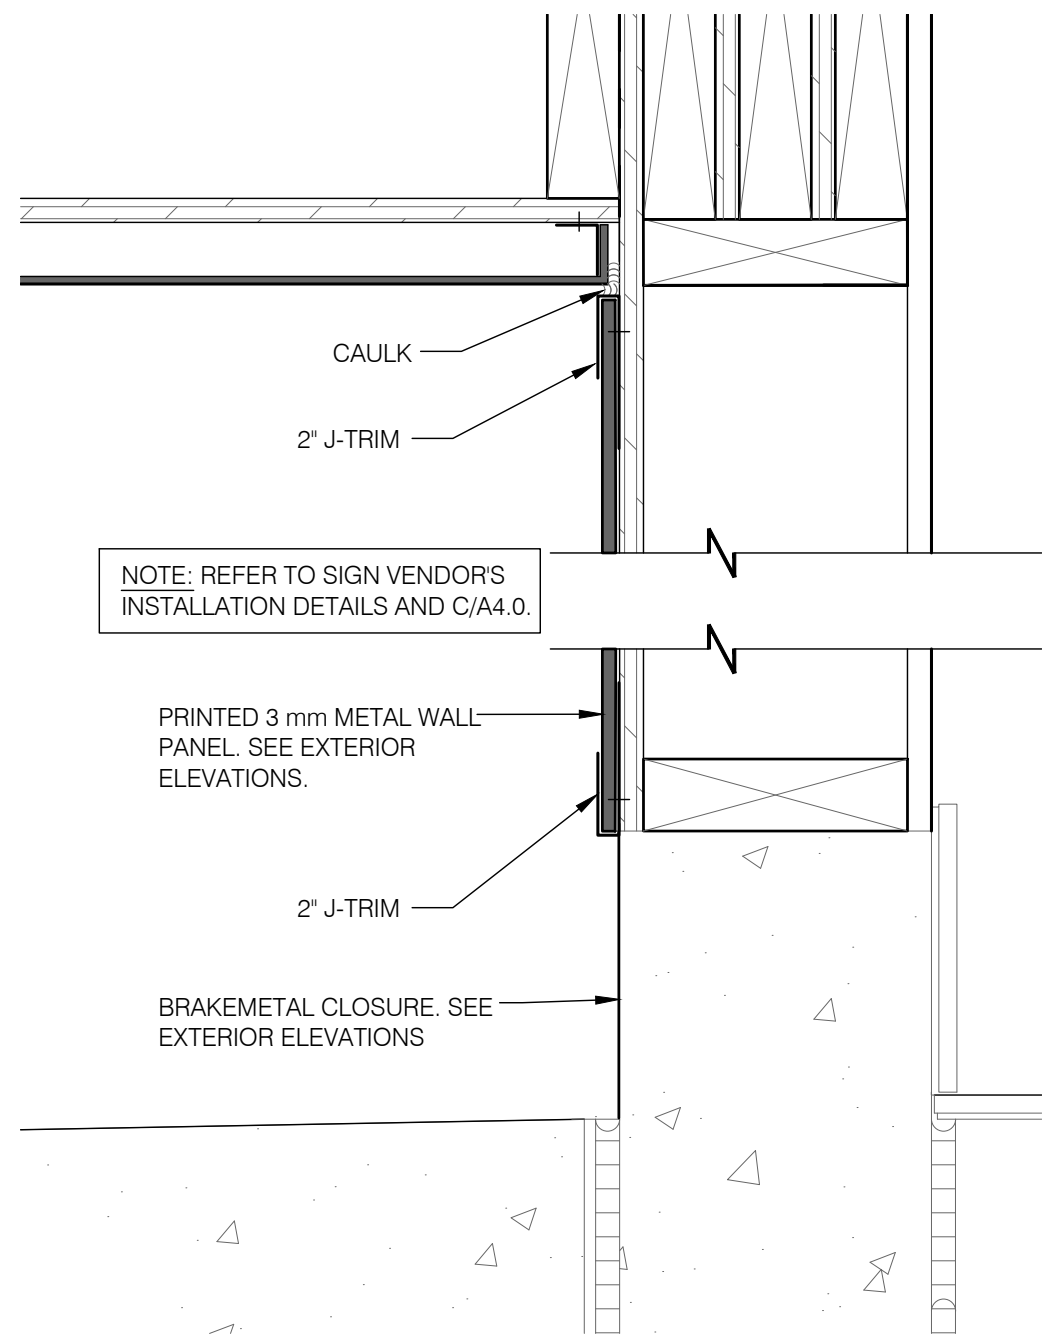


METAL WALL PANEL @ EXTERIOR 3' = 1'-0" 15

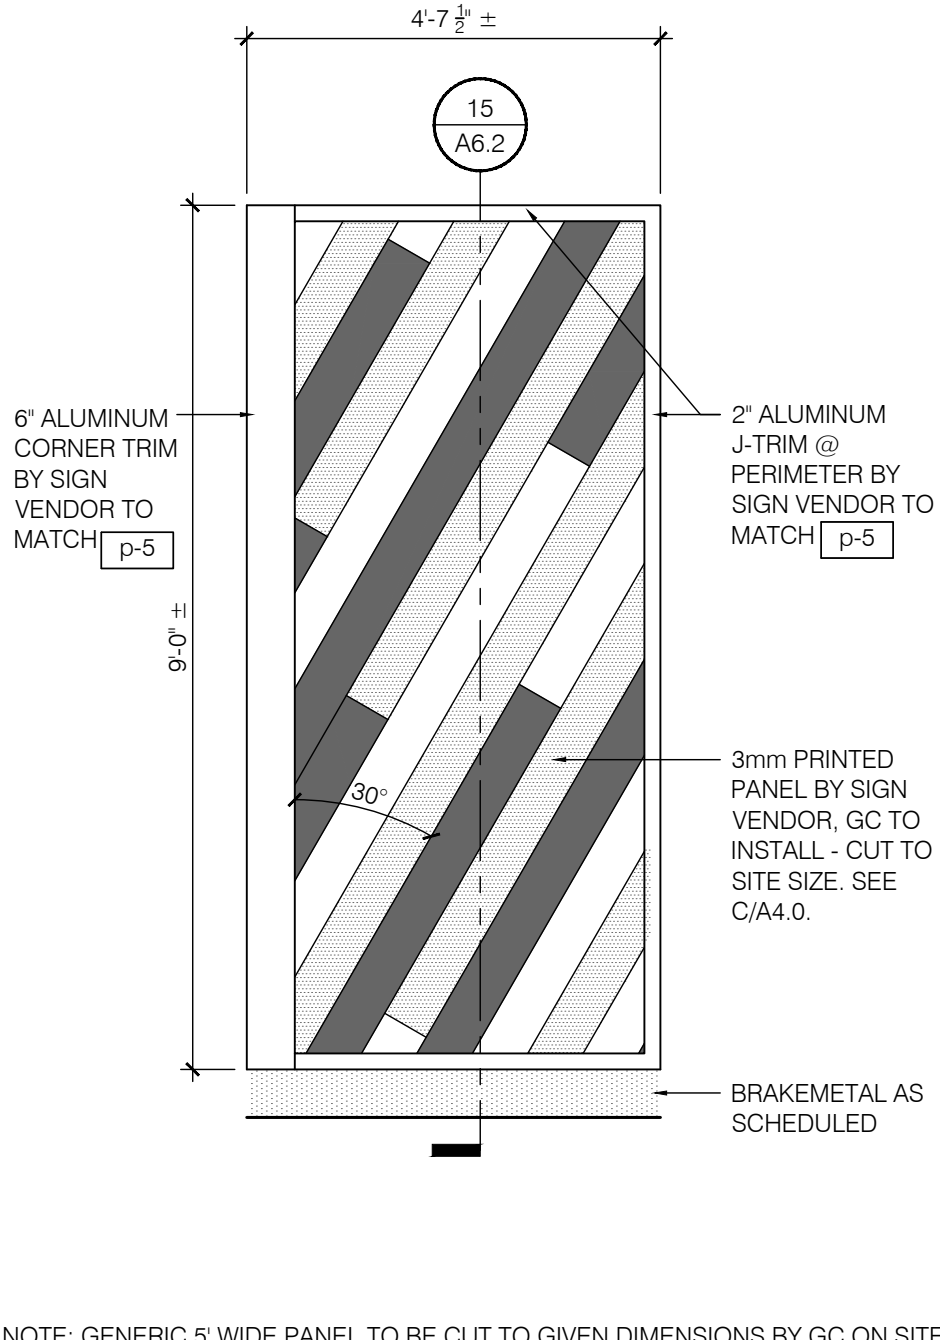


NOTE: GENERIC 5' WIDE PANEL TO BE CUT TO GIVEN DIMENSIONS BY GC ON SITE

ELEVATION @ S44c WALL PANEL - EXT 1/2' = 1'-0" 14

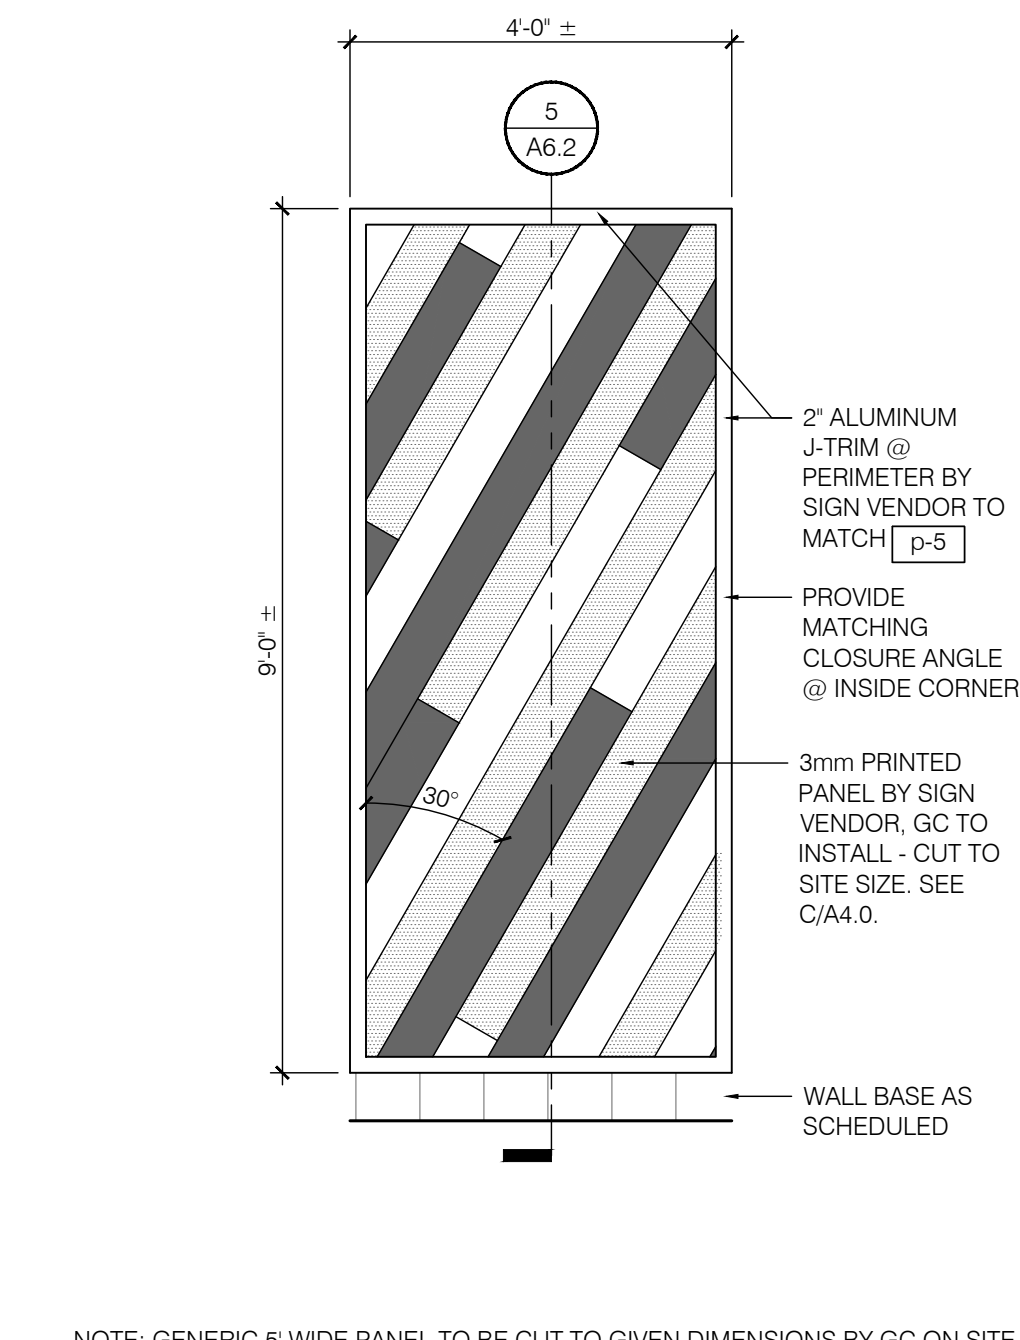


NOTE: GENERIC 5' WIDE PANEL TO BE CUT TO GIVEN DIMENSIONS BY GC ON SITE


ELEVATION @ S44c WALL PANEL - INT 1/2' = 1'-0" 13

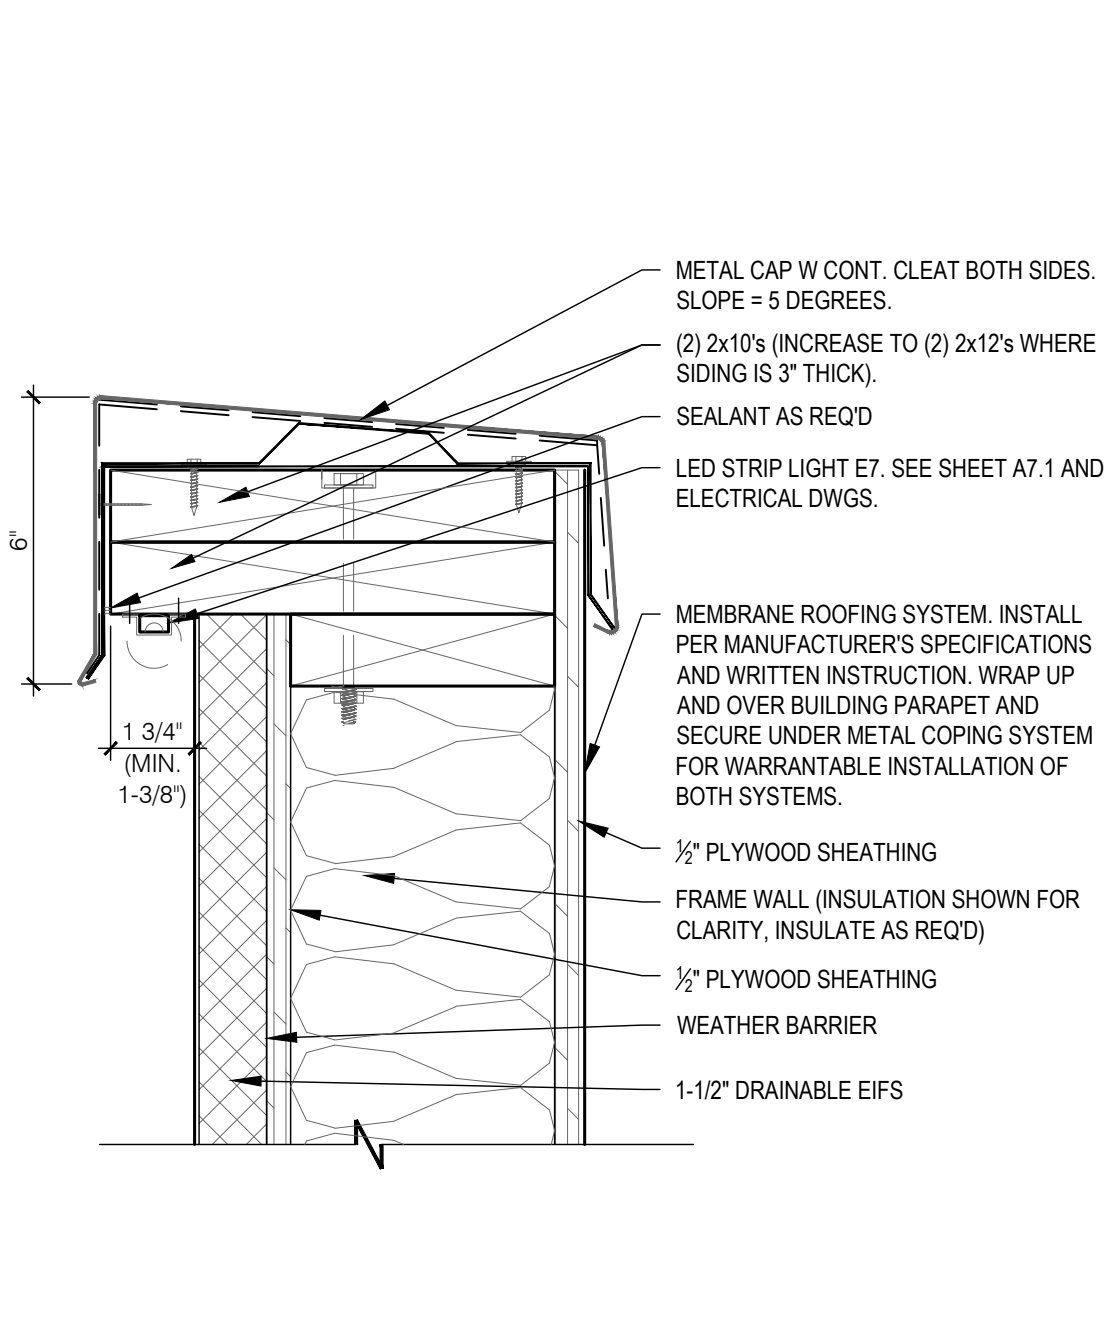


PARAPET CAP 3' = 1'-0" 17

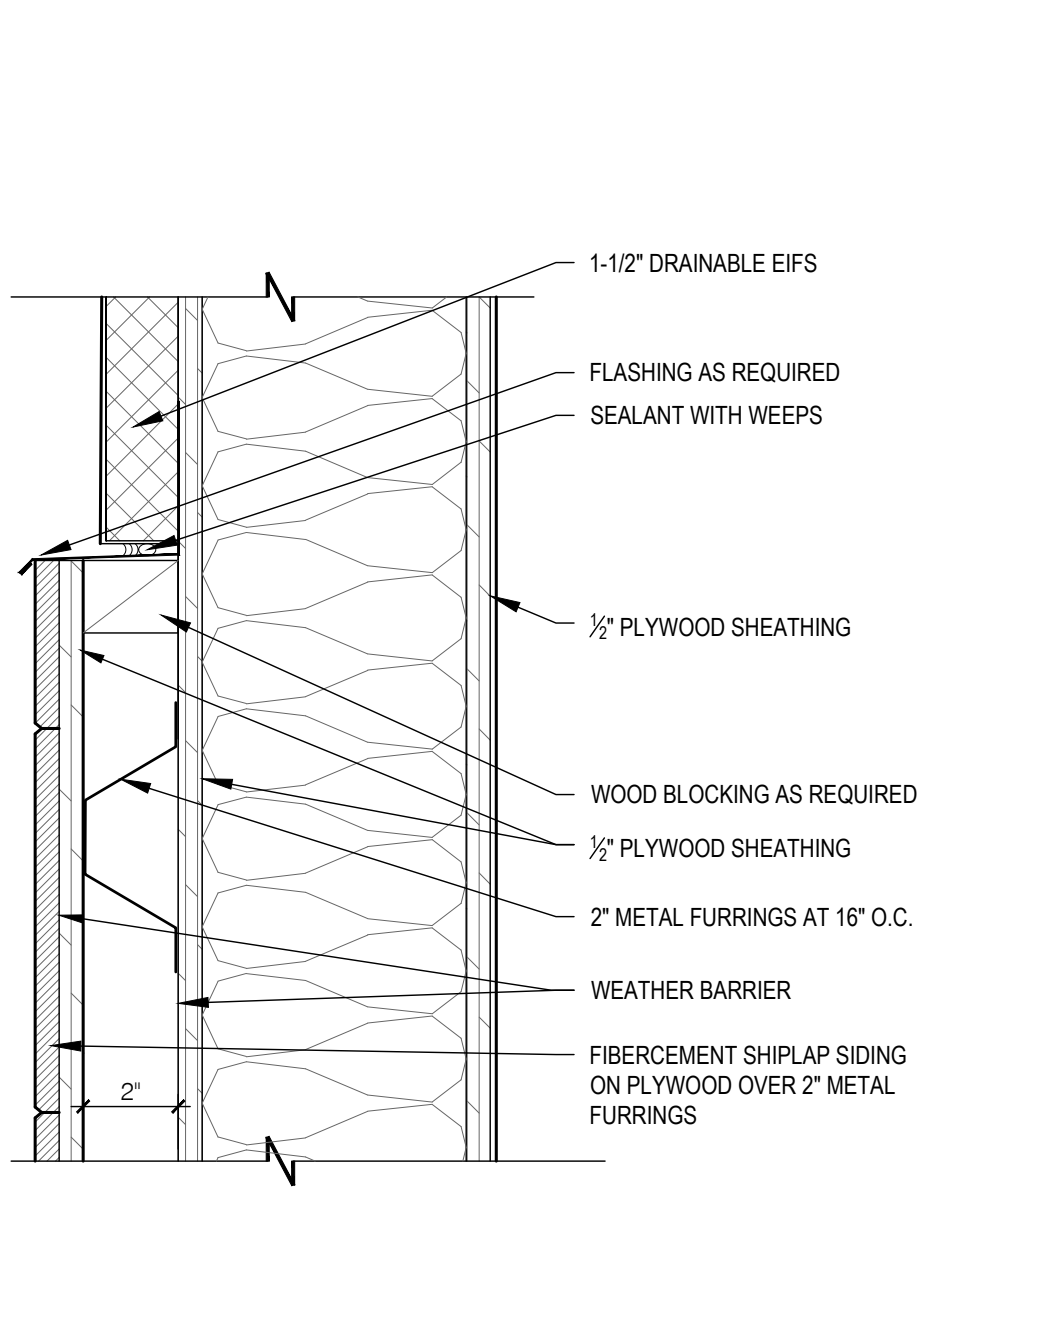


TOP OF PLANK SIDING TRANSITION 3' = 1'-0" 16

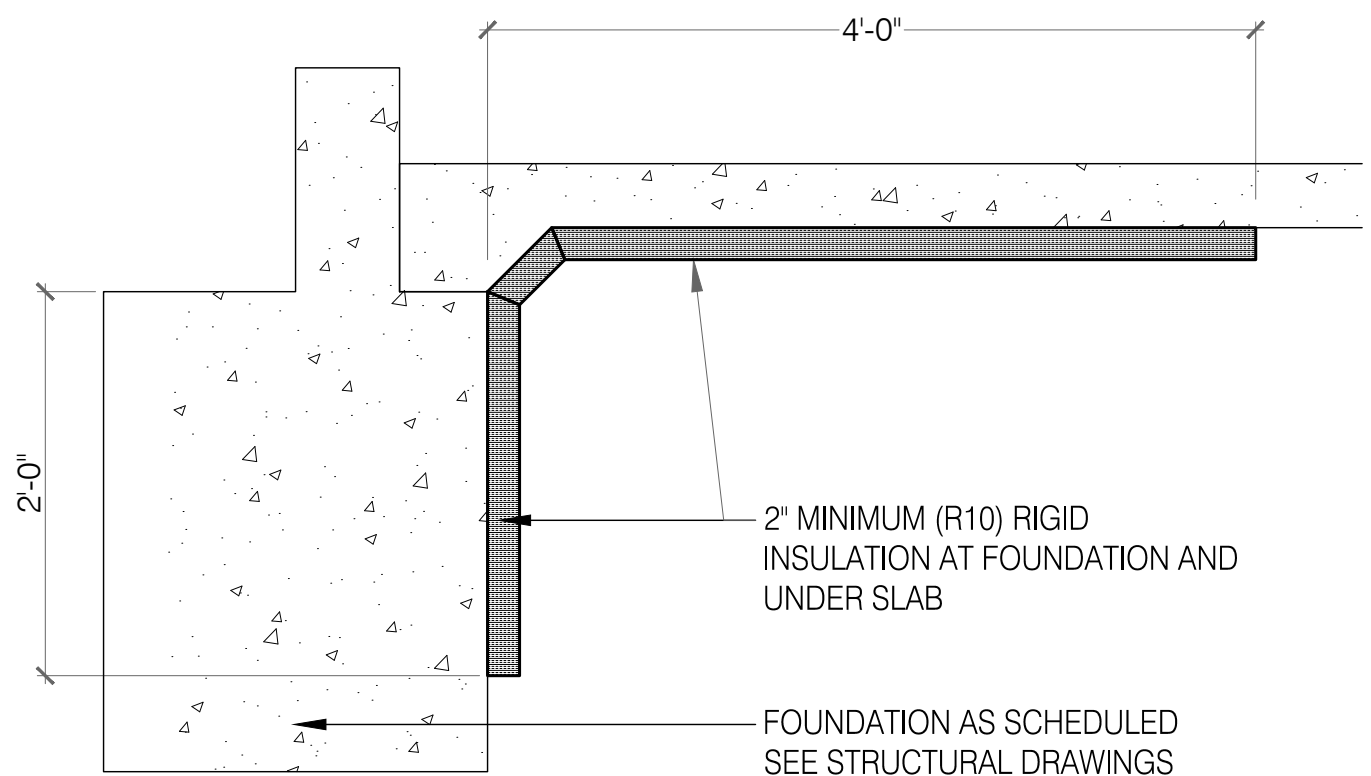


UNDER SLAB INSULATION DETAIL 1" = 1'-0" 4

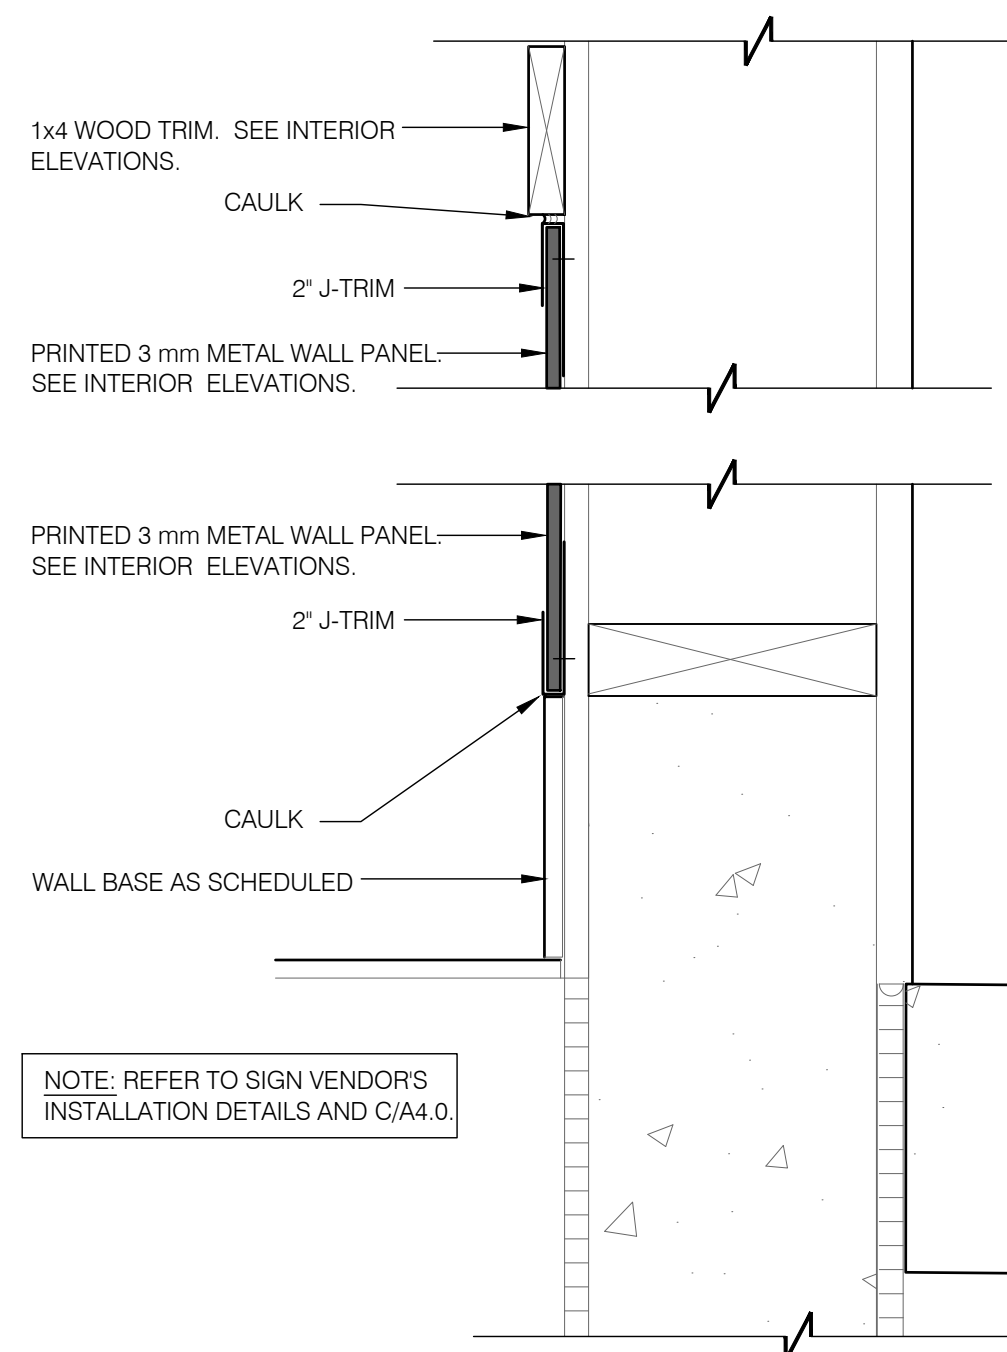


METAL WALL PANEL @ INTERIOR 3' = 1'-0" 5

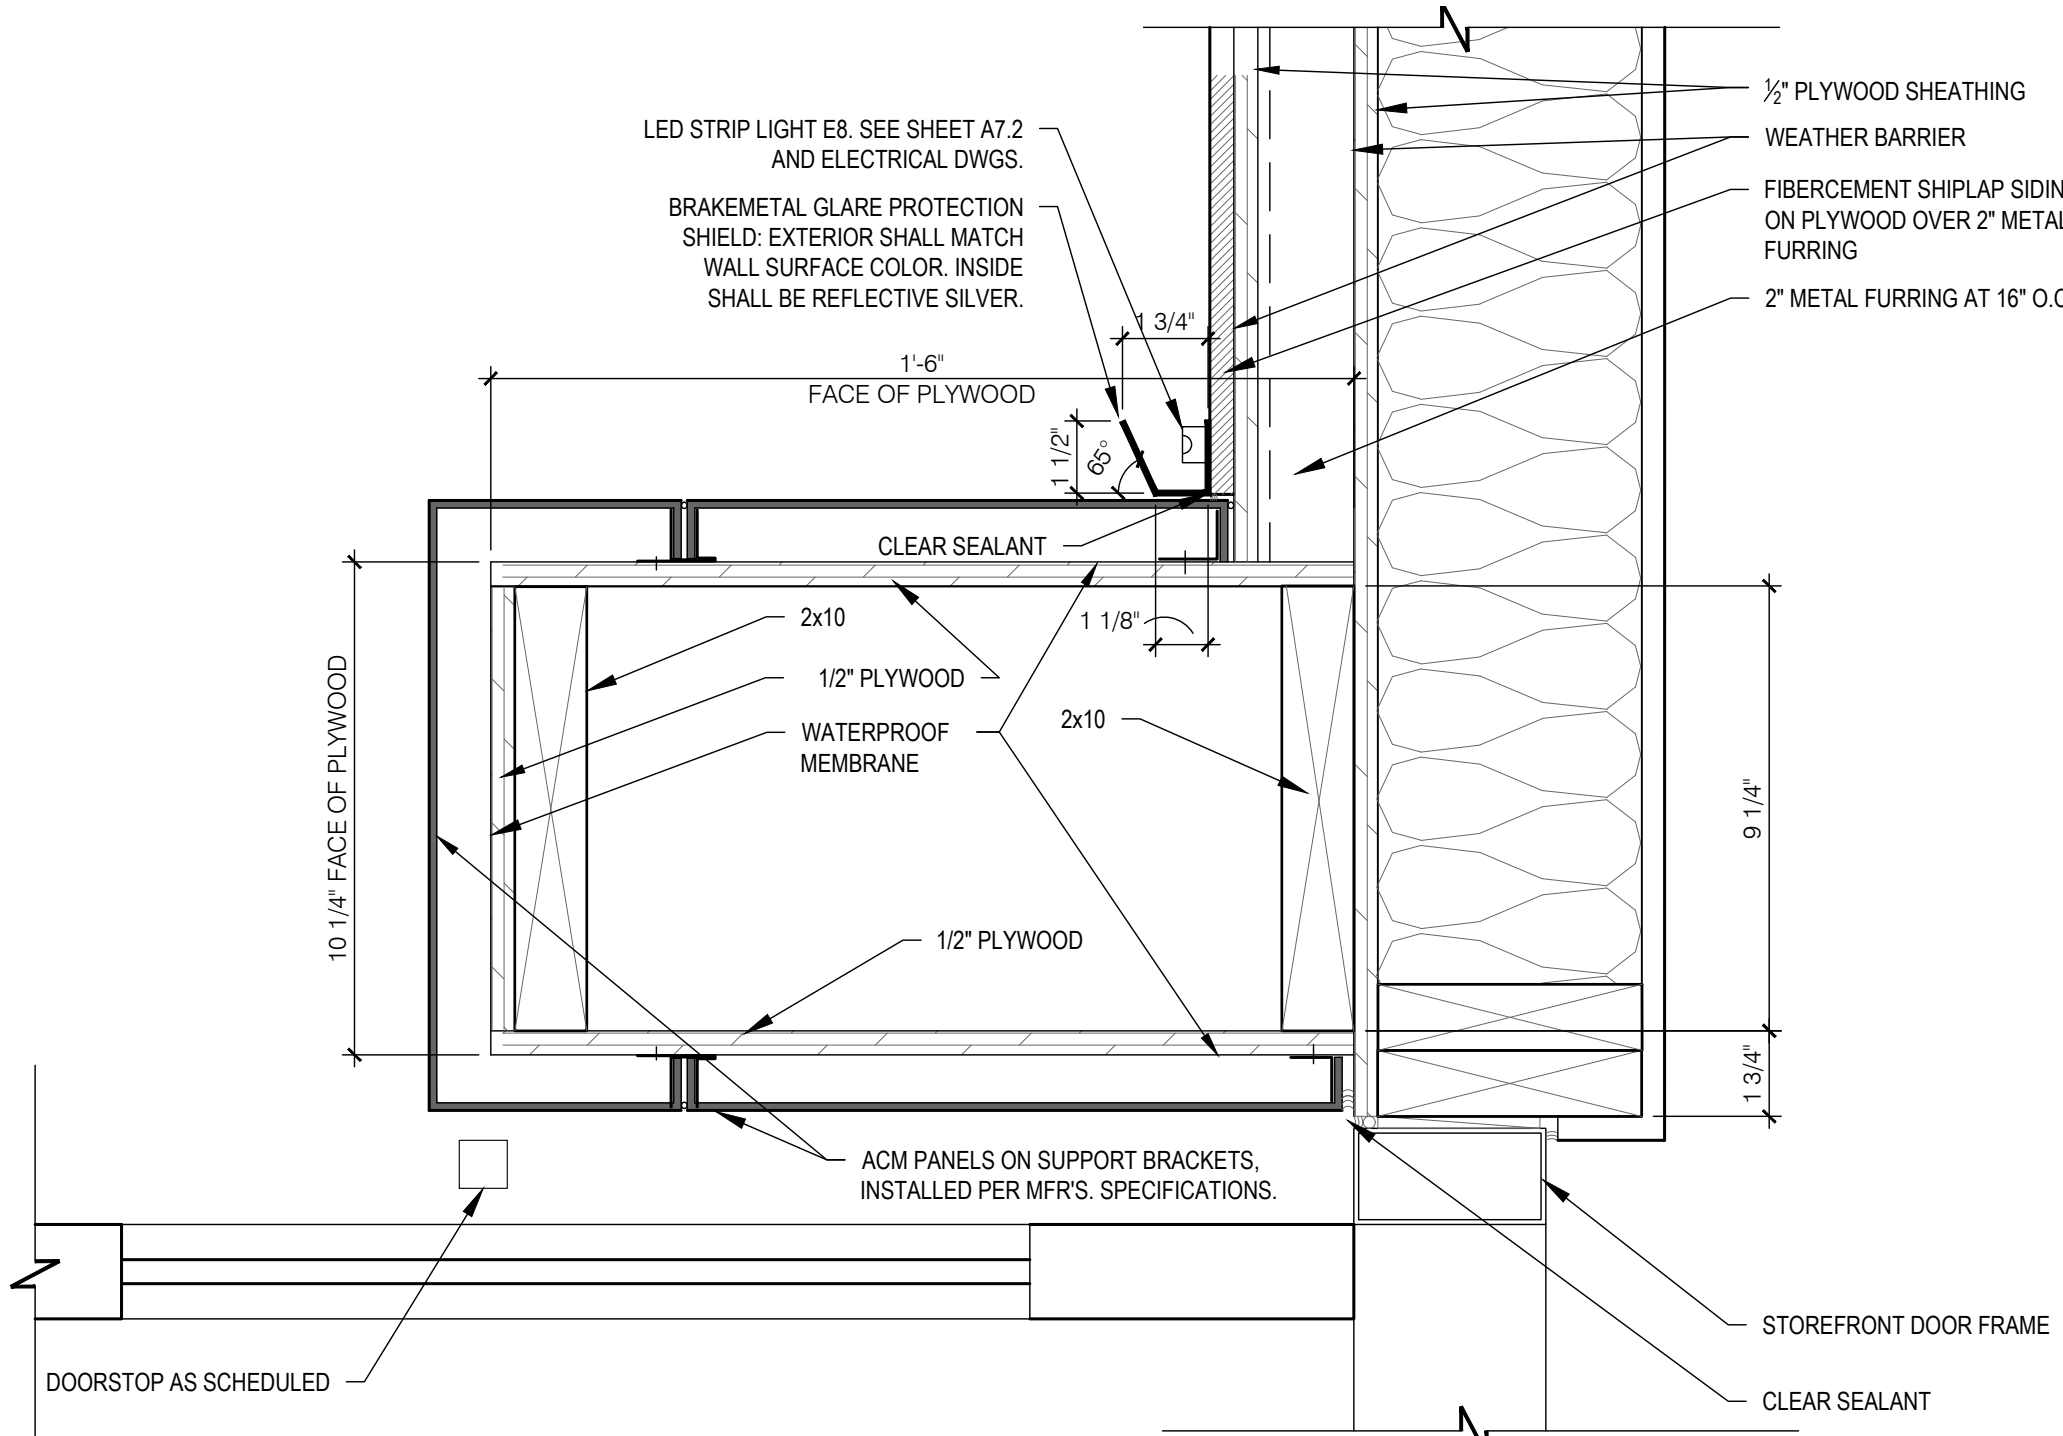


PLAN VIEW - VERTICAL ELEMENT AT CANOPY 3' = 1'-0" 3

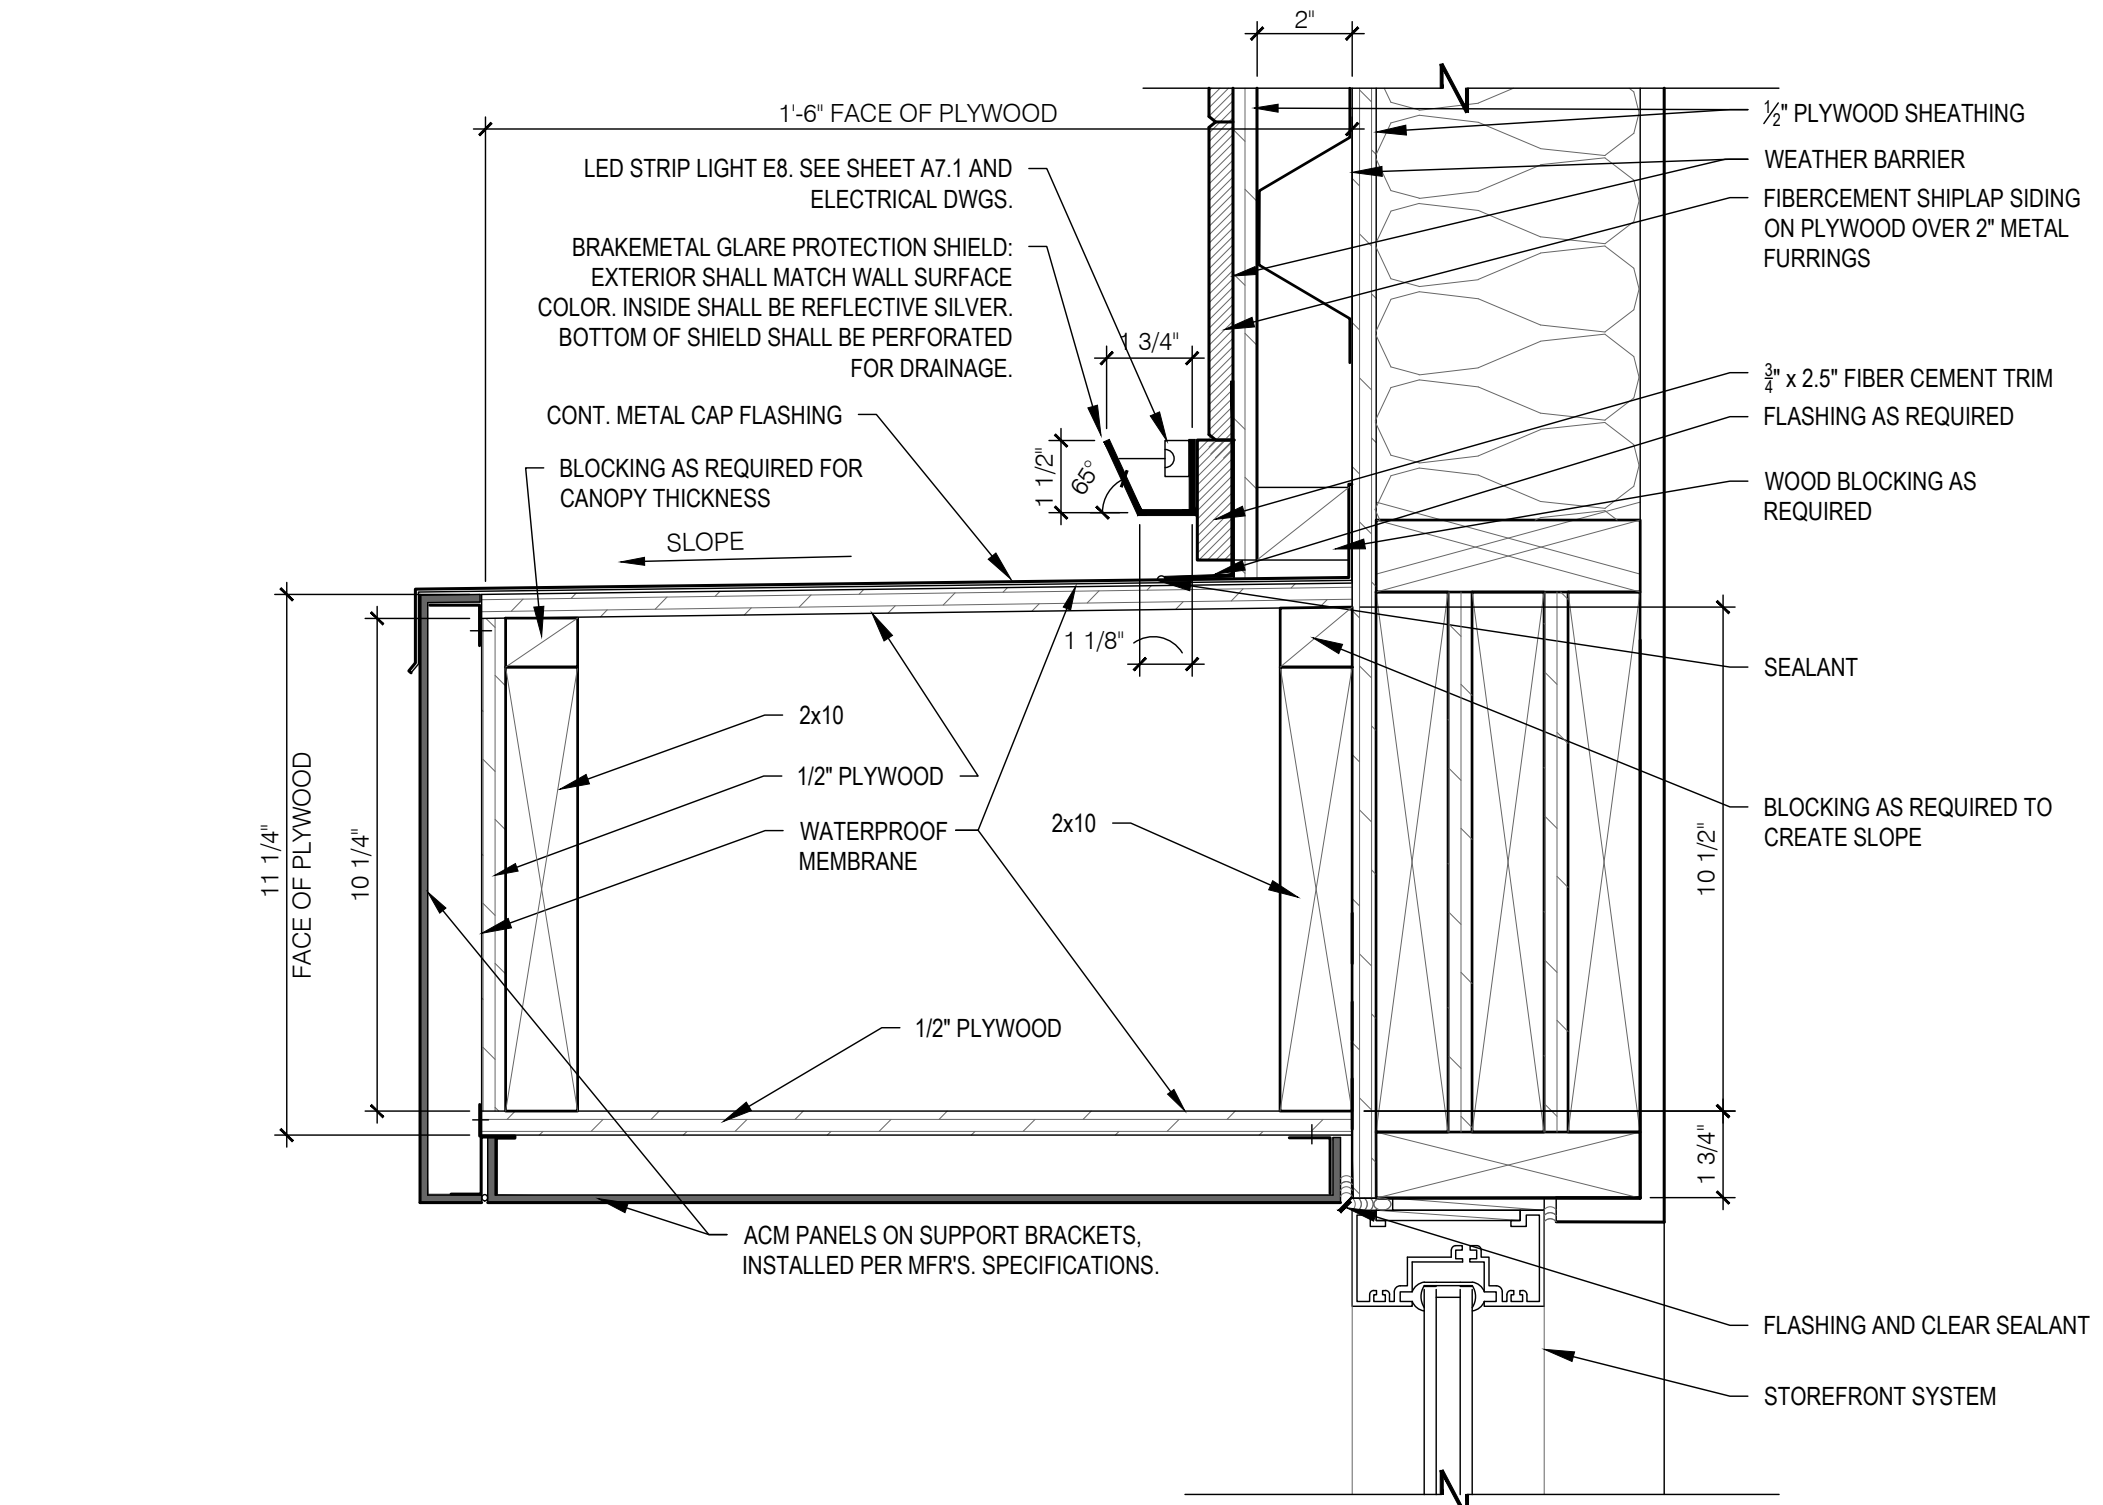

STOREFRONT AND EYEBROW CANOPY 3' = 1'-0" 6

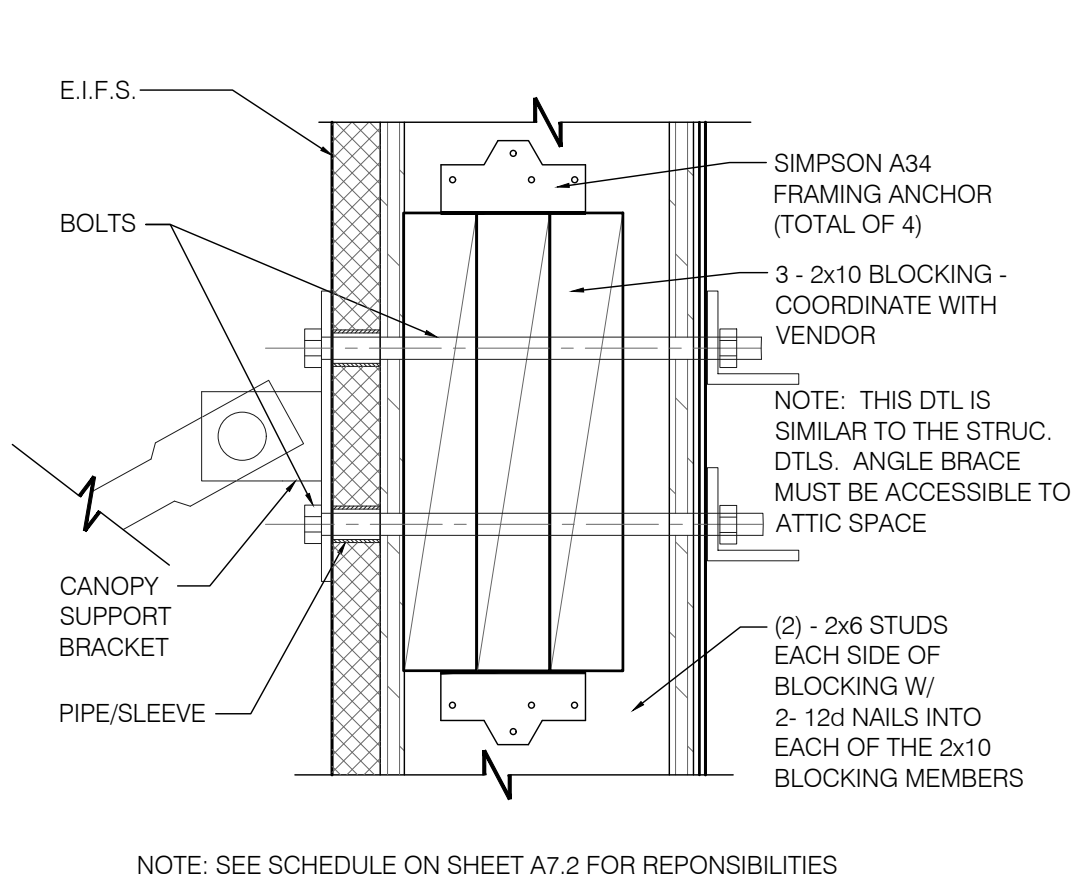

BLOCKING AT CANOPY 3' = 1'-0" 2

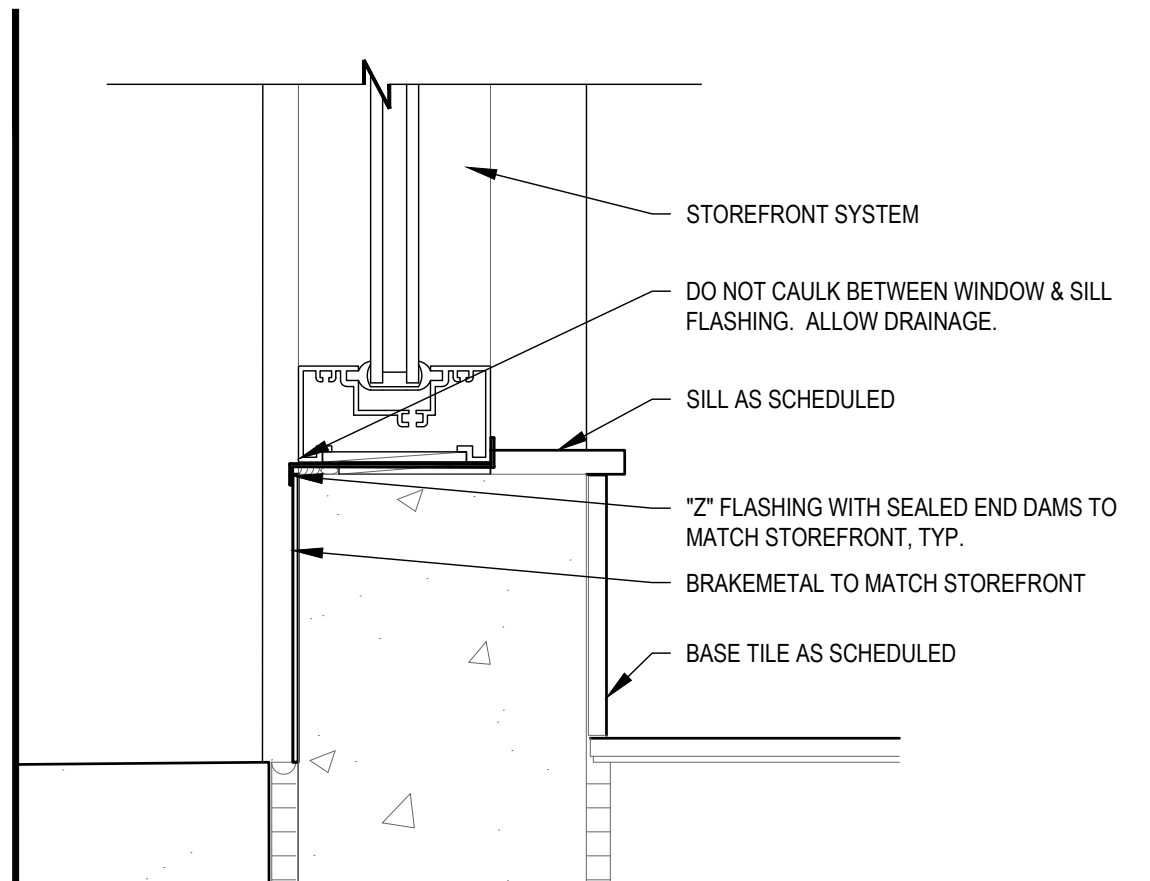

SILL AT STOREFRONT 3' = 1'-0" 1

JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HUDDLESTON ROAD, SUITE 1000
PEACHTREE CITY, GEORGIA 30094
770-438-9545
JEFFERSONARCHITECTS.COM



PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028



DT1800 RED

CONSTRUCTION
DETAILS

A6.2

PLOT DATE: 19.11.2025



PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC


1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028

DT1800 RED

FLOOR
FINISH
PLAN


A7.0

PLOT DATE: 19.11.2025

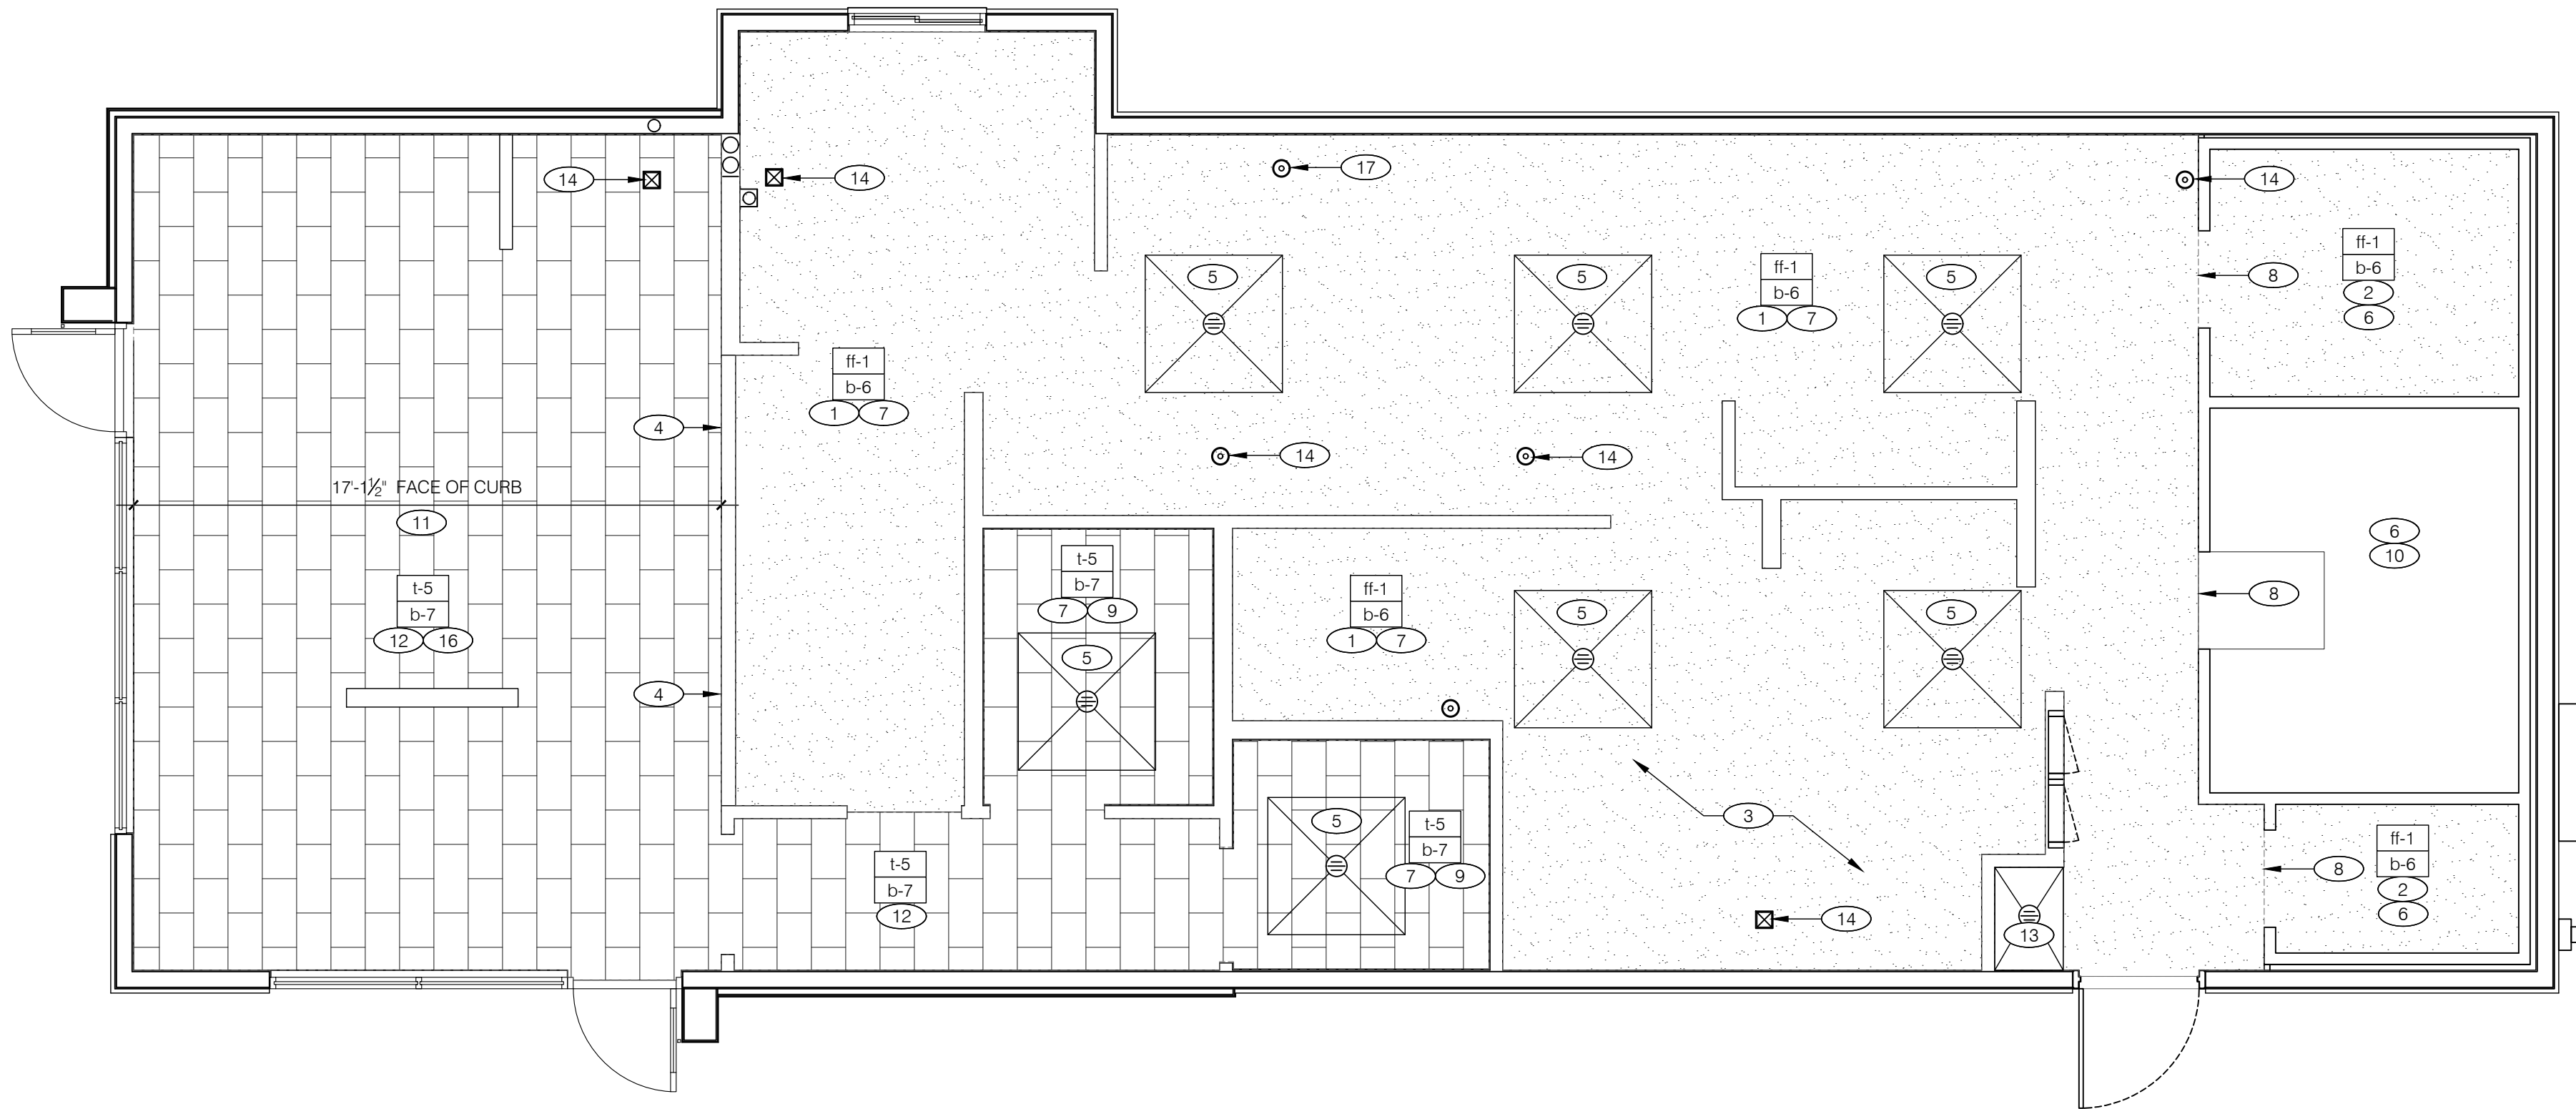

FLOOR FINISH PLAN 1/4"=1'-0"

A

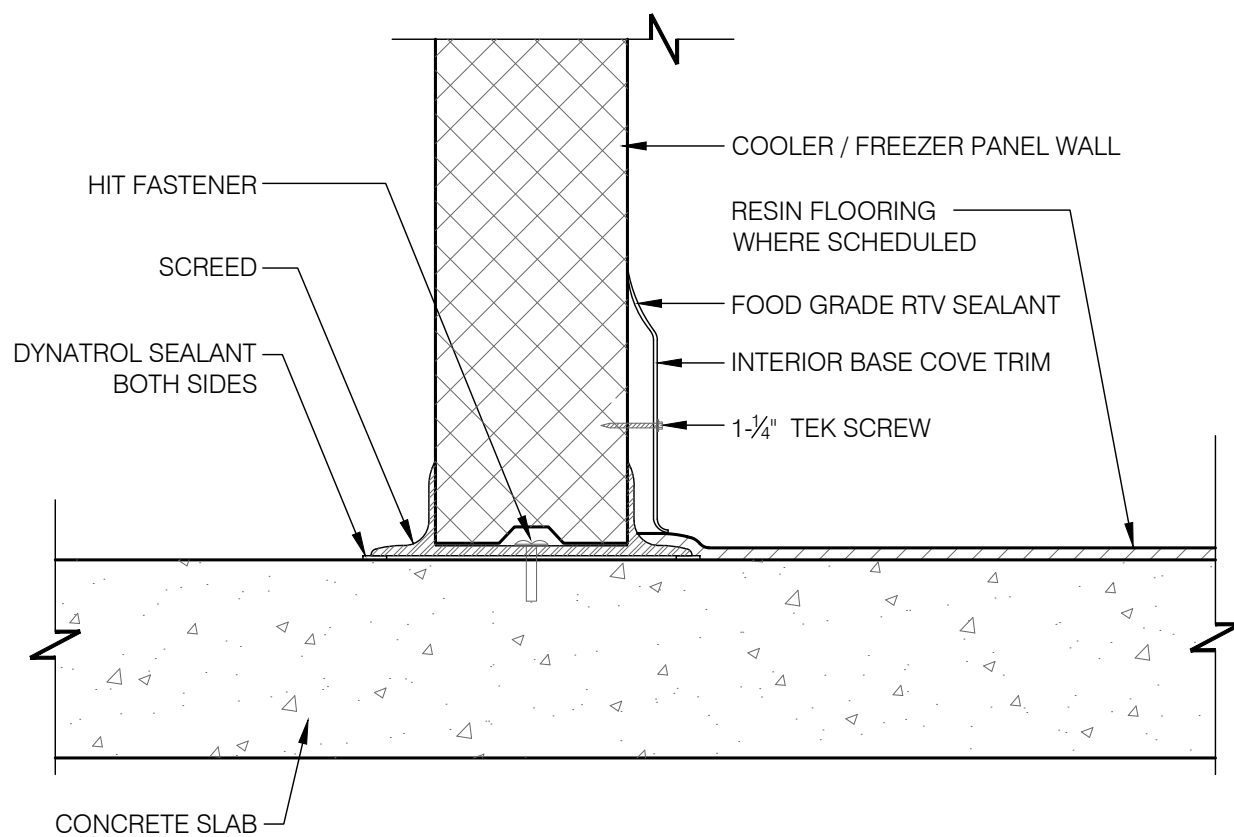

BASE @ WALK-IN COOLER/FREEZER 3" = 1'-0"

E

- A. DENOTES FINISH MATERIAL. REFER TO SHEET A7.3 FOR FINISHES.
- B. TILE JOINTS (U.O.N.):
1. QUARRY FLOOR TILE : 1/4"
2. GLAZED WALL TILE : 1/8"
3. BASE, TRIM AND ACCESSORIES : MATCH ADJOINING TILE UNITS
- C. TILE INSTALLATIONS REQUIRE MANUFACTURERS STANDARD MOLDED CORNERS AT BOTH INSIDE AND OUTSIDE CORNERS, AND BULLNOSE AT TOP OF TILE WAINSCOT (RESTROOM WALL).
- D. ALL BASE TILE SHALL BE SANITARY COVE STYLE WITH 3/8" MIN RADIUS, U.O.N.
- E. SEE RESPONSIBILITIES SCHEDULE ON SHEETS T1.1 & T1.2.
- F. PROVIDE CLEAR SILICONE CAULK WHERE FRP STOPS AT TOP OF COVE BASE.
- G. TILE CHIPPING AROUND CORE DRILL HOLES FOR SEATING WILL NOT BE ACCEPTED.

FINISH NOTES

D

- 1 6" INTEGRALLY POURED RESIN WALL BASE. SEE DETAILS 4, 14/ A6.0.
- 2 PROVIDE RESIN FLOORING INSIDE WALK-IN COOLER & STORAGE. FLOAT FLOORING IN COOLERS TO DRAIN TO KITCHEN. COORDINATE WITH WALK-IN WALL CONFIGURATION.
- 3 FLOOD BACK OF HOUSE CONCRETE 1 WEEK PRIOR TO INSTALLING RESIN FLOORING IN ORDER TO IDENTIFY LOW SPOTS IN SLAB.
- 4 FLOOR TILE TRANSITION FROM DINING ROOM TO KITCHEN SHALL BE FLUSH. FOLLOW INSTALLATION SPECIFICATIONS FROM RESIN FLOORING MFR.
- 5 CUT / SLOPE FLOORING TO DRAIN. FOLLOW RESIN FLOORING MFR'S DETAILS AND SPECIFICATIONS. FRANCHISEE APPROVED ALTERNATE: SLOPE TO WALLS; GC TO CONFIRM ALTERNATE WITH FRANCHISEE.
- 6 METAL BASE IN COOLER/FREEZER; RESPONSIBILITIES SCHEDULE AND DETAIL E, THIS SHEET.
- 7 REFER TO STRUCTURAL DRAWINGS FOR CONCRETE FLOOR SLOPES AROUND FLOOR DRAINS.
- 8 FLOAT FLOORING TO MEET COOLER FLOORS FLUSH. COORDINATE WITH COOLER THRESHOLD INSTALLATION.
- 9 SANITARY COVE TILE BASE (RESTROOMS). SEE DETAIL 10/ A6.0.
- 10 FACTORY FLOOR FINISH (GALV. STL.) w/ INTEGRAL COVE BASE AND BUILT-IN INTERNAL RAMP IN WALK-IN FREEZER.
- 11 DIMENSION STRING REPRESENTS LINE OF FcH -to- BoH FLOOR TILE TRANSITION.
- 12 6" WALL BASE (DINING ROOM). SEE DETAILS 3, 5/A6.0.
- 13 SILIKAL FLOORING AND BASE AT 6" RECESSED SLAB MOP SINK LOCATION.
- 14 FLOOR SINKS / HUB DRAINS. SEE PLUMBING DRAWINGS.
- 15 NOT USED.
- 16 LOCATE CORE DRILLS FOR SEATING / DECOR PACKAGE PRIOR TO PERFORMING WORK. SEE SHEET A2.0.
- 17 HUB DRAIN AS REQUIRED FOR OPTIONAL EQUIPMENT. SEE SHEET A2.0.

KEY NOTES

B

NOT USED

N.T.S.

F



PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC


1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028

DT1800 RED

WALL
FINISH
PLAN

A7.1

PLOT DATE: 19.11.2025

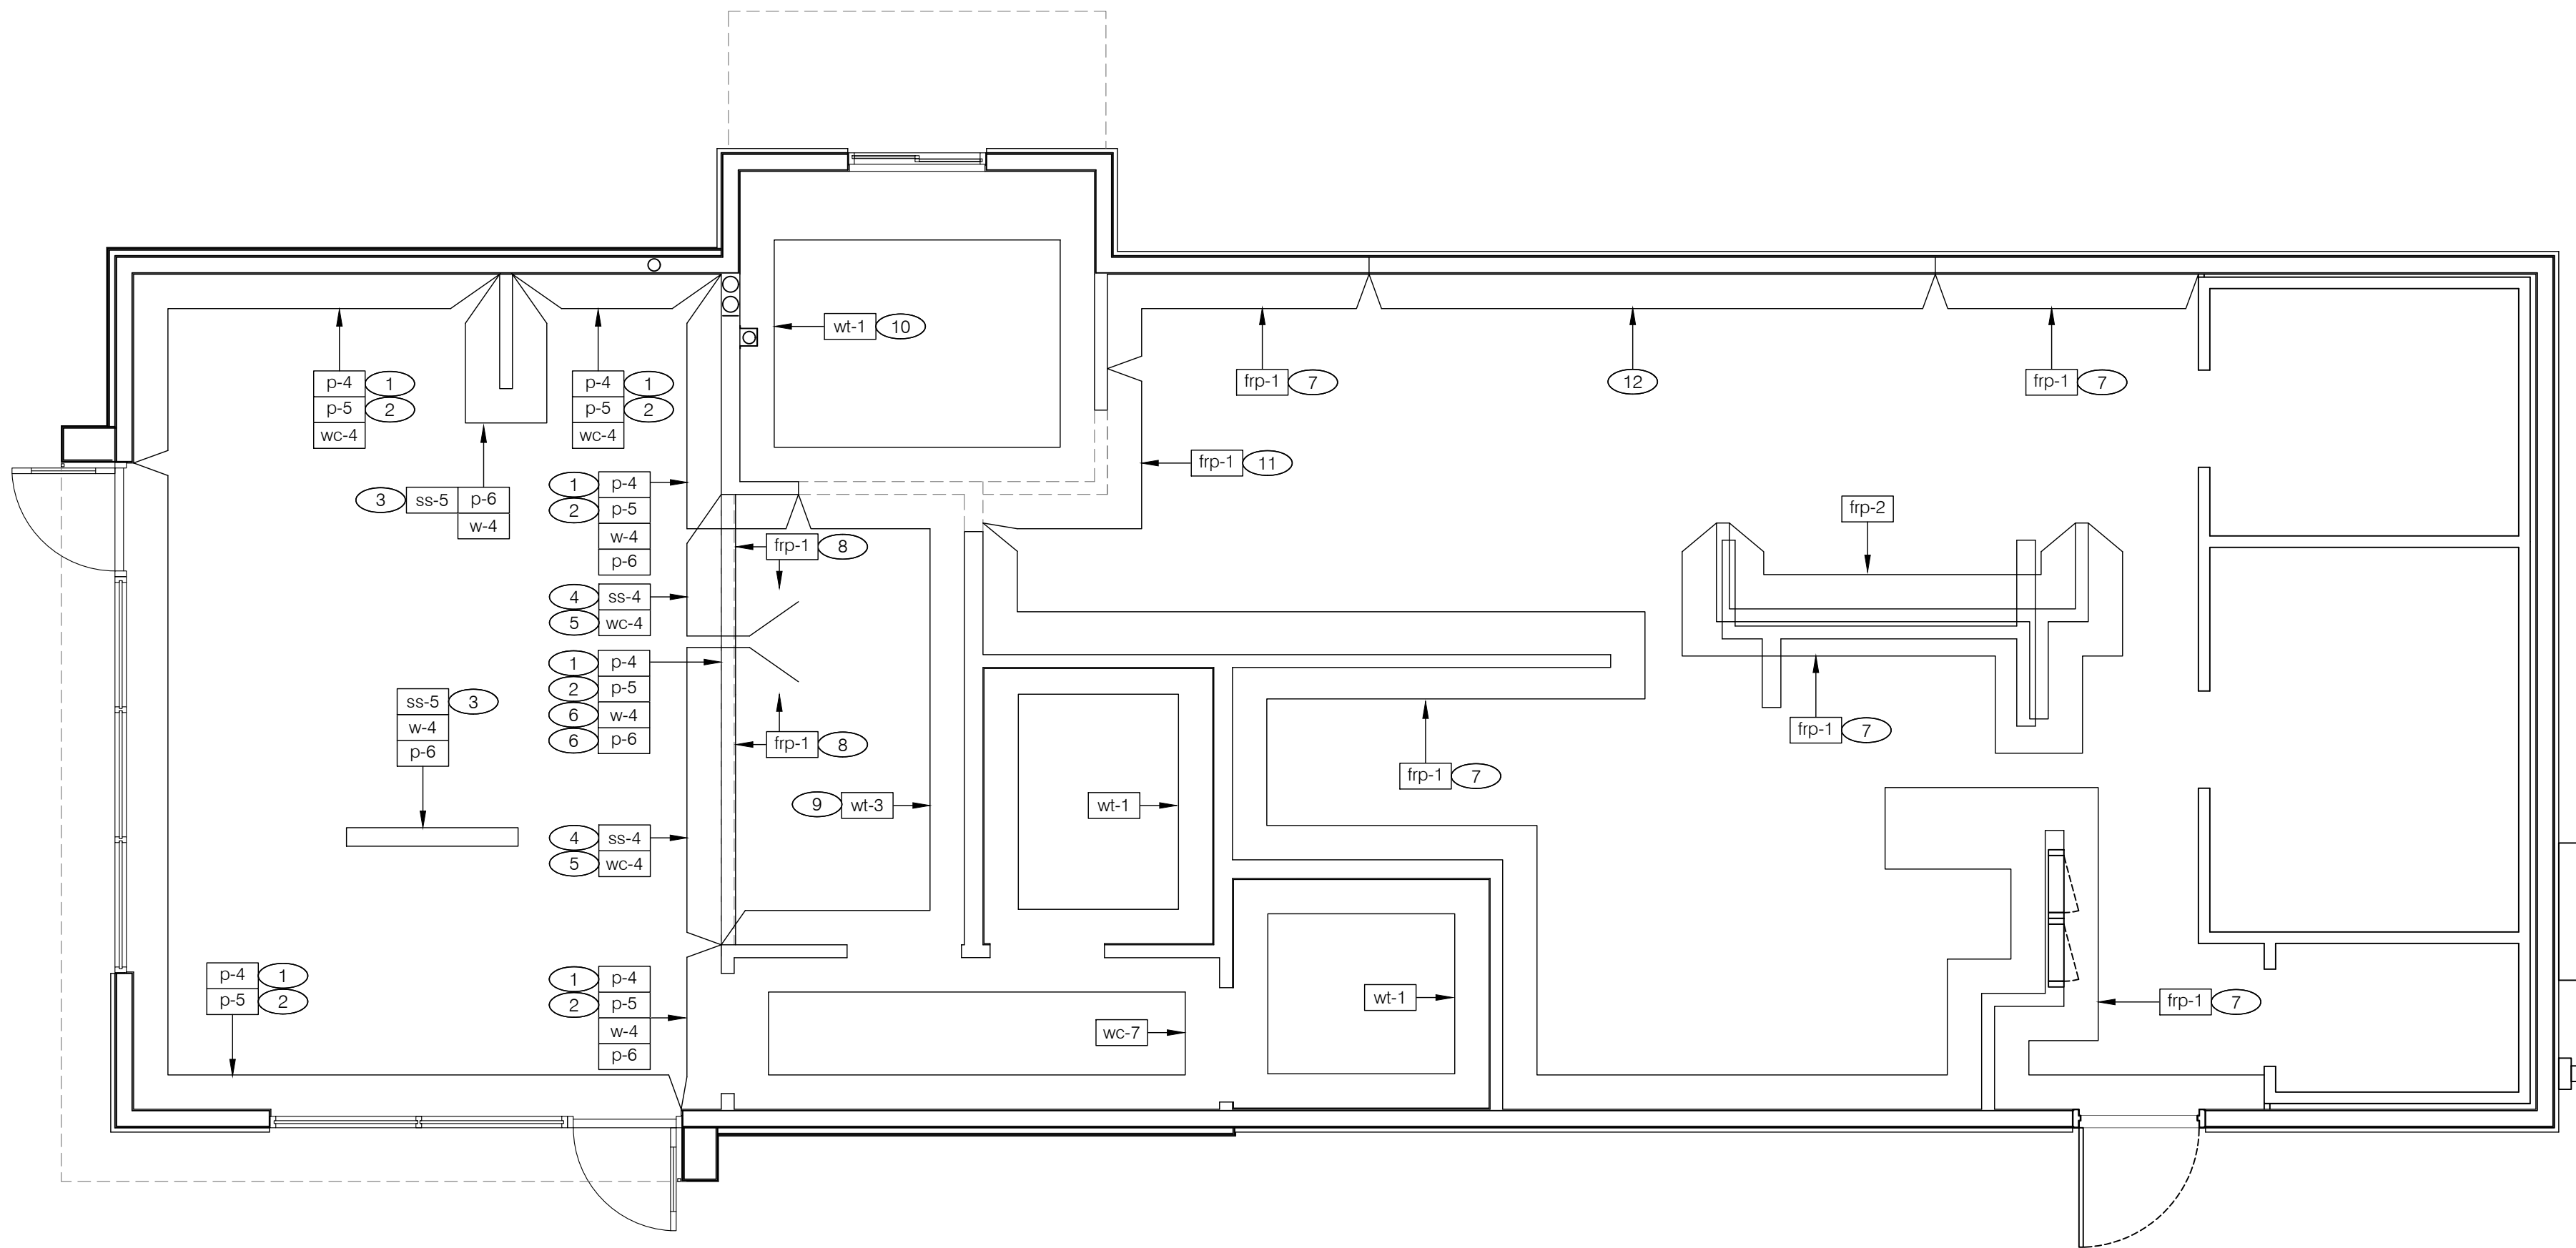

FLOOR FINISH PLAN 1/4"=1'-0"

A

- A.  DENOTES FINISH MATERIAL. REFER TO SHEET A7.3 FOR FINISHES.
- B. TILE JOINTS (U.O.N.):
1. QUARRY FLOOR TILE : 1/4"
2. GLAZED WALL TILE : 1/8"
3. BASE, TRIM AND ACCESSORIES : MATCH ADJOINING TILE UNITS
- C. TILE INSTALLATIONS REQUIRE MANUFACTURERS STANDARD MOLDED CORNERS AT BOTH INSIDE AND OUTSIDE CORNERS, AND BULLNOSE AT TOP OF TILE WAINSCOT (RESTROOM WALL).
- D. ALL BASE TILE SHALL BE SANITARY COVE STYLE WITH 3/8" MIN RADIUS, U.O.N.
- E. SEE RESPONSIBILITIES SCHEDULE ON SHEET T1.1.
- F. PROVIDE CLEAR SILICONE CAULK WHERE FRP STOPS AT TOP OF COVE BASE.
- G. TILE CHIPPING AROUND CORE DRILL HOLES FOR SEATING WILL NOT BE ACCEPTED.


- 1 PAINT WALLS ABOVE UPPER HORIZONTAL TRIM, TRUSSES.
- 2 HORIZONTAL TRIM AT 9'-6" A.F.F.
- 3 WALL CAP.
- 4 SERVING COUNTER TOP.
- 5 FACE OF SERVING COUNTER, DINING SIDE.
- 6 FACE OF BULKHEAD, DINING SIDE.
- 7 ALL BACK-OF-HOUSE WALLS U.O.N.
- 8 ALL VERTICAL SURFACES OF SERVING COUNTER KNEEWALLS, B.O.H. SIDE.
- 9 INCLUDES FACE OF BULKHEAD, SERVING SIDE.
- 10 INCLUDES FACE OF BULKHEAD, DRIVE-THRU SIDE.
- 11 FACE OF BULKHEAD TYP., KITCHEN SIDE.
- 12 STAINLESS STEEL WALL PANELS BEHIND HOOD. SEE SHEET A1.0.

NOT USED N.T.S. F

NOT USED N.T.S. E

FINISH NOTES D

KEY NOTES B

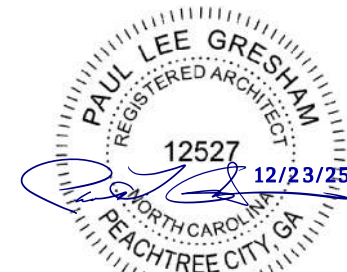

PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC


1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028

DT1800 RED

REFLECTED
CEILING
PLAN

A7.2

PLOT DATE: 19.11.2025

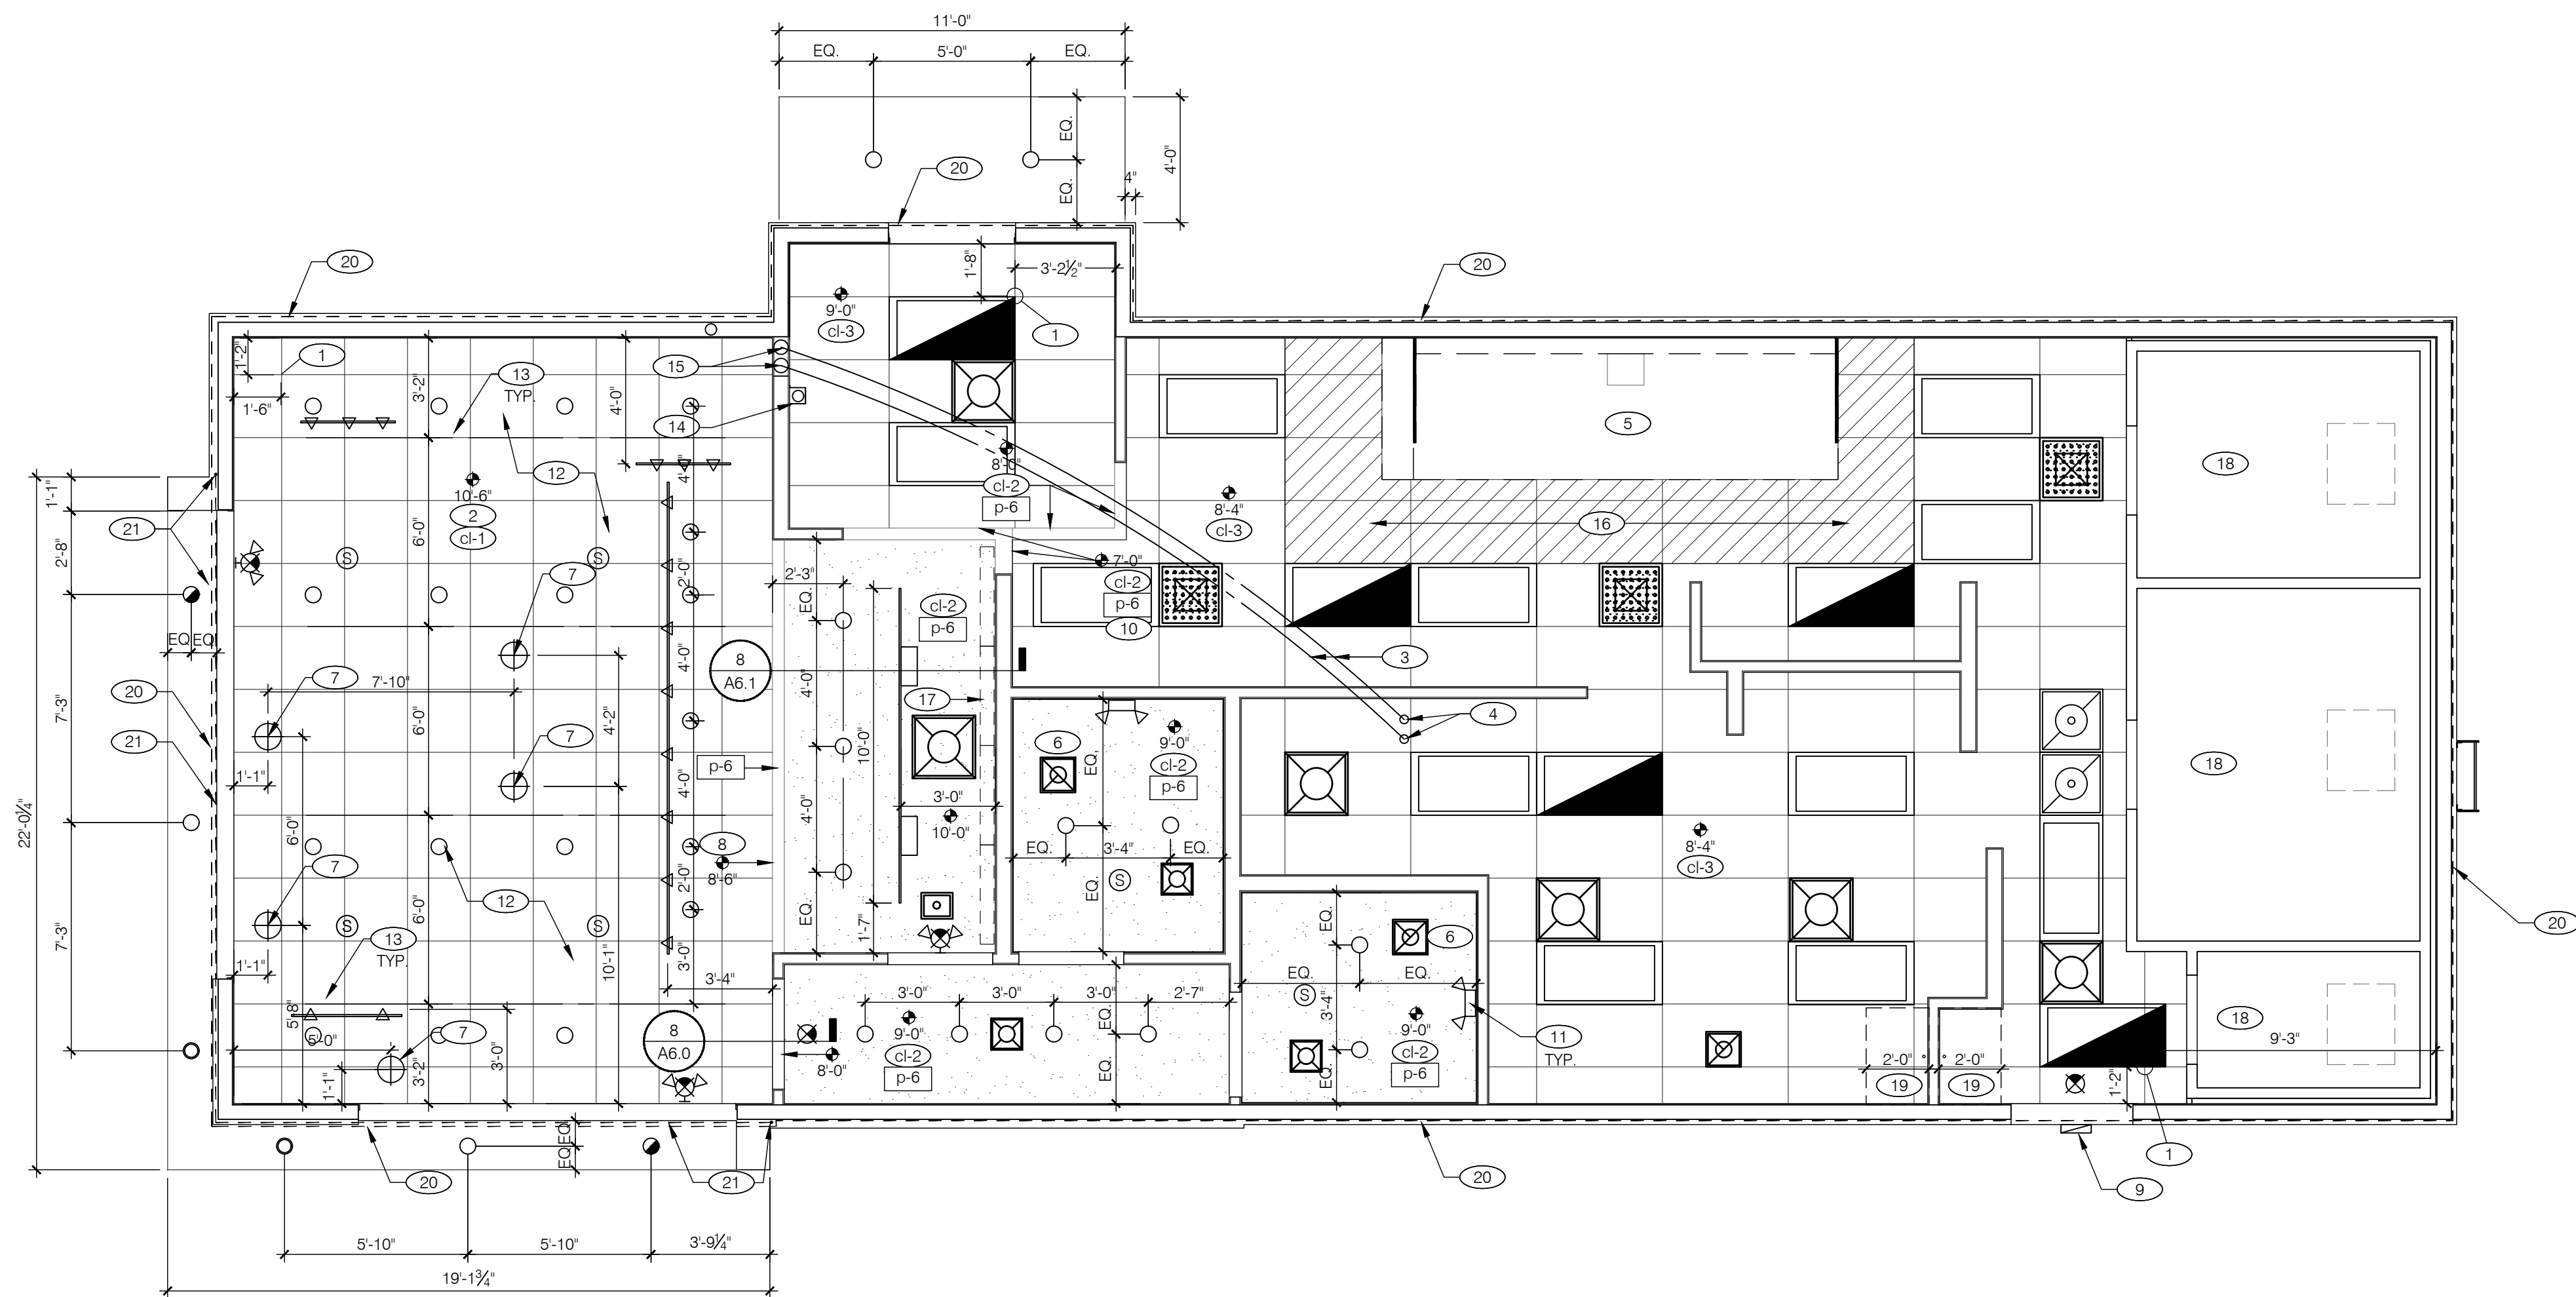

FLOOR PLAN 1/4\"=1'-0\" A

	2'-0\" x 2'-0\" LED LIGHT FIXTURE		EXTERIOR WALL FIXTURE
	2'-0\" x 4'-0\" LED LIGHT FIXTURE		SPEAKER
	DOWNLIGHT @ WALK-IN (BY WALK-IN MFR.)		12\" EXHAUST FAN
	PENDANT FIXTURE		HVAC RETURN GRILLE
	DOWNLIGHT		HVAC SUPPLY DIFFUSER
	EMERGENCY LIGHTS		HVAC SUPPLY DIFFUSER
	EXIT LIGHT (WALL MOUNTED)		HVAC SUPPLY DIFFUSER
	EXIT LIGHT (CEILING MOUNTED)		BATTERY BACKUP CEILING FIXTURE
	EXIT LIGHT/EM LIGHT (WALL MOUNTED)		BATTERY BACKUP CEILING FIXTURE
	DIRECTIONAL FIXTURE TRACK MOUNTED		

CEILING SYMBOL LEGEND E

DIMENSIONS:
A. ALL DIMENSIONS ARE FROM FACE OF FINISH WALL TO $\bar{C}$ OF FIXTURES; U.O.N.

CEILING FINISHES:
A. REFER TO SHEET A7.3 FOR CLG. FINISHES.

SUSPENDED CEILING:
A. ACOUSTICAL PANEL INSTALLATION: INSTALL ACOUSTICAL PANELS WITH EDGES IN CLOSE CONTACT WITH METAL SUPPORTS AND IN TRUE ALIGNMENT.
B. ALLOWABLE VARIATIONS FROM FLAT AND LEVEL SURFACE: 1/8\" IN 10'-0\" MAX.
C. ALLOWABLE VARIATIONS FROM PLUMB OF GRID MEMBERS: AS CAUSED BY ECCENTRIC LOADS, 2\" MAX.
D. INSTALL SYSTEM AFTER MAJOR ABOVE CLG. WORK IS COMPLETE. COORD LOCATIONS OF HANGERS WITH RELATED WORK.
E. SEE MANUFACTURER'S SPECIFICATIONS FOR ADDITIONAL INFORMATION.

GYPSUM BOARD CEILING:
A. SUBSTRATE SHALL BE 1/2\" THICK GYP BD.

ELECTRICAL:
A. SEE ELECT. DWGS. FOR FIXTURE SCHED.

GENERAL NOTES:
A. PROVIDE ESCUTCHEON PLATES AND SEALANT AT ALL PENETRATIONS INTO WALLS, CEILINGS, AND FLOORS. DO NOT USE CAULKS OR EXPANDING FOAM FOR SEALANT.

REFLECTED CEILING PLAN NOTES D


- (1) CEILING GRID STARTING POINT.
- (2) EXPOSED TRUSSES IN DINING ROOM ONLY.
- (3) SYRUP / FILTERED WATER TUBE BUNDLES FOR DRINK SYSTEM. SEE DETAILS 1 and 6 / A6.1. SEE RESPONSIBILITIES SCHEDULE ON SHEETS T1.1 & T1.2.
- (4) 6\" DIA PVC STUB THROUGH CEILING, SEE DETAIL 4 / A6.1.
- (5) HOOD. SEE <E24X> SHEET A2.1.
- (6) SEE AIR DEVICE SCHEDULE FOR ROUGH FRAMING OPENINGS (TYP. AT RESTROOMS).
- (7) DECORATIVE PENDANT LIGHT CENTERED OVER TABLE, HT. 5'-6\" A.F.F. TO BOTTOM OF FIXTURE. SEE ELECTRICAL DRAWINGS.
- (8) BOTTOM OF ORDER AREA BULKHEAD AT 8'-6\" A.F.F. SEE DETAIL F/A7.2.
- (9) EXTERIOR WALL LIGHT FIXTURE, SEE ELEVATIONS AND ELECT. DWGS.
- (10) BOTTOM OF MENU BOARD BULKHEAD AT 7'-0\" A.F.F. SEE DETAIL 8 / A6.1.
- (11) EMERGENCY LIGHT. SEE ELECTRICAL DRAWINGS.
- (12) REFER TO MECHANICAL PLAN FOR DIFFUSER LOCATIONS IN DINING ROOM.
- (13) SUSPENDED DOWN LIGHT IN DINING ROOM, TYP. MOUNT AT 12'-6\" TO BOTTOM OF FIXTURE. SEE ELECTRICAL DRAWINGS.
- (14) 6\" X 6\" STAINLESS STEEL CHASE ALONG WALL FOR ICE MACHINE REFRIGERANT LINES: CEILING TO TOP OF ICE MACHINE; BY GENERAL CONTRACTOR.
- (15) SYRUP / FILTERED WATER TUBE BUNDLES CHASE IN WALL. SEE DETAIL 1 / A6.1.
- (16) STAINLESS STEEL LAY-IN CEILING PANELS EQUAL TO USG PANZ, SMOOTH, WITHIN 18\" OF HOOD.
- (17) MENUBOARD LOCATION. SEE SHEET A2.0.
- (18) WALK-IN LIGHTS. SEE T1.1.
- (19) ENSURE CLEAR ACCESS TO WATER HEATERS ABOVE CEILING.
- (20) CONTINUOUS LINEAR ACCENT LIGHT FIXTURE E7 - WHITE @ PARAPET CAP. SEE DETAIL 17 / A6.2.
- (21) CONTINUOUS LINEAR ACCENT LIGHT FIXTURE E8 - RED ABOVE EYEBROW CANOPY AND TURNING DOWN THE CANOPY LEGS TO 6\" A.F.F. SEE DETAILS 3 and 6 / A6.2.
- (22) CANOPY VENDOR SHALL PRE-WIRE CANOPY AND INSTALL LIGHT FIXTURES.
- (23) SUSPENDED SPEAKER FOR OPEN CEILING.
- (24) THIS CANOPY SHALL BE BUILT BY GC. SEE DETAILS ON SHEET A6.2.

KEY NOTES B

NOT USED

F

FLOOR FINISH					PAINT					CEILINGS				
ANY SUBSTITUTIONS MUST BE APPROVED EQUAL					PAINT SUBSTITUTIONS WILL NOT BE ACCEPTED.					ANY SUBSTITUTIONS MUST BE APPROVED EQUAL				
DESCRIPTION			ALTERNATE / NOTE		DESCRIPTION			ALTERNATE / NOTE		DESCRIPTION				
t-5	MFR.: TYPE: COLOR: SIZE: GROUT: LOCATION:	DALTILE VOLUME 1.0 ELECTRIC MOSS VL79 12" x 24" CBP PRISM #335 WINTER GRAY DINING, PASSAGE, RESTROOMS	REFER TO FINISH FLOOR PLAN FOR PATTERN.		p-1	MFR.: TYPE: COLOR: LOCATION: NOTE:	BENJAMIN MOORE AURA EXTERIOR PAINT EXOTIC RED 2086-10 EXTERIOR LOW LUSTRE (634)			OPEN	MFR.: TYPE: COLOR: NOTE:	- OPEN CEILING SEE SHEET A7.1 SEE INTERIOR ELEVATIONS FOR TRUSS PAINT COLOR		
t-f-1	MFR.: TYPE: COLOR:	SILIKAL QUARTZ FLOORING 61CQ CQ BLEND #4 (Gray)	LOCATION: KITCHEN WALK-IN CHICKEN COOLER WALK-IN VEGGIE COOLER SERVING AREA SILIKAL INTEGRAL WALL BASE b-2 WHEREVER FLOORING IS USED.		p-4	MFR.: TYPE: COLOR: NOTE:	BENJAMIN MOORE PRECATALYZED EPOXY LUPALOMA GRAY 1551 INTERIOR WALLS - EGG SHELL (V342) DOORS & FRAMES - SEMI GLOSS (V341)	ALTERNATE FOR P-4: SCUFF - X EGGSHELL #485		cl-2	MFR.: TYPE: COLOR: NOTE:	GYPSUM BOARD 1/2" THICK SEE SHEET A7.1 OVER 2x FRAMING AT 24" O.C. COORDINATE FRAMING WITH MECHANICAL AND ELECTRICAL FIXTURES.		
WALL BASE					ANY SUBSTITUTIONS MUST BE APPROVED EQUAL									
DESCRIPTION			ALTERNATE / NOTE											
b-6	MFR.: TYPE: COLOR: SIZE: TYPE:	SILIKAL QUARTZ FLOORING 61CQ CQ BLEND #4 (Gray) 6" HIGH INTEGRAL WALL BASE	LOCATION: KITCHEN SERVING AREA		p-6	MFR.: TYPE: COLOR: LOCATION: NOTE:	BENJAMIN MOORE PRECATALYZED EPOXY WEDDING VEIL 2125-70 DINING ROOM HORIZ. PLANKS, CEILINGS EGGSHELL (V342)	ALTERNATE FOR P-6: SCUFF - X EGGSHELL #487						
b-7	MFR.: TYPE: COLOR: SIZE: GROUT: NOTE:	DALTILE HARMONIST REPOSE HM35 6" x 12" x 3/8" CBP PRISM #60 CHARCOAL MITER OUTSIDE CORNERS	LOCATION: DINING ROOM BASE PASSAGE BASE RESTROOM BASE		p-9	MFR.: TYPE: COLOR: LOCATION: NOTE:	BENJAMIN MOORE AURA EXTERIOR PAINT BLACK JACK 2133-20 EXTERIOR LOW LUSTRE (634)	NOTE: FOR THE METAL TRIM CAPS/DUMPSTER POSTS: -PRIME W/ FRESH START 046 PRIMER - TRIM CAP JOINTS TO BE SEALED WITH PAINT-ABLE SEALANT. ALTERNATE FOR p-9 : REGAL SELECT LOW LUSTRE N401.		frp-1	MFR.: TYPE: COLOR: LOCATION:	MARLITE FIBERGLASS REINFORCED PANEL FP-100 WHITE KITCHEN		
WALL TILE					ANY SUBSTITUTIONS MUST BE APPROVED EQUAL									
DESCRIPTION			ALTERNATE / NOTE											
wt-1	MFR.: TYPE: COLOR: SIZE: GROUT:	DALTILE COLOR WHEEL LINEAR (GLAZED) ARCTIC WHITE 0790 MATTE 4" x 8" x 3/8" CBP PRISM #546 CAPE GRAY	LOCATION: RESTROOMS SEE TILE SUPPLIER CONTACT INFORMATION, THIS SHEET. REFER TO INTERIOR ELEVATIONS FOR PATTERN.											
wt-3	MFR.: TYPE: COLOR: GROUT:	DALTILE COLOR WHEEL LINEAR (GLAZED) K711 MATTE BLACK 4" x 8" x 3/8" MAPEI #10 BLACK												
PLASTIC LAMINATE					ANY SUBSTITUTIONS MUST BE APPROVED EQUAL									
DESCRIPTION			ALTERNATE / NOTE											
pl-6	MFR.: TYPE: COLOR: MTO ITEM: DOORS:	FORMICA LAMINATE 8844-WR AGED ASH DINING, RESTROOM AND SERVING AREA INSTALL GRAIN VERTICALLY.												
					METAL					ANY SUBSTITUTIONS MUST BE APPROVED EQUAL				
DESCRIPTION			ALTERNATE / NOTE											
ss-4	MFR.: TYPE: COLOR: THICKNESS: LOCATION:	CORIAN SOLID SURFACE ANTARCTICA 1/2" THICK SERVICE COUNTER TOPS												
ss-5	MFR.: TYPE: COLOR: THICKNESS: LOCATION:	CORIAN SOLID SURFACE DEEP ANTHROCITE - GLOSS 1/2" THICK WINDOW SILLS, LOW WALL CAPS												
					SOLID SURFACE					ANY SUBSTITUTIONS MUST BE APPROVED EQUAL				
DESCRIPTION			ALTERNATE / NOTE											
wc-4	MFR.: TYPE: COLOR: LOCATION: FINISH: SIZE:	MARLITE ARTIZAN PRINTED FRP KFC AGED ASH (CUSTOM) DINING, SERVING COUNTER FACE SMOOTH 4x8 and 4x10 PANELS AVAILABLE												
wc-7	MFR.: TYPE: COLOR: LOCATION: FINISH: SIZE:	MARLITE ARTIZAN PRINTED FRP KFC RED STRIPES (CUSTOM) RESTROOM VESTIBULE WALLS SMOOTH 4x8 and 4x10 PANELS AVAILABLE												
					WOOD FINISH					ANY SUBSTITUTIONS MUST BE APPROVED EQUAL				
DESCRIPTION			ALTERNATE / NOTE											
w-4	MFR.: TYPE: COLOR: FINISH: SIZE:	ARAUCO (AVAIL. AT HOME DEPOT) PINE - NICKEL GAP SHIP LAP WHITE (TO BE PAINTED) SMOOTH 5.25 X 8'-0" AND 7.25 X 8'-0" (50%/50%)												
					CONTACT INFORMATION									
COMPANY / CONTACT			COMPANY / CONTACT											
ARMSTRONG CONTACT: LISA CAVATAIO CELL PH: 733.882.0299 EMAIL: LYCAVATAIO@ARMSRONGCEILINGS.COM														
BENJAMIN MOORE CONTACT: MATT EKINCI OFFICE: 877.623.8484 CELL PH: 201.788.3282 EMAIL: MATT.EKINCI@BENJAMINMOORE.COM														
JAMES HARDIE CONTACT: MIKE MAZURK CELL PH: 470.589.0548 EMAIL: MICHAEL.MAZURK@JAMESHARDIE.COM														
CORIAN CONTACT: DAVID GREENING CELL PH: 614.975.6700 EMAIL: DAVID.P.GREENING@DUPONT.COM														
CUMMINGS RESOURCES CONTACT: JOEL HALL OFFICE: 615.921.5816 EMAIL: JOEL.HALL@CUMMINGSSIGNS.COM														
DALTILE CONTACT: NATIONAL ACCOUNTS OFFICE: 877.556.5728 EMAIL: NATIONAL.ACCOUNTS@DALTILE.COM														
FORMICA CONTACT: JENNIFER HORNER CELL PH: 614.264.7769 EMAIL: JENNIFER.HORNER@FORMICA.COM														
					FINISH SCHEDULE					A				

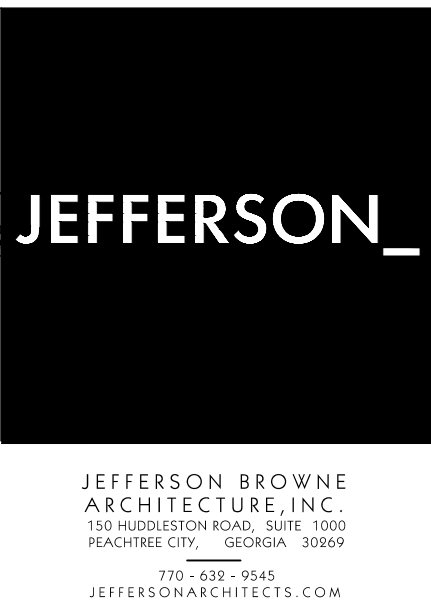[illegible]

ISSUED FOR CONSTRUCTION	
ARCH PROJECT #:	25-4358
BUILDING TYPE:	DT1800 RED
PLAN VERSION:	1.2
SITE NUMBER:	N/A
ENTITY NUMBER:	N/A
STORE NUMBER:	E320147

KFC
1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028



FINISH SCHEDULE

A7.3

PLOT DATE: 19.11.2025



- | | |
|------------------|----------|
| KEY NOTES | A |
|------------------|----------|

PLAN SET ISSUE / REVISION HISTORISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-43


BUILDING TYPE: DT1800 RE

PLAN VERSION: 1

SITE NUMBER.

STORE NUMBER 50001

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028







INTERIOR ELEVATIONS DINING ROOM





A8.0

PLOT DATE: 19.11.20




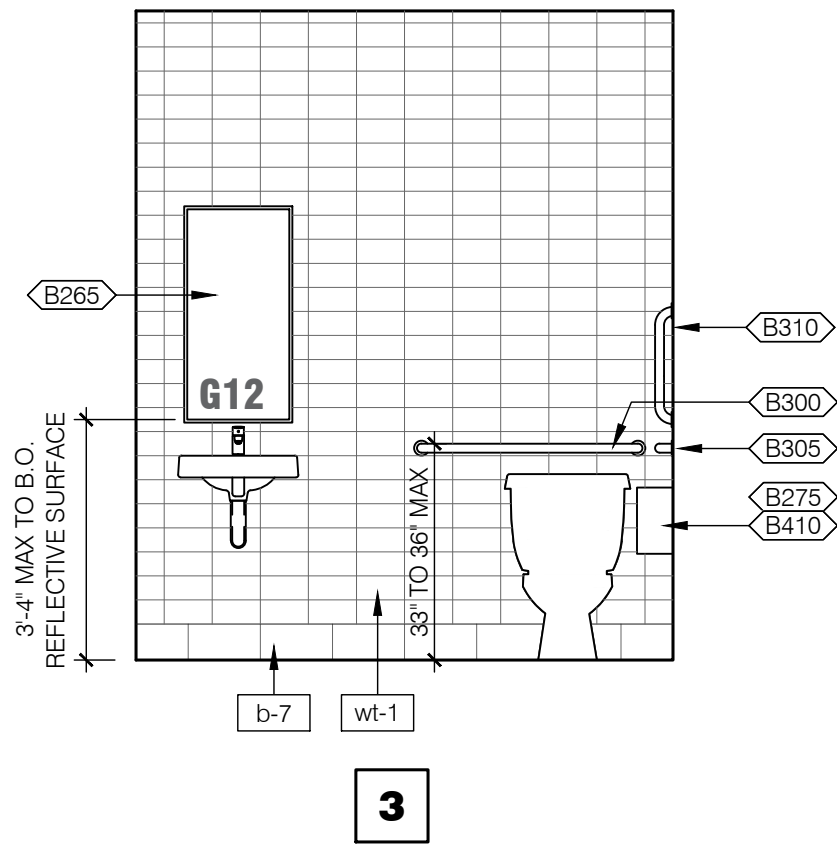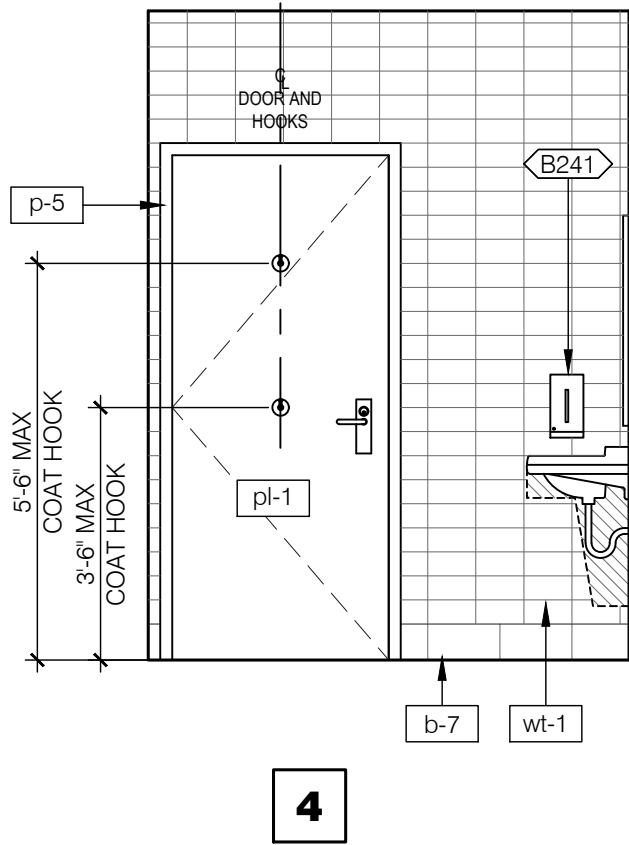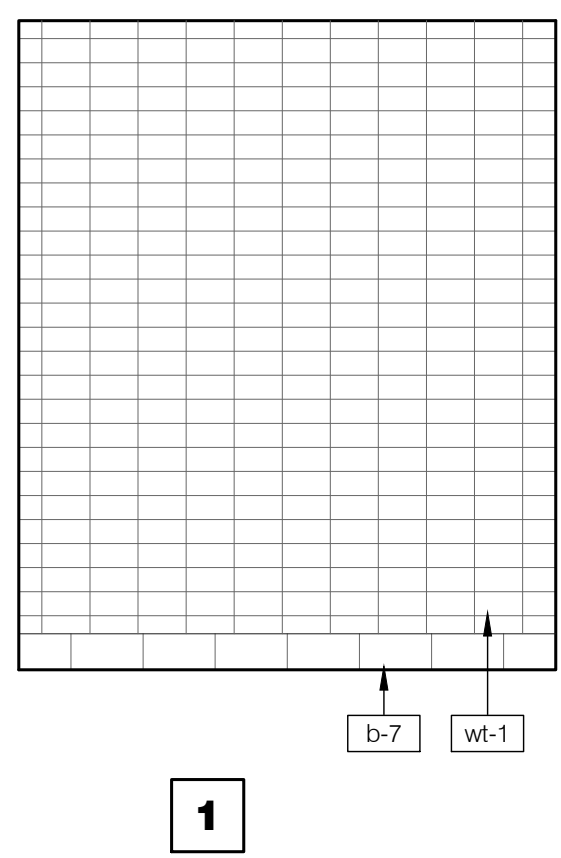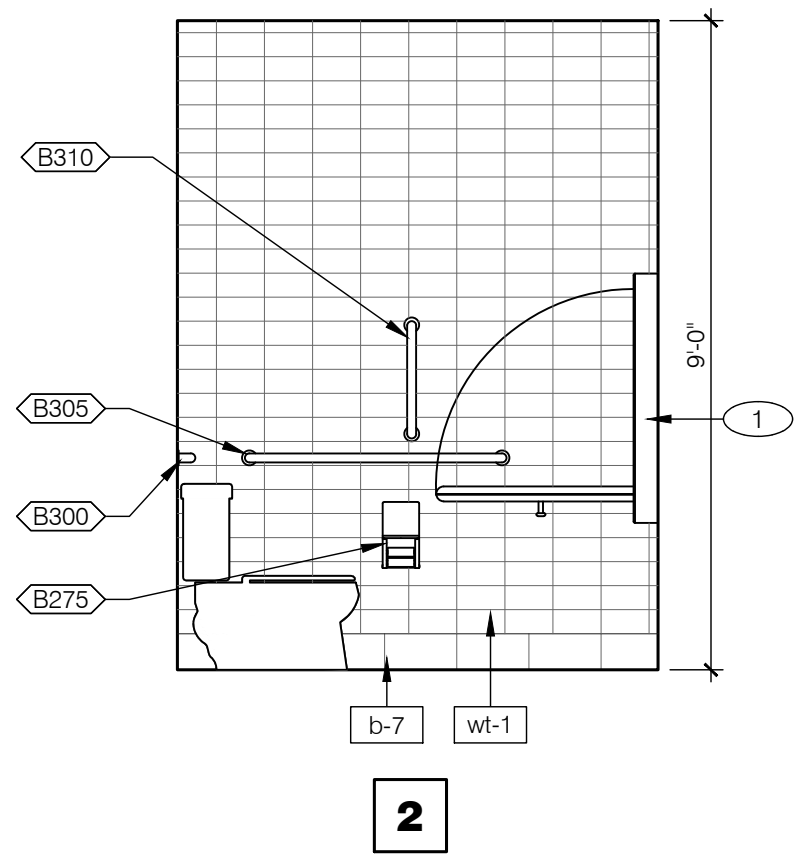

MEN'S RESTROOM 3/8" = 1'-0"

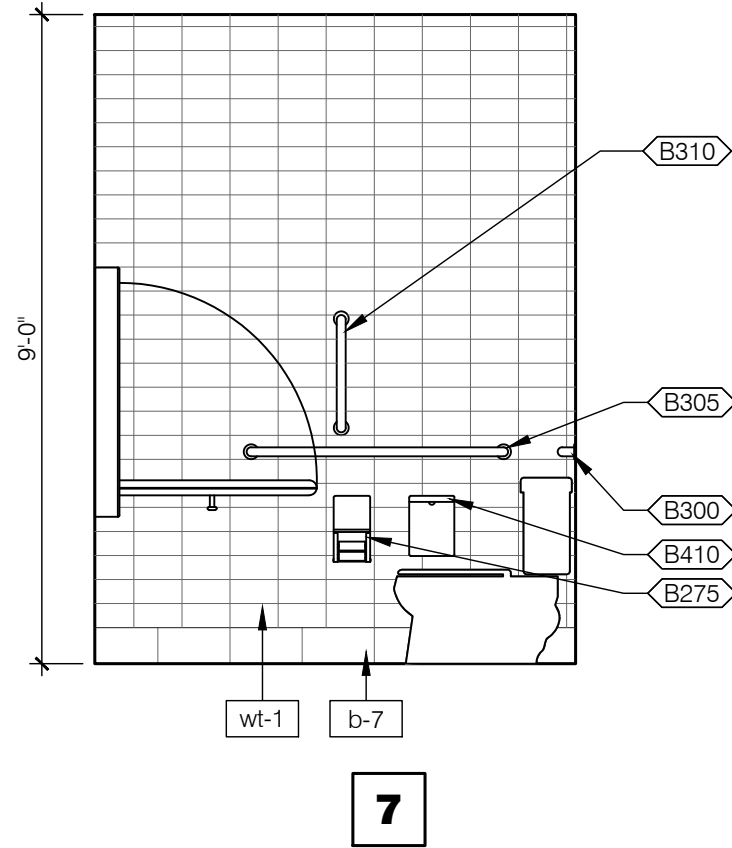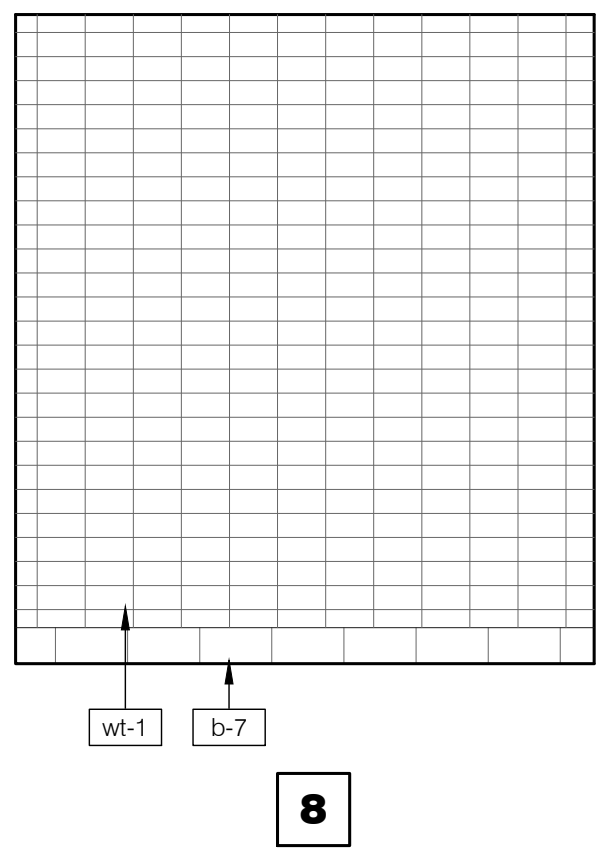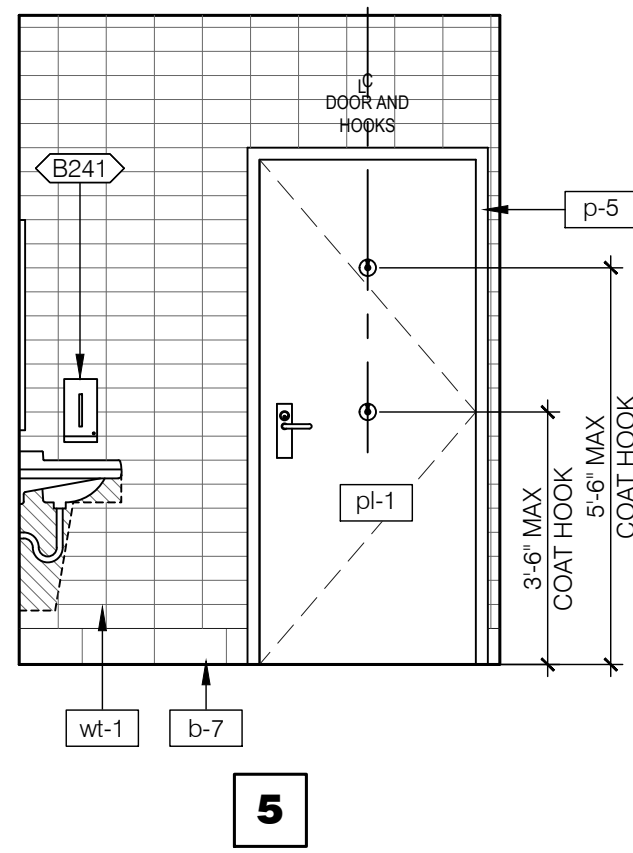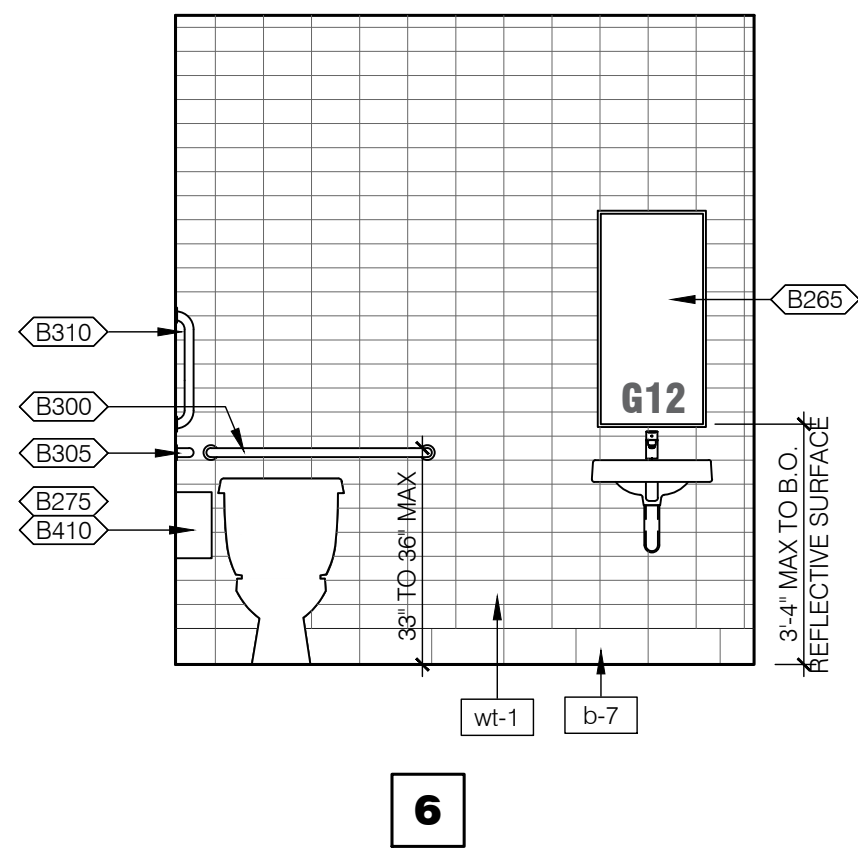

WOMEN'S RESTROOM 3/8" = 1'-0"

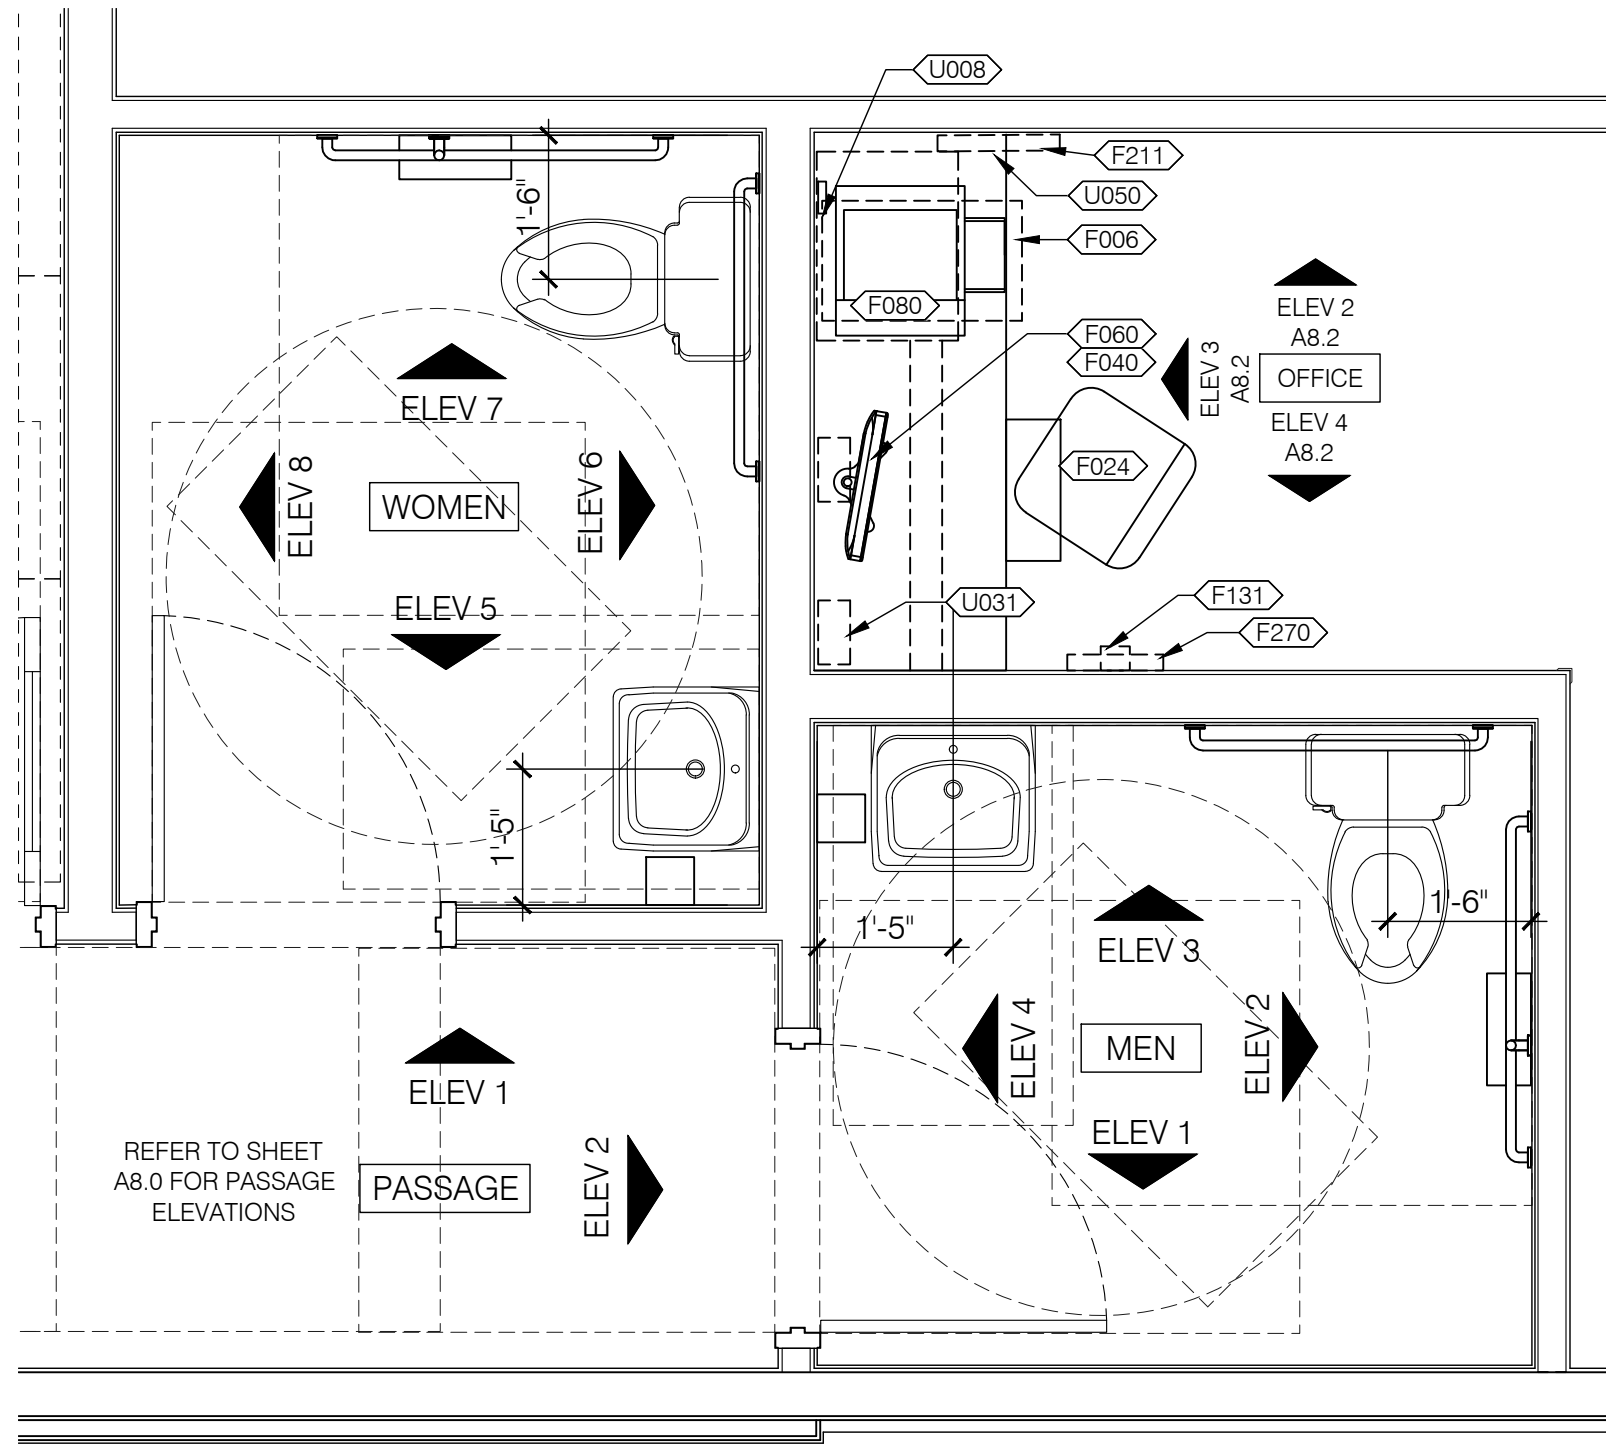

ENLARGED RESTROOM / OFFICE PLAN 1/2" = 1'-0" A

GENERAL NOTES:

- REFER TO SHEET ADA1.0 FOR MOUNTING HEIGHTS AND CLEARANCES OF ACCESSORIES AND FIXTURES.
- PROVIDE 2x BLOCKING AT ALL WALL MOUNTED ACCESSORIES. REFER TO FLOOR PLAN NOTES FOR BLOCKING AND SUBSTRATE NOTES.
- GRAB BARS, FASTENERS AND MOUNTING DEVICES SHALL BE INSTALLED PER ADA REQUIREMENTS. REFER TO SHEET ADA1.0.
- ALL DIMENSIONS THIS DRAWING ARE TO FINISH SURFACE.
- FOR DESCRIPTIONS, REFER TO ARTWORK SCHEDULE ON SHEET A7.3.
- FOR RESTROOM ACCESSORIES DESCRIPTIONS, REFER TO SHEET A2.1.
- G.C. TO CONFIRM THAT ALL OWNER PROVIDED RESTROOM ACCESSORIES SHALL CONFORM TO ADA REQUIREMENTS INCLUDING 4" MAXIMUM DEPTH. SEE SHEET ADA1.0 AND THE 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN FOR MORE INFORMATION.

KEYNOTES:

- PROVIDE 2X BLOCKING FOR WALL MOUNTED BABY CHANGING TABLES. INSTALL PER ADA REQUIREMENTS. REFER TO SHEET ADA1.0.
- BABY CHANGING STATION: KOALA KARE VERTICAL STAINLESS STEEL WALL MOUNTED BABY CHANGING STATION; KB111-SSWM.

GENERAL NOTES / KEY NOTES B

NOT USED N.T.S. A

JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HUDDLESTON ROAD, SUITE 1000
POCONO CITY, GEORGIA 30269
770-639-9545
JEFFERSONARCHITECTS.COM



PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028











DT1800 RED

INT. ELEV's
ENLARGED
RESTROOM/
OFFICE PLAN

A8.1

PLOT DATE: 19.11.2025

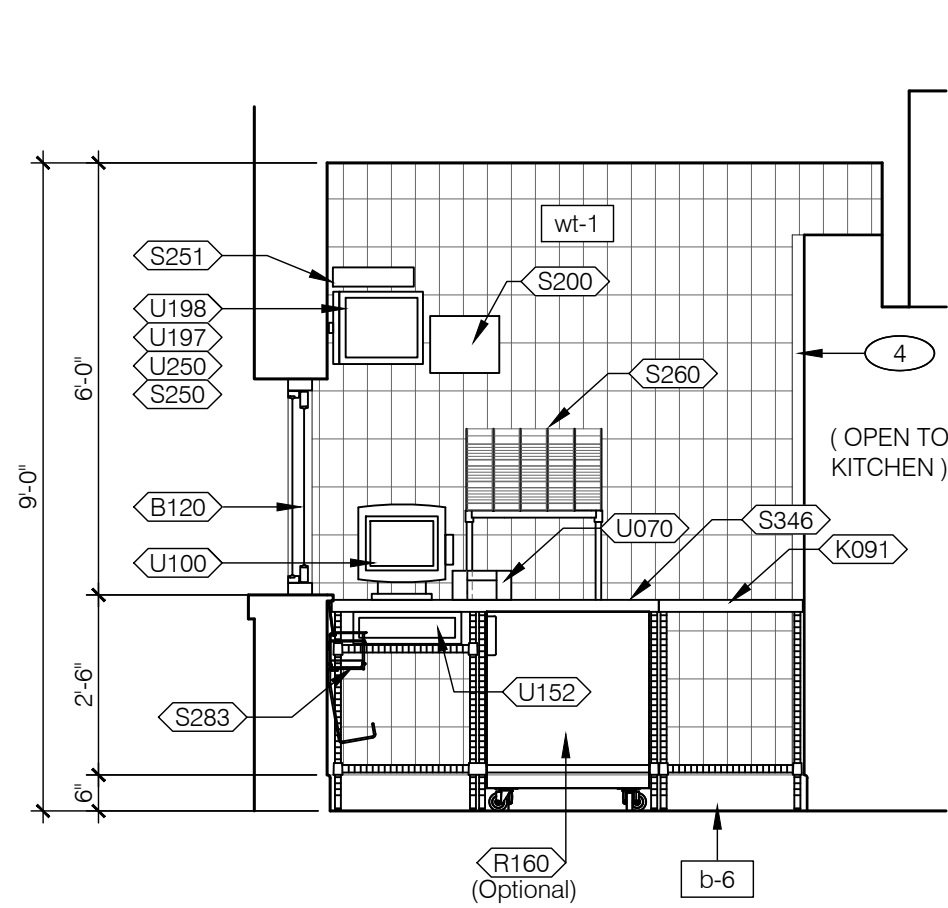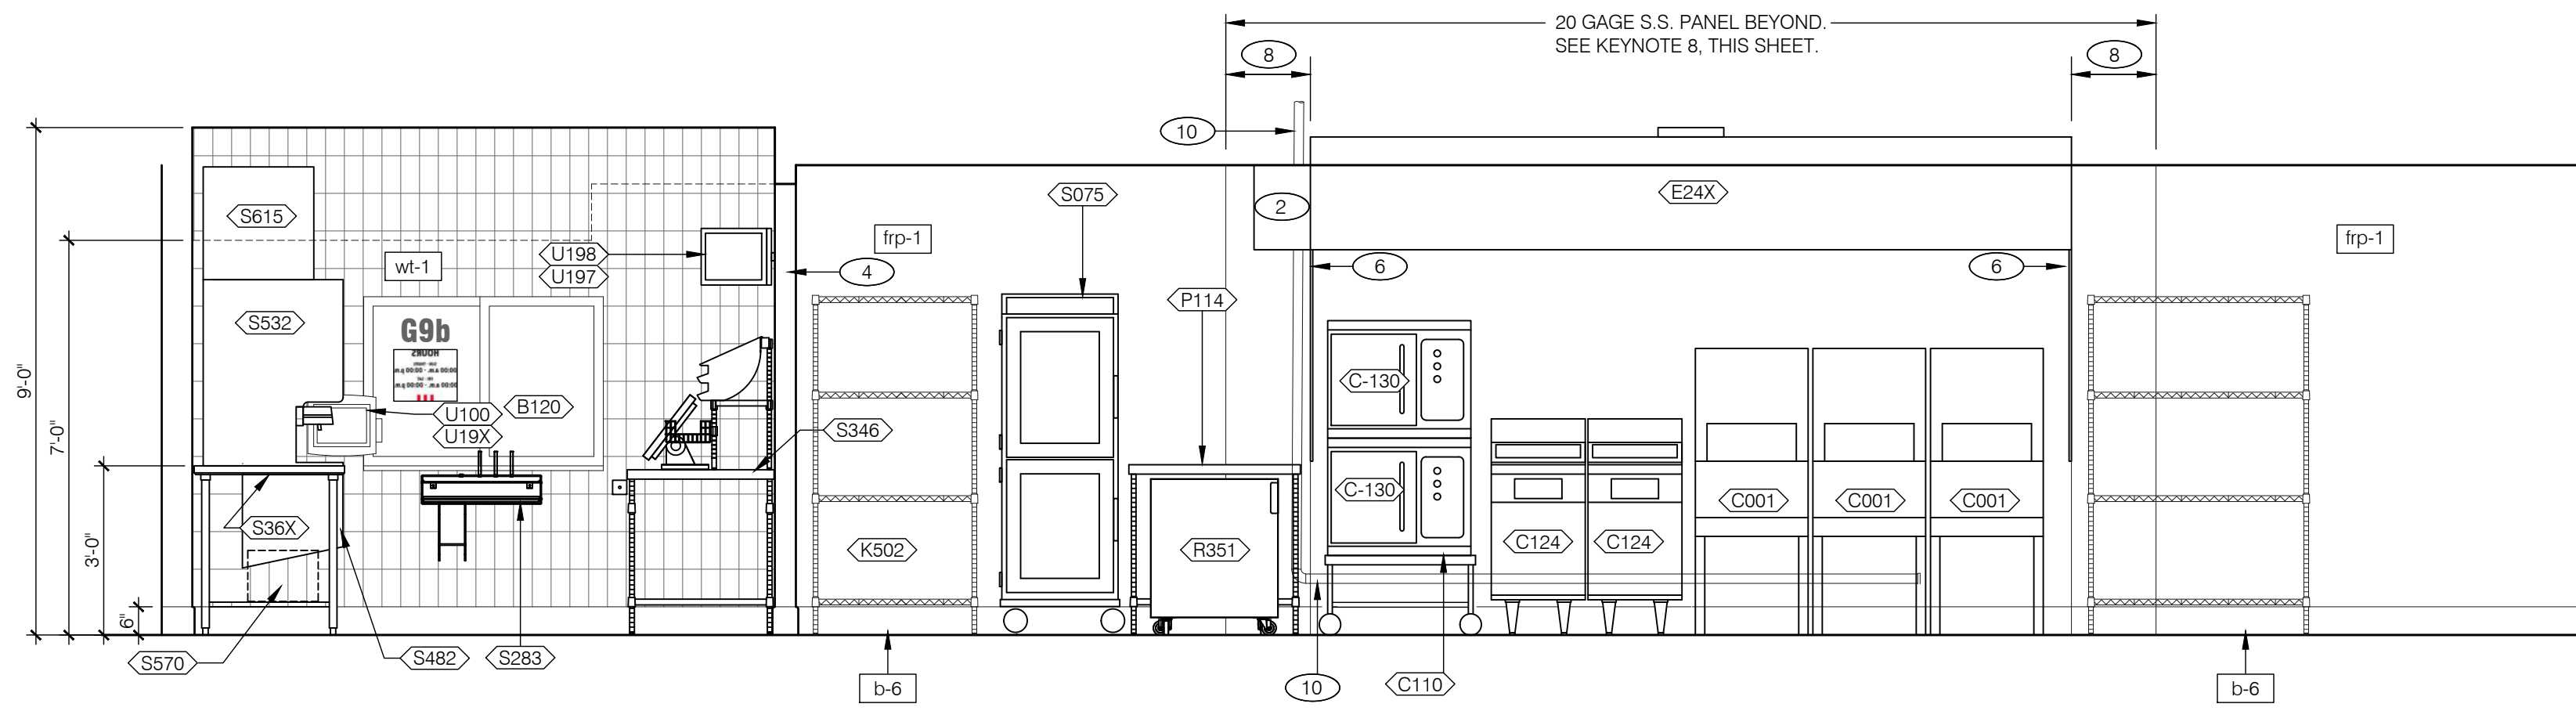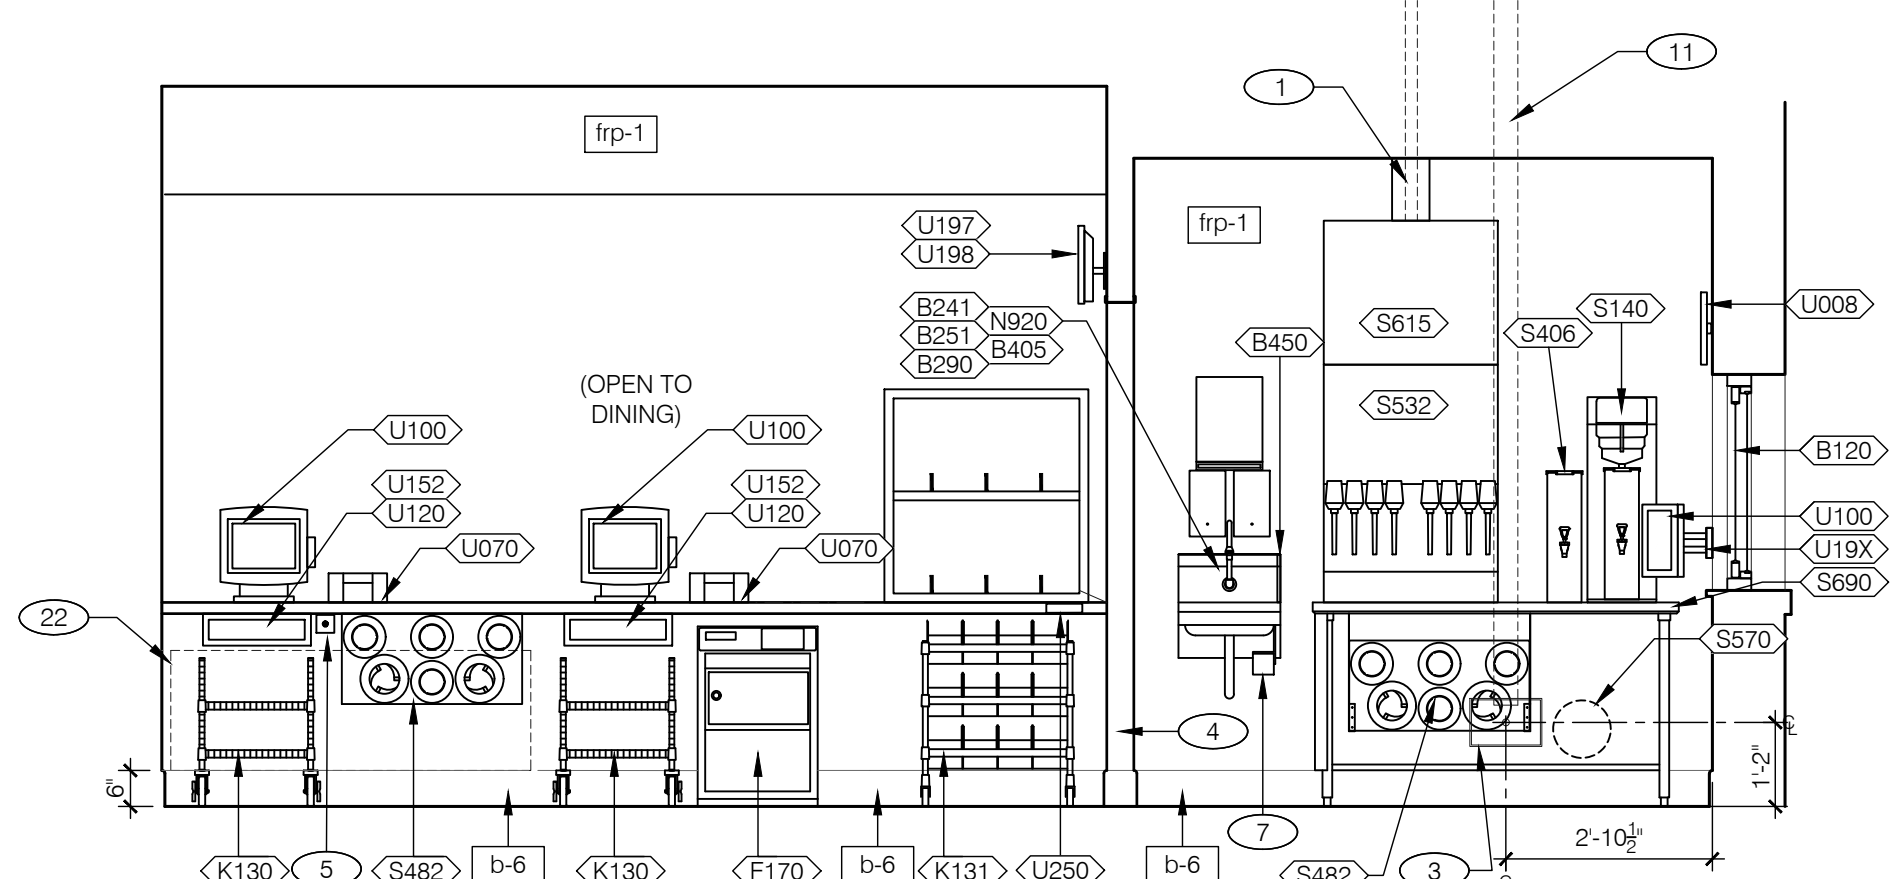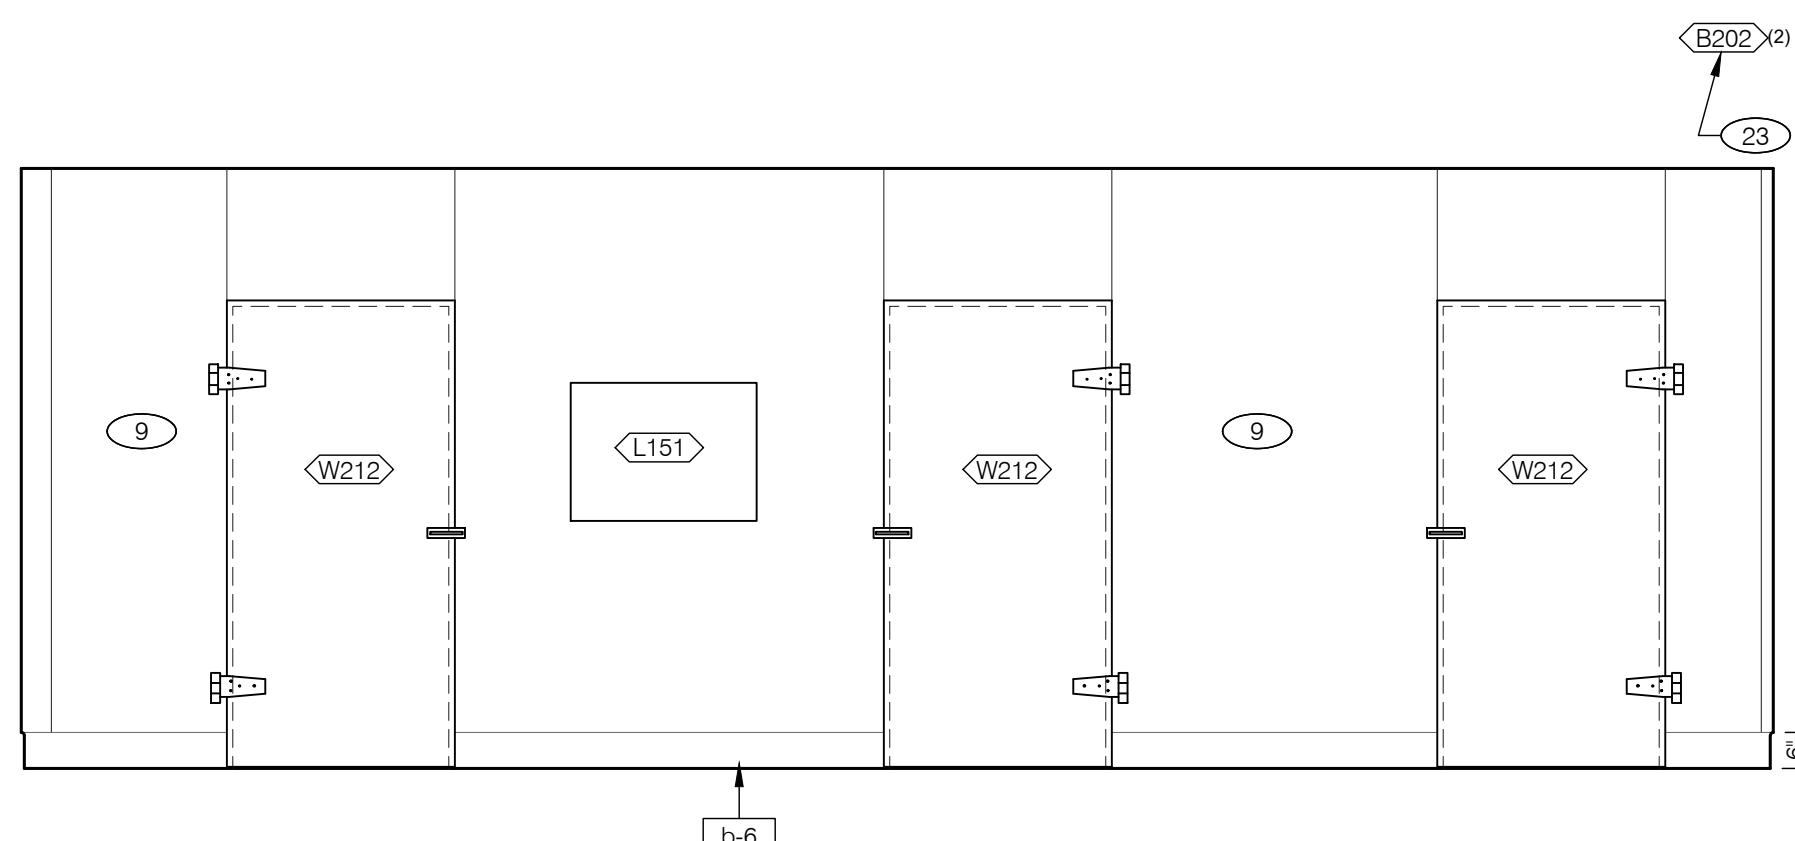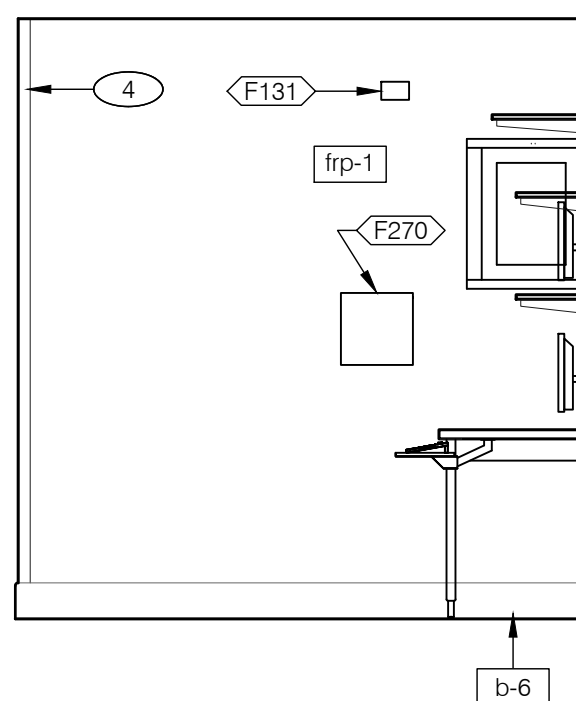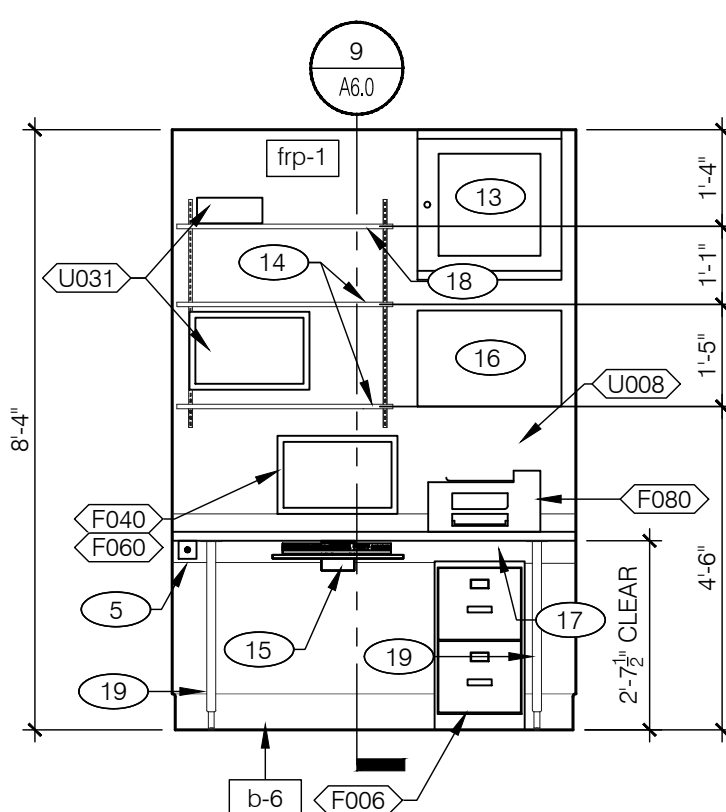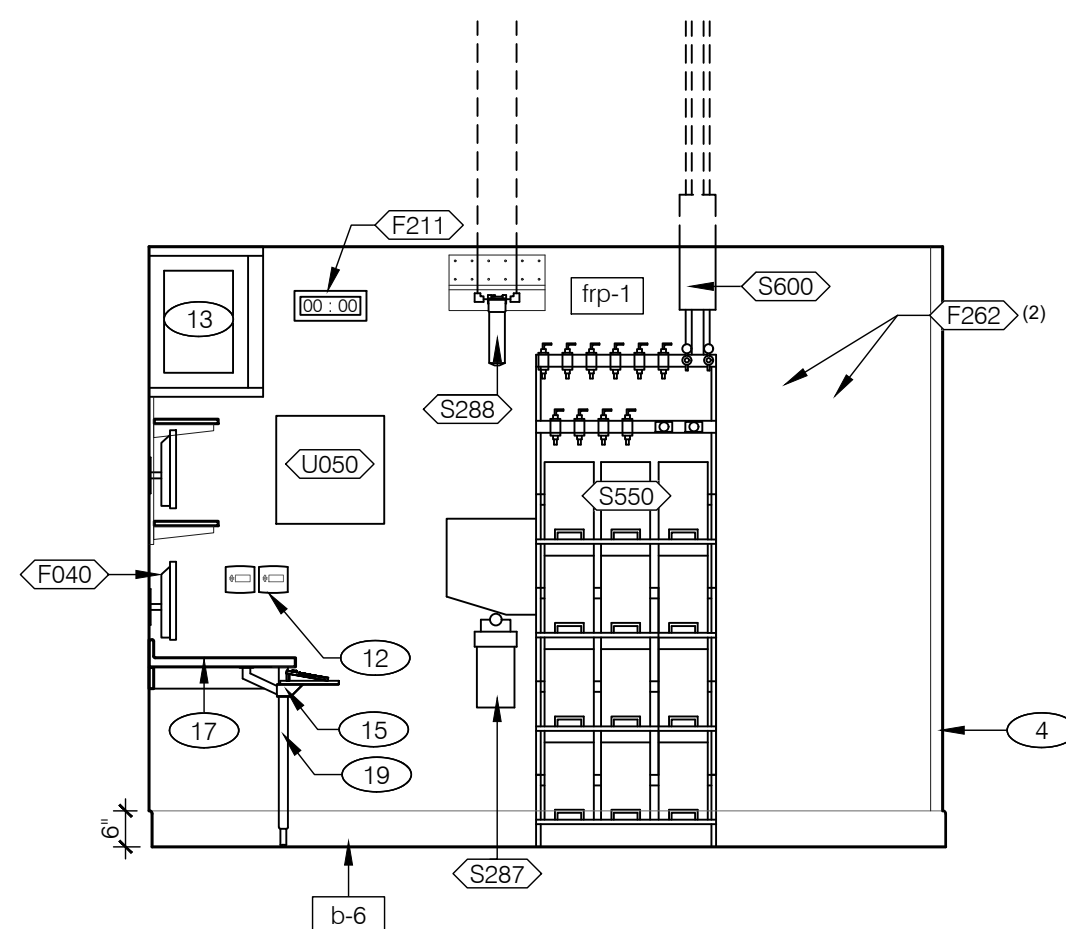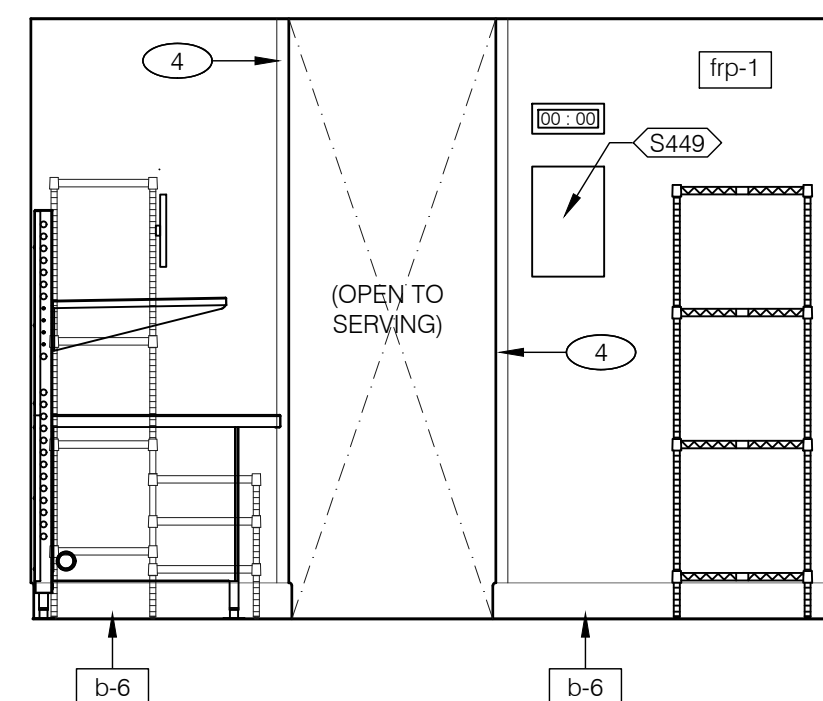**11 DRIVE-THRU****10 DRIVE-THRU****9 COOK****KITCHEN ELEVATIONS** 3/8" = 1'-0"**7 SERVING****6 DRIVE-THRU****5 WALK-INS****KITCHEN ELEVATIONS** 3/8" = 1'-0"**4 OFFICE****3 OFFICE****2 OFFICE****1 PREP****KITCHEN / OFFICE ELEVATIONS** 3/8" = 1'-0"

- 6" X 6" STAINLESS STEEL CHASE ALONG WALL FOR ICE MACHINE REFRIGERANT LINES: CEILING TO TOP OF ICE MACHINE; BY GENERAL CONTRACTOR.
- ANSUL CABINET.
- 8" x 12" OPENING FOR SYRUP / FILTERED WATER TUBE BUNDLE. SEE 1 / A6.1.
- S.S. CORNER / END WALL CHANNEL GUARD, FULL HEIGHT. SEE 2 / A6.1.
- HOLD UP BUTTON (SECURITY SYSTEM SUPPLIER)).
- S.S. END SKIRT.
- HAND SINK KNEE PEDAL.
- EDGE OF 20 GAGE STAINLESS STEEL PANEL BEHIND HOOD. COORDINATE EXTENTS OF PANEL BEYOND HOOD WITH LOCAL CODE REQUIREMENTS.
- WALK-IN COOLER/FREEZER BOX.
- GAS RISER. SEE PLUMBING DRAWINGS.
- SYRUP / FILTERED WATER TUBE BUNDLES FOR DRINK SYSTEM.
- THERMOSTAT BY (EMS) SUPPLIER.
- DATA (LAN) RACK MOUNTED TO WALL. PROVIDE BLOCKING PER MFR'S. REQUIREMENTS.
- 12" DEEP WHITE MELAMINE SHELVING W/ 11.5" SHELF BRACKETS. SEE DETAIL 9 / A-6.0.
- UNDER COUNTER KEYBOARD TRAY.
- 16" x 24" WHITEBOARD BACKER FOR NETWORK EQUIPMENT. EQUIPMENT OWNER PROVIDED & INSTALLED.
- 1-1/2" LAMINATE COUNTERTOP W/ INTEGRAL SPLASH. SEE DETAIL 9 / A-6.0 FOR SUPPORT SYSTEM; SEE SHEET A-7.2 FOR FINISHES.
- 16" DEEP WHITE MELAMINE SHELVING @ TOP SHELF OVER MONITORS ONLY. SEE DETAIL 9 / A-6.0.
- COUNTERTOP SUPPORT LEG W/ ADJUSTABLE BASE (BY G.C.). QTY. 4.
- FRANCHISEES HAVE THE OPTION TO ELIMINATE THIS OPENING AND FULLY EXTEND THE STANDARD COUNTER INTO THIS SPACE.
- TANKLESS WATER HEATERS MOUNTED TO WALL ABOVE CEILING. COORDINATE WITH TRUSS LOCATIONS.
- ACCESS PANEL IN SERVING COUNTER KNEE WALL. SEE DETAIL 11A/A6.1.
- TANKLESS WATER HEATERS MOUNTED TO WALL ABOVE CEILING. COORDINATE WITH TRUSS LOCATIONS AND PROVIDE ACCESS PANELS. SEE PLUMBING SET FOR FINAL LOCATION AND TIE-IN. ROUTE OVERFLOW DRAIN INTO MOP SINK.

KEY NOTES**A**


PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION


ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028**DT1800 RED****INTERIOR
ELEVATIONS
KITCHEN****A8.2**


PLOT DATE: 21.11.2025

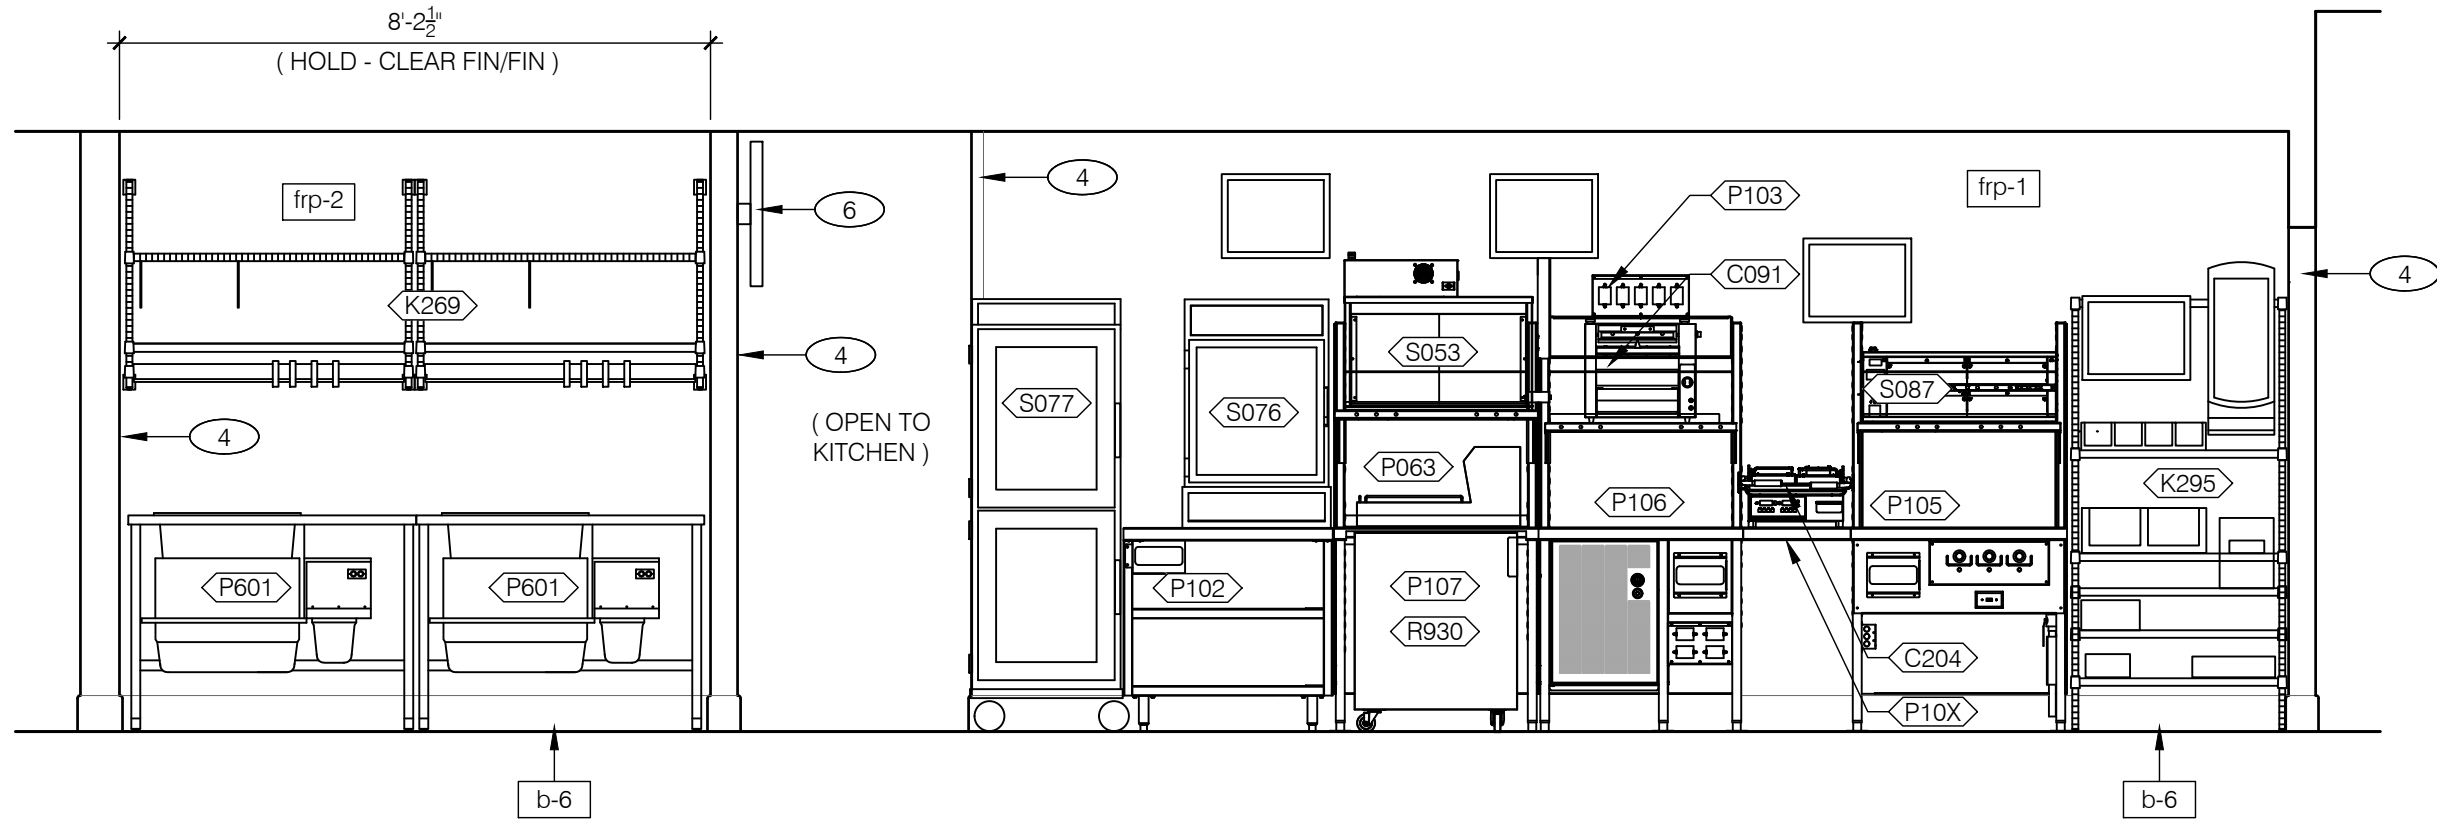


22 CHICKEN PREP

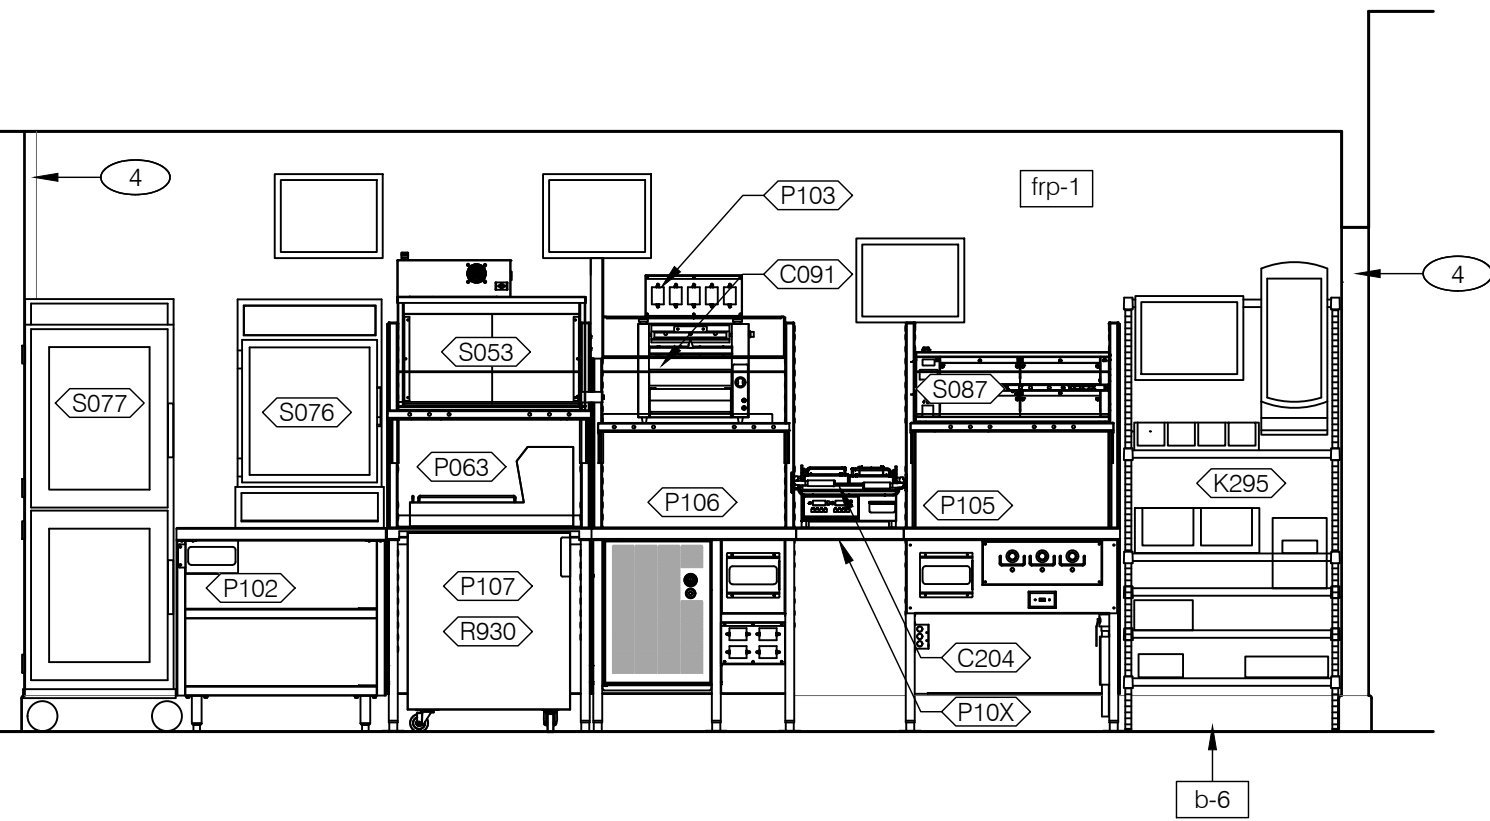


21 PREP

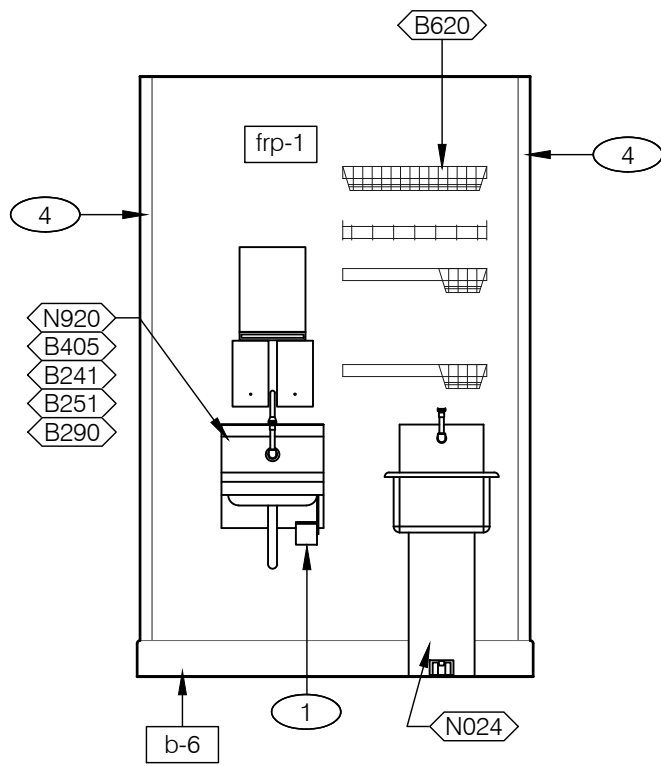

20 CHICKEN PREP

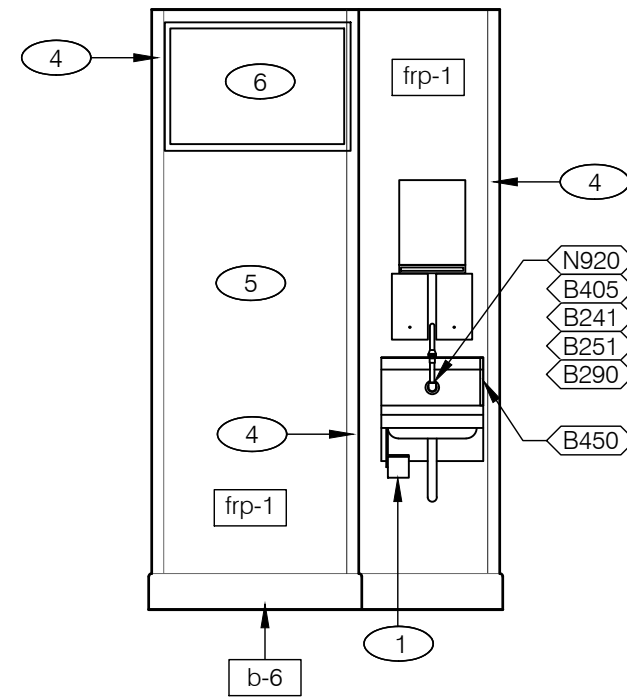


19 UTILITY

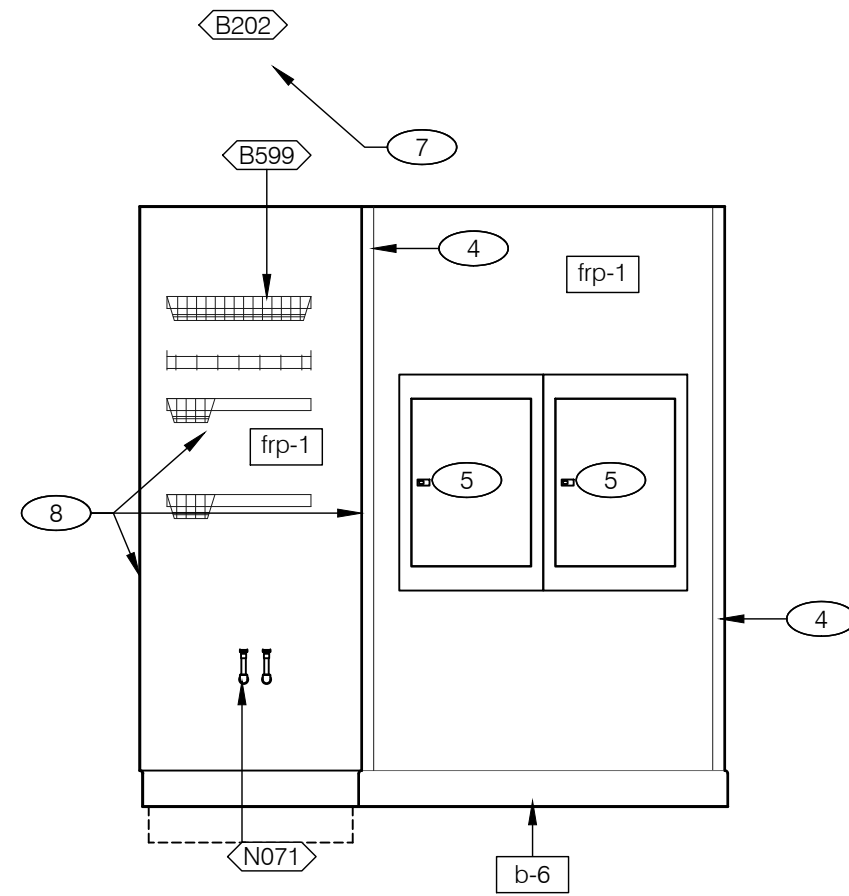


18 UTILITY


KITCHEN ELEVATIONS 3/8" = 1'-0"

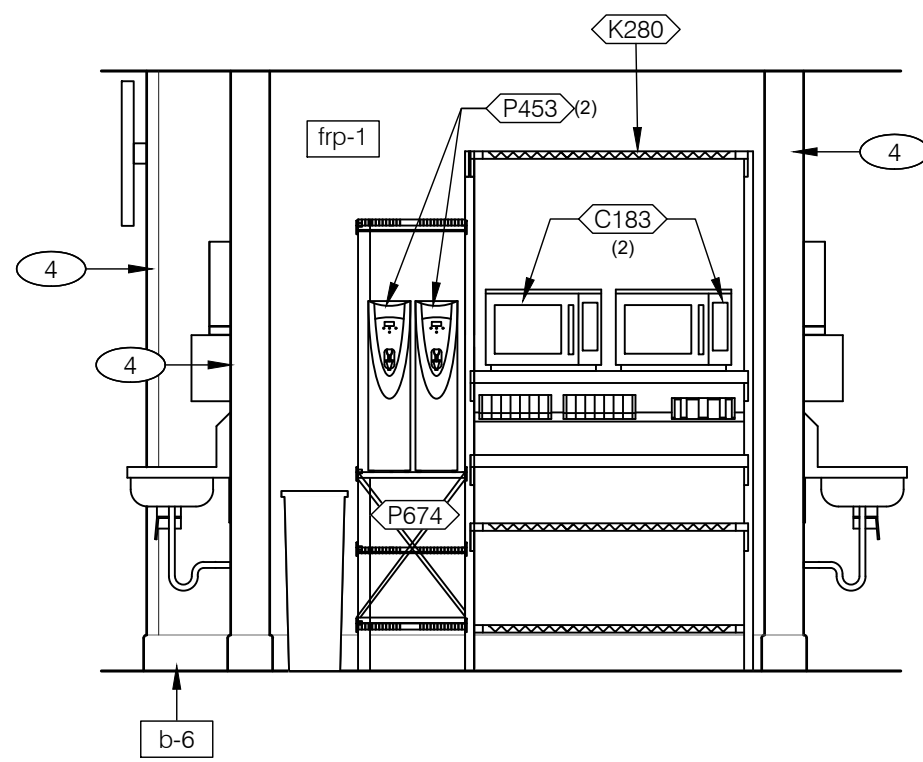

17 PREP

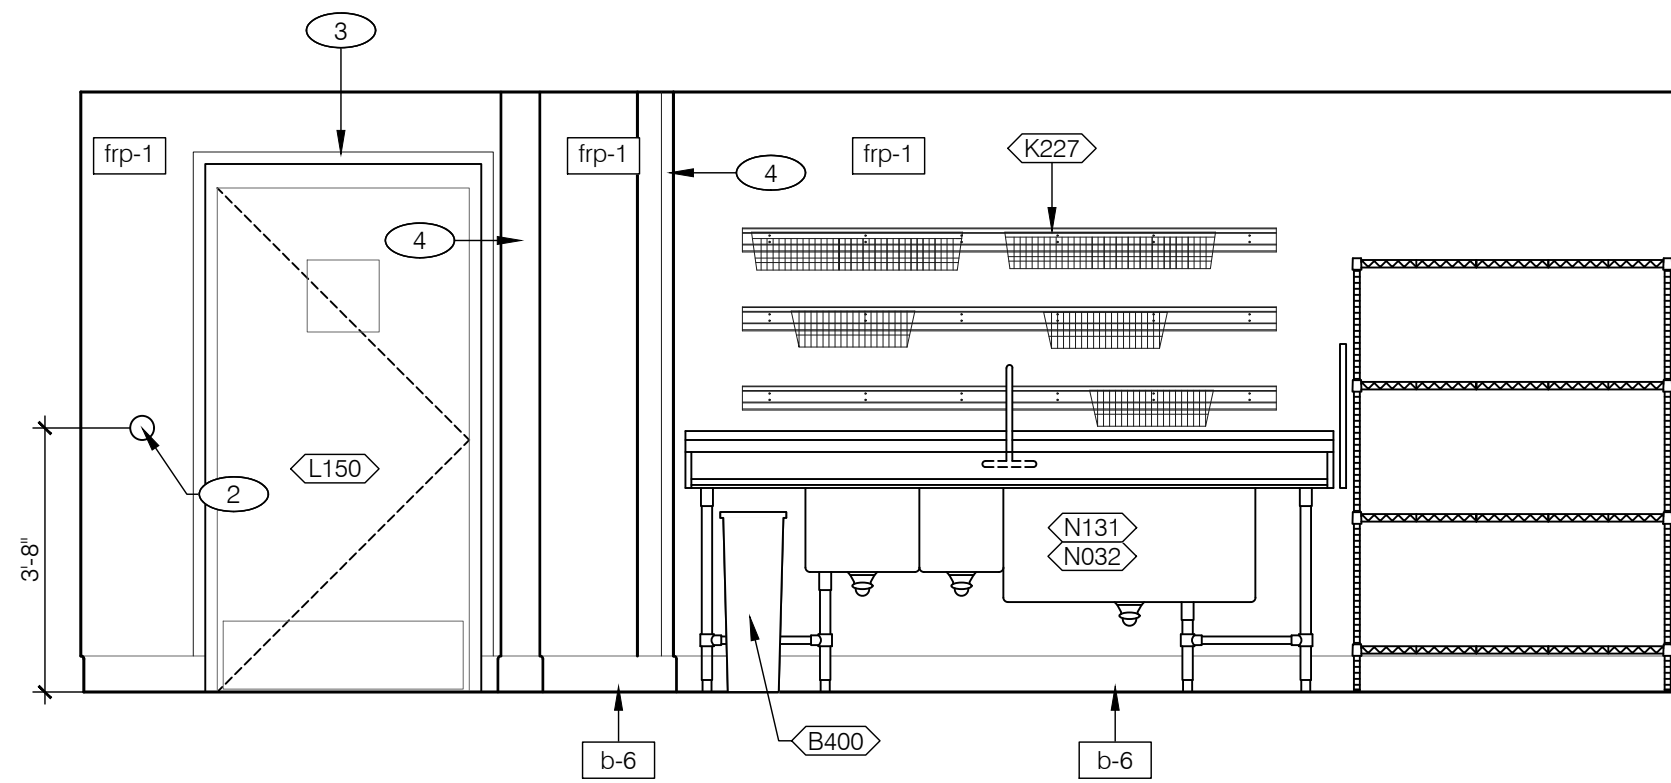

16 UTILITY

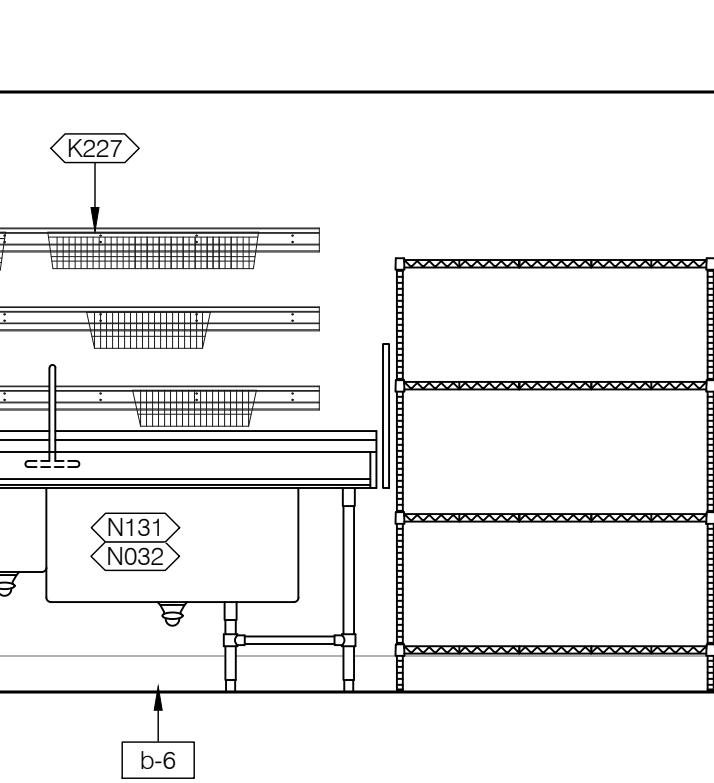

15 WARE WASHING

KITCHEN ELEVATIONS 3/8" = 1'-0"

- 1 HAND SINK KNEE PEDAL.
- 2 PULL STATION.
- 3 SS CORNER GUARD AT SERVICE DOOR HEAD AND JAMB; SEE 17 & 18 / A6.0.
- 4 S.S. CORNER / END WALL CHANNEL GUARD, FULL HEIGHT. SEE 2 / A6.1.
- 5 ELECTRICAL PANELS.
- 6 TV MONITOR.
- 7 TANKLESS WATER HEATERS MOUNTED TO WALL ABOVE CEILING. COORDINATE WITH TRUSS LOCATIONS AND PROVIDE ACCESS PANELS. SEE PLUMBING SET FOR FINAL LOCATION AND TIE-IN. ROUTE OVERFLOW DRAIN INTO MOP SINK.
- 8 FULL HEIGHT STAINLESS STEEL WALL PANELS TO CEILING


NOT USED 3/8" = 1'-0"

KEY NOTES

A

JEFFERSON_

JEFFERSON BROWNE
ARCHITECTURE, INC.
150 HUDDLESTON ROAD, SUITE 1000
PEACHTREE CITY, GEORGIA 30299
770-639-9545
JEFFERSONARCHITECTS.COM

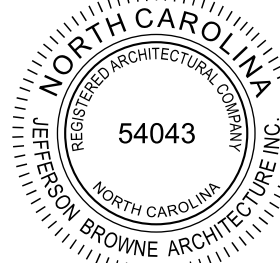

PLAN SET ISSUE / REVISION HISTORY

ISSUED FOR CONSTRUCTION

ARCH PROJECT #: 25-4358
BUILDING TYPE: DT1800 RED
PLAN VERSION: 1.2
SITE NUMBER: N/A
ENTITY NUMBER: N/A
STORE NUMBER: E320147

KFC

1230 YADKINVILLE ROAD
MOCKSVILLE, NC 270028



DT1800 RED

INTERIOR
ELEVATIONS
KITCHEN

A8.3

PLOT DATE: 19.11.2025