



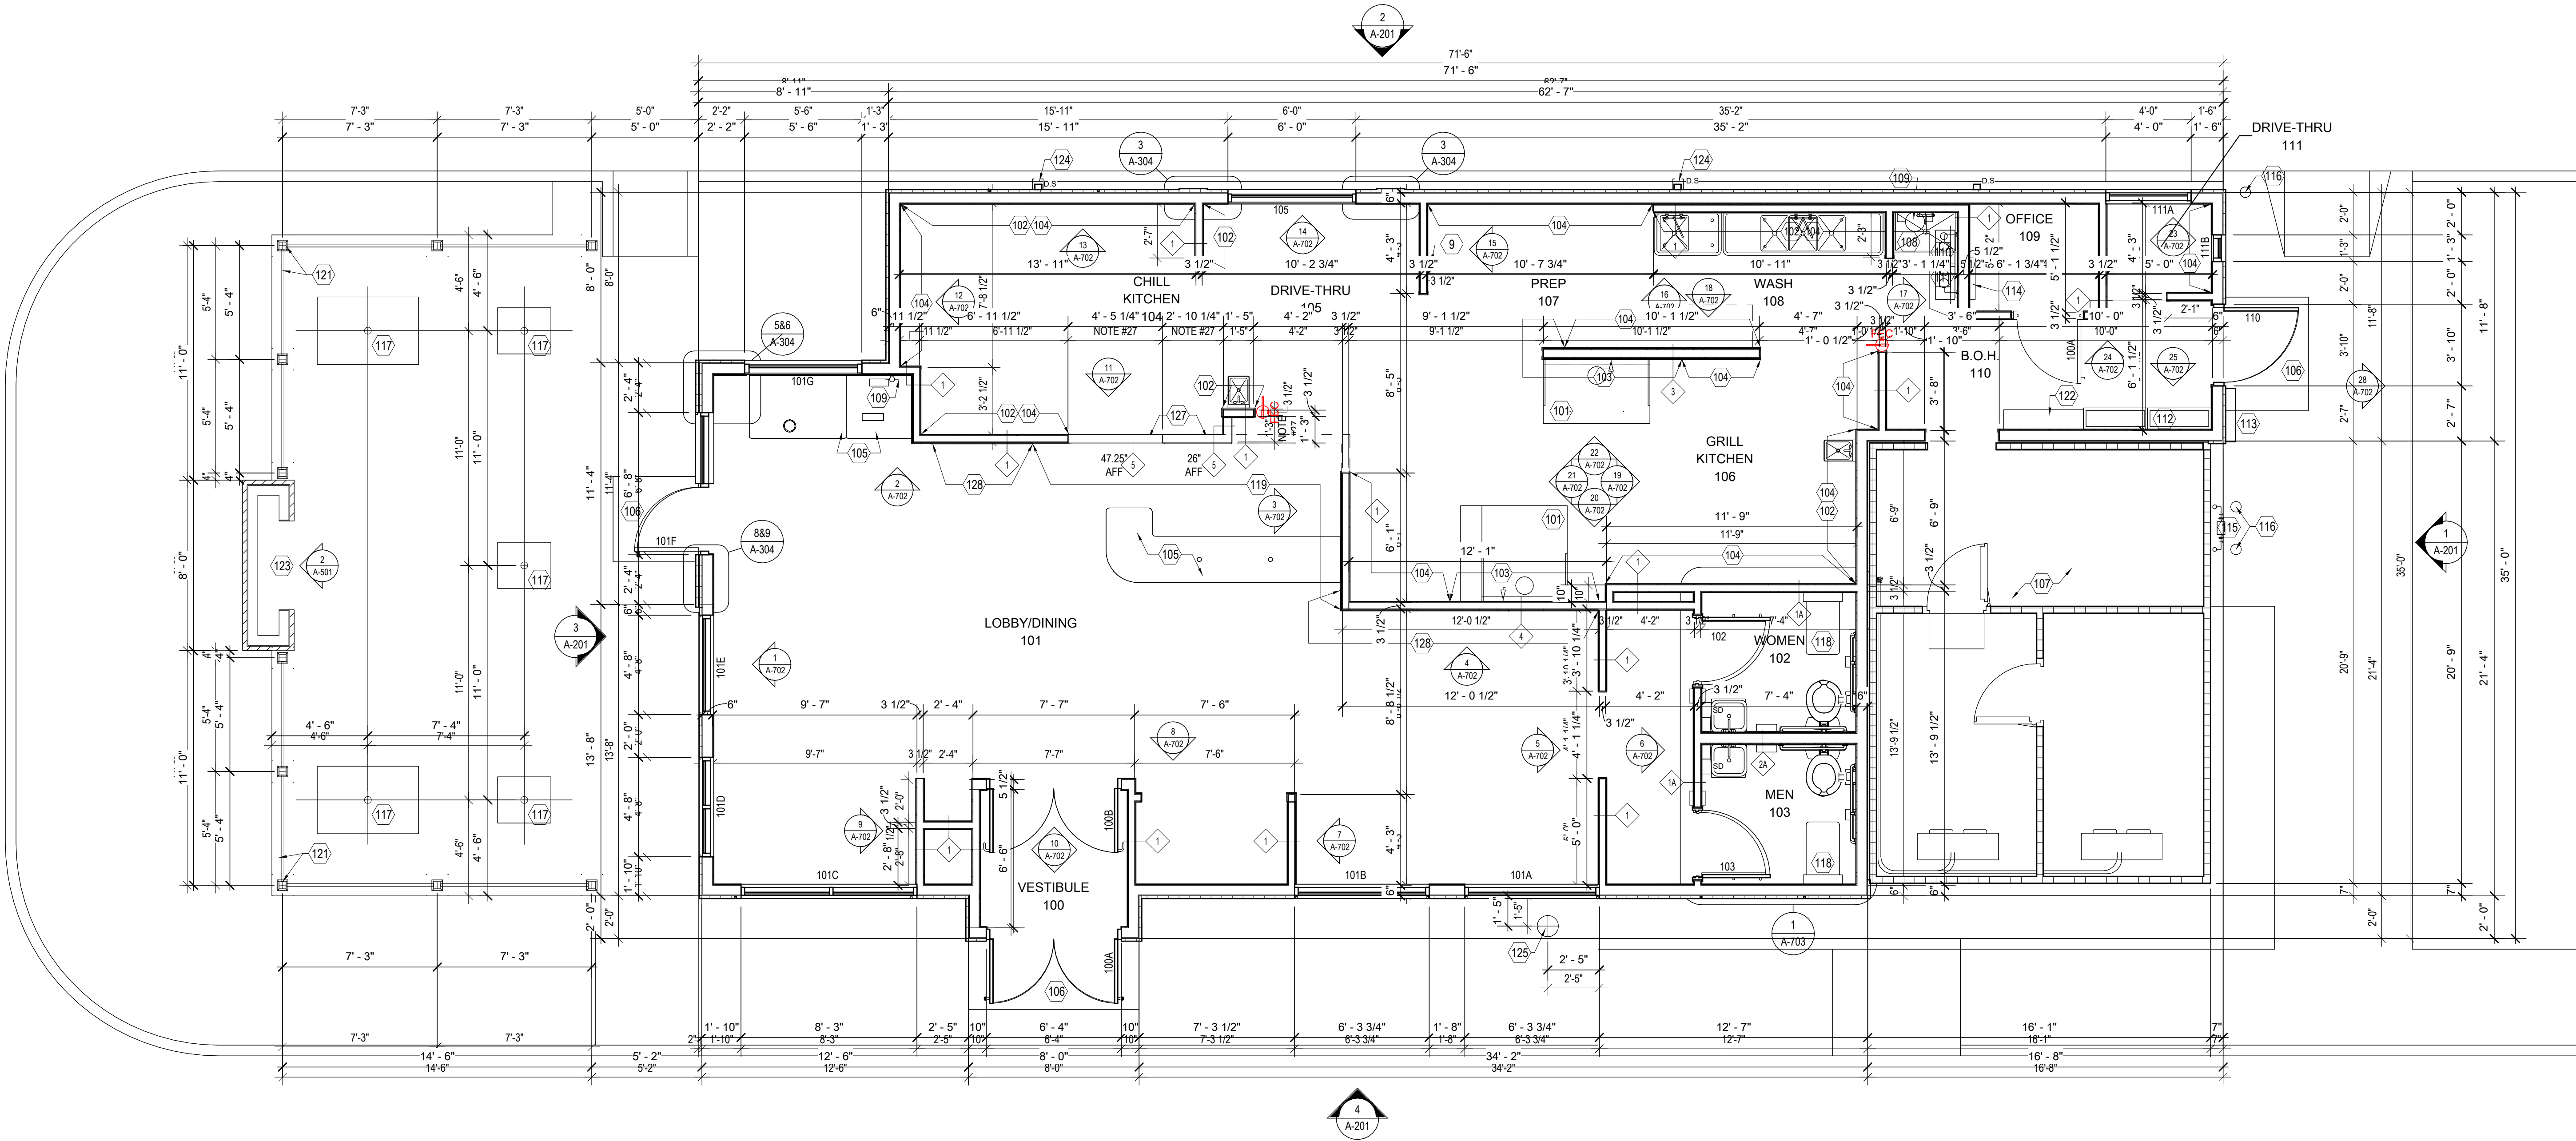

FLOOR PLAN - NOTES

0 20' 40' 60'
1/4" = 1'-0"



PARTITION TYPES

NOTE: THESE ARE PARTITION TYPES. ALL PARTITIONS MAY NOT BE USED.

- | | | | |
|----|---|----|---|
| 1 | 2x4 WOOD FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE | 4 | 3 1/2" MTL. FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE. |
| 1A | 2x4 WOOD FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE, PROVIDE FULL THICKNESS SOUND BATT INSULATION TO 3" ABOVE CEILING | 4A | 3 1/2" MTL. FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE, PROVIDE FULL THICKNESS SOUND BATT INSULATION TO 3" ABOVE CEILING |
| 2 | 2x6 WOOD FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE | 5 | 2x4 WOOD FRAMING @ 16" O.C., PARTIAL HEIGHT WALL SEE PLAN FOR HEIGHT |
| 2A | 2x6 WOOD FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE, PROVIDE FULL THICKNESS SOUND BATT INSULATION TO 3" ABOVE CEILING | | |
| 3 | 5 1/2" MTL. FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE. | | |
| 3A | 5 1/2" MTL. FRAMING @ 16" O.C. EXTEND TO ROOF STRUCTURE, PROVIDE FULL THICKNESS SOUND BATT INSULATION TO 3" ABOVE CEILING | | |

GENERAL NOTES:

1. PROVIDE 5/8" GYP. BD. ON ALL WALL SURFACES UNLESS NOTED OTHERWISE
2. PROVIDE MOISTURE RESISTANT GYP. BD. AT WET WALL LOCATIONS
3. ALL INTERIOR WALL SHEATHING (GYP. BD. OR PLYWOOD) TO EXTEND 3" ABOVE CEILING.

FLOOR PLAN GENERAL NOTES

1. UNLESS NOTED OTHERWISE, ALL EXTERIOR DIMENSIONS ARE TO FACE OF SHEATHING.
2. UNLESS NOTED OTHERWISE, ALL INTERIOR DIMENSIONS ARE TO FACE OF STUD.
3. REFER TO DRAWINGS AND SPECIFICATIONS PREPARED BY EQUIPMENT SUPPLIERS AND MECHANICAL SUPPLIER FOR THEIR UNIQUE REQUIREMENTS. ALL MATERIALS ARE TO BE INSTALLED ACCORDING TO THE MANUFACTURER'S SPECIFICATIONS AND RECOMMENDATIONS.
4. PROJECT ARCHITECT AND/OR G.C. TO COORDINATE FIRE EXTINGUISHER TYPE AND LOCATIONS WITH LOCAL AUTHORITIES HOLDING JURISDICTION.

FLOOR PLAN KEYNOTES

- 101 GENERAL CONTRACTOR SHALL INSTALL EXHAUST HOOD PACKAGE AS WELL AS PROVIDE ANY/ALL NECESSARY MATERIALS IN ORDER FOR PROPER HOOD OPERATION, SEE EQUIPMENT, MECHANICAL, AND ELECTRICAL.
- 102 PROVIDE 5/8" INTERIOR SANDED PLYWOOD IN LIEU OF GYPSUM WALL BOARD.
- 103 PROVIDE 5/8" CEMENT BOARD IN LIEU OF GYPSUM WALL BOARD.
- 104 PROVIDE WD. BLOCKING AT WALL SHELVES COORDINATE EXTENT WITH EQUIPMENT PLAN. SEE DETAIL 13, SHEET A-501.
- 105 COUNTERTOPS AND DECOR WALLS ARE PART OF COUNTER MILLWORK PKG. SEE EQUIPMENT SHEETS FOR PLAN, ELEVATIONS AND DETAILS.
- 106 CONCRETE STOOP, SEE STRUCTURAL.
- 107 GENERAL CONTRACTOR SHALL INSTALL WALK-IN COOLER/FREEZER PACKAGE. PROVIDE SEALED TRIM, FROM COOLER BOX TO SIDE WALL. VERIFY SEALING REQUIREMENTS PER LOCAL CODES. (COOLER TYPICALLY 1" FROM WALLS-REFER TO DETAILS 10, 11, 16, & 17 ON SHEET A-303.
- 108 MOP SINK, SEE DETAIL 14 ON SHEET INSERT A-501.
- 109 WATER FILTER SYSTEM, SEE EQUIPMENT PLAN AND SCHEDULES.
- 110 WATER METER LOCATION, SEE PLUMBING.
- 111 WATER HEATER, SEE PLUMBING.
- 112 ELECTRICAL PANEL, SEE ELECTRICAL - VERIFY W/ MANUFACTURER INSTALL REQUIREMENTS.
- 113 ELECTRICAL DISCONNECT AND METER SOCKET.
- 114 PHONE BOARD.
- 115 GAS METER
- 116 6" CONC. FILLED STEEL BOLLARD, SET INTO 12" CONC. PIER. MIN. 36"H & MIN. 36" DEEP.
- 117 PATIO TABLE LOCATIONS, INSTALL PER MANUFACTURERS RECOMMENDATIONS.
- 118 G.C. TO VERIFY AND PROVIDE BLOCKING PER MANUFACTURERS REQUIREMENTS.
- 119 G.C. TO PROVIDE AND INSTALL 2X8 HORIZONTAL WOOD BLOCKING (LET IN) TO STUDS BEHIND GYP. BD., CENTER OF BLOCKING 8'-11 1/2" AFF. MINIMUM LENGTH OF BLOCKING AS NOTED, END OF BLOCKING MUST LAND ON STUD.
- 120 OPTIONAL ROOF ACCESS LADDER.
- 121 PATIO RAILING, SEE DETAIL 5 INSERT SHEET AS-102.
- 122 COAT ROD & SHELF, PROVIDED & INSTALLED BY G.C.
- 123 EXTERIOR FIREPLACE ENCLOSURE (OPTIONAL), SEE DETAILS 1&2 SHEET A-304.
- 124 ROOF SCUPPER & DOWNSPOUT.
- 125 EXTERIOR RED SPOON, SEE EQUIPMENT PLAN, ELEVATIONS, WALL SECTIONS, AND FOUNDATION PLAN.
- 126 SEE STRUCTURAL DRAWINGS FOR SHEARWALL REQUIREMENTS.
- 127 EQUIPMENT IN THIS AREA HAS CRITICAL INSTALLATION DIMENSIONS, SEE SHEET Q-105.
- 128 THIS AREA REQUIRES A DOUBLE LAYER OF GYP. BD. AND TRIMS. SEE INTERIOR ELEVATIONS AND DETAIL #5 ON SHEET A-501 FOR REQUIREMENTS.
- 129 HEAVY DUTY REFLECTIVE RUBBER SPEED BUMPS

FLOOR PLAN LEGEND

-  MOP SINK, SEE PLUMBING DRAWINGS
-  SINK, SEE PLUMBING DRAWINGS



REVISIONS:

DELTA	DESCRIPTION	DATE
-------	-------------	------

DATE OF ISSUE: 04.13.2026

MA PROJECT NO: 0559-25

PROJECT PHASE: CD

DRAWN BY: RP

FLOOR PLAN - NOTES