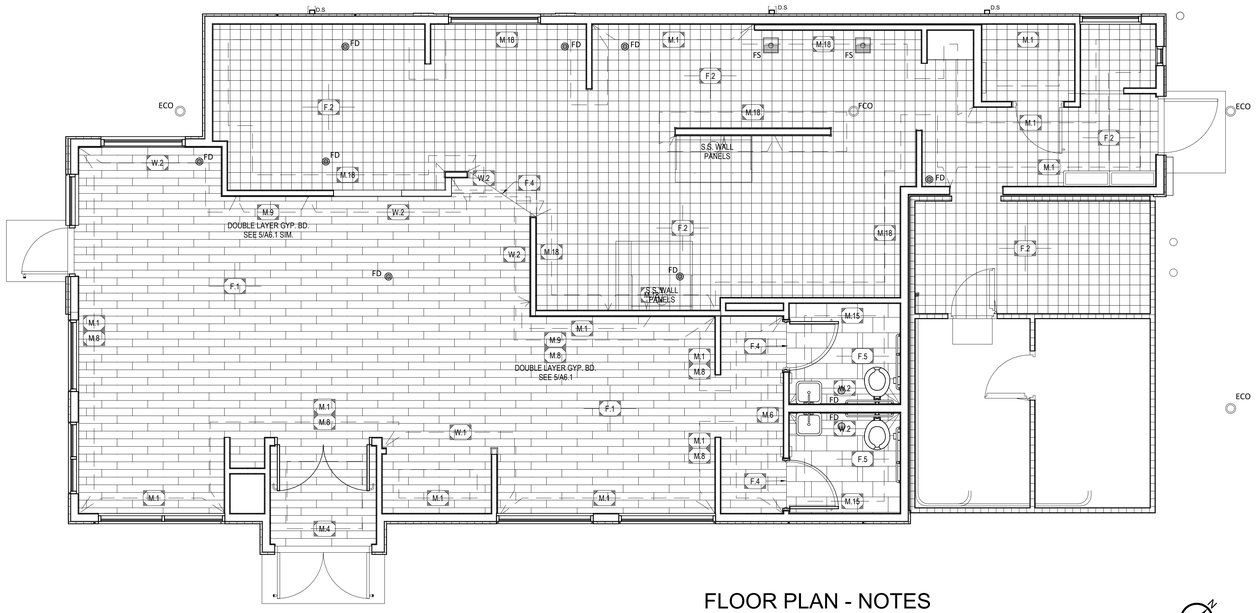


FLOOR PLAN - NOTES

0 20' 40' 60'

1/4" = 1'-0"

FINISH SCHEDULE: (GRILL & CHILL)

NOTE: THIS IS A PROTOTYPICAL SCHEDULE, ALL FINISHES MAY NOT BE USED.

F.1 DINING VINYL FLOOR TILE: PRIME
MFGR: SHAW CONTRACT
SERIES: PROVINCE II 20 MIL
COLOR: BAHIA 00775
FINISH: EXOGUARD+
SIZE: 6"x48" 1/3 OFFSET/STAGGERED PATTERN
PRODUCT: HEAVY COMMERCIAL LUXURY VINYL TILE
RELATED ITEMS:
-#164CA LOKWORX RESILIENT ADHESIVE
-#174CA 6" COVED BASE CHARCOAL 00086
-#141VS BASE ADHESIVE
-FURNITURE FEET FLOORING PROTECTORS (AVAILABLE FROM SHAW CONTRACT OR FURNITURE VENDOR)
VENDOR: SHAW CONTRACT

F.1 DINING ROOM FLOOR TILE: UPGRADE OPTION
MFGR: MILESTONE
SERIES: MOOD WOOD
COLOR: HONEY
SIZE: 6"x36" 1/3 OFFSET/STAGGERED PATTERN
VENDOR: HJC
GROUT: LATICRETE W/ SPECTRALOCK, 1/8" JOINT
GROUT COLOR: DUSTY GREY #60
NOTE: USE W.4 BASE. PROVIDE SCHLUTER EKE U 11/O 10 PG IF COVED TRANSITION IS REQUIRED

F.2 QUARRY FLOOR TILE:
MFGR: METROPOLITAN CERAMICS
SERIES: QUARRY BASICS
COLOR: BOULEVARD #107
SIZE: 8"x8" W/ MATCHING 6"x8" COVE BASE TRIMS
AT MOP SINK: BULLNOSE & FLAT TOP COVE TRIMS
VENDOR: HJC
GROUT: LATICRETE SPECTRALOCK 2000 IG, 3/8" JOINT
GROUT COLOR: DUSTY GREY #60

F.3 RESTROOM FLOOR BASE COVED TRANSITION TRIM:
MFGR: SCHLUTER SYSTEMS
SERIES: DILEX-AHK
MODEL: AHK 1S 125 AE
MATERIAL: SATIN ANODIZED ALUMINUM, 8'-2 1/2"
VENDOR: HJC
NOTE: PROVIDE ASSOCIATED ACCESSORIES
- INSIDE CORNER: 190/AHK IS/AE
- OUTSIDE CORNER: EI/AHK IS/AE
- CONNECTOR: V/AHK

F.4 FLOOR TRANSITION:
MFGR: SCHLUTER
SERIES: RENO-U REDUCER, EBU125
HEIGHT: 1/2" [12.5mm]
FINISH: SATIN ANODIZED ALUMINUM
VENDOR: HJC

F.5 REST ROOM FLOOR TILE:
MFGR: PANARIA
SERIES: CONNECT
COLOR: AKASHI
FINISH: NATURAL
SIZE: 12"x24" RUNNING BOND PATTERN
VENDOR: HJC
GROUT: LATICRETE W/ SPECTRALOCK, 3/8" JOINT
GROUT COLOR: DUSTY GREY #60
NOTE: USE W.4 BASE WITH F.3 COVE

M.1 PAINT: (LIGHT)
MFGR: BENJAMIN MOORE
COLOR: SILVER CHAIN #1472
PRODUCT: ULTRA SPEC SCUFF-X INTERIOR LATEX MATTE 484
PRIMER: ULTRA SPEC 500 INTERIOR LATEX PRIMER 534

M.2 DOOR & MILLWORK LAMINATE:
MFGR: WILSONART
COLOR: NORTH SEA D90-60

M.4 PAINT VESTIBULE/ ENTRY ACCENT:
MFGR: BENJAMIN MOORE
COLOR: HOLLY BERRY 1321
PRODUCT: ULTRA SPEC SCUFF-X INTERIOR LATEX MATTE 484
PRIMER: ULTRA SPEC 500 INTERIOR LATEX PRIMER 534

M.5 RESTROOM CEILING AND SOFFIT:
MFGR: BENJAMIN MOORE
COLOR: SHORELINE #1471
PRODUCT: ULTRA SPEC SCUFF-X INTERIOR LATEX MATTE 484
PRIMER: ULTRA SPEC 500 INTERIOR LATEX PRIMER 534

M.6 ACCENT WALL:
MFGR: BENJAMIN MOORE
COLOR: BIG COUNTRY BLUE 2066-30
PRODUCT: ULTRA SPEC SCUFF-X INTERIOR LATEX MATTE 484
PRIMER: ULTRA SPEC 500 INTERIOR LATEX PRIMER 534

M.8 WAINSCOT PANELS:
MFGR: CONSTRUCTION SPECIALITIES
COLOR: PEARL GRAY #136
FINISH: SUEDE
SERIES: ACROVYN (040") SOLID COLORS
TRIMS: CLEAR ANODIZED FLAT TRIMS & COLOR MATCH SEALANT (SEE DETAILS
VENDOR: HJC

M.9 LOBBY WALL PAINT:
MFGR: BENJAMIN MOORE
COLOR: HEARTHSTONE 1601
PRODUCT: ULTRA SPEC SCUFF-X INTERIOR LATEX MATTE 484
PRIMER: ULTRA SPEC 500 INTERIOR LATEX PRIMER 534

M.9.1 LOBBY ACCENT WALL TILE: UPGRADE OPTION
MFGR: PANARIA
SERIES: HOME
COLOR: GREY RANGE
FINISH: MATTE
SIZE: 12"x24" STACKED PATTERN
GROUT: LATICRETE PERMACOLOR, 1/4" JOINT
GROUT COLOR: DUSTY GREY #60
VENDOR: KATELO TILE & STONE
NOTE: USE W.6 AT FINISH TRANSITIONS. DO NOT DOUBLE LAYER GYP. BD. OR USE M.10 TRIM

M.10 LOBBY WALL TRIMS:
MFGR: FRY REGLET
SERIES: 1/2" J-TRIM * JDM-50"
FINISH: CLEAR SATIN ANODIZED ALUMINUM
VENDOR: HJC

M.12 COUNTER TOP AND SILL SOLID SURFACE:
MFGR: CORIAN SOLID SURFACE
SIZE: 1/2" THICK
COLOR: CIRRUS WHITE (MATTE FINISH)

M.13 FRONT CABINET FACE LAMINATE:
MFGR: WILSONART
COLOR: MILWAUKEE JCT. RUST, Y0397K-22

M.15 RESTROOM WALL PANEL: PRIME
MFGR: CRANE COMPOSITES - VARIETEX
TEXTURE: LINEN
COLOR: SHELTER COVE GRAY (1281)
TRIMS: CLEAR ANODIZED TRIMS (J-MOLD, OUTSIDE CORNER, INSIDE CORNER, & T-MOLD)
VENDOR: HJC

M.17 CORNER GUARD:
MFGR: CONSTRUCTION SPECIALTIES
SERIES: ACROVYN SURFACE MOUNTED
MODEL: #SSM2048F949
COLOR: WHITE #949
SIZE: 2"x2"x48"long

M.18 FRP:
MFGR: SEQUENTIA
COLOR: WHITE
FINISH: PEBBLED
VENDOR: HJC
NOTE: PROVIDE ALL MATCHING TRIM PIECES. INSTALL PER MANUFACTURERS REQUIREMENTS.

M.20 OPTIONAL WINDOW SHADE:
GENERAL CONTRACTOR TO PROVIDE & INSTALL
-WINDOW HEAD FRAME MOUNTED
-SNAP ON FASCIA, BRONZE #976
-FABRIC: SUMMIT U500, COLOR: FOG/WHITE C7805
VENDOR: CE CONTRACT

M.24 DINING CEILING TILE/GRID:
MFGR: ARMSTRONG
SERIES: FINE FISSURED
SIZE: 24"x24"x3/4" SQUARE LAY-IN
COLOR: GREY STONE
GRID: PRELUDE XL 15/16" EXPOSED TEE
GRID COLOR: GREY STONE
VENDOR: HJC
NOTE: PAINT CEILING DIFFUSERS: BENJAMIN MOORE WILLOW CREEK #1468

M.28 KITCHEN CEILING TILE/GRID:
MFGR: ARMSTRONG
SERIES: VINYLCLAD
SIZE: 24"x48"x12" SQUARE EDGE
COLOR: WHITE
GRID: PRELUDE 15/16" EXPOSED TEE
GRID COLOR: WHITE
VENDOR: HJC

W.1 CAVE ENCLOSURE WALL TILE:
MFGR: IMOLA
SERIES: SLASH
COLOR: WHITE, SLSH 73W
ACCENT: WHITE SLSH1 73W - 33% RANDOM INSTALL
SIZE: 3"x12" STACKED/GRID PATTERN
GROUT: LATICRETE PERMACOLOR, 1/8" JOINT
GROUT COLOR: SMOKE GREY #89
VENDOR: HJC
NOTE: ACCENT TILE REQUIRED TO BE INSTALLED RANDOMLY THROUGHOUT THE FIELD OF TILE

W.2 WALL TILE:
MFGR: KATE-LO TILE & STONE
SERIES: CD MODULAR
COLOR: ARCTIC WHITE (KB.CD.ARW.1020.BR)
SIZE: 10"x20" STACKED PATTERN
GROUT: LATICRETE PERMACOLOR, 1/8" JOINT
GROUT COLOR: SMOKE GREY #89
VENDOR: HJC

W.3 UPGRADE RESTROOM WALL TILE: IN LIEU OF M.15
MFGR: PANARIA
SERIES: CONNECT
COLOR: SOSPIRI, NATURAL
SIZE: 12"x24" STACKED PATTERN
GROUT: LATICRETE PERMACOLOR, 1/4" JOINT
GROUT COLOR: SMOKE GREY #89
VENDOR: HJC
NOTE: USE W.4 BASE

W.4 WALL BASE TILE:
MFGR: MILESTONE
SERIES: PLASTER 2.0
COLOR: SILVER GREY #1102931
SIZE: 6"x24" (CUT FROM 12x24)
GROUT: LATICRETE PERMACOLOR, 1/4" JOINT
GROUT COLOR: DUSTY GREY #60
VENDOR: HJC
NOTE: USE WITH F.5 AND F.1 TILE UPGRADE OPTION

W.6 TILE ACCESSORIES:
MFGR: SCHLUTER SYSTEMS
STYLE: QUADEC
COLOR: SATIN ANODIZED ALUM. (AE)
SIZE: AS REQUIRED BY LOCATION & TILE THICKNESS
VENDOR: HJC
NOTE: PROVIDE ASSOCIATED ACCESSORIES
-END CAP, OUTSIDE/INSIDE CORNER - EV/
-CONNECTOR - V/RO

G.2 GREY WITH RED SPARKLES: UPGRADE OPTION
MFGR: JOLIET PATTERN
SERIES: INSET AT LOBBY WALL PANELING
COLOR: GREY WITH RED SPARKLES WALLPAPER (WWPG)
SIZE: 50" WIDTH BOLT x LF, AS REQUIRED
NOTES: INSTALL HORIZONTAL, DO NOT PATTERN MATCH

G.3 VESTIBULE GRAPHIC WALL COVERING: UPGRADE OPTION
MFGR: JOLIET PATTERN
SERIES: COMMERCIAL GRADE TYPE II-J
COLOR: RED WITH RED ICONS (18WP-FR OR 27WP-FR)
SIZE: 50" WIDTH BOLT x 18' OR 27' LENGTH, 27.72" REPEAT
NOTE: PROVIDE PROTECTION AT OUTSIDE CORNERS WITH BRUSHED ALUMINUM GUARDS FULL HEIGHT.

G.4 GRAPHIC WALL COVERING: UPGRADE OPTION
ALTERNATE "M.1"
MFGR: JOLIET PATTERN
SERIES: COMMERCIAL GRADE TYPE II-J
COLOR: GREY WITH GREY ICONS (18WP-F OR 27WP-F)
SIZE: 50" WIDTH BOLT x 18' OR 27' LENGTH, 27.72" REPEAT
NOTE: PROVIDE PROTECTION AT OUTSIDE CORNERS WITH BRUSHED ALUMINUM GUARDS FULL HEIGHT.

FINISH NOTES:

1) THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE SPECIFICATION MANUAL, THE MECHANICAL AND ELECTRICAL DRAWINGS ALONG WITH THEIR SPECIFICATIONS.
2) FIELD VERIFICATION IS REQUIRED FOR QUANTITIES OF ALL MATERIALS PRIOR TO ORDERING AND INSTALLING. THIS INCLUDES FLOOR & WALL TILES, VINYL WOOD FLOORING AND PAINT (DO NOT SCALE DRAWINGS).
3) CONTRACTOR TO PHYSICALLY RECHECK ALL MEASUREMENTS PROVIDED IN THE DRAWINGS
4) UPON AWARD OF CONTRACT CONTRACTOR TO ORDER FINISH MATERIALS & CONFIRM DELIVERY DATE OF ORDER.
5) ALL MATERIALS LISTED TO BE AS SPECIFIED OR AN APPROVED ALTERNATE, ANY PROPOSED ALTERNATES MUST BE SUBMITTED TO THE IDQ ARCHVCONST. DEPT. FOR REVIEW PRIOR TO ORDERING.
6) ALL MATERIALS LISTED TO BE SUPPLIED AND INSTALLED BY THE GENERAL CONTRACTOR, UNLESS OTHERWISE NOTED.
7) ENSURE SUB FLOOR IS PROPERLY PREPARED FOR INSTALLATION OF SPECIFIED FLOOR FINISH.
8) ALL FLOORING MATERIAL TO HAVE MANUFACTURERS RECOMMENDED FINISH APPLIED AFTER INSTALLATION AND PROPER CARE AND MAINTENANCE INSTRUCTIONS TO BE ISSUED TO THE CLIENT.
9) ALL FLOOR FINISHES TO BE INSTALLED AFTER ALL WALLS AND KNEE WALLS HAVE BEEN CONSTRUCTED.
10) FLOOR FINISH TO EXTEND COMPLETELY UNDER MILLWORK.
11) WHEN A CHANGE IN FLOOR FINISH OCCURS AT DOORWAY, THE SEAM IS TO BE CENTERED UNDER THE DOOR IN THE CLOSED POSITION, UNLESS OTHERWISE INDICATED.
12) ALL FLOOR FINISHES TO BE PROTECTED FROM DAMAGE BY TRADES AFTER INSTALLATION. ANY DAMAGE TO BE REPAIRED AT NO COST TO THE OWNER.
13) ALL DOOR FRAMES AND BASE MUST BE PROTECTED WITH APPROPRIATE MATERIAL TO AVOID DAMAGE DURING INSTALLATION OF FLOORING MATERIALS. THE PROTECTION MATERIALS AND METHOD OF ADHESION SHOULD NOT DAMAGE THE FINISH WHEN REMOVED. DAMAGE DONE TO COMPLETED WORK TO BE REPAIRED AT NO COST TO THE OWNER.
14) CONTRACTOR TO PREPARE A PACK OF SIGNIFICANT SIZE LEFTOVERS WHICH WILL REMAIN ON SITE FOR FUTURE REPAIRS AND PATCHING. (CONFIRM QUANTITY WITH CLIENT, 10% OVERAGE IS STANDARD).
15) USE "4XLT" GREY THINSET FOR ALL FLOOR & WALL TILE UNLESS NOTED OTHERWISE.
16) USE "4XLT" GREY THINSET BY LATICRETE FOR ALL FLOOR & WALL TILE UNLESS NOTED OTHERWISE.
17) USE "GLASS TILE ADHESIVE" BY LATICRETE FOR ALL GLASS TILE. ENSURE FULL COVERAGE WITH NO TROWEL MARKS.
18) PROVIDE "HYDROBAN" BY LATICRETE FOR CRACK ISOLATION AS NEEDED.
19) PROVIDE "LATASIL" 100% SILICONE SEALANT BY LATICRETE AT CHANGE IN PLANE AS NEEDED.
20) ANY KILN RELEASE RESIDUE MUST BE CLEANED OFF TILE BEFORE SETTING.

DAIRY QUEEN - MANCHESTER

JAIE DAMRON
Manchester, TN

CLIENT CONTACT:
JAIE DAMRON | HIGHWAY 53 | MANCHESTER, TN 37349
(931) 273-7166 | jaie@dammonventures.com

MERIDIAN | ARCHITECTURE
nashville, tennessee
e: office@meridiantn.com
t: 615.390.2236
www.meridiantn.com

David A. Brown 4/13/2026

REVISIONS:

DELTA	DESCRIPTION	DATE

DATE OF ISSUE: 04.13.2026
MA PROJECT NO: 0559-25
PROJECT PHASE: CD
DRAWN BY: RP

FINISH PLAN

A-701

© 2026