


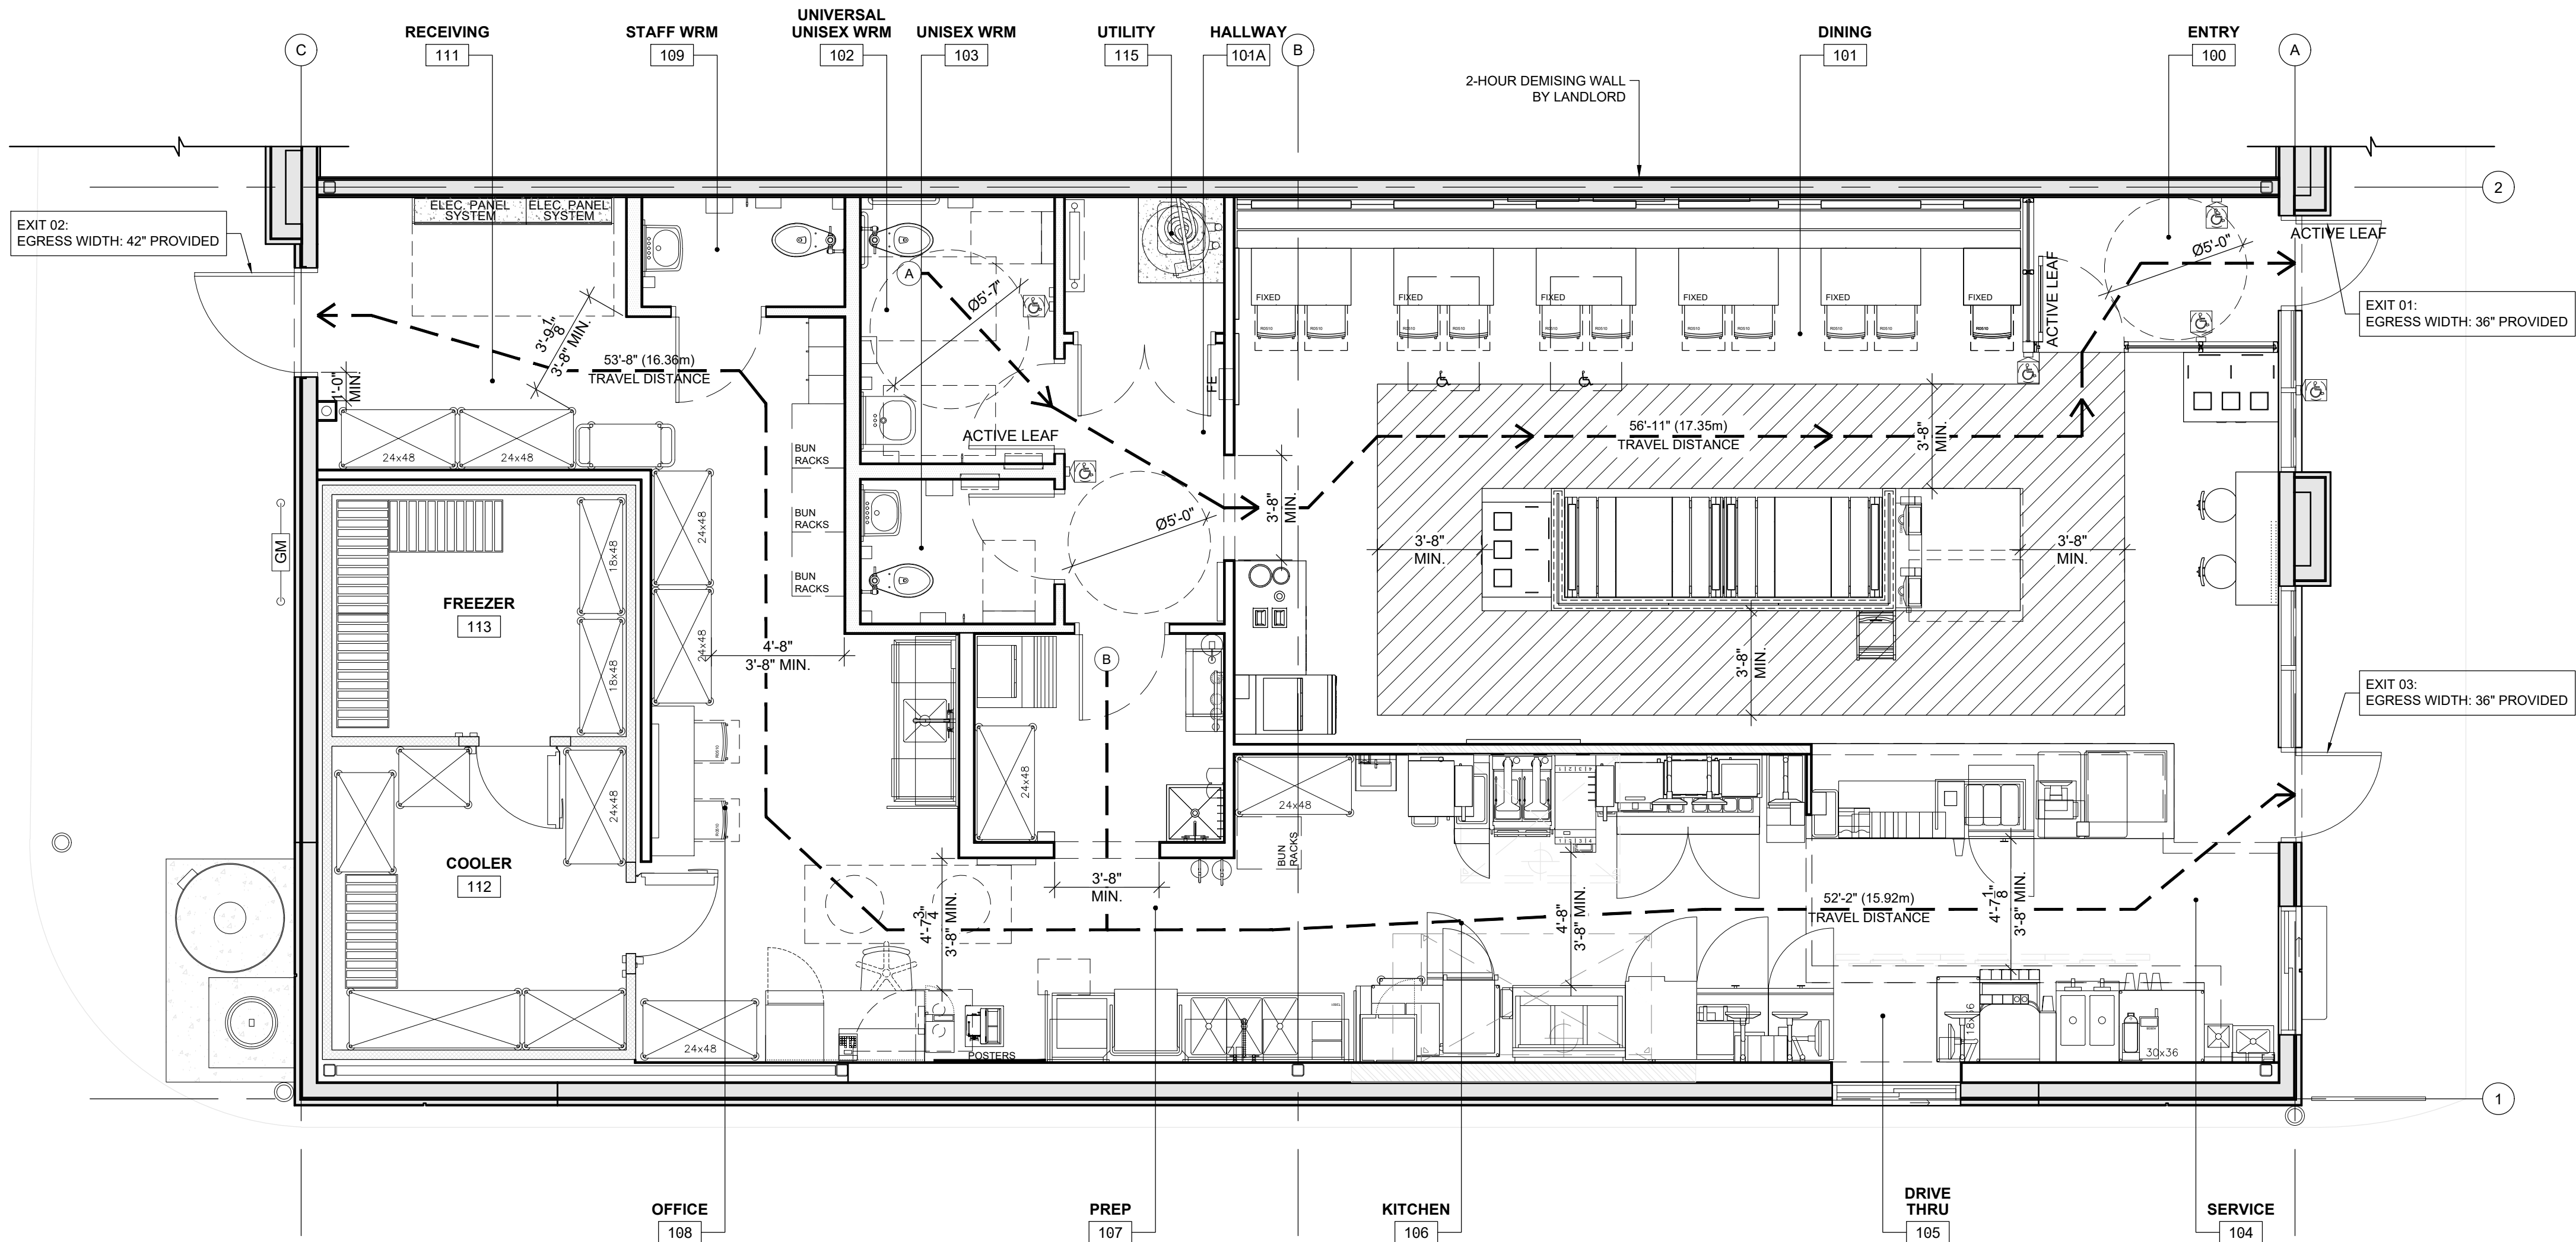

LEGEND

- EGRESS PATH
- EGRESS TRAVEL PATH
- PUSH BUTTON ACTUATOR
- FIRE EXTINGUISHER
- OR FIRE EXTINGUISHER

SEATING AT TABLES

- EGRESS PATH: 44"
- aisle: 44" W. MIN. BETWEEN TABLES, NO CHAIRS
- aisle access way: 12" W. MIN.
 - 19" FOR ADJACENT CHAIR (EITHER SIDE)
 - 38" FOR CHAIRS BOTH SIDES

EXIT TRAVEL DISTANCE

A	TRAVEL DISTANCE PERMITTED: 98'-0" (30m) MAX. [NBC-AE 3.4.2.5.(1)(f)] TRAVEL DISTANCE PROVIDED: 56'-11" (17.35m)
B	TRAVEL DISTANCE PERMITTED: 98'-0" (30m) MAX. [NBC-AE 3.4.2.5.(1)(f)] TRAVEL DISTANCE PROVIDED: 52'-2" (15.92m)
B	TRAVEL DISTANCE PERMITTED: 98'-0" (30m) MAX. [NBC-AE 3.4.2.5.(1)(f)] TRAVEL DISTANCE PROVIDED: 53'-8" (16.36m)

EXIT CALCULATIONS

EGRESS WIDTH PER OCCUPANT SERVED FOR USER GROUP A2 (ASSEMBLY) AS PER SECTION 3.4.3.2.(1)(a). CAPACITY OF ACCESS TO EXITS
- NATIONAL BUILDING CODE 2023 (ALBERTA EDITION) - 6.1 mm EGRESS WIDTH PER PERSON

OCCUPANT LOAD	EGRESS WIDTH REQUIRED	EGRESS WIDTH PROVIDED	NUMBER OF EXITS REQUIRED
37 OCCUPANTS	225.7mm MINIMUM	2895.6mm	(2) EXITS

EXITS REQUIRED

NUMBER OF EXITS REQUIRED: 2
NUMBER OF EXITS PROVIDED: 3
DOORWAY WIDTH: 850mm MIN.
DOOR WIDTH: 915mm MIN.
EGRESS PASSAGE WIDTH: 1100mm MIN.

MAX TRAVEL DISTANCE = 98'-0" (30m) NON-SPRINKLERED PER NATIONAL BUILDING CODE 2023 (ALBERTA EDITION)

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ONSITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

#	Date	Description	Dwn
---	------	-------------	-----

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

1	JUNE 17, 2026	REVISED PER CITY COMMENTS	MO
---	---------------	---------------------------	----

#	Date	Description	Dwn
---	------	-------------	-----

DRAWING TITLE:

LIFE SAFETY PLAN

PRINT DATE: 6/19/2026 SCALE: AS NOTED

DRAWN BY: DB DRAWING NO:

CHECKED BY: MO

PROJECT NO: 17037

G1.2

APPROVED SUPPLIER LIST

SHADING INDICATES PRODUCT IS AVAILABLE THROUGH CONSOLIDATOR

PRODUCT		CONTACT INFORMATION		DIVISION 9 - FINISHES		DIVISION 12 - FURNISHINGS		
CONSOLIDATOR								
CONSOLIDATOR	HIC HAINES, JONES & CADBURY CORPORATION CUSTOMER SUCCESS TEAM BARRY BRANTWORTH@CCORP.CA ATTN: BARRY BRANTWORTH P: 866-256-3885 EXT. 3802	HAMILTON PARKER TRANS@HAMILTONPARKER.COM ATTN: TRINA SPARKS P: 814-385-7844	SUSPENDED ACoustICAL CEILING	ARMSTRONG LOCAL CERTANTEED 800-388-7878 X1 ATTN: BOBBY LUCAS BOBBYLUCAS@ARMSTRONGLOCAL.COM	DINING ROOM FURNITURE	(SEE KITCHEN EQUIPMENT ABOVE) PETER ANTHONY DESIGN, LTD ANDESIGN.CO 3021 CRYSTAL DR. #408 ATTN: EMMA PINE EMMAPINE@PETERANTHONYDESIGNS.COM		
			FRP PANELING	LOCAL SUPPLY		VUE MILLWORK INC. 832 ALMA STREET, AMHERSTBURG, CENTRO RD NW 775, CANADIA MARKE@VUEMILLWORK.COM 319-736-3667		
DIVISION 3 - CONCRETE			LAMINATE	PANDOLFI WALNET LOCK PANELS ORDERING: HAINES, JONES AND CADBURY (HJC)	WILSONART: OAK-LOOK PANELS ORDERING: HAINES, JONES AND CADBURY (HJC)	PATIO FURNITURE	REVELUX DESIGN ANDERSON, IN 703-374-0318 ATTN: JOHN BOLTWELL	
PRE-TINTED CONCRETE	GENERAL CONTRACTOR TO PURCHASE LOCALLY		WILSONART LAMINATE (L-6)	WILSONART ORDERING: HAINES, JONES AND CADBURY (HJC)	AVAILABLE THROUGH LOCAL RETAIL LOCATIONS CONTACT NATIONAL ACCOUNT REPS BELOW FOR TECHNICAL QUESTIONS ONLY		PI. METAL MAZZ PANCHABAYA MAZZ@PI-METAL.COM 647-973-6229	
DIVISION 4 - MASONRY AND STONE			PAINT	WILSONART ORDERING: HAINES, JONES AND CADBURY (HJC)	SHERWIN WILLIAMS (TECHNICAL SUPPORT) NATIONAL ACCOUNT DUTY EXECUTIVE 654-406-3837 ATTN: ANDREW KHIM PITTSBURGH PAINTS (PPGI) (TECHNICAL SUPPORT) ATTN: RICH GARLIN GARLIN@PITTSBURHPAINTS.COM: 317-318-5800	PATIO UMBRELLAS	TULC KATTA KATTIA LATINO PH: 303-637-4884 KATLATINO@TULC.COM	
FACE BRICK	BRampton BRICK BRampton, ON 905-840-1811 MASON MASONRY SUPPLY LTD. MISSISSAUGA, ON 905-670-1233	CULTURED STONE DUTOZ QUALITY STONE ATTN: KATHY MANNOON - NATIONAL COMMERCIAL ACCOUNT MANAGER EMAIL: KMANN@WESTLAKE.COM PHONE: 800-486-2334 WESTLAKE ROYAL STONE & ROOFING SOLUTIONS WWW.ELAVIEWESTSTONE.COM	PAINT	BENJAMIN MOORE & COMPANY (TECHNICAL SUPPORT) CLEVELAND, OH 330-343-3800 ATTN: DOROTHY HAZENHO WALL COVERING (TECHNICAL SUPPORT) ELKHORVE VILLAGE, L 800-621-4066 X4318 ATTN: JAN PREWITT	SIGN PAINT	(REFER TO SIGN VENDORS)	UNIVERSAL AUTOMATIC DOOR	CAMDEN DOOR CONTROLS 888-CAMDEN-9 CAMDEN@DOORCONTROLS.COM
MANUFACTURED STONE			GROUT, THRESH, AND WATERPROOFING MEMBRANE	MARFI ORDERING: HAINES, JONES AND CADBURY (HJC)				
DIVISION 5 - METALS			TILE	AHF / CROSSVILLE CERAMICS ORDERING: HAINES, JONES AND CADBURY (HJC) ATTN: TOM LEE LEE@AHF-USA.COM / THOMAS.LEE@AHFPRODUCTS.COM				
DUMPKSTER GATES AND HARDWARE	GENERAL CONTRACTOR TO PURCHASE LOCALLY		TILE (BLUE & WHITE HEXAGON WALL TILE)	HAMILTON PARKER 307-287-8128 P: 389-203-9786 ATTN: REBECCA GARBACH - NATIONAL ACCOUNT SALES COORDINATOR RGARBACH@HAMILTONPARKER.COM				
OAK LOOK PATIO BATTERNS **COVERED PATIO IS OPTIONAL**	KNOTWOOD DISTRIBUTED BY PARALLELS PRIMARY: CUB SHIPPERS SHIPPERS@PARALLELX.COM SECONDARY: KATHERE ELEGUOT 720-638-0973 ELEGUOT@PARALLELX.COM		SILKAL FLOORING (OPTIONAL BACK OF HOUSE FLOOR)	SILKAL FLOORING 618-524-5171 ATTN: FRANCIS MOREL MOREL@SILKALFLOORING.COM				
PEDESTRIAN SAFETY RAIL	HIC - REFER TO CONSOLIDATOR FORTRESS RAILING PRODUCTS WWW.FORTRESSRAILING.COM		POLYFLOR FLOORING (OPTIONAL BACK OF HOUSE FLOOR)	POLYFLOR ATTN: MICHAEL LANDONACO 647-623-7659 MICHAEL.LAMONAC@POLYFLOR.COM				
DIVISION 6 - WOOD, PLASTICS AND COMPOSITES			WALL COVERINGS, WE-BR HAOWOODS	ORDERING: HAINES, JONES AND CADBURY (HJC)				
ROOF JOISTS, MICRO-LAMB BEAMS	REDUBILT COLUMBUS, OH 740-343-4428 ATTN: PRESTON PERLUST PERLUST@REDUBILT.COM			VENDOR DIRECT HAOWOODS ATTN: MADELINE CLARK MADELINE.CLARK@HAOWOODS.COM				
MILLWORK	REFER TO DIVISION 12			OHIO VALLEY SUPPLY CINCINNATI, OH 800-956-5628 X3133 ATTN: RFF HERGENS RFF.HERGE@OVSCVO.COM				
DIVISION 7 - THERMAL AND MOISTURE PROTECTION			DRIVE THRU CANOPY (PUW AWNINGS & ORDER POINT)	PRIDE SIGNS, LTD CAMBRIDGE, ON 519-622-4040 EXT. 229 ATTN: DOUG EAGLES DEALS@PRIDESIGNS.COM				
INSULATING PRODUCTS	PRESTOPEC BUILDING PRODUCTS MISSISSAUGA, ONTARIO 905-565-6339		SOLID SURFACE MATERIAL - CORIAN (SI-4)	ORDERING: PETER ANTHONY				
	BURGSLAY INSULATING INC. SAGINAW MI 888-645-0807 ATTN: DUFFY BRIDSON TWO27-PRINCIPAL@BURGS.COM			CHOD VALLEY SUPPLY CINCINNATI, OH 800-956-5628 X3133 ATTN: RFF HERGENS RFF.HERGE@OVSCVO.COM				
GLASS/LARD	LLOYD LARD 317-555-3029							
SKIS	STO CORP ATLANTA GA 678-455-4386 ATTN: RAY RESMOND RESMOND@STOCORP.COM							
ACM PANEL FABRICATOR	GENERAL CONTRACTOR TO PURCHASE LOCALLY							
CORRUGATED METAL PANELS	JOHNWAY METALS INC. BRAMPTON, ON 416-598-2983							
PREMANUFACTURED BASES AND SERVITS (OPTIONAL)	CLADDING & COMPONENT SOLUTIONS COMMING, GA 770-627-2777 ATTN: STEPHEN RODGERE							
EXTERIOR WALL PANEL (STEEL)	VIEWPOINT BURLINGTON, ON 905-624-3333 ATTN: DAVID SHELTON DSHELTON@VIEWPOINT.COM							
EXTERIOR GLAZING	MECHANICAL 226							
DIVISION 8 - DOORS AND WINDOWS								
DOORS AND HARDWARE	HAMILTON PARKER COLUMBIUS, OH D: 814-385-7844 ATTN: KELLEN KOENIG KOELEN@HAMILTONPARKER.COM							
WOOD GRAIN EXTERIOR DOORS	KAWNEER COMPANY, INC. HAWAII, HI 816-250-3600 ATTN: AUSA BULLINGER AUSA.BULLINGER@KAWNEER.COM							
	ACUSTIC BUILDING ENVELOPE TERRILL, TX 817-446-1848 ATTN: MARK ELSHAAN MELSHAAN@TERRILLACUSTE.COM							
	TUBULAR WALKER, IA 715-634-6486 ATTN: KEVIN BAGGMAN KBAGGMAN@TUBULUSTECH.COM							
STOREFRONT	ACUSTIC BUILDING ENVELOPE TERRILL, TX 817-446-1848 ATTN: MARK ELSHAAN MELSHAAN@TERRILLACUSTE.COM							
	ALUDORP ATTN: RFF THOMAS RTHOMAS@ALUDORP.COM / 304-295-3857							
	KAWNEER COMPANY, INC. HAWAII, HI 816-250-3600 ATTN: AUSA BULLINGER AUSA.BULLINGER@KAWNEER.COM							
	TURGETTE MONTICELLO, MI 973-351-6386 ATTN: KYLE BAGGMAN KBAGGMAN@TURGETTE.COM							
	OS COLUMBIUS LANCASTER, DE 300-277-8840 ATTN: RANDY SMITH, ARCHITECTURAL SALES REPRESENTATIVE RSMITH@OSCORP.COM							
	BARONCE PROTECTIVE FILMS PRODUCTS PH: 858-6866 MERBT.CRAW@BARONCE.COM							
GLAZING	ELUDORP GLAZING ALUDORP HILLS MI 810-964-0000 ATTN: KYLE HARTSHORN KHARTSHORN@ELUDORP.COM							
	PPG INDUSTRIES HOGANSPORT, IN 800-963-8800 ATTN: GUYVERI SCHNEIDER							
PICK-UP WINDOW (PUW)	QUIKSERVE / EASY-SERVE VANCOUVER, BC 800-388-8307 ATTN: BRIAN MCCLOSKEY BMC@EASYSERVE-SERV.COM	QUIKSERVE LUXTON, VT 817-723-7646 ATTN: BRIAN MCCLOSKEY BMC@EASYSERVE-SERV.COM						

RESPONSIBILITY SCHEDULE

OWNER

02-24-2025

KED : KITCHEN EQUIPMENT DISTRIBUTOR (CONTRACTED BY OWNER)

S: SUPPLIER CONTRACTED THROUGH OWNER

GC: GENERAL CONTRACTOR

LL: LANDLORD

SHADING INDICATES ITEM IS AVAILABLE THROUGH CONSOLIDATOR. REFERENCE APPROVED CONSOLIDATORS ON ADJACENT SUPPLIER LIST

ITEM

SUPPLIED

INSTALLED

FINAL UTILITY CONNECTION

COMMENTS

EQUIPMENT (DEPICTED ON EQ SHEETS)

KITCHEN EQUIPMENT / SHELVING

KED

KED

GC

REFER TO EQ1.1 & EQ1.2 FOR ADDITIONAL INFORMATION

DSG 2.0 GRILL

S

S

S

DINING ROOM PACKAGE

S

GC

N/A

GC TO ANCHOR FIXED FURNITURE BASES TO FLOOR

ART PACK

S

GC

N/A

GC TO PROVIDE POWER FOR ART PACK AS REQUIRED. SEE E-SHEETS. GC TO UTILIZE VENDOR SUPPLIED INSTALL INSTRUCTIONS AND TEMPLATES

CONDIMENT / DRINK STAND, DINING ROOM TRASH CANS

S

GC

GC

FLY LIGHT

S

S

N/A

QTY: 2. GC TO PROVIDE POWER. SEE E-SHEETS

EXTERIOR

SIGNAGE

S

S

GC

MUST BE SUPPLIED BY APPROVED VENDOR

LADDER DOCK & LADDER PORT

LL

LL

N/A

BY LANDLORD.

USED COOKING OIL TANK & TANK SURROUND/SHED

S

S

GC

TYPICALLY PART OF U.C.O. CONTRACT

BULK CO2 TANK & CO2 LINES

S

S

S

WALK-IN-BOX (FREEZER/COOLER/DRY STORAGE)

S

S

GC

REFRIGERATION BY WALK-IN BOX VENDOR

PATIO FURNITURE (IF REQUIRED)

S

GC

N/A

PROVIDE ONLY IF PATIO IS INCLUDED IN PROJECT

RECYCLE BIN

S

GC

N/A

SEMI-RECESSED WASTE CONTAINERS

LL

LL

N/A

VERIFY WITH CM AND LEASE REQUIREMENTS.

GARBAGE ENCLOSURES

LL

LL

N/A

BY LANDLORD.

PARKING SIGNS (DELIVERY, MOBILE PICKUP, HANDICAP)

S

GC

N/A

POST BY LANDLORD. SIGNAGE BY G.C.

BIKE RACK

S

LL

N/A

LANDLORD TO PROVIDE AS APPROVED BY WENDY'S

PEDESTRIAN SAFETY RAIL & PATIO FENCE

LL

LL

N/A

SAFETY RAIL REQUIRED - SEE PLANS, INCLUDE PATIO RAILS IF PATIO OPTION IS SELECTED.

BOLLARD SLEEVE (BL-1)

LL

LL

N/A

PROVIDE ON ALL BOLLARDS.

DRIVE THRU

EXTERIOR DIGITAL MENU BOARDS

S

S

GC

FOUNDATION AND CONDUITS BY LANDLORD. ANCHOR BOLT KIT TO BE INSTALLED BY IT TECH.

EXTERIOR DIGITAL PRE-SELL BOARDS

S

S

GC

FOUNDATION AND CONDUITS BY LANDLORD. ANCHOR BOLT KIT TO BE INSTALLED BY IT TECH.

EXTERIOR SPEAKER PEDESTAL (W/MENU BOARD)

S

S

GC

FOUNDATION AND CONDUITS BY LANDLORD. ANCHOR BOLT KIT TO BE INSTALLED BY IT TECH.

ORDER POINT CANOPY AND CANOPY SUPPORT POLE

S

S

GC

FOUNDATION BY LANDLORD. INCLUDES LIGHTS & HEAT TRACE. SOURCE ANCHOR BOLT KIT FROM SUPPLIER.

CLEARANCE BAR (REQ'D WITH OPTIONAL PUW CANOPY)

S

S

N/A

FOUNDATION BY LANDLORD. ANCHOR BOLTS BY SUPPLIER. OPTIONAL ITEM. CONFIRM WITH OWNER

PLOW CANOPY (OPTIONAL BUT RECOMMENDED)

LL

LL

GC

INCLUDES LIGHTS & HEAT TRACE. ALLOWING BY GC. OPTIONAL ITEM. CONFIRM WITH OWNER

DETECTOR LOOP

S

LL

S

SUPPLIED BY OWNERS IT INSTALLERS. BY LANDLORD.

PICK UP WINDOW

LL

LL

GC

FROM APPROVED VENDOR. BY LANDLORD.

WALK-UP WINDOW

LL

LL

GC

FROM APPROVED VENDOR. BY LANDLORD.

INTERIOR

DIGITAL MENU BOARDS

S

S

GC

FIRE EXTINGUISHER CABINET

GC

GC

N/A

SUPPLIED BY GC - SEE SPECIFICATIONS

FIRE EXTINGUISHERS (FAN & BOH)

GC

GC

N/A

GC IS RESPONSIBLE FOR EXTINGUISHER TAGS

FIRE SAFETY BOX

S

GC

N/A

FIRE SAFETY PLANS

S

N/A

N/A

STAINLESS STEEL CORNER GUARDS

GC

GC

N/A

INSTALL ON ALL EXPOSED CORNERS IN BACK OF HOUSE

FLOOR COVERINGS

GC

GC

N/A

SPECIFIED WALL COVERINGS ONLY. NO SUBSTITUTES

CERAMIC / PORCELAIN TILE FLOOR, WALL & BASE

GC

GC

N/A

SPECIFIED TILE ONLY. NO SUBSTITUTES

CELING TILE & GRID

GC

GC

N/A

ORDER/PICKUP COUNTER AND MOBILE ORDER SHELF FRAMEWORK

GC

GC

GC

COUNTERTOPS AND SS LEGS MAY BE SOURCED THROUGH KED

CORIAN TOP AND WINDOW SILLS

S

GC

GC

GC TO PROVIDE SITE MEASUREMENTS TO PREFERRED CORIAN SUPPLIER - PET ANTHONY

CORIAN CAP AT FRONT COUNTER

S

GC

GC

GC TO PROVIDE SITE MEASUREMENTS TO PREFERRED CORIAN SUPPLIER - PET ANTHONY

WOOD CLADDING AT SERVICE COUNTER

GC

GC

GC

PREFERRED SUPPLIER - HJC

WINDOW SHADES

GC

GC

GC

MECHANICAL

RTU EQUIPMENT PACKAGE

S

LL

GC

REFER TO MECHANICAL SHEETS FOR PACKAGE COMPONENTS. BY LANDLORD.

RTU - START UP

GC

GC

N/A

RTU - FACTORY COMMISSIONING

S

N/A

N/A

14 BUSINESS DAY NOTICE REQUIRED

HVAC CONTROLS COMMISSIONING

S

N/A

N/A

14 BUSINESS DAY NOTICE REQUIRED

HVAC TEST & BALANCE

GC

GC

-

T&B REQUIRED. APPROVED SUPPLIER RECOMMENDED

REMOTE CONDENSER EQUIPMENT RAILS(SLEEPERS)

GC

GC

GC

FIRE SUPPRESSION SYSTEM

GC

GC

GC

HOOD COMMISSIONING

S

N/A

N/A

EXHAUST HOOD PACKAGE

S

GC

GC

REFER TO MECHANICAL SHEETS FOR PACKAGE COMPONENTS AND ADDITIONAL INFORMATION. INCLUDES CURBS, FANS AND HOODS.

RESTROOM ACCESSORIES

PLUMBING FIXTURES (TOILETS, URINALS, LAVATORIES)

GC

GC

GC

RESTROOM HARDWARE

GC

GC

N/A

DISPENSERS (PAPER TOWEL, TOILET PAPER, NAPKIN DISPOSAL), GRAB BARS, MIRROR

HAND DRYERS

GC

GC

GC

IF OPTION SELECTED, REPLACES PAPER TOWEL DISPENSERS

SOAP DISPENSERS

S

GC

N/A

TOILET PARTITIONS AND HARDWARE (IF REQUIRED)

GC

GC

N/A

STAINLESS STEEL ONLY

PLUMBING

WATER HEATER

GC

GC

GC

REFER TO PLUMBING SHEETS

USED COOKING OIL PIPING

GC

GC

GC

REFER TO PLUMBING SHEETS. PROVIDED UNDER COOKING OIL RECYCLE CONTRACT

MOP SINK

GC

GC

GC

AVAILABLE THROUGH CONSOLIDATOR OR KED

POP SINK FAUCETS	KED	GC	GC	REFER TO EQUIPMENT SCHEDULE
REVERSE OSMOSIS SYSTEM (RO)	S	S	GC	REFER TO EQUIPMENT SCHEDULE
WATER SOFTENER	S	S	GC	IF REQUIRED
WATER FILTRATION SYSTEM	S	S	GC	BY BEVERAGE EQUIPMENT INSTALLER

ELECTRICAL

LIGHT FIXTURES AND LAMPS (INTERIOR, EXTERIOR BUILDING & SITE)	GC	GC	GC	
POINT OF SALE SYSTEM (POS)	S	S	S	REFERENCE E-SHEETS FOR ROUGH-INS BY GC
CUSTOMER SELF ORDER KIOSK	S	S	S	REFERENCE E-SHEETS FOR ROUGH-INS BY GC
SECURITY CAMERAS / MONITORS	S	S	S	REFERENCE SECURITY PLAN FOR WORK BY GC
INTRUSION ALARM	S	S	S	REFERENCE SECURITY PLAN FOR WORK BY GC
SMART SAFE	S	S	S	
MUSIC SYSTEM	S	S	S	
ELECTRICAL PANEL	S	GC	GC	
OPERATIONS TABLE	O	O	GC	INSTALL IN FINAL LOCATION - REFERENCE E-SHEETS
PATIO HEATERS / PATIO FANS (OPTIONAL WITH PATIO)	GC	GC	GC	OPTIONAL IF PATIO IS INCLUDED IN PROJECT
INTERNET SERVICE / CABLING	O	O	O	
IT RACK	S	GC	S	

NOTES:

1	ALL ITEMS NOT SPECIFICALLY NOTED AS "BY SUPPLIER" OR "BY KED" ARE FURNISHED AND INSTALLED BY THE GENERAL CONTRACTOR.
2	SEE EQUIPMENT SCHEDULE COMMENT SECTION FOR ADDITIONAL EQUIPMENT TO BE CONNECTED BY GC'S PLUMBING AND ELECTRICAL SUB-CONTRACTORS.
3	GENERAL CONTRACTOR MUST RECEIVE, STORE, AND MAKE SAFE ALL OWNER AND KED SUPPLIED ITEMS
4	SEE APPROVED SUPPLIER LIST FOR SUPPLIER CONTACT INFORMATION.
5	ALL CONDUIT, WIRING, & PIPING DEPICTED ON DRAWINGS AND/OR REQUIRED TO MAKE FINAL CONNECTIONS ARE BY GC UNLESS NOTED OTHERWISE.
6	GC TO PROVIDE BACK UP SUPPORTS AS REQUIRED.
7	REFER TO THE NOTICE TO CONTRACTORS IN CONJUNCTION WITH THIS SCHEDULE.

NOTE: IN THE EVENT OF CONFLICT BETWEEN THIS SCHEDULE AND CONSTRUCTION DETAILS, THE CONSTRUCTION DETAILS PREVAIL.

RESPONSIBILITY SCHEDULE TO BE READ IN CONJUNCTION WITH THE "NOTICE TO CONTRACTOR" DOCUMENT.



4711 Yonge St.
Suite 800
Toronto, ON.
M2N 6K8
T.416.497.3662
info@glsmith.ca
www.glsmith.ca

**Wallfacer Architecture Inc.**

**4711 Yonge Street Suite 801
Toronto Ontario M2N 6K8
647 547 6060**

PROFESSIONAL STAMPS

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN AND CONSTRUCTION ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ELECTRICAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNATURED BY THE ARCHITECT
- CONTRACTOR CANNOT COMMIT ANY ON SITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

[illegible]

SUPPLIER LIST & RESPONSIBILITY SCHEDULES

PRINT DATE: _____

SCALE: AS NOTED

DRAWN BY:

DRAWING NO:

DB

BY:


PROJECT NO:

17037

G2.1

01 COORDINATION SITE PLAN

SCALE: 1/16" = 1'-0"

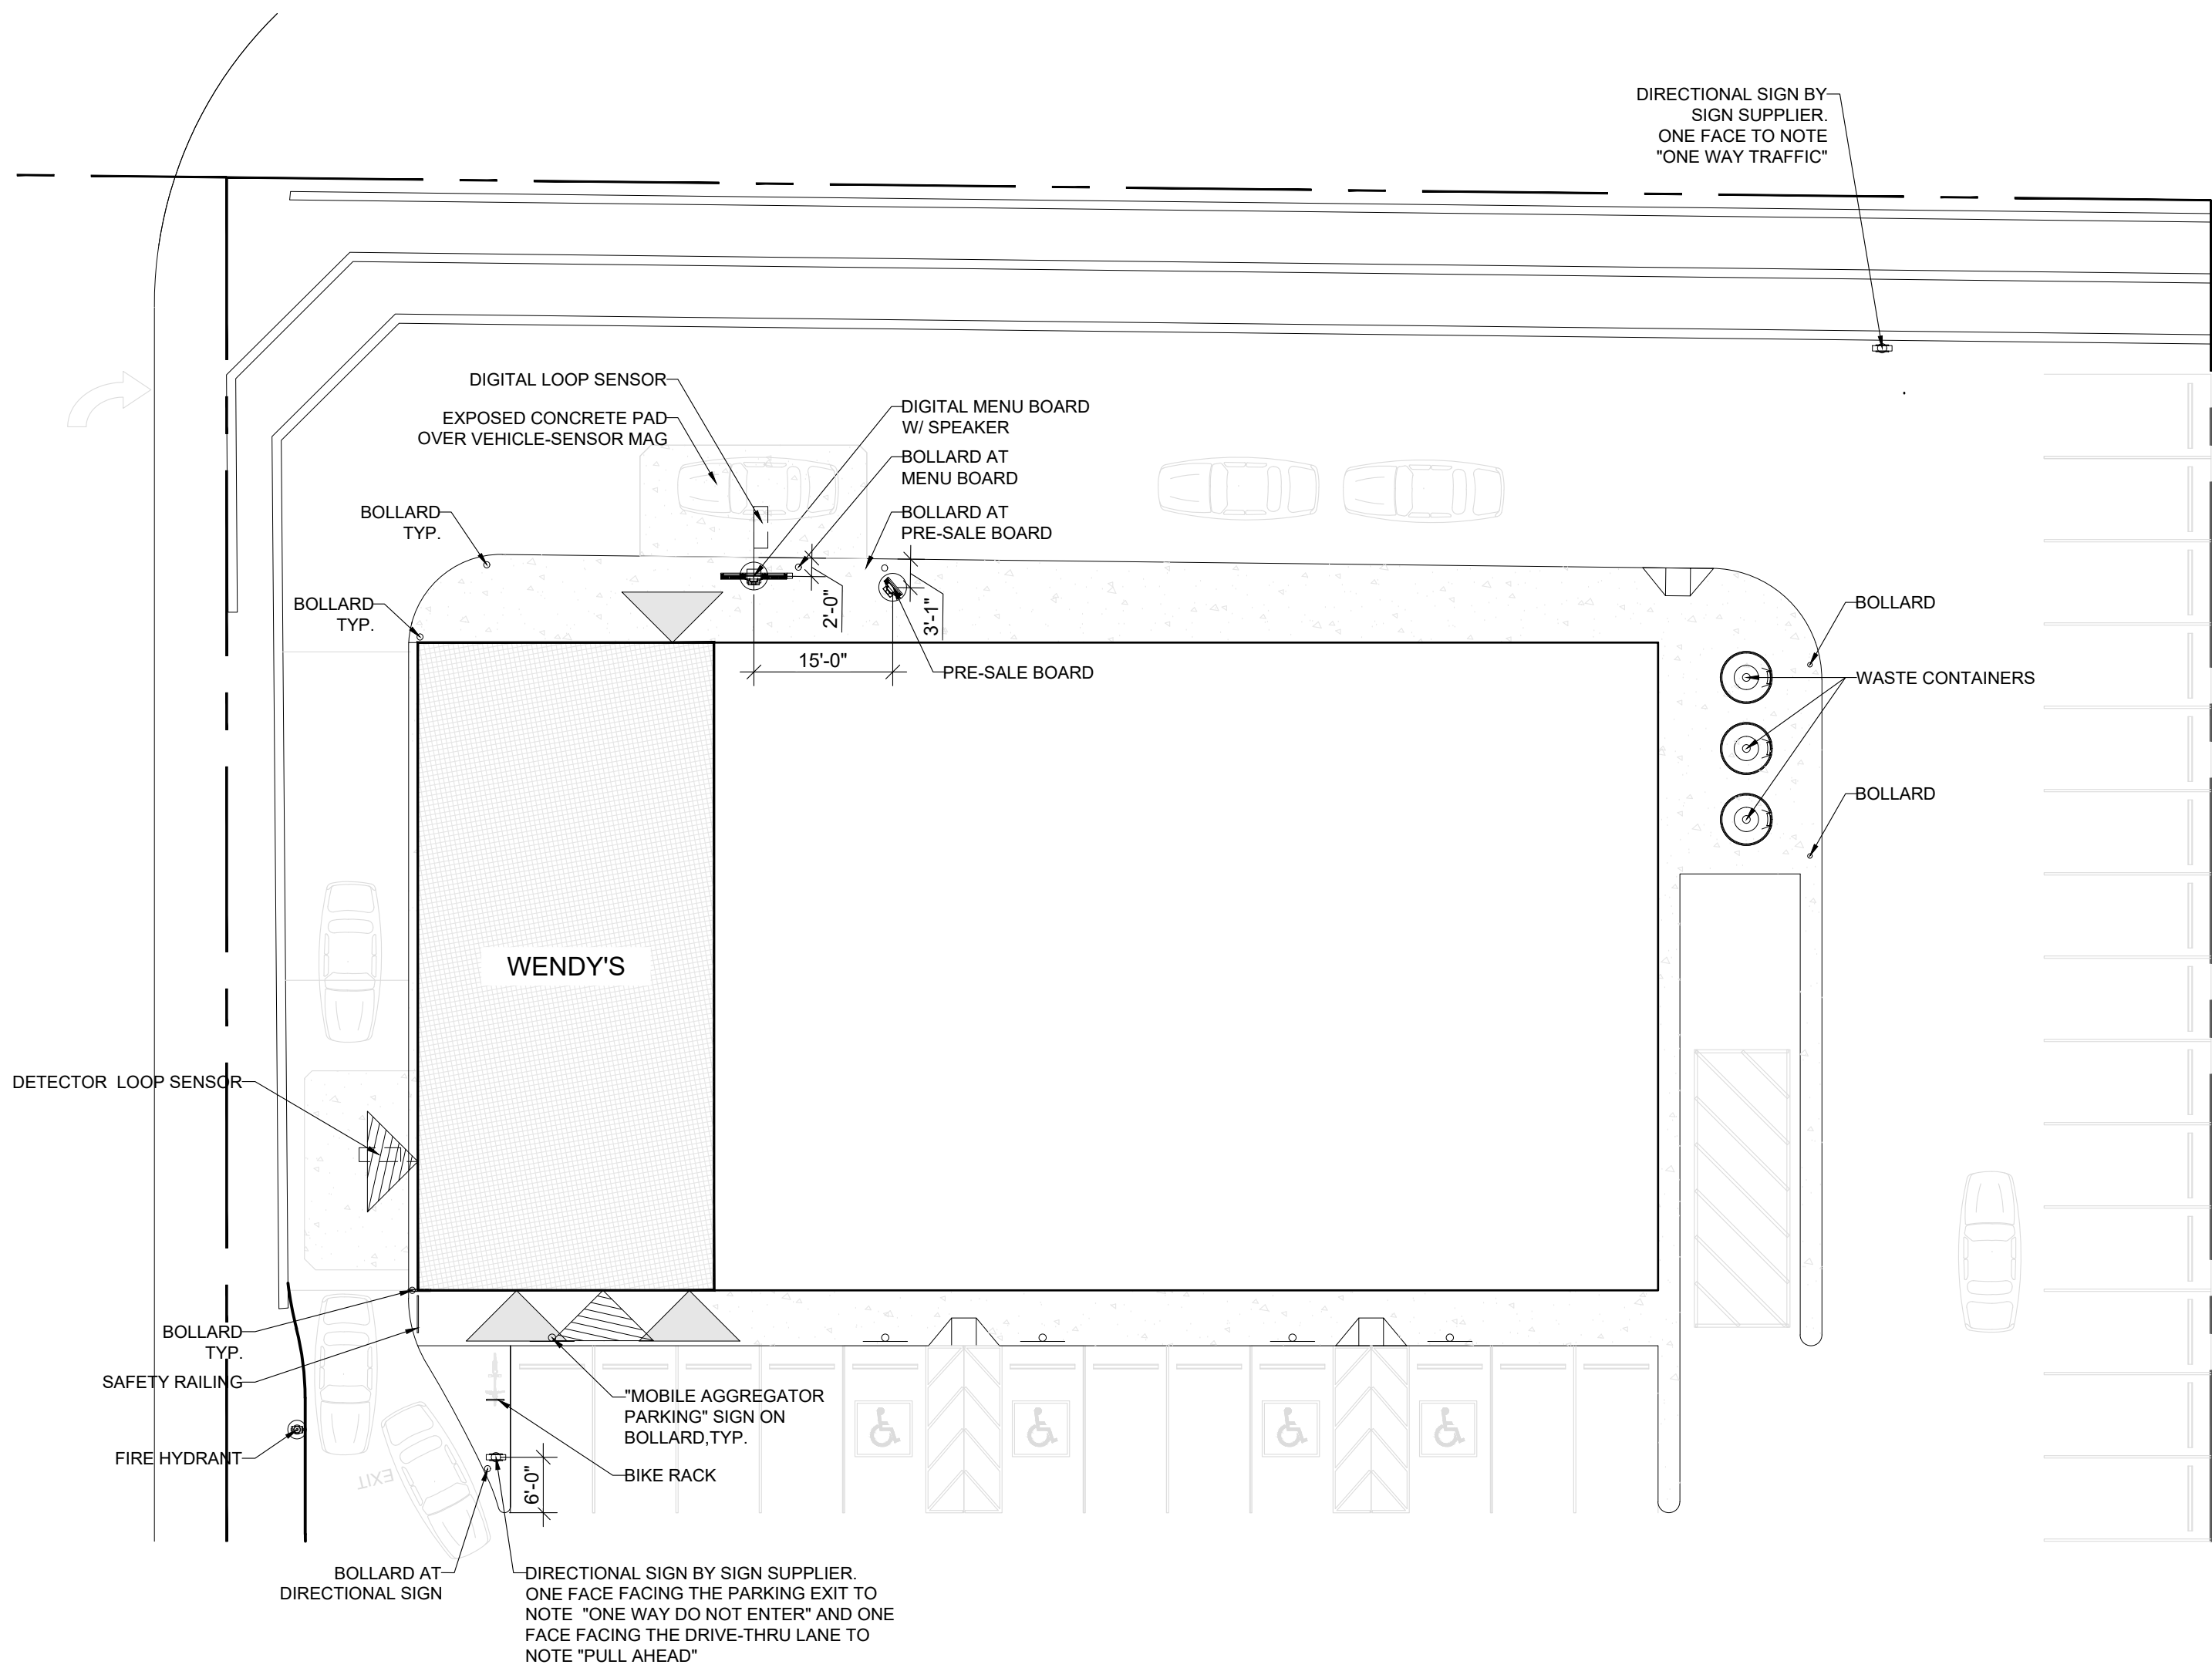

LEGEND			
	ENTRANCE/EXIT		BOLLARD
	DRIVE THRU / PICK UP WINDOW		POLE LIGHT
	BUILDING		PUBLIC UTILITY EASEMENT LINE
	EXISTING LANDSCAPING		PROPERTY LINE
	EXISTING CONCRETE PAVING		
	BARRIER FREE PARKING SPACE		

SITE RESPONSIBILITY SCHEDULE					
O : OWNER (TENANT)				09-04-2025	
S: SUPPLIER CONTRACTED THROUGH OWNER		GC : GENERAL CONTRACTOR (TENANT)		LL : LANDLORD	
ITEM	SUPPLIED	INSTALLED	FINAL UTILITY CONNECTION	COMMENTS	
SITE					
CONCRETE CURBS AND SIDEWALKS	LL	LL	N/A		
PAVING, INTERIOR TRAFFIC CONTROLS CURBS, AND PARKING CURBS	LL	LL	N/A		
LANDSCAPING	LL	LL	N/A		
PARKING LOT LINE STRIPING	LL	LL	N/A		
DRIVE-THRU CONCRETE PADS	LL	LL	N/A	LANDLORD TO PROVIDE AS SPECIFIED IN THE SIGNED LEASE AGREEMENT.	
PATIO FURNITURE (REQUIRED)	S	GC	N/A	LANDLORD TO PROVIDE THE RAILING OF THE PATIO	
RECYCLE BIN	S	GC	N/A		
SEMI-RECESSED WASTE CONTAINERS (EARTH BINS)	LL	LL	N/A	VERIFY WITH CM AND LEASE REQUIREMENTS. BY LANDLORD	
GARBAGE ENCLOSURES	LL	LL	N/A		
PARKING SIGNS (DELIVERY, MOBILE PICKUP, HANDICAP)	S	GC	N/A	POST BY LANDLORD, SIGNAGE BY G.C.	
BIKE RACK	LL	LL	N/A	LANDLORD TO PROVIDE AS APPROVED BY WENDY'S	
PEDESTRIAN SAFETY RAIL & PATIO FENCE	LL	LL	N/A	SAFETY RAIL REQUIRED - SEE PLANS, INCLUDE PATIO RAILS IF PATIO OPTION IS SELECTED.	
BOLLARD AND SLEEVE (BL-1)	LL	LL	N/A	PROVIDE ON ALL BOLLARDS	
PYLON SIGN	LL	LL	LL	FOUNDATION AND FINAL CONNECTION BY LANDLORD. G-6-TO SOURCE ANCHOR BOLT KIT FROM SUPPLIER.	
DIRECTIONAL SIGNS	S	S	GC	FOUNDATION AND CONDUITS BY LANDLORD. G-6-TO SOURCE ANCHOR BOLT KIT FROM SUPPLIER.	
EXTERIOR DIGITAL MENU BOARDS	S	S	GC	FOUNDATION AND CONDUITS BY LANDLORD. ANCHOR BOLT KIT TO BE INSTALLED BY IT TECH.	
EXTERIOR DIGITAL PRE-SELL BOARDS	S	S	GC	FOUNDATION AND CONDUITS BY LANDLORD. ANCHOR BOLT KIT TO BE INSTALLED BY IT TECH.	
EXTERIOR SPEAKER PEDESTAL W/ MENU BOARD	S	S	GC	FOUNDATION AND CONDUITS BY LANDLORD. ANCHOR BOLT KIT TO BE INSTALLED BY IT TECH.	
GRODGER POINT CANOPY AND CANOPY SUPPORT POLE	S	S	GC	FOUNDATION BY LANDLORD. INCLUDES LIGHTS & HEAT TRACE. SOURCE ACHOR BOLT KIT FROM SUPPLIER.	
CLEARANCE BAR (RED D WITH OPTIONAL PUW CANOPY)	S	S	GC	FOUNDATION BY LANDLORD. ANCHOR BOLTS BY SUPPLIER. OPTIONAL ITEM. CONFIRM WITH OWNER.	
PUW CANOPY (OPTIONAL BUT RECOMMENDED)	S	S	GC	INCLUDES LIGHTS & HEAT TRACE. BLOCKING BY GC. OPTIONAL ITEM. CONFIRM WITH OWNER.	
DETECTOR LOOP	S	LL	S	SUPPLIED BY OWNER'S IT INSTALLERS. INSTALLED BY LANDLORD.	
PICK UP WINDOW	LL	LL	GC	FROM APPROVED VENDOR.	
WALK-UP WINDOW	LL	LL	GC	FROM APPROVED VENDOR.	
SITE LIGHT FIXTURES AND LAMPS	LL	LL	LL		
RESPONSIBILITY SCHEDULE TO BE READ IN CONJUNCTION WITH THE "NOTICE TO CONTRACTOR" DOCUMENT. CONTRACTOR TO REFER TO RESPONSIBILITY SCHEDULE IN SHEET G2.1 FOR ADDITIONAL INFORMATION.					

GENERAL NOTES		CONCRETE SPECS
REFER TO CIVIL DRAWING FOR SPOT ELEVATIONS.		CONCRETE SLAB SPEC 1. CONCRETE SLAB TO BE A MINIMUM OF 8" THICK - VERIFY SLAB REQUIREMENTS WITH GEOTECHNICAL REPORT. 2. CONCRETE SEALER: 'SCOLFIELD' CEMENTONE CLEAR SEALER. APPLY PER MANUFACTURER'S RECOMMENDATIONS. 3. CONCRETE COLOR HARDENER: 'SCOLFIELD' LITHOCHROME, A33 'CLASSIC GREY' APPLY PER MANUFACTURERS RECOMMENDATIONS. NOTE: CONCRETE BASE/SLAB, ENCLOSURE, FENCE, GATE AND BOLLARDS BY G.C.
REFER TO CIVIL DRAWINGS FOR CONTOUR LINE.		
REFER TO SITE SERVICING DRAWINGS FOR SERVICES LOCATION.		



4711 Yonge St.
Suite 800
Toronto, ON.
M2N 6K8
T.416.497.3662
info@glsmith.ca
www.glsmith.ca



Wallfacer Architecture Inc.
4711 Yonge Street Suite 801
Toronto Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

- GENERAL NOTES:
- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
 - ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
 - I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
 - REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
 - DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
 - CONTRACTOR CANNOT COMMENCE ANY ONSITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

#	Date	Description	Dwn

DRAWING TITLE:

COORDINATION
SITE PLAN

PRINT DATE:	SCALE:
6/19/2026	AS NOTED
DRAWN BY:	DRAWING NO:
DB	
CHECKED BY:	
MO	
PROJECT NO:	
17037	

AS1.1

GENERAL NOTE:


CONFIRM ALL STRUCTURAL DETAILS WITH SIGN COMPANY (PRIDE SIGN) FOR THEIR ACTUAL STRUCTURAL AND SIGN DRAWINGS. THESE DRAWINGS ARE FOR REFERENCES.

ALL CONCRETE PIERS AND EMPTY CONDUITS TO BE PROVIDED BY LANDLORD. ANCHOR BOLTS TO BE PROCURED BY TENANT FOR LANDLORD INSTALLATION. ALL WIRING BY TENANT G.C. INSTALLATION OF MENU BOARD, PRE-SALE BOARD, AND SPEAKERS TO BE COMPLETED BY G.C. IN COORDINATION WITH THE SUPPLIER.

NOTE:


ALL DETAILS ON THIS PAGE ARE STANDARD AND ARE TO BE USED FOR REFERENCE ONLY. LANDLORD TO PROVIDE STRUCTURAL DETAILS AS REQUIRED FOR SITE SPECIFIC INSTALLATION AND FOR COORDINATION WITH SIGN SUPPLIER.

ALL CURBS, SIDEWALKS, AND RAMPS ARE TO BE PROVIDED BY LANDLORD IN ACCORDANCE TO LOCAL CODES AND REGULATIONS.

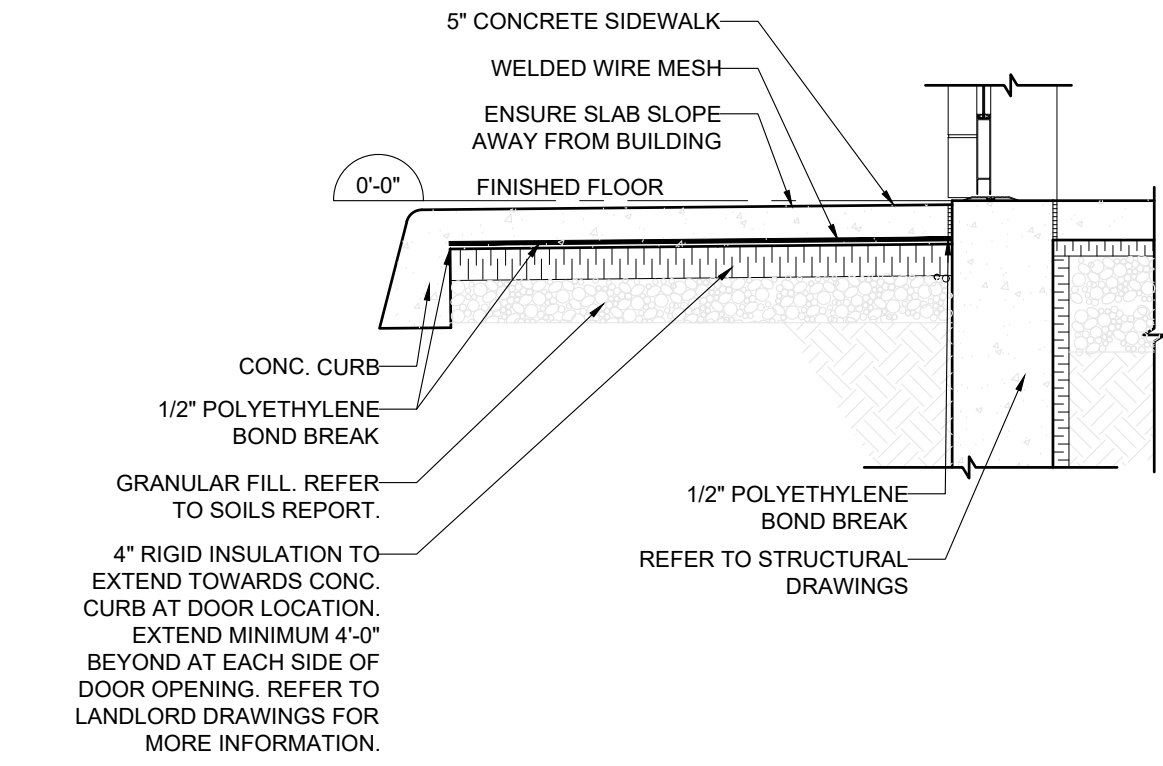


07 FROST SLAB DETAIL

SCALE: 1/2" = 1'-0"

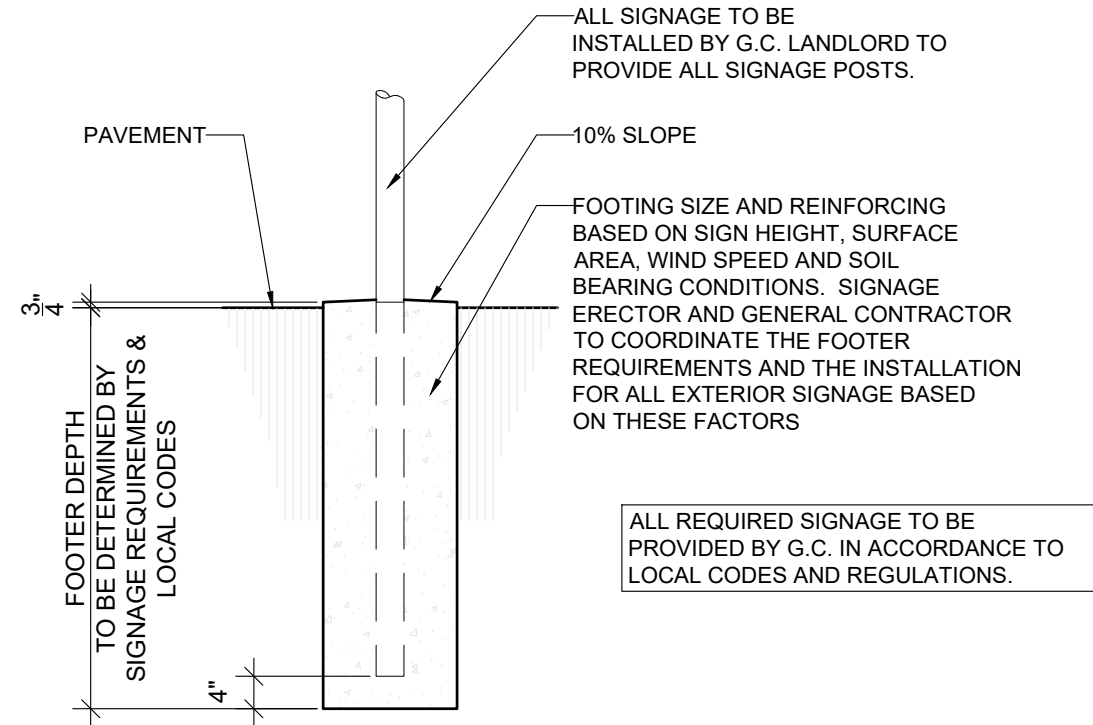


06 SIGN BASE DETAIL

SCALE: 1/2" = 1'-0"

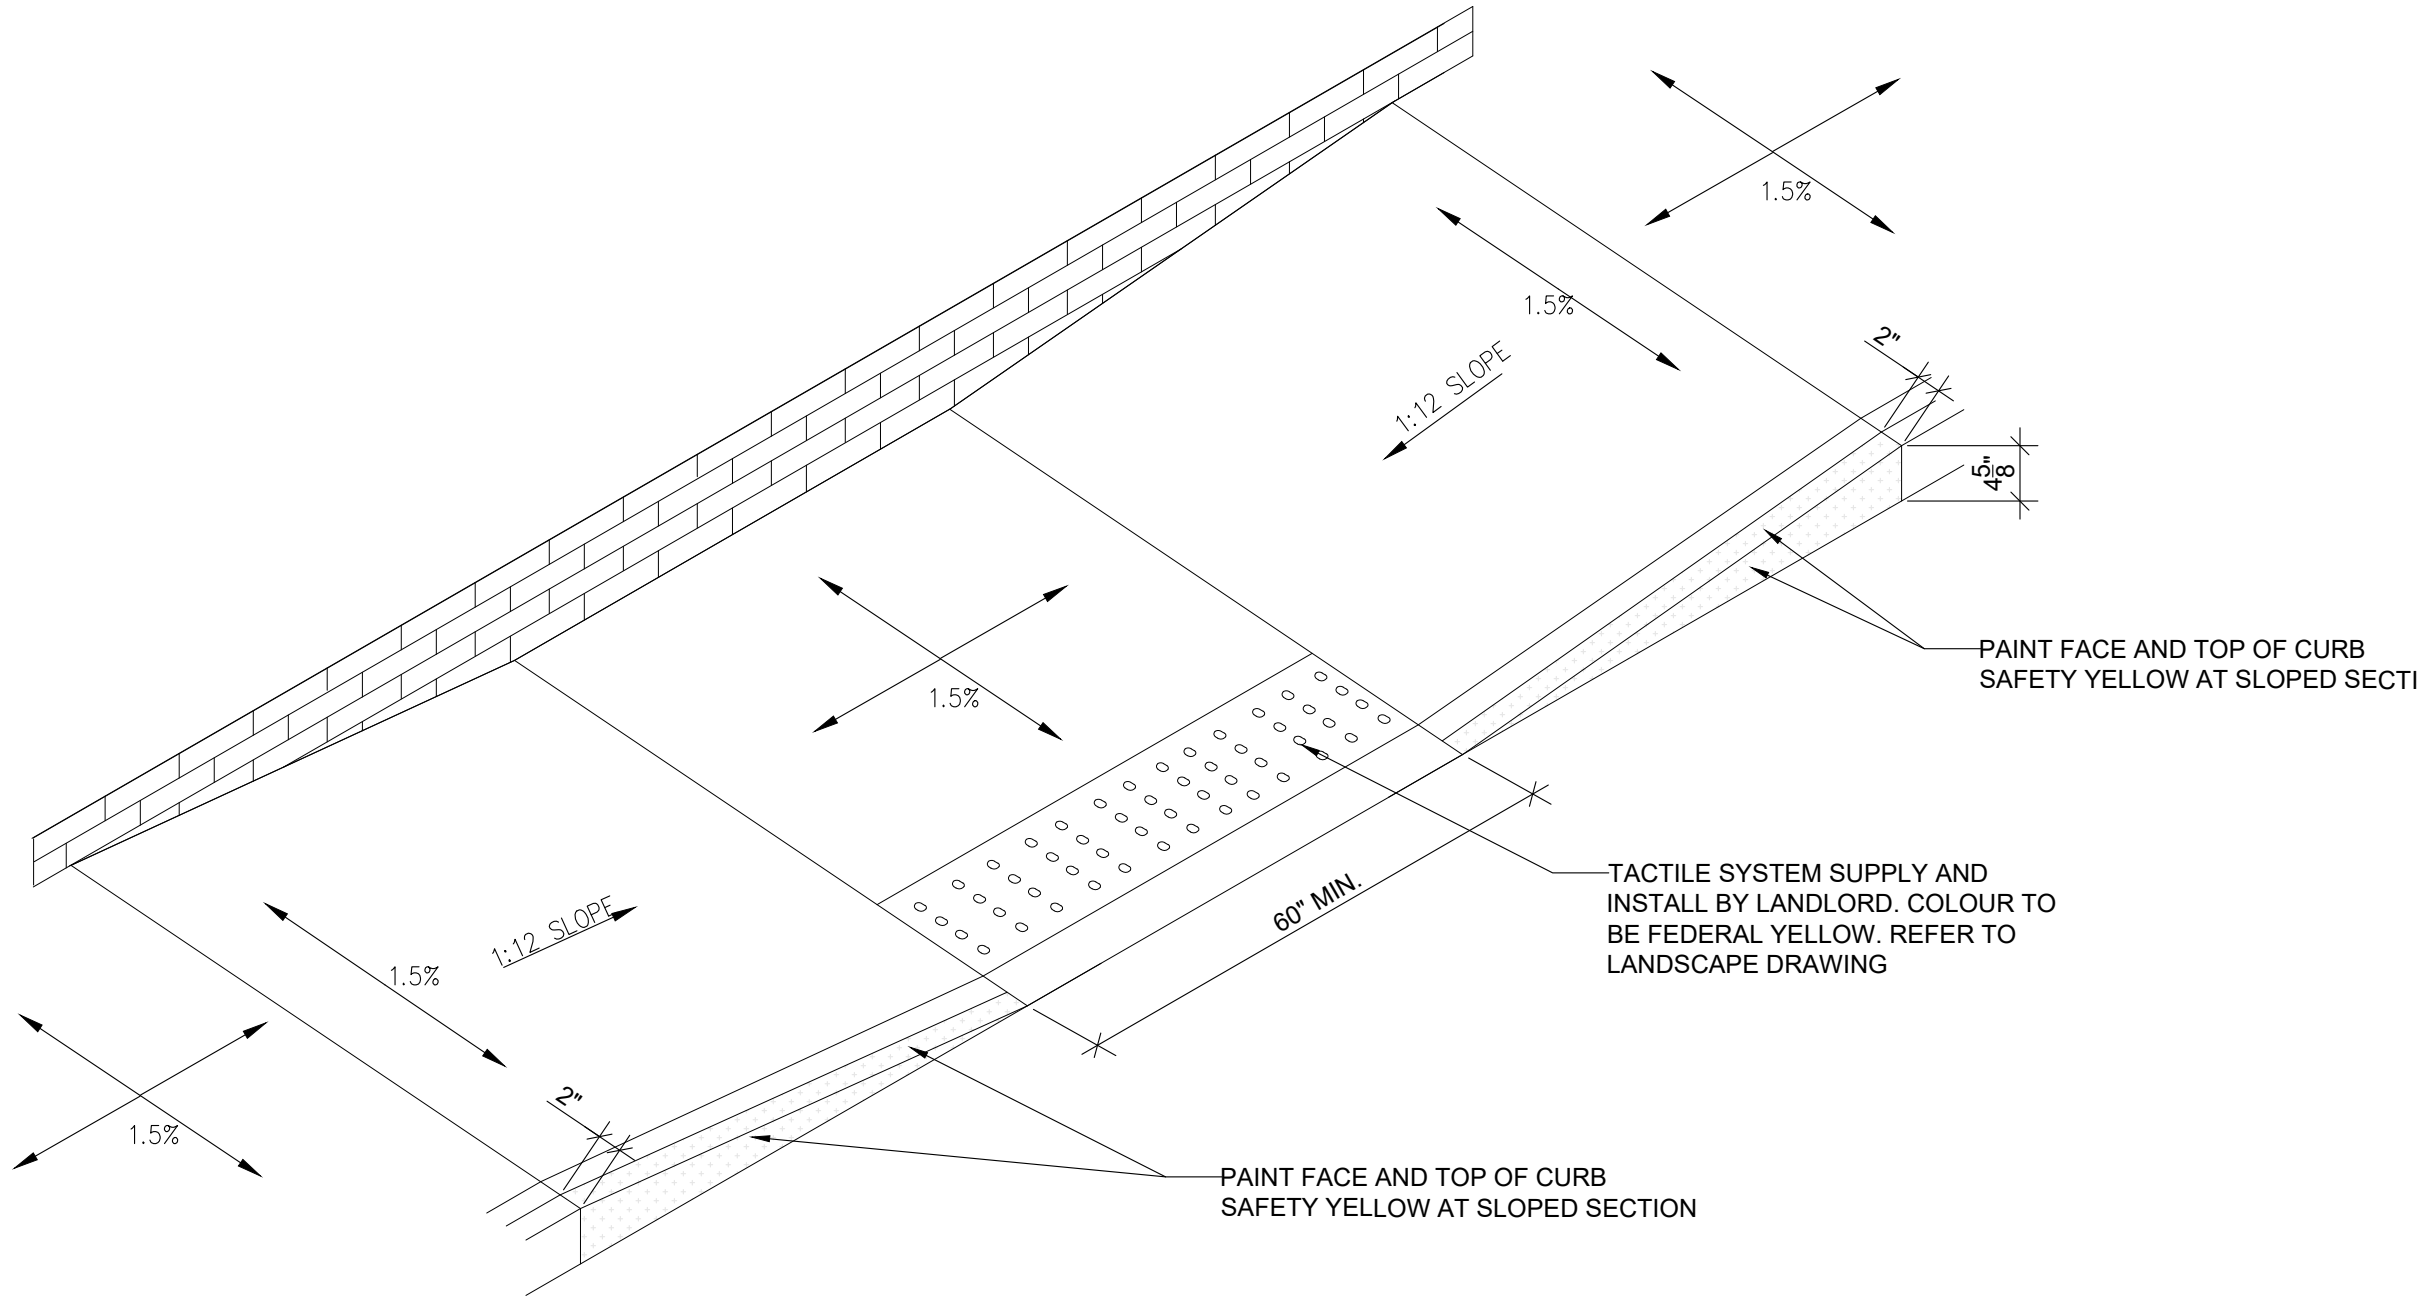


05 SIDEWALK RAMP DETAIL

SCALE: NTS

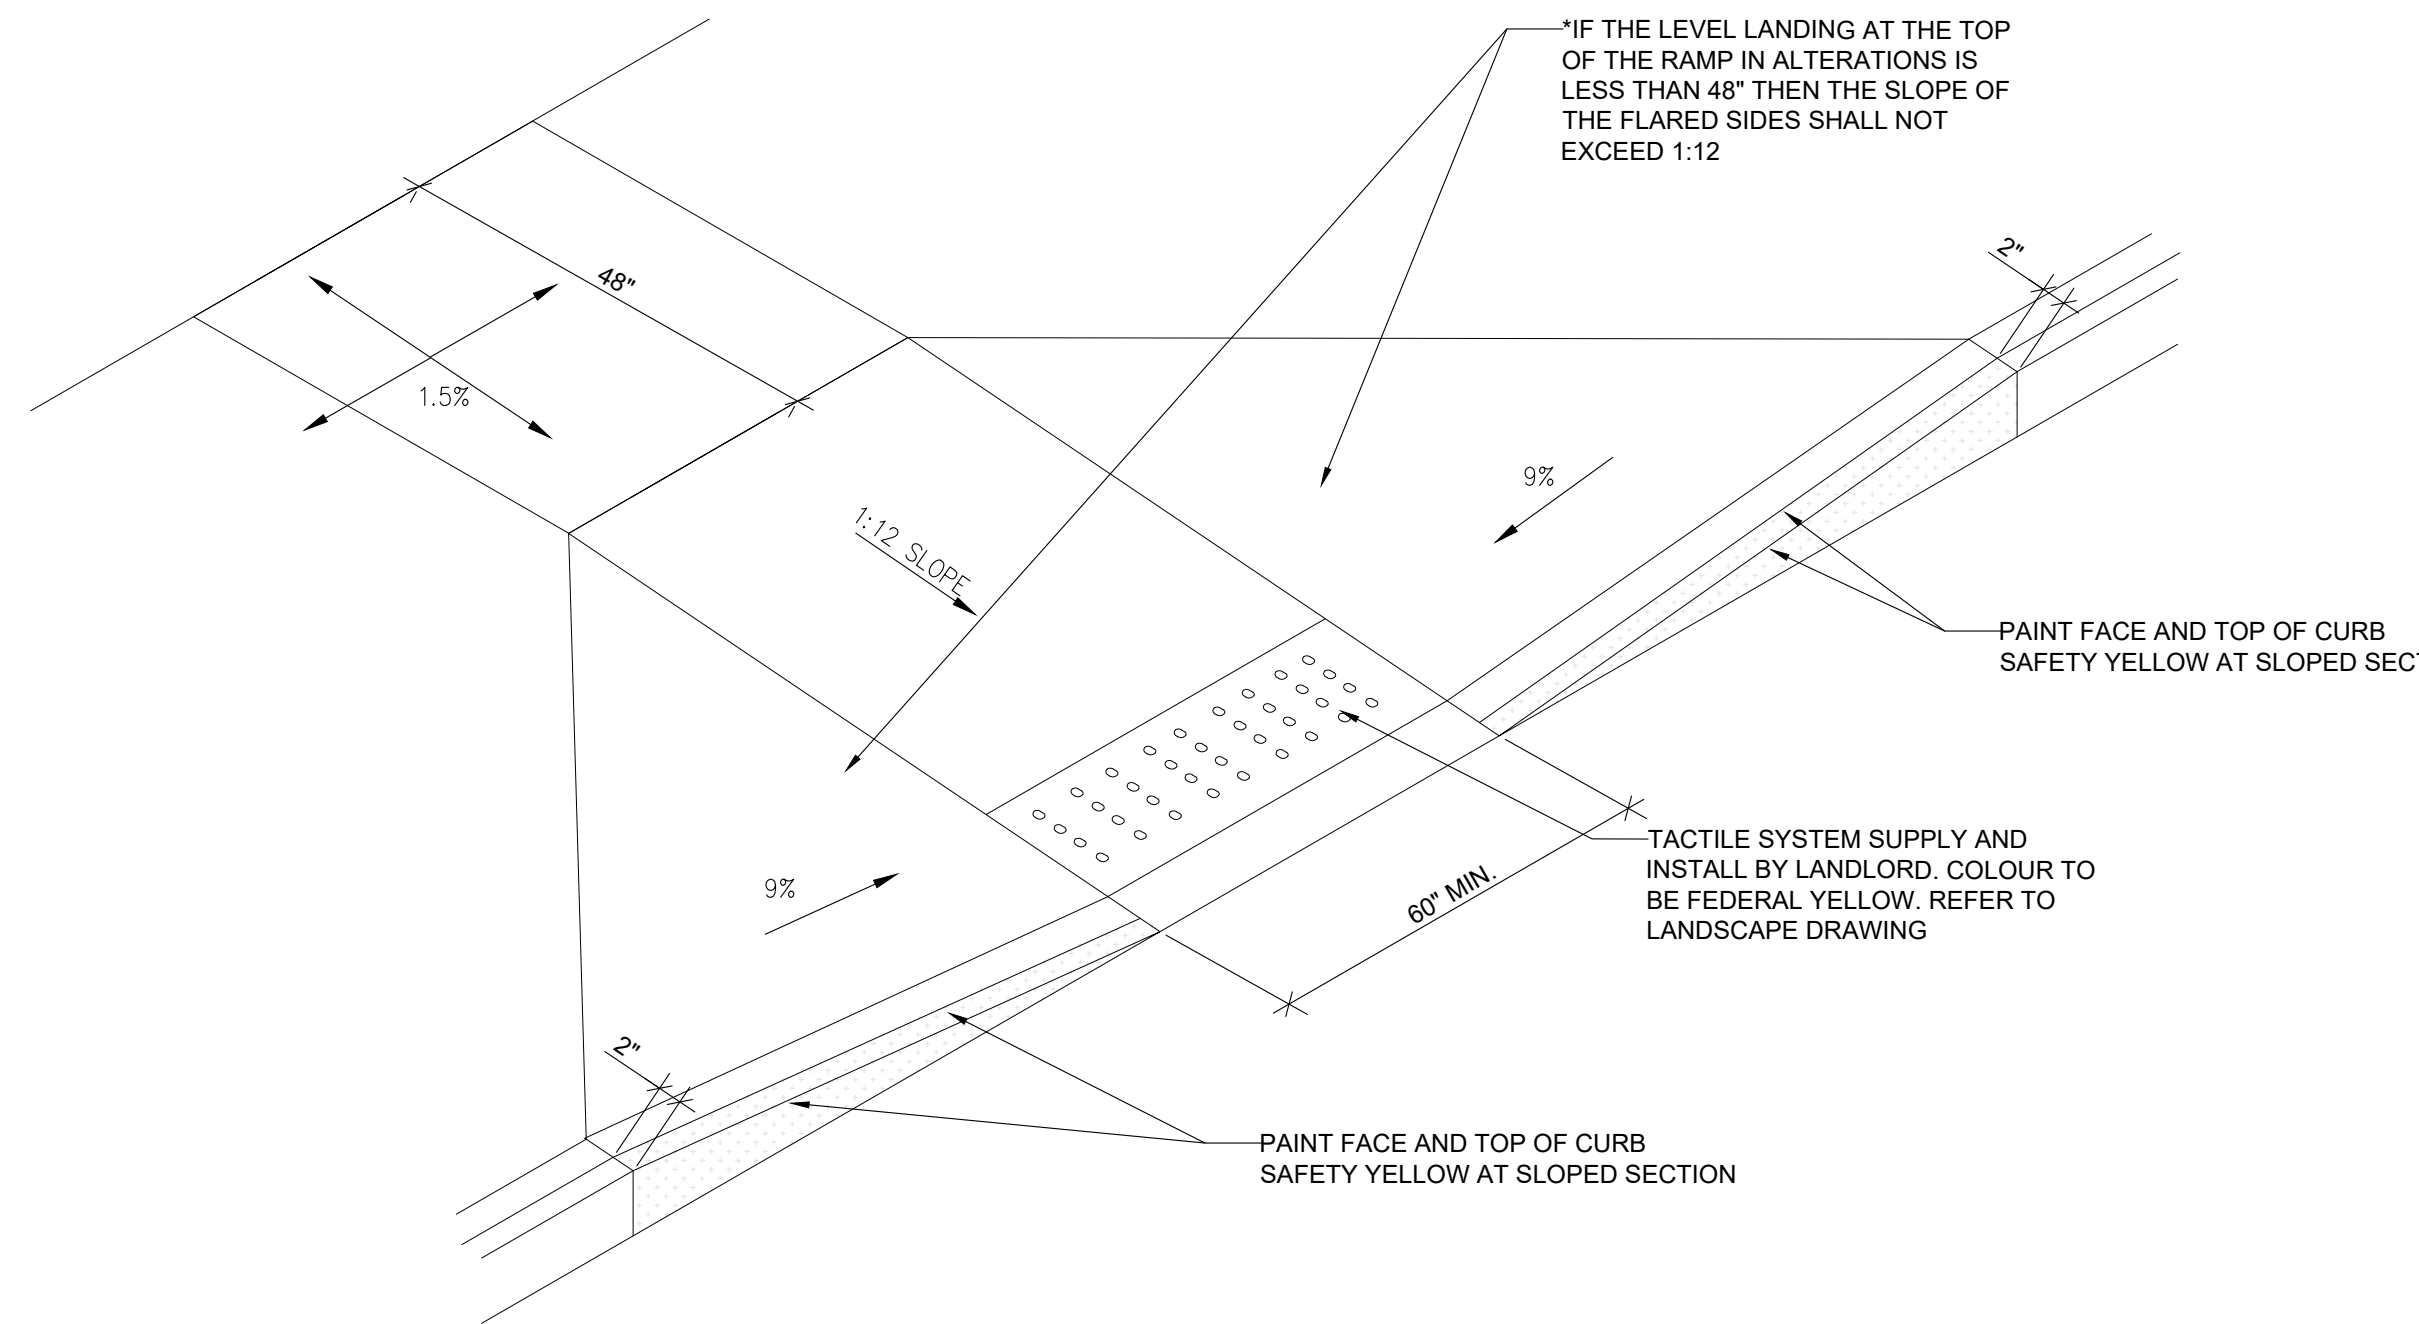


04 CURB RAMP DETAIL

SCALE: NTS

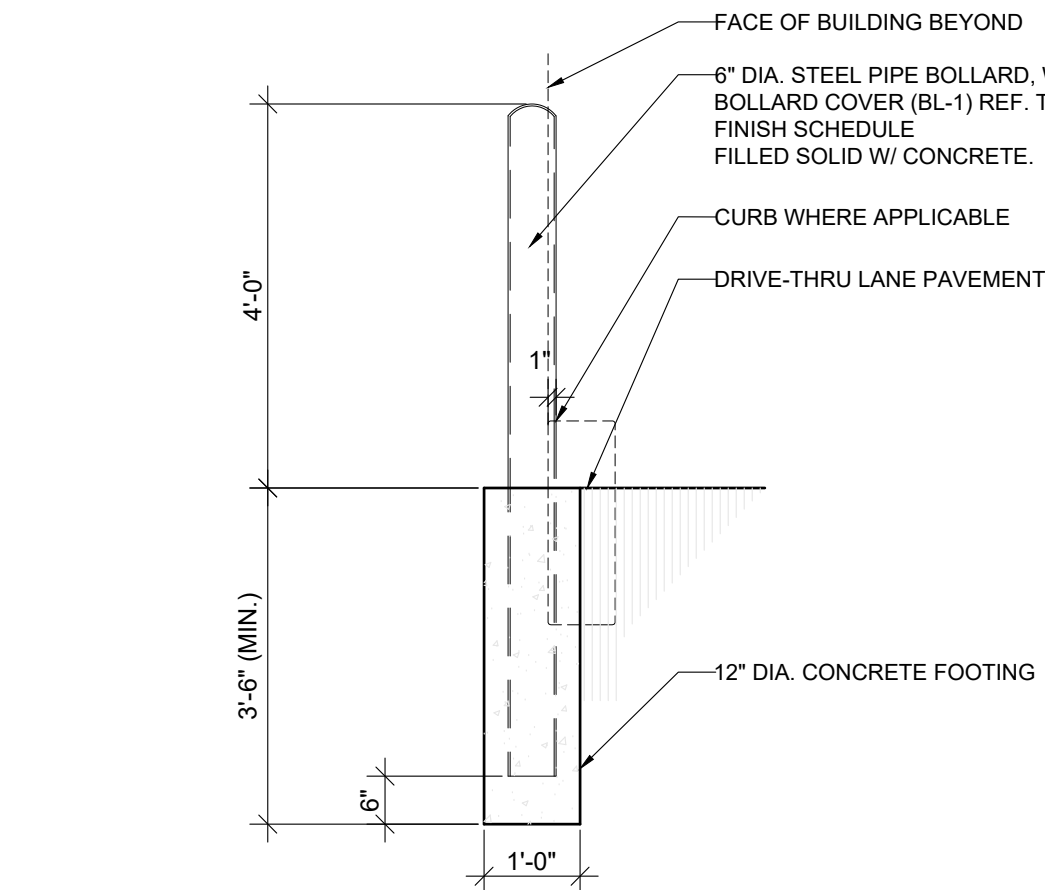

03 6" BOLLARD DETAIL

SCALE: 1/2" = 1'-0"

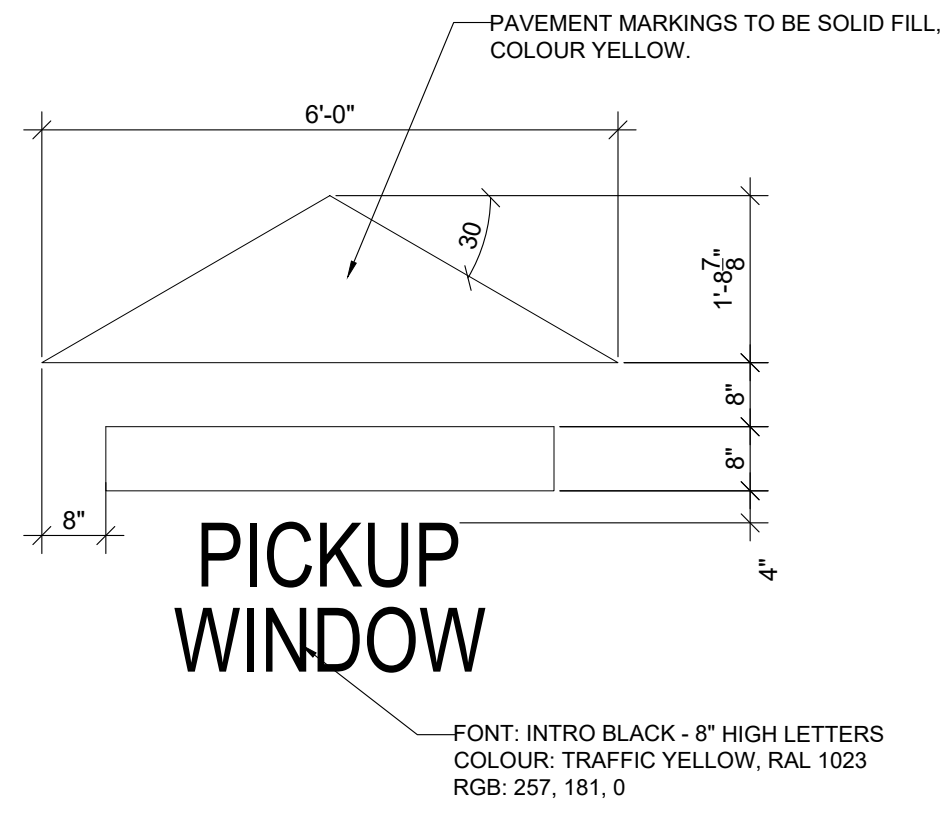


02 PAVEMENT MARKER DETAIL

SCALE: 1/2" = 1'-0"


NOTES:

1. PROVIDE EXPANSION JOINTS IN CONCRETE CURBS, AND RAMPS AT MIN. 3048mm O/C OR AS SPECIFIED ON SITE PLAN AND CIVIL DRAWINGS.
2. REINFORCING TO BE AS PER CIVIL DRAWINGS.
3. 6" MIN. THICK CONCRETE TO BE BROOM-FINISHED.

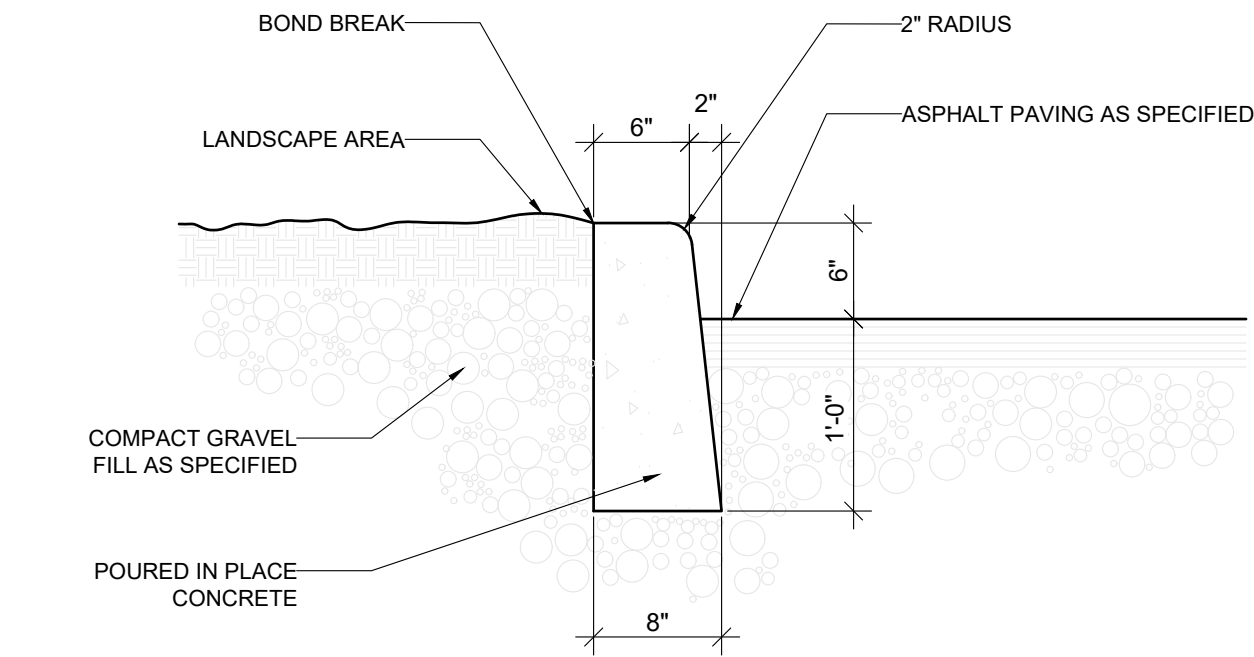

NOTES:

1. PROVIDE EXPANSION JOINTS IN CONCRETE CURBS, AND RAMPS AT MIN. 3048mm O/C OR AS SPECIFIED ON SITE PLAN AND CIVIL DRAWINGS.
2. REINFORCING TO BE AS PER CIVIL DRAWINGS.
3. 6" MIN. THICK CONCRETE TO BE BROOM-FINISHED.

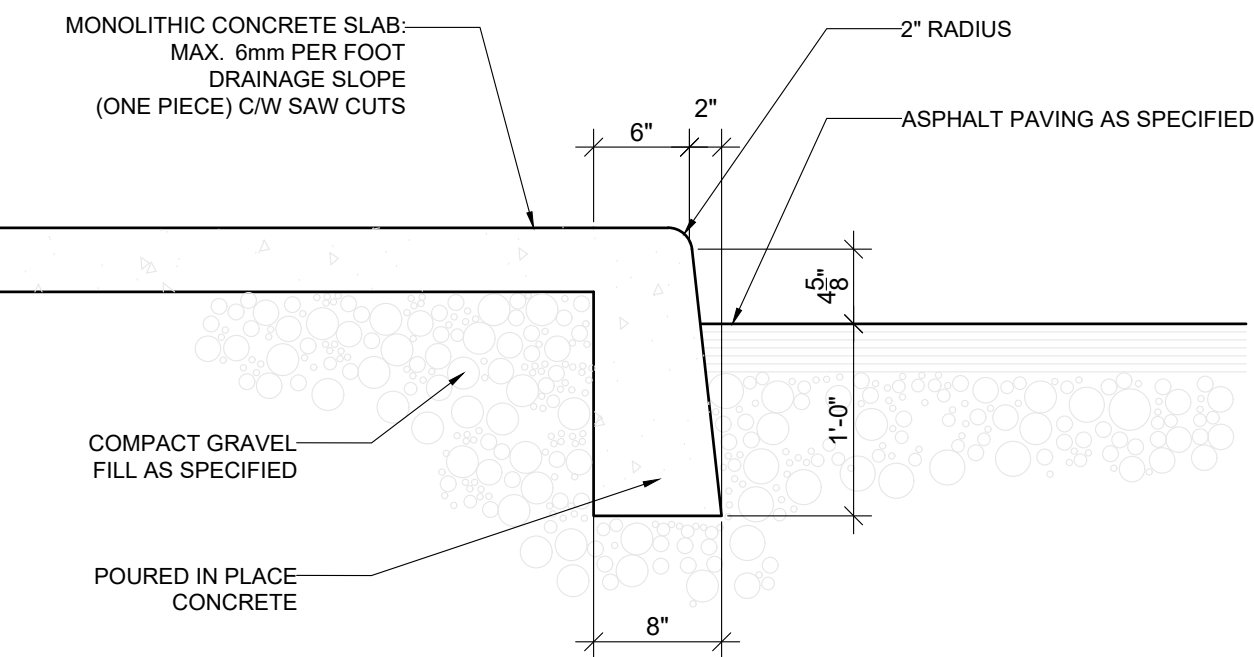

01 CONCRETE CURB DETAIL

SCALE: 1" = 1'-0"



4711 Yonge St.
Suite 800
Toronto, ON.
M2N 6K8
T.416.497.3662
info@glsmith.ca
www.glsmith.ca

G.L. SMITH



Wallfacer Architecture Inc.

4711 Yonge Street Suite 801
Toronto Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ONSITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

Date Description Dwn

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

GENERAL NOTE:

CONFIRM ALL STRUCTURAL DETAILS WITH SIGN COMPANY (PRIDE SIGN) FOR THEIR ACTUAL STRUCTURAL AND SIGN DRAWINGS. THESE DRAWINGS ARE FOR REFERENCES.

ALL CONCRETE PIERS AND EMPTY CONDUITS TO BE PROVIDED BY LANDLORD. ANCHOR BOLTS TO BE PROCURED BY TENANT FOR LANDLORD INSTALLATION. ALL WIRING BY TENANT G.C. INSTALLATION OF MENU BOARD, PRE-SALE BOARD, AND SPEAKERS TO BE COMPLETED BY G.C. IN COORDINATION WITH THE SUPPLIER.

NOTE:

ALL DETAILS ON THIS PAGE ARE STANDARD AND ARE TO BE USED FOR REFERENCE ONLY. LANDLORD TO PROVIDE STRUCTURAL DETAILS AS REQUIRED FOR SITE SPECIFIC INSTALLATION AND FOR COORDINATION WITH SIGN SUPPLIER.

ALL CURBS, SIDEWALKS, AND RAMPS ARE TO BE PROVIDED BY LANDLORD IN ACCORDANCE TO LOCAL CODES AND REGULATIONS.

01 N/A

SCALE:


CONCRETE SLAB SPEC

1. CONCRETE SLAB TO BE A MINIMUM OF 5" THICK - VERIFY SLAB REQUIREMENTS WITH GEOTECHNICAL REPORT.
2. CONCRETE SEALER: 'SCOFIELD' CEMENTONE CLEAR SEALER. APPLY PER MANUFACTURER'S RECOMMENDATIONS.
3. CONCRETE COLOR HARDENER: 'SCOFIELD' LITHOCHROME, A33 'CLASSIC GREY' APPLY PER MANUFACTURER'S RECOMMENDATIONS.

DETECTOR LOOP NOTES:

1. LOOP SHOULD BEGIN 12' TO 18' OUT FROM CURB.
2. INSTALL LOOP TO BE 2" BELOW TOP OF PAVEMENT
3. THE FORWARD EDGE OF THE LOOP SHOULD BE LINED UP WITH CENTERLINE OF THE D/T WINDOW OR SPEAKER PEDESTAL
4. A 3' AREA FROM THE LOOP MUST BE KEPT CLEAR OF METAL, INCLUDING REBAR, REINFORCING MESH, OTHER ELECTRICAL CABLES OR CONDUIT.
5. SEE DETECTOR LOOP MANUFACTURER'S INSTALLATION INSTRUCTION FOR ADDITIONAL INFORMATION


NOTE: SEE G2.1 RESPONSIBILITY SCHEDULE FOR ADDITIONAL INFORMATION

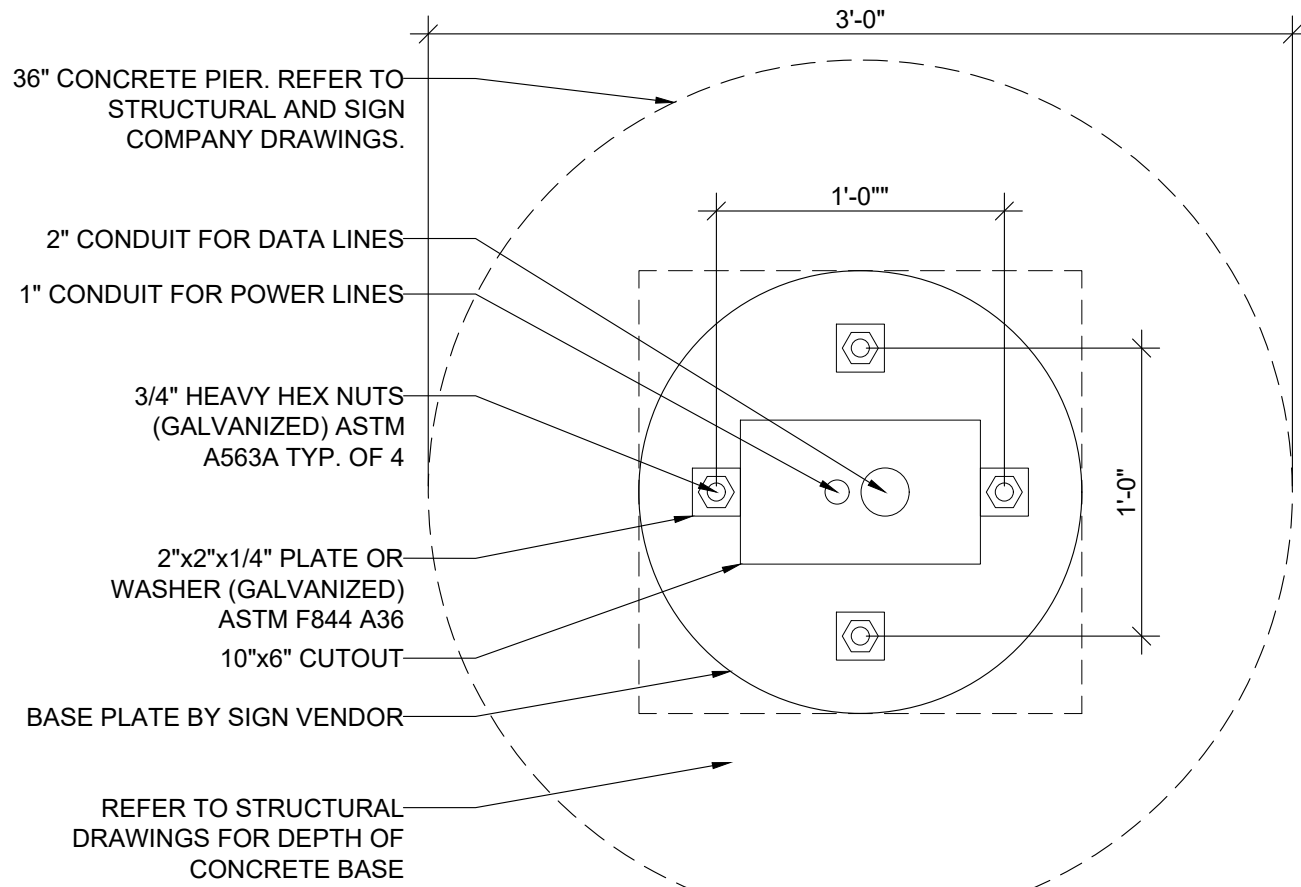

NOTE: BOLT PATTERN FOR EQUIPMENT BASE PLATES SHALL VARY BETWEEN VENDORS. COORDINATE WITH VENDOR FOR INSTALLATION. REFER TO MENU BOARD SHOP DRAWINGS FOR FINAL BASE PLATE AND ANCHOR BOLT REQUIREMENTS.


08 PLAN VIEW DIGITAL MENU BOARD

SCALE: 1 1/2" = 1'-0"

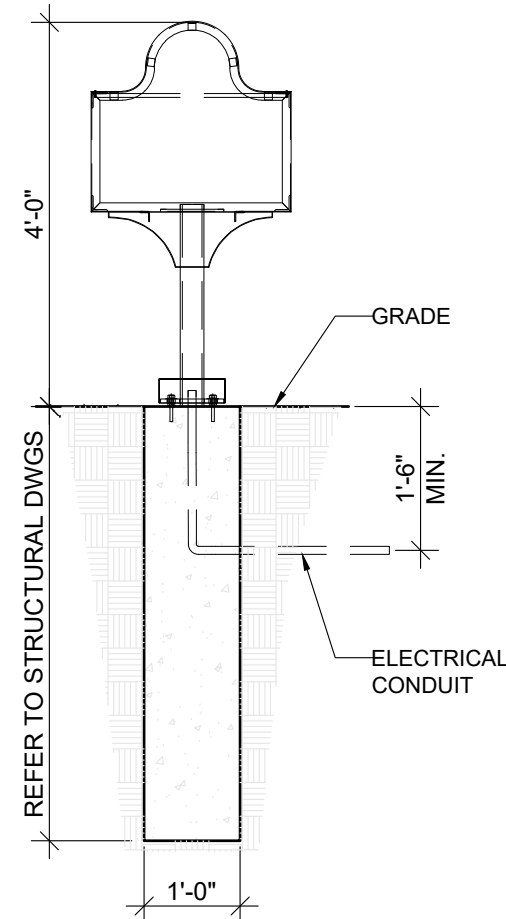


09 DIRECTIONAL SIGNAGE DETAIL (TYP.)

SCALE: 1/2" = 1'-0"

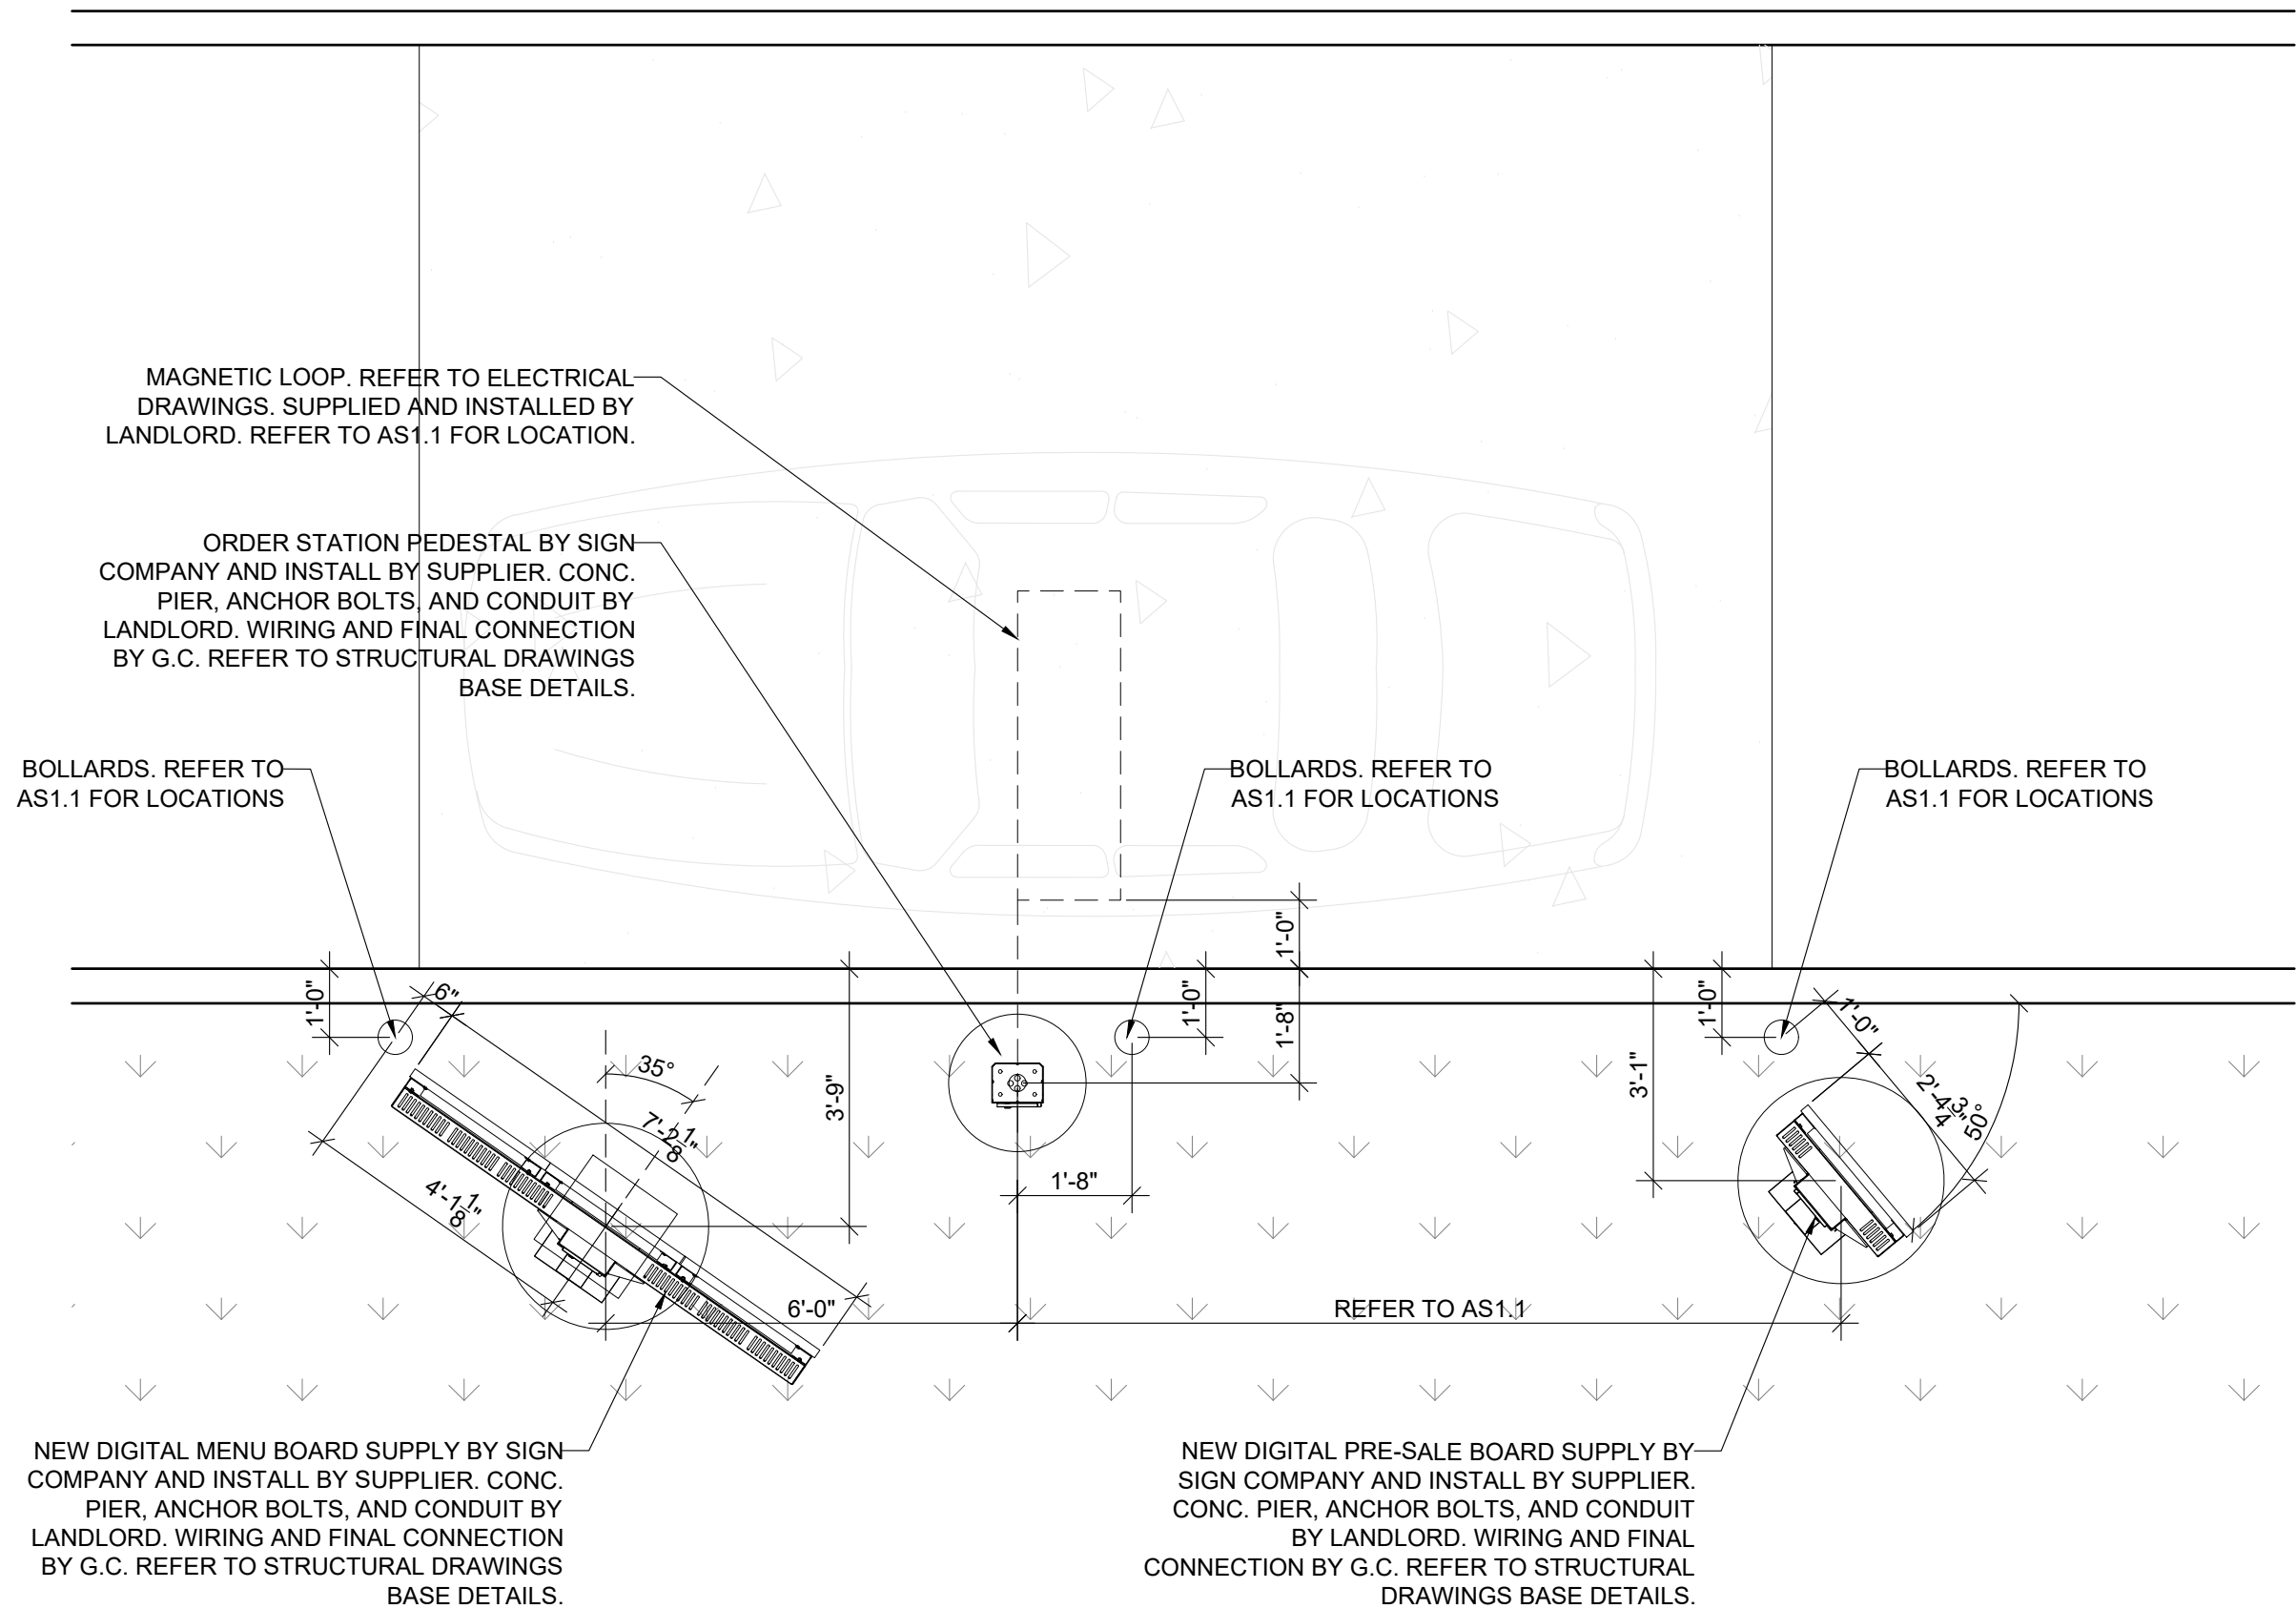

09 PARTIAL PLAN VIEW


SCALE: 3/8" = 1'-0"

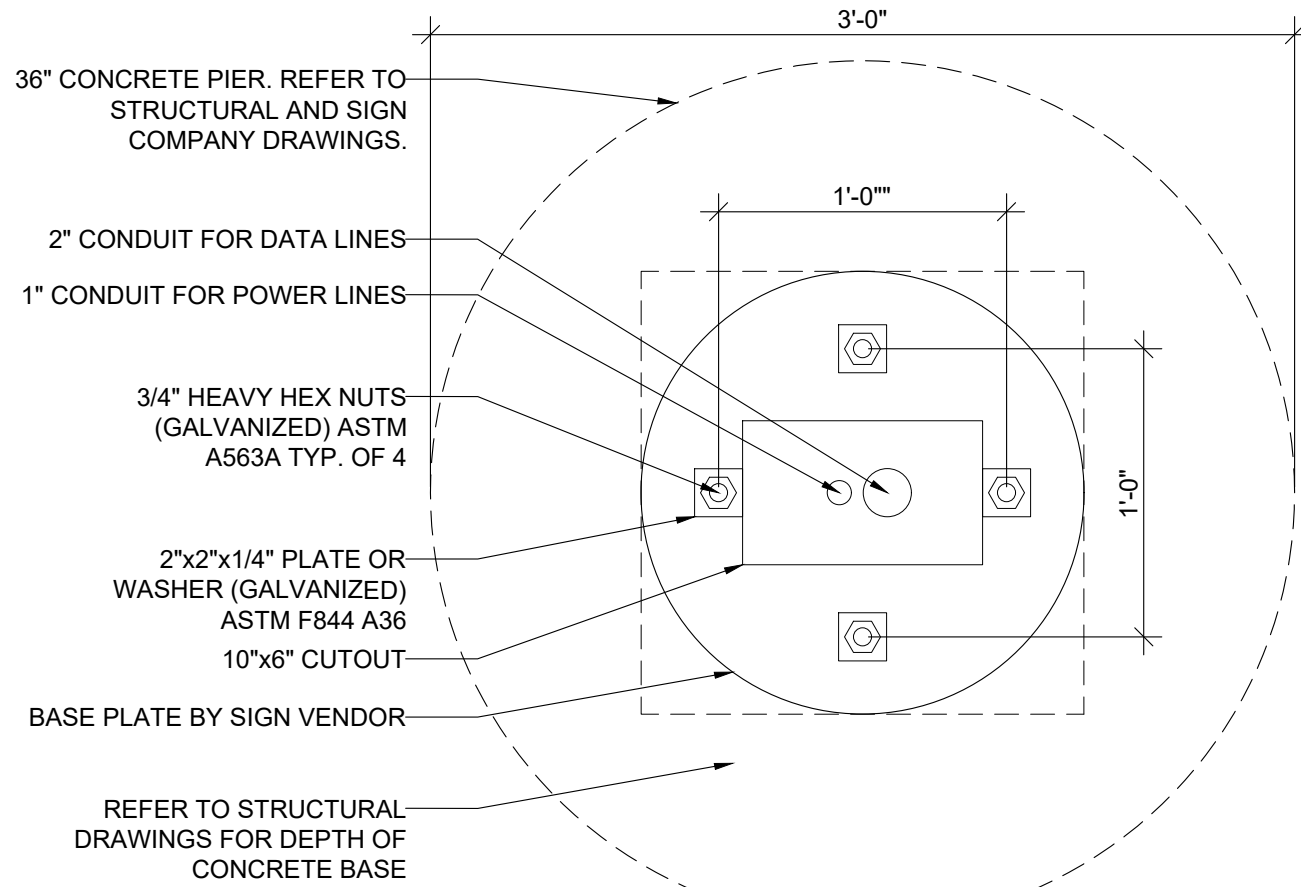

NOTE: BOLT PATTERN FOR EQUIPMENT BASE PLATES SHALL VARY BETWEEN VENDORS. COORDINATE WITH VENDOR FOR INSTALLATION. REFER TO PRE-SALE BOARD SHOP DRAWINGS FOR FINAL BASE PLATE AND ANCHOR BOLT REQUIREMENTS.


07 PLAN VIEW PRE-SALE BOARD

SCALE: 1 1/2" = 1'-0"

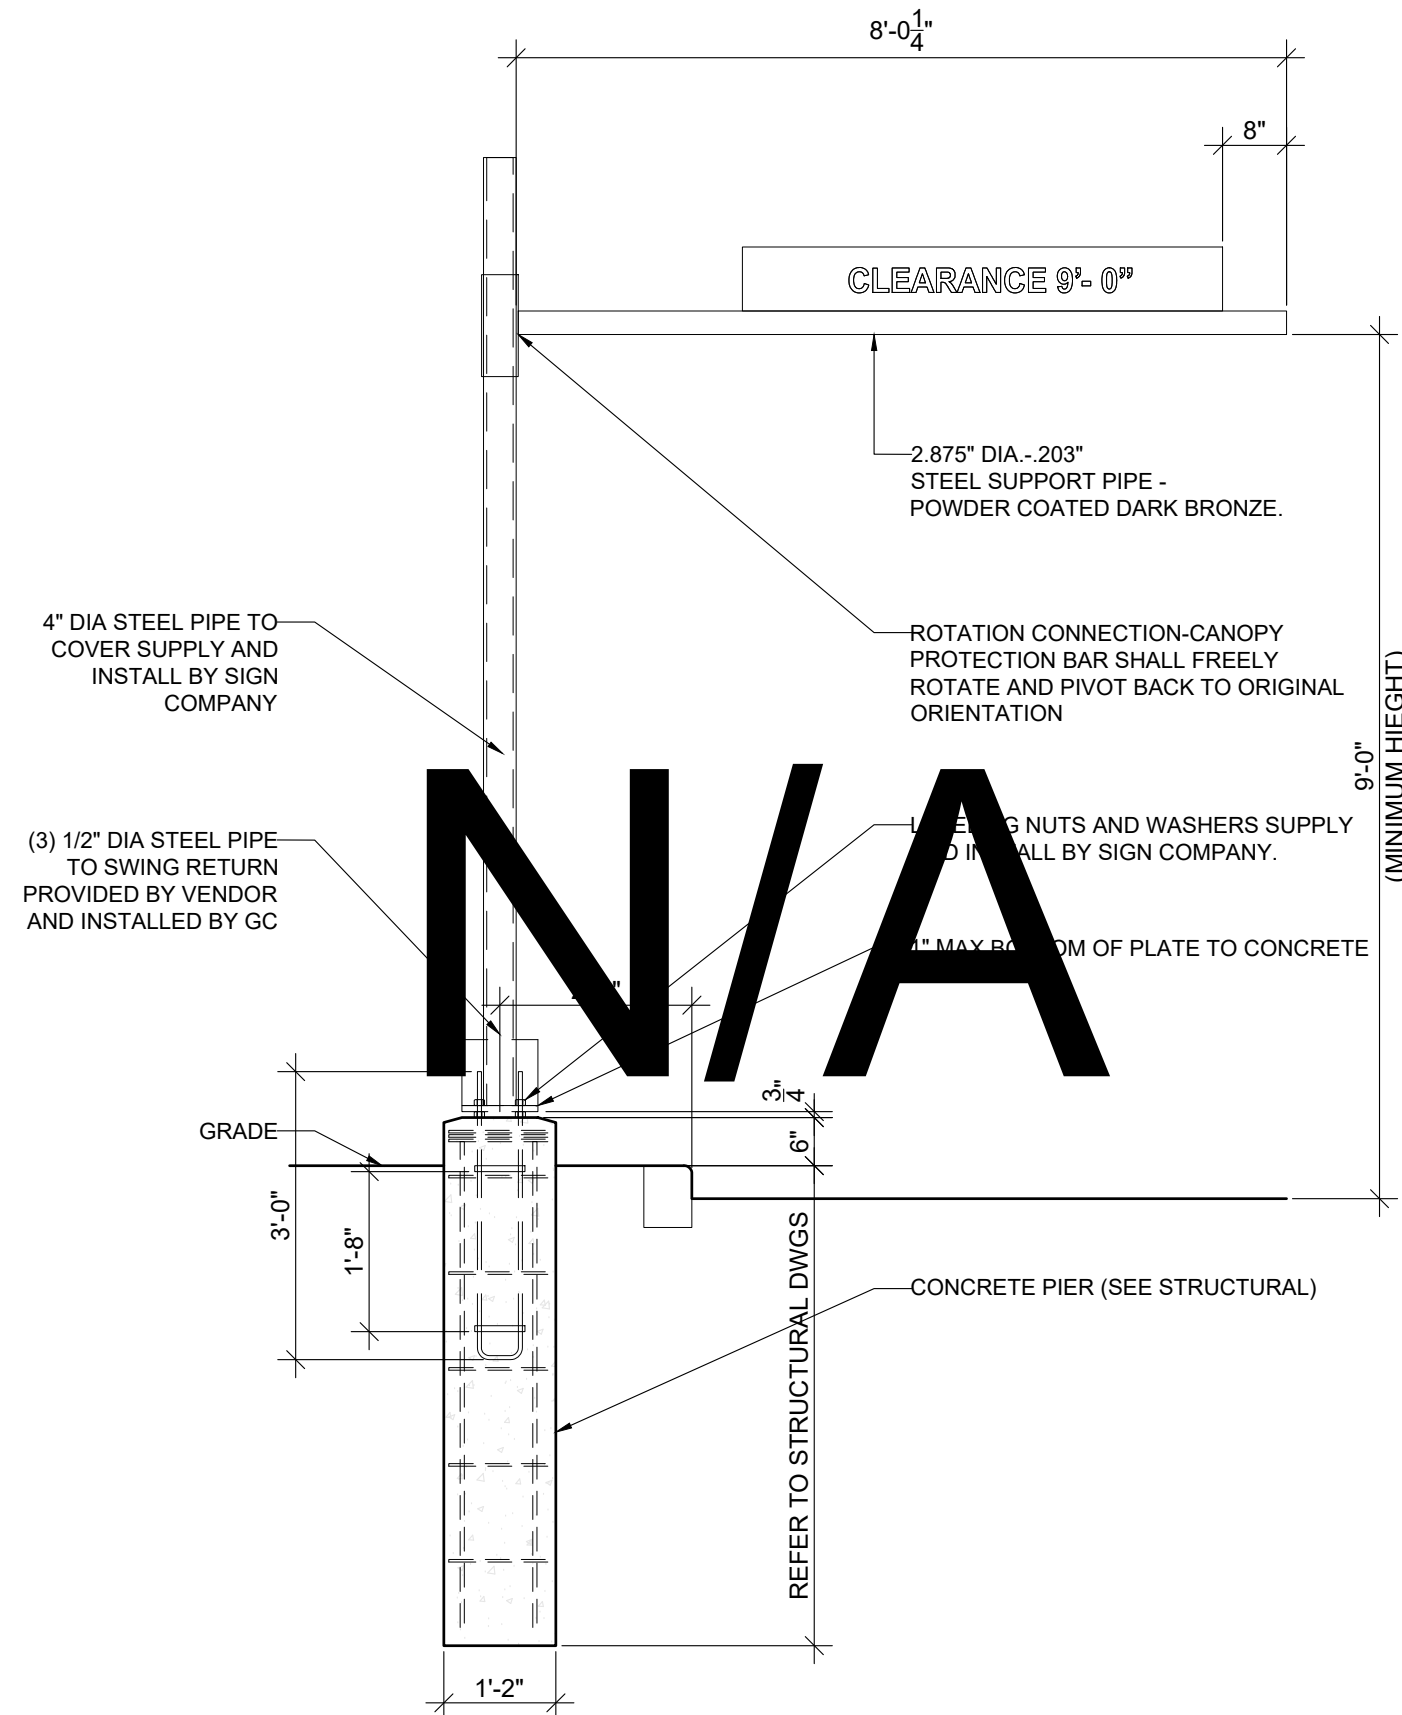


06 HEIGHT RESTRICTION BAR

SCALE: 1/2" = 1'-0"

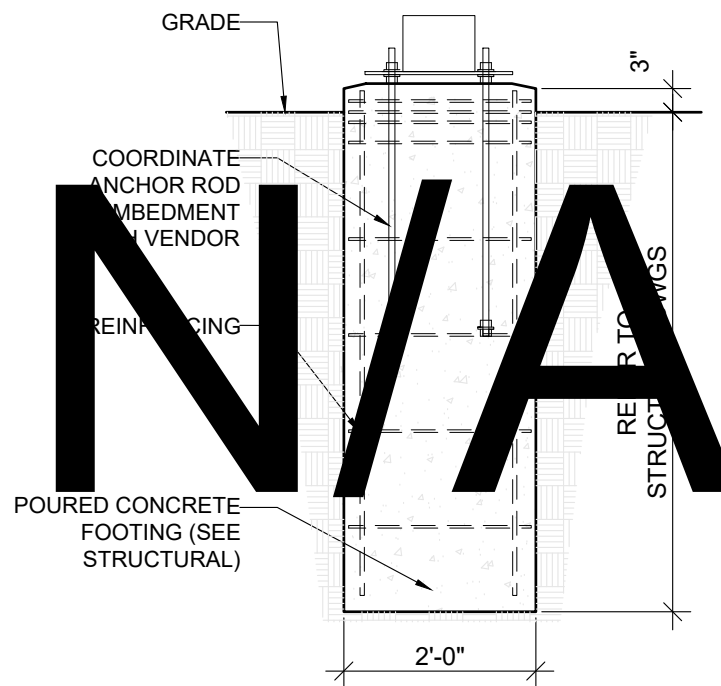

05 SPEAKER POST FOOTING


SCALE: 1/2" = 1'-0"

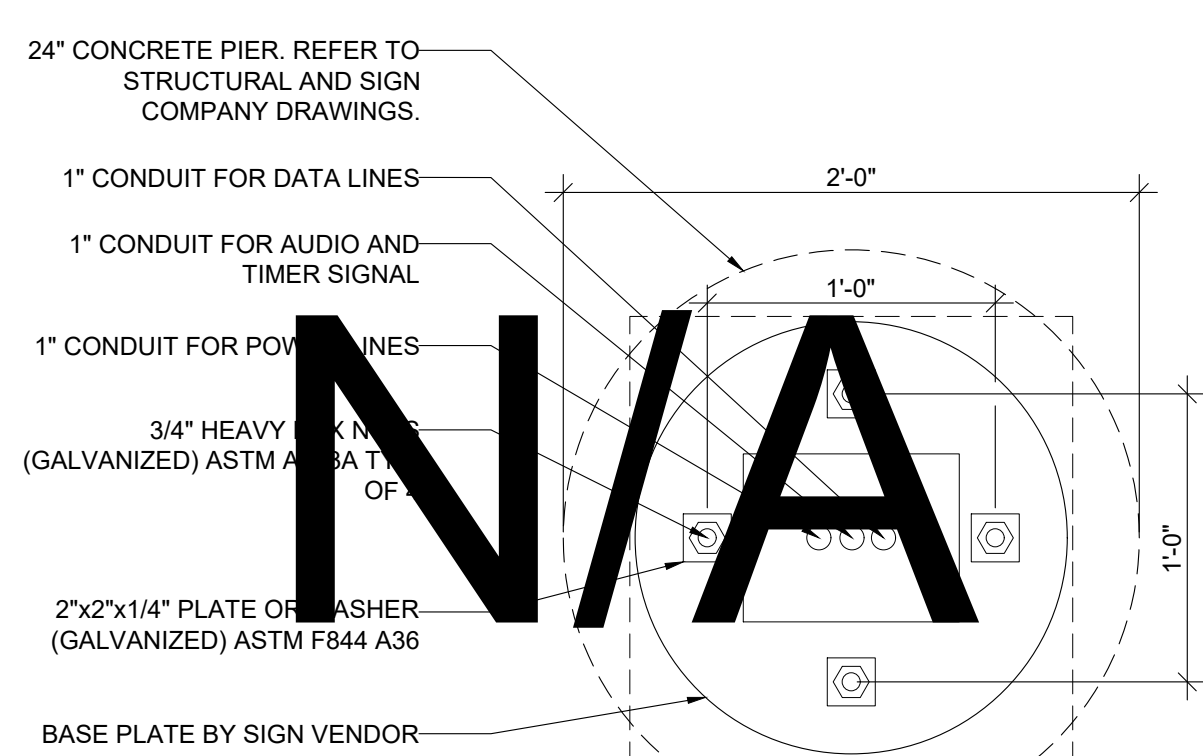

NOTE: BOLT PATTERN FOR EQUIPMENT BASE PLATES SHALL VARY BETWEEN VENDORS. COORDINATE WITH VENDOR FOR INSTALLATION. REFER TO SPEAKER POST SHOP DRAWINGS FOR FINAL BASE PLATE AND ANCHOR BOLT REQUIREMENTS.


04 PLAN VIEW SPEAKER POST

SCALE: 1 1/2" = 1'-0"

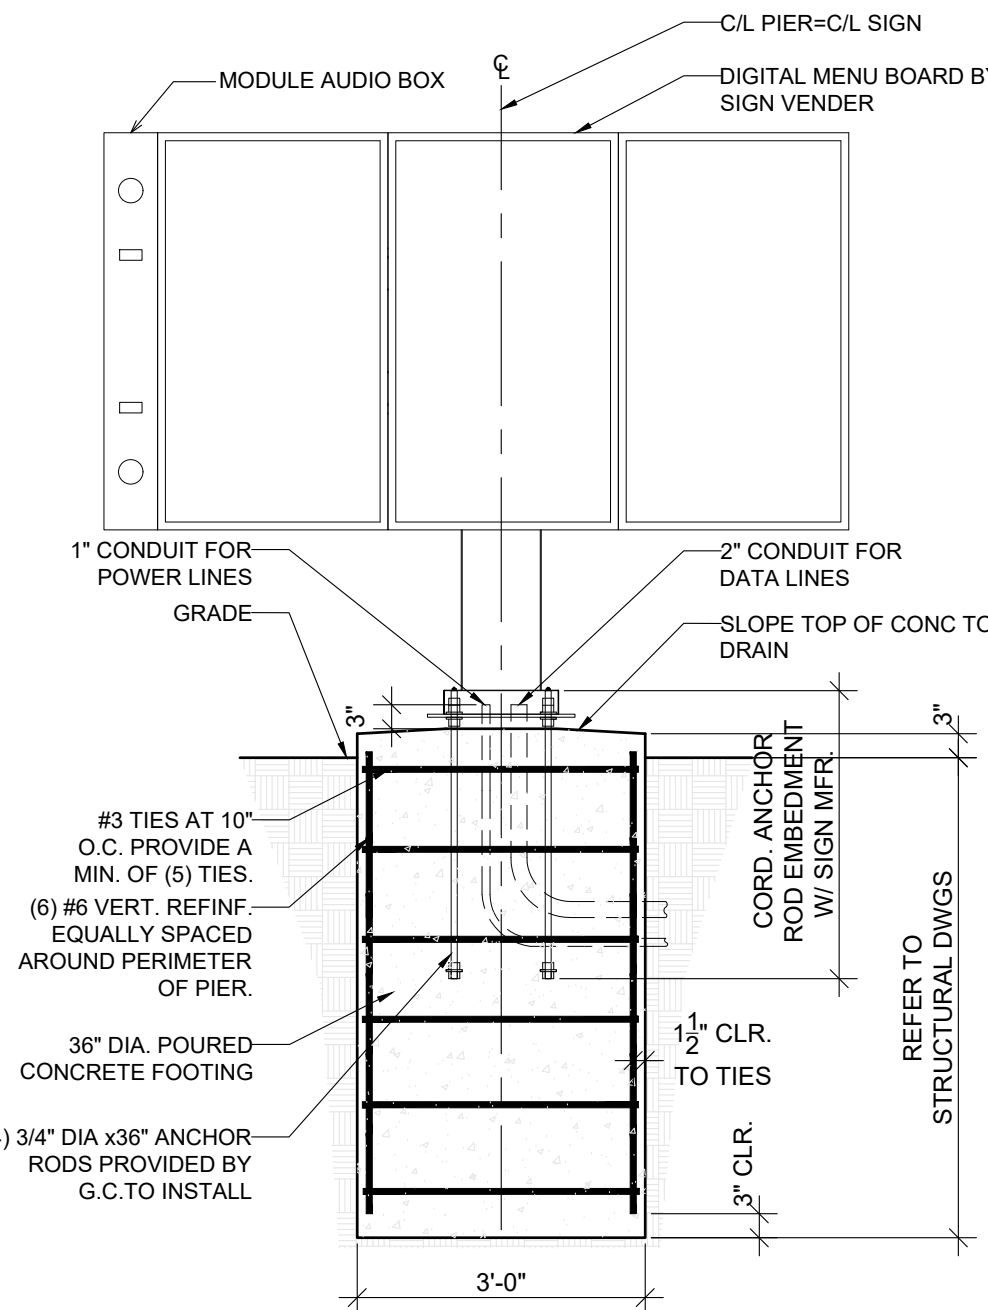

03 DIGITAL MENU BOARD FOOTING

SCALE: 1/2" = 1'-0"

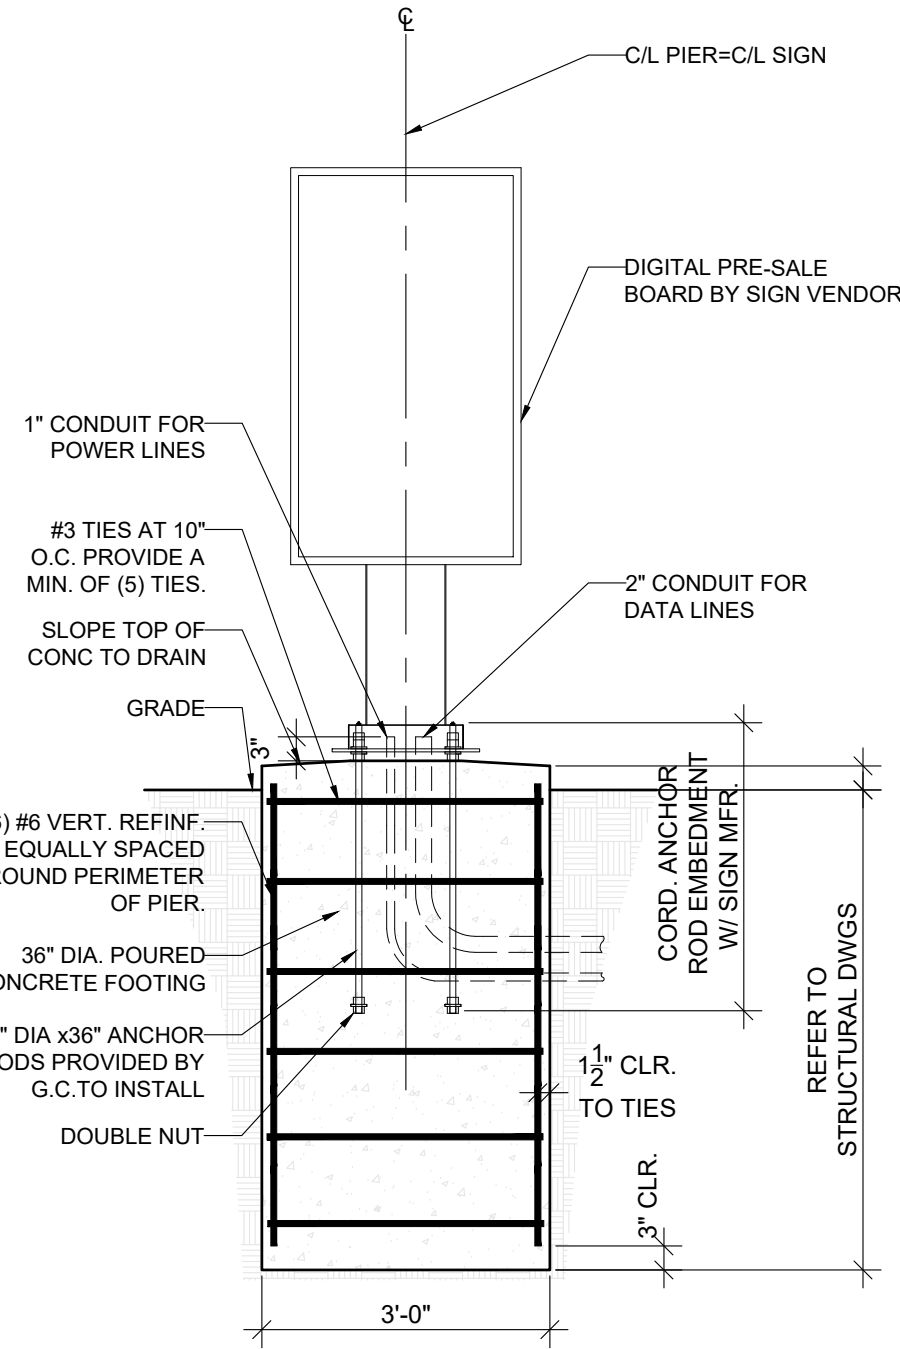

02 PRE-SALE BOARD FOOTING

SCALE: 1/2" = 1'-0"



G.L. SMITH



Wallfacer Architecture Inc.

4711 Yonge Street Suite 801
Toronto Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY CONSTRUCTION WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION






#	Date	Description	Dwn

DRAWING TITLE:

SITE DETAILS

PRINT DATE:	6/19/2026	SCALE:	AS NOTED
DRAWN BY:	DB	DRAWING NO:	
CHECKED BY:	MO		
PROJECT NO:	17037		

AS3.1

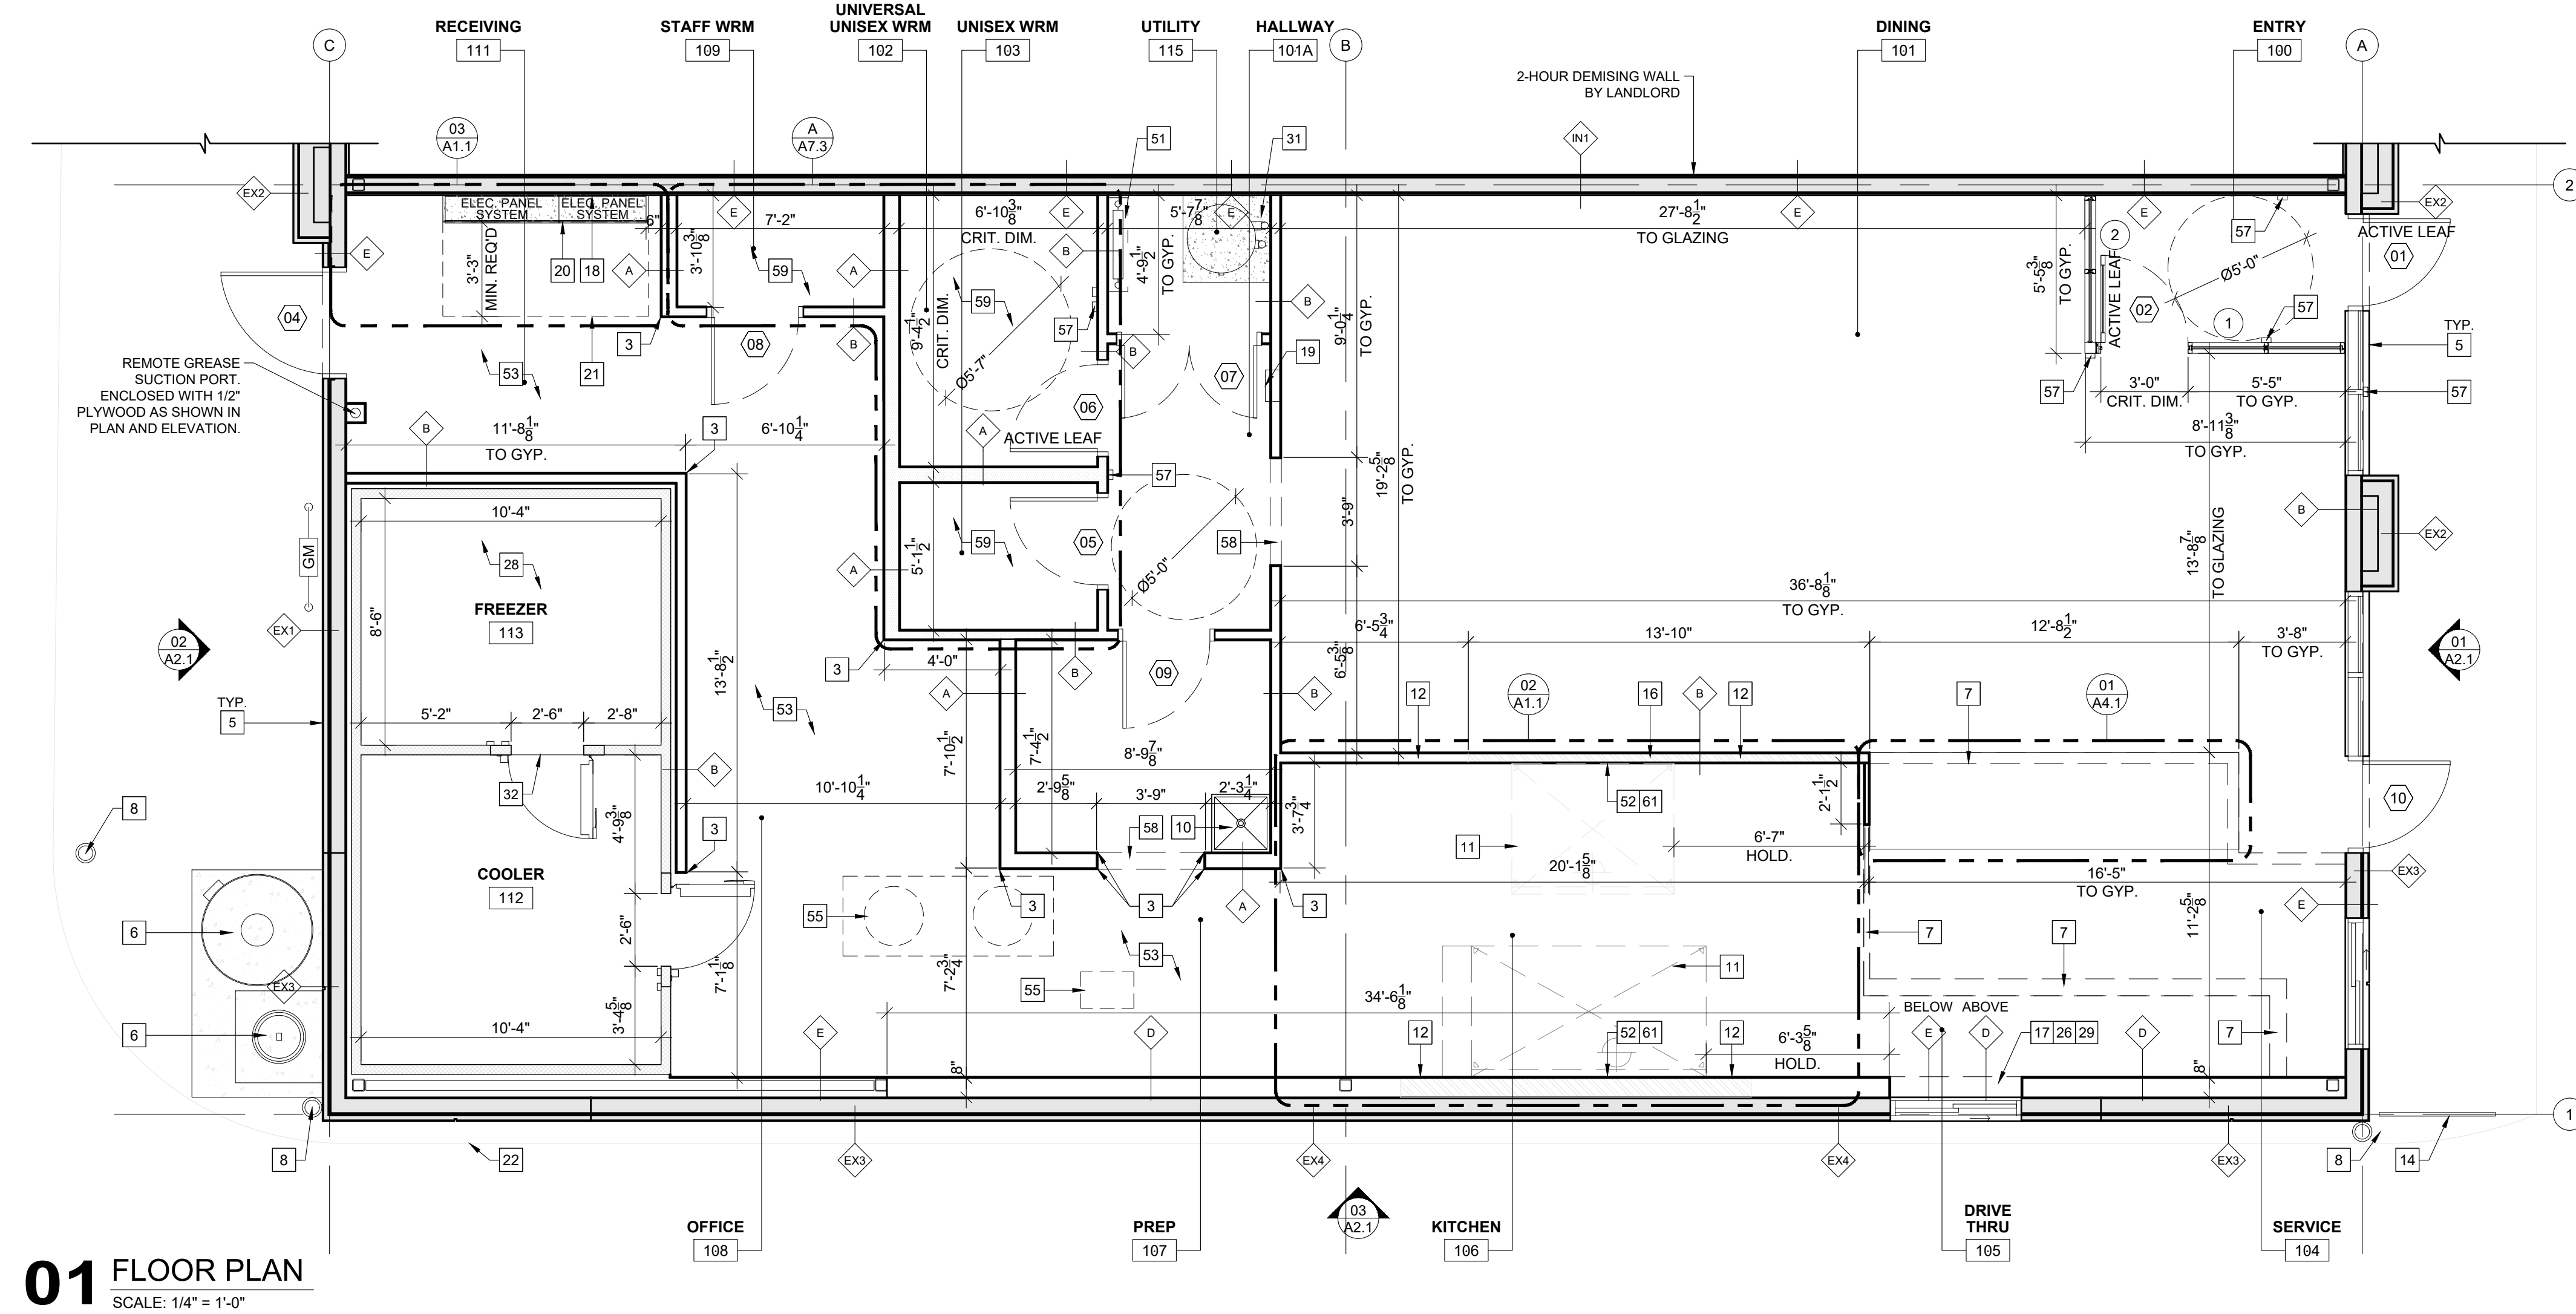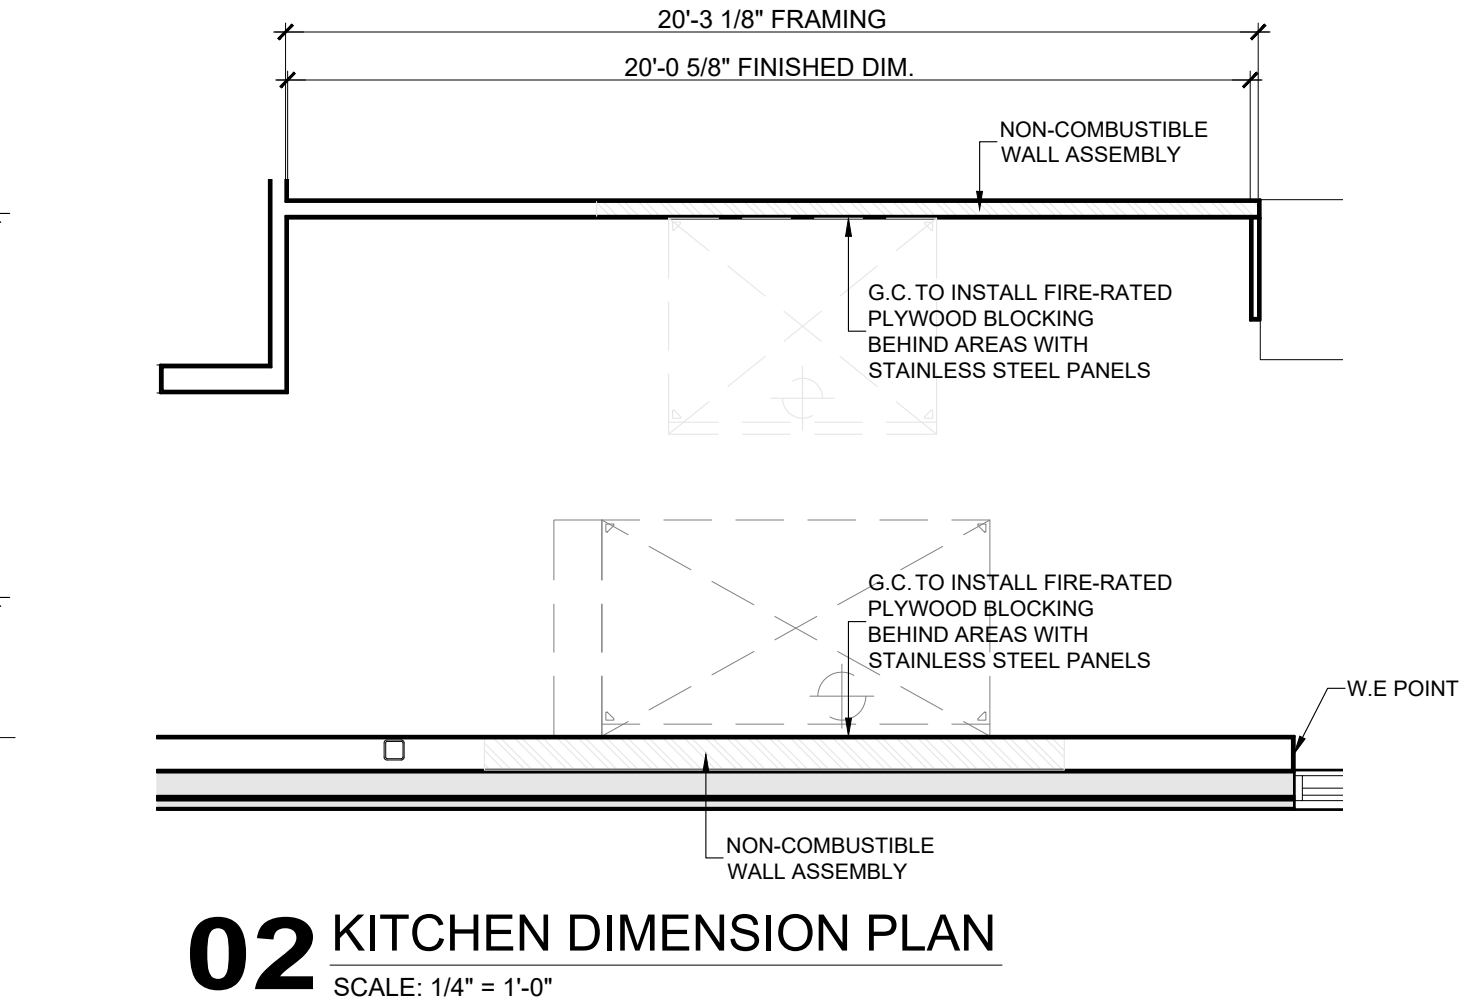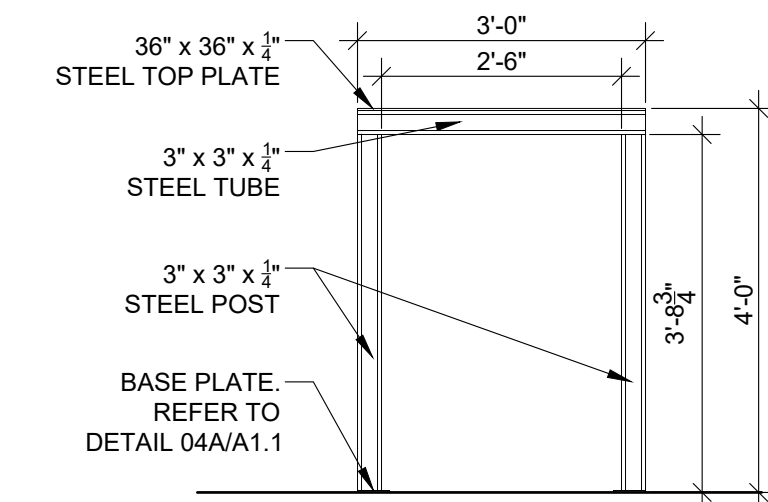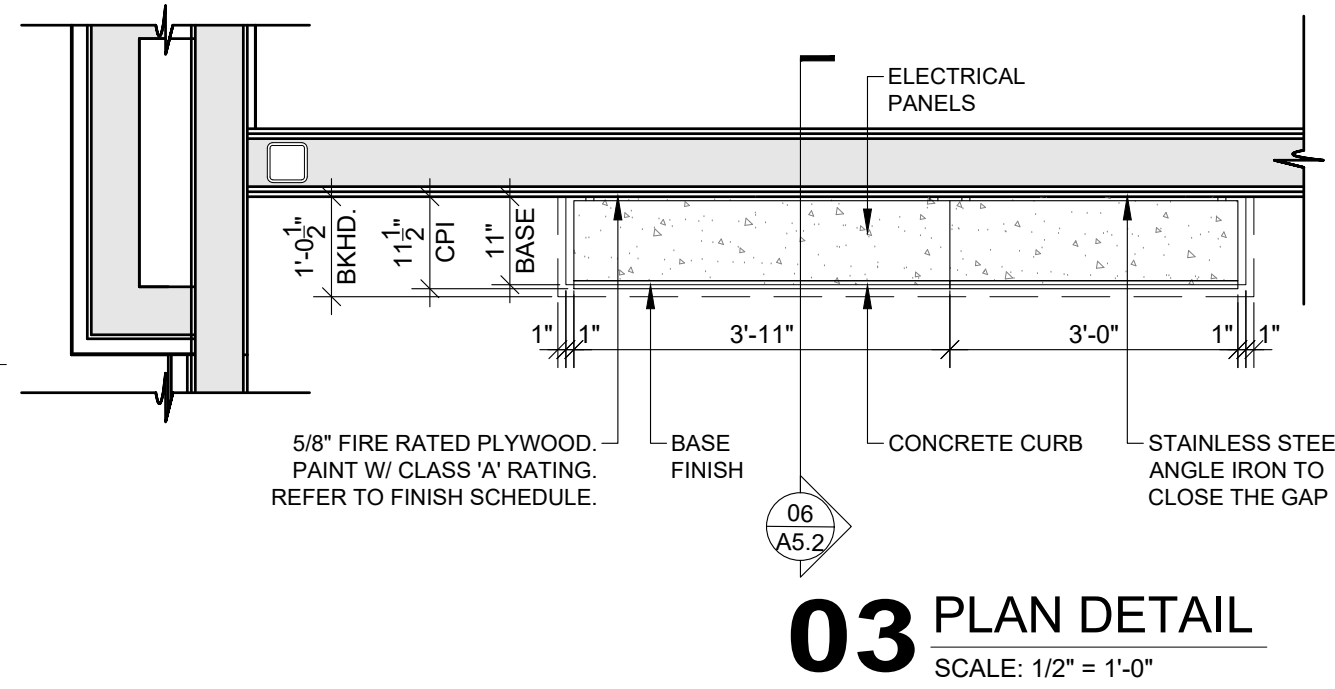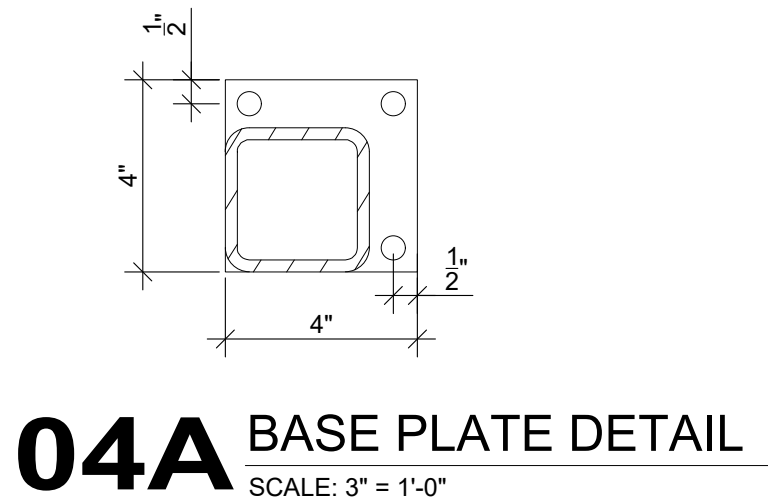

EXTERIOR / INTERIOR WALL TYPE LEGEND: (FOR REFERENCE ONLY, REFER TO BASE BUILDING DRAWINGS FOR LATEST INFO)

- EXTERIOR WALL1 (EX1): [SEE NOTE1] - (W1 IN BASE BUILDING DRAWING)
- FINAL FINISH COAT. ROLL-ON TEXTURE COLOR TO BE CONFIRMED.
 - BASE PRIMER.
 - LAYER OF MESH REQUIRED.
 - 50mm (2") EXPANDED POLYSTYRENE (EPS) (TYPE 2)
 - INSULATION ADHESIVE. ADHERE INSULATION WITH PARING LAYER C/W SMALL GAP
 - ROLL ON WPB (WATER PENETRATION BARRIER) OVER TOP OF EXTERIOR SHEATHING.
 - 1/2" THK. DensGlass @ SHEATHING
 - LAYER OF MESH & WPB (WATER PENETRATION BARRIER) TO ALL SHEATHING JOINTS.
 - 6" STEEL STUDS @ 16" O.C.
 - MIN. R20 ROXUL INSULATION
 - 1/2" THK. GWB ON THE INSIDE, TAPED & SANDED READY FOR FINISH.
- EXTERIOR WALL2 (EX2): [SEE NOTE1] - (W3 IN BASE BUILDING DRAWING)
- PRE-FINISHED METAL PANEL AS PER MANUFACTURER'S GUIDELINE.
 - (ALL NECESSARY GIRTS, SUB-GIRTS, TRIMS, CLIPS, FASTENERS & SEALANTS)
 - TYVEK BLDG. PAPER OR APPROVED EQUAL.
 - 1/2" DensGlass @ SHEATHING
 - 6" HEAVY GAUGE STEEL STUDS @ 16" O.C.
 - MIN. R20 ROXUL INSULATION
 - 6 MIL. POLYETHYLENE VAPOR BARRIER.
 - 1/2" REGULAR G.W.B. TAPED & SANDED READY FOR FINISH
- EXTERIOR WALL3 (EX3): [SEE NOTE1] - (W5 IN BASE BUILDING DRAWING)
- PRE-FINISHED METAL PANEL AS PER MANUFACTURER'S GUIDELINE.
 - BASE PRIMER.
 - LAYER OF MESH REQUIRED.
 - 50mm (2") EXPANDED POLYSTYRENE (EPS) (TYPE 2)
 - INSULATION ADHESIVE. ADHERE INSULATION WITH PARING LAYER C/W SMALL GAP
 - ROLL ON WPB (WATER PENETRATION BARRIER) OVER TOP OF EXTERIOR SHEATHING.
 - 1/2" THK. DensGlass @ SHEATHING
 - LAYER OF MESH & WPB (WATER PENETRATION BARRIER) TO ALL SHEATHING JOINTS.
 - 6" STEEL STUDS @ 16" O.C.
 - MIN. R20 ROXUL INSULATION
 - 1/2" THK. GWB ON THE INSIDE, TAPED & SANDED READY FOR FINISH.
- EXTERIOR WALL4 (EX4): [SEE NOTE1] - (W6 IN BASE BUILDING DRAWING)
- FINAL FINISH COAT. ROLL-ON TEXTURE COLOR TO BE CONFIRMED.
 - BASE PRIMER.
 - LAYER OF MESH REQUIRED.
 - 50mm (2") EXPANDED POLYSTYRENE (EPS) (TYPE 2)
 - INSULATION ADHESIVE. ADHERE INSULATION WITH PARING LAYER C/W SMALL GAP
 - ROLL ON WPB (WATER PENETRATION BARRIER) OVER TOP OF EXTERIOR SHEATHING.
 - 1/2" THK. DensGlass @ SHEATHING
 - LAYER OF MESH & WPB (WATER PENETRATION BARRIER) TO ALL SHEATHING JOINTS.
 - 6" STEEL STUDS @ 16" O.C.
 - MIN. R20 ROXUL INSULATION
 - 1/2" THK. GWB ON THE INSIDE, TAPED & SANDED READY FOR FINISH.
- INTERIOR (DEMISING) WALL1 (IN1): [SEE NOTE 1] - (P1 IN BASE BUILDING DRAWING)
- 2 LAYERS OF 5/8" THICK "TYPE X" GYPSUM WALLBOARD TAPED & SANDED READY FOR FINISH.
 - 6" STEEL STUDS @ 16" O.C.
 - MIN. R20 (152mm) FIT. BATT. INSULATION.
 - 2 LAYERS OF 5/8" THICK "TYPE X" GYPSUM WALLBOARD TAPED & SANDED READY FOR FINISH.
 - HEIGHT TO UNDERSIDE OF DECK.

NOTES:

1. G.C TO CONFIRM IF BASE BUILDING SUBSTRATES ALIGN WITH SUBSTRATES REQUIRED FOR FINISHES AS SHOWN ON A5.1

GENERAL NOTES:

- A. EXTERIOR DIMENSIONS ARE FROM FINISH FACE CLADDING TO FINISH FACE CLADDING
U.N.O.-ALL INTERIOR DIMENSIONS ARE TO FACE OF STUD U.N.O.
- B. COORDINATE CURB CUTS AT DOORS WITH STOREFRONT MANUFACTURER PRODUCT DETAILS AND SHOP DRAWINGS:
- C. REFER TO FINISH PLAN AND INTERIOR ELEVATIONS FOR EXTENT OF INTERIOR FINISHES
- D. THE CONTRACTOR SHALL PROVIDE AND INSTALL SOLID WOOD BLOCKING AND INSTALLATION OF ADDITIONAL METAL STUDS IN FIRE RATED WALL FOR ALL WALL MOUNTED ITEMS, EQUIPMENT, MILLWORK, ETC. COORDINATE LOCATIONS WITH OWNER'S CONSTRUCTION REPRESENTATIVE PRIOR OF CLOSING WALL.
- E. REFER TO WALL TYPES ON SHEET A5.1.
- F. REFER TO DOOR AND WINDOW SCHEDULE ON SHEET A6.3.
- G. ALL CEILING AND WALL PENETRATIONS SHALL BE NO LARGER THAN 1/8". G.C. IS RESPONSIBLE FOR ALL SEALING AND CAULKING.
- H. ALL INTERIOR WALL CORNER STUDS AND STUDS SPANNING OVER 15'-0" IN PARTITION LENGTH TO BE EXTENDED TO UNDERSIDE OF DECK. JOINTS TO BE TAPED. CROSS BRACE AS PER MANUFACTURER'S INSTRUCTIONS.
- I. G.C. TO SEAL AND CLOSE OFF ANY WALL, FLOOR, AND CEILING PENETRATIONS 1/8" OR LARGER, INCLUDING FROM PENETRATIONS MADE BY VENDORS.
- J. ALL PENETRATIONS THROUGH FIRE RATED WALLS TO BE TIGHTLY FITTED AND FIRE STOPPED.
- K. FIRE RATED WALLS TO BE EXTENDED TO THE U/S OF DECK.
- L. FIRE RATING OF EXISTING WALLS TO BE MAINTAINED.

LEGEND:

- SHADED AREA = EXISTING WALL
- DIAGONAL HATCH = METAL STUD WALLS COMPLETE WITH NON-COMBUSTIBLE MATERIALS. (I.E. DUROCK BRAND CEMENT BOARD)
- STIPPLE = SOUND BATT INSULATION
- A - 1/2" SUBSTRATE PER PLAN (SEE A5.1)
6" METAL STUD @ 16" O.C. EXTEND TO U/S OF JOIST, U.N.O.
1/2" SUBSTRATE PER PLAN (SEE A5.1)
- B - 1/2" SUBSTRATE PER PLAN (SEE A5.1)
3" METAL STUD @ 16" O.C. EXTEND TO U/S OF JOIST, U.N.O.
1/2" SUBSTRATE PER PLAN (SEE A5.1)
- C - 1/2" SUBSTRATE PER PLAN (SEE A5.1)
2x6 WOOD STUD @ 16" O.C. EXTEND TO U/S OF JOIST, U.N.O.
1/2" SUBSTRATE PER PLAN (SEE A5.1)
- D - 1/2" SUBSTRATE PER PLAN (SEE A5.1)
3" METAL STUD @ 16" O.C. EXTEND TO U/S OF JOIST, U.N.O.
(8" METAL STUD @ 16" O.C. AS NOTED IN PLAN)
- E - 1/2" SUBSTRATE PER PLAN (SEE A5.1)
EXISTING BASE BUILDING WALL CONSTRUCTION

SEE A5.1 FOR ADDITIONAL INFORMATION

**TAGS UPDATED IN PLAN

CODED NOTES:

- 1 N/A.
- 2 N/A.
- 3 G.C. TO INSTALL STAINLESS STEEL CORNER GUARD, REFER TO FINISH PLAN FOR LOCATIONS AND TYPE OF CORNER GUARDS.
- 4 SHADED AREA INDICATES SHEAR WALL. REFER TO STRUCTURAL DRAWINGS. COORDINATE FINISHES WITH NUMBER OF PLIES PROVIDED. EXTEND PLYWOOD AS REQUIRED TO MAINTAIN FINISH PLANE.
- 5 ROOF / PARAPET OVERHANG ABOVE. REFER TO ROOF PLAN. SECTIONS AND EXTERIOR ELEVATIONS FOR ADDITIONAL INFORMATION. BY LANDLORD.
- 6 EXTERIOR USED COOKING OIL AND CO2 TANK. SUPPLIER TO PROVIDE STEEL CAGE FOR CO2 TANK. PROVIDE MIN 6" THICK, 7'-10" X 4'-6" CONC. SLAB. BY LANDLORD.
- 7 SOFFIT / BULKHEAD ABOVE. REFER TO SHEET A1.2 REFLECTED CEILING PLAN.
- 8 6" DIA. CONCRETE FILLED METAL PIPE BOLLARD W/ BOLLARD SLEEVE. INSTALL BOLLARD PER CIVIL DRAWINGS. BY LANDLORD.
- 9 ROOF ACCESS LADDER. REFER TO DETAIL ON SHEET A4.3 BY LANDLORD.
- 10 SURFACE MOUNTED MOP SINK. INSTALL WATERPROOF MEMBRANE IN MOP SINK. RECESS TO TIE INTO DRAIN. REFER TO DETAIL ON SHEET A5.1.
- 11 EXHAUST HOOD. PROVIDE 18" CLEARANCE FROM TOP OF EXHAUST HOOD TO UNDERSIDE OF ROOF TRUSSES/COMBUSTIBLE MATERIALS AND LEFT TO RIGHT OF THE EXHAUST HOOD TO ANY COMBUSTIBLE MATERIALS. REFER TO MECHANICAL DRAWINGS.
- 12 STAINLESS STEEL PANELS TO EXTEND 18" MIN. BEHIND AND BESIDE HOODS, FRYERS & GRILL. REFER TO INTERIOR ELEVATIONS, EQUIPMENT PLAN & FINISHES PLAN.
- 14 NEW SAFETY RAILING. 3" x 3" POST. COLOUR TO BE PEX-10. BY LANDLORD.
- 15 6" PRE-CAST CONCRETE BELOW STOREFRONT. REFER TO WALL SECTIONS AND STRUCTURAL DRAWINGS.
- 16 G.C. TO SUPPLY AND INSTALL INTERMEDIATE METAL STUDS HORIZONTALLY AND VERTICALLY FOR WALL MOUNTED EQUIPMENT.
- 17 STAINLESS STEEL CLOSURE TRIM / ANGLES BY G.C.
- 18 LOCATION FOR MDP. REFER TO ELECTRICAL DRAWINGS.
- 19 SEMI RECESSED FIRE EXTINGUISHER CABINET TO BE ORDERED THROUGH HJC. SUPPLY AND INSTALL BY G.C. REFER TO INTERIOR ELEVATIONS.
- 20 PRE-MANUFACTURED SWITCHGEAR CABINET ON 6" CONC. CURB. REF. DETAILS 03/A1.1 & 06/A5.2.
- 21 CLEAR FLOOR AREA TO BE MAINTAINED IN FRONT OF ELECTRICAL PANELS. MIN. 3'-3" AS REQUIRED BY CODE.
- 22 CONCRETE CURB. REFER TO CIVIL DRAWINGS
- 23 G.T. CABINET AND METER SUITABLE FOR OUTDOOR INSTALL. REFER TO ELECTRICAL DRAWINGS. TO BE PAINTED TO MATCH VAV-1.
- 25 EDGE OF CONCRETE SLAB / FOUNDATION FOR WALK-IN BOX. REF. STRUCT. DRAWINGS. BY LANDLORD.
- 26 RETURN TILE ON SIDE AND TOP OF DRIVE-THRU WINDOW. COMPLETE WALL CORNERS WITH CP-13.
- 28 WALK-IN BOX. FREEZER SUPPLIED WITH INSULATED FLOOR.
- 29 CONDUIT FOR LOOP TO TIMER TO BE INSTALLED UNDERGROUND.
- 30 HOLD-DOWNS PROVIDED BY WIB MANUFACTURER. G.C. TO DRILL AND EPOXY SET ANCHOR BOLTS AS REQUIRED. VERIFY LOCATION AND QUANTITY WITH MANUFACTURER.
- 31 4'-0" HIGH PRE-FABRICATED METAL PLATFORM. SUPPLY AND INSTALL BY G.C. G.C TO PROVIDE SHOP DRAWINGS FOR REVIEW PRIOR FABRICATION.
- 32 4" HIGH STEP TO FREEZER SECTION BY WIB MANUFACTURER.
- 51 LOCATION OF WATER SERVICE. REFER TO MECHANICAL DRAWINGS.
- 52 G.C. TO SUPPLY AND INSTALL 1/2" CEMENT BOARD (FULL HEIGHT) BEHIND ALL EXHAUST HOOD WALLS.
- 53 G.C. TO SUBSTITUTE GYPSUM WALL BOARD WITH PLYWOOD BACKING AT ALL BACK OF HOUSE WALLS, U.N.O.
- 54 FROST SLAB AT DOOR LOCATIONS. REFER TO STRUCTURAL DRAWING 3/S3.1.
- 55 GREASE INTERCEPTOR. TOP PLATE TO BE FLUSH WITH FLOOR TILE. NON-SLIP COATING TO BE APPLIED TO LIDS. REFER TO PLUMBING DRAWINGS.
- 56 RAIN-WATER LEADER. REFER TO MECHANICAL DRAWINGS. BY LANDLORD.
- 57 LOCATION OF BARRIER FREE PUSH BUTTON. REFER TO EXTERIOR ELEVATIONS AND INTERIOR ELEVATIONS FOR MOUNTING HEIGHT. G.C. TO PROVIDE BACKPLATE AT VESTIBULE LOCATION AS NEEDED. BACKPLATE FINISH TO MATCH GLAZING FRAME.
- 58 NEW DROP DOWN GWB HEADER. REFER TO A1.2 REFLECTED CEILING PLAN.
- 59 G.C. TO REFER TO WASHROOM ELEVATIONS TO DETERMINE INTERIOR SUBSTRATE.
- 60 CONCRETE SLAB TO BE BROOM FINISHED IN FRONT OF DELIVERY PICK-UP.
- 61 G.C. TO INSTALL FIRE-RATED PLYWOOD BLOCKING BEHIND AREAS WITH STAINLESS STEEL PANELS.



G.L. SMITH



Wallfacer Architecture Inc.

4711 Yonge Street, Suite 801
Toronto, Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REVIEWED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY CONSTRUCTION WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

#	Date	Description	Dwn
1	JUNE 17, 2026	REVISED PER CITY COMMENTS	MO

DRAWING TITLE:

FLOOR PLAN

PRINT DATE: 6/19/2026 SCALE: AS NOTED


DRAWN BY: DB DRAWING NO:

CHECKED BY: MO

PROJECT NO: 17037

A1.1

NOTE:
MATCH ZIP TIE COLOR
TO CORD COLOR.

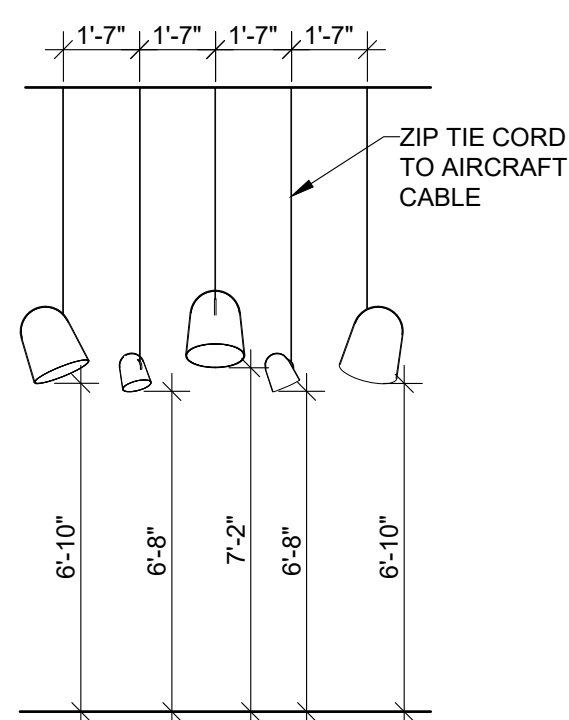


06 SUSPENDED LIGHT HEIGHTS

SCALE: 1/4" = 1'-0"


GENERAL SEISMIC NOTES:

- THE GENERAL CONTRACTOR IS TO ENSURE THE FOLLOWING ITEMS ARE BUILT TO MEET CODE REQUIREMENTS (INCLUDING SEISMIC AND LATERAL RESTRAINT) AS REQUIRED:
 - SUSPENDED SHELVING AND SUPPORTS
 - SUSPENDED CEILING PANELS, GYPSUM BOARD/T-BAR CEILINGS IN RELATION TO SEISMIC AND LATERAL RESTRAINT
- THE GENERAL CONTRACTOR IS RESPONSIBLE THAT ALL SUB-TRADES HAVE RETAINED A QUALIFIED STRUCTURAL ENGINEER TO REVIEW THEIR APPROPRIATE WORK. STRUCTURAL ENGINEER(S) TO ISSUE LETTER (ON THEIR LETTERHEAD) STATING THAT ALL WORK MEETS THE REQUIREMENTS OF BUILDING CODE FOR SEISMIC RESTRAINTS.
- GENERAL CONTRACTOR TO PROVIDE SEISMIC RESTRAINTS FOR ELEMENTS OF STRUCTURE, NON STRUCTURAL COMPONENTS AND EQUIPMENT AS DEFINED BY GOVERNING BUILDING CODE. PROVIDE SIGN OFF LETTERS AS REQUIRED.

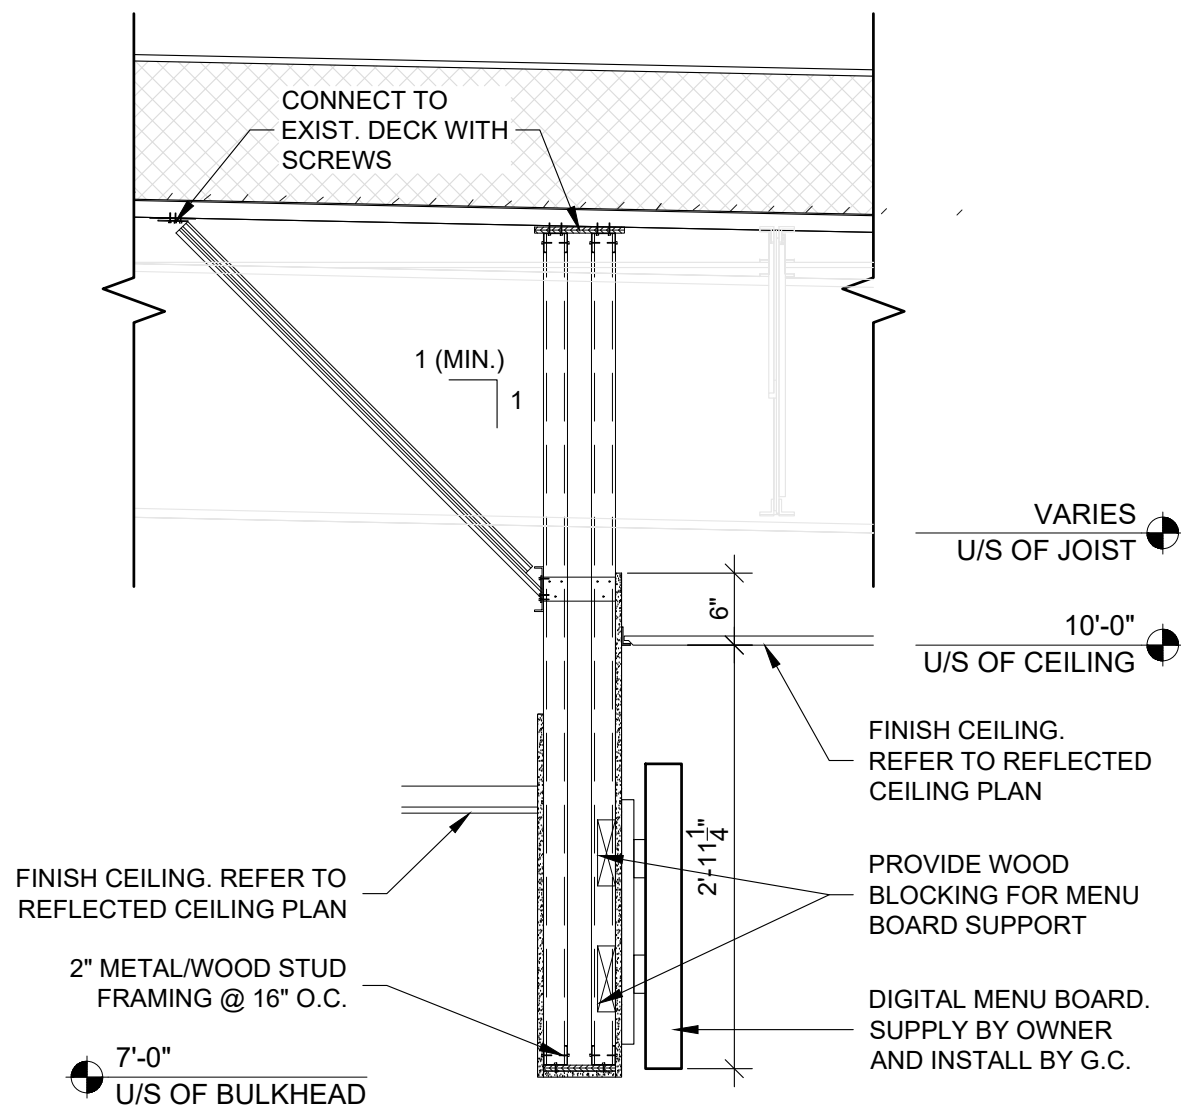


05 SOFFIT - MENU BOARD

SCALE: 3/4" = 1'-0"

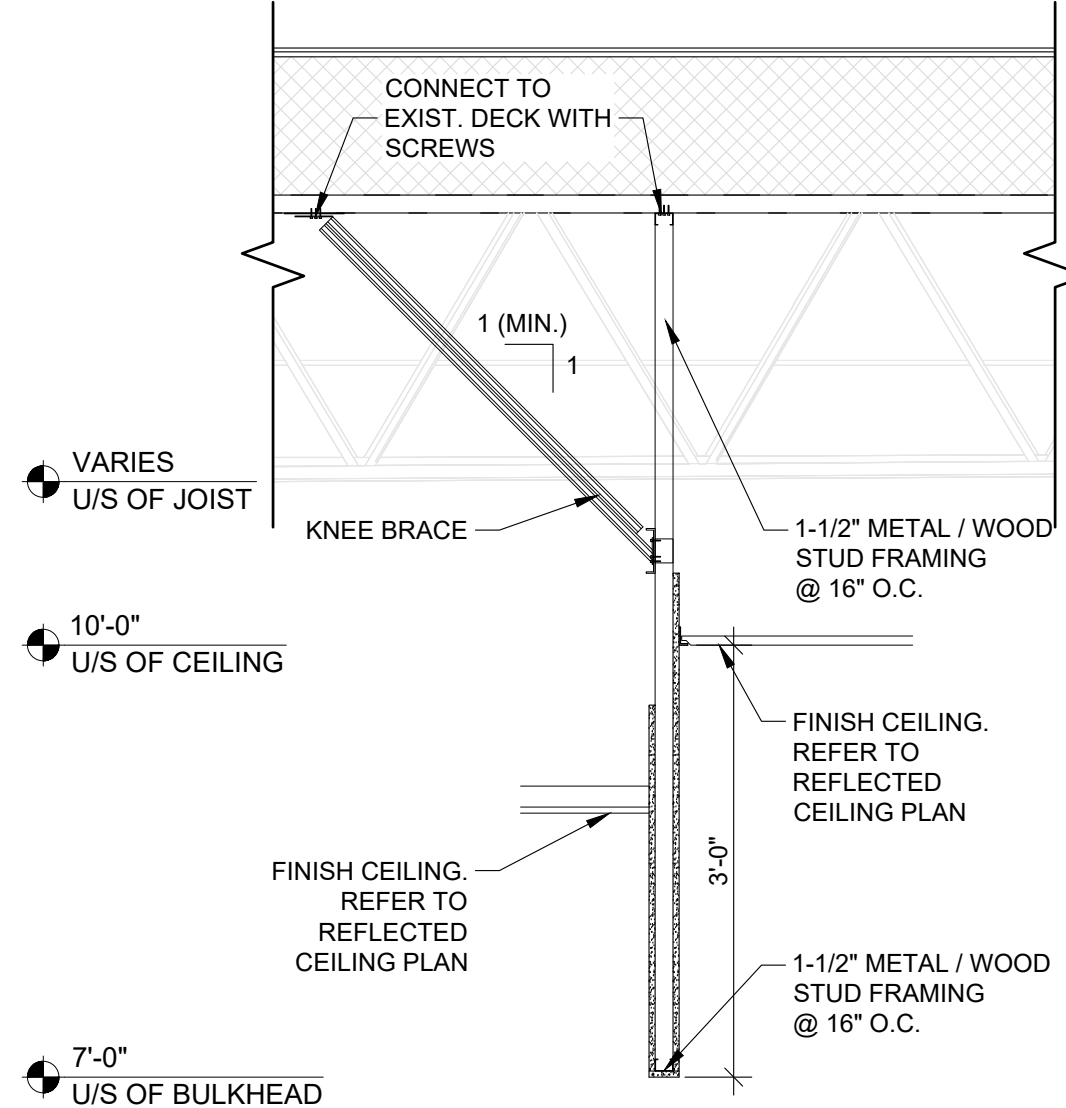


04 SIDE SOFFIT BULKHEAD

SCALE: 3/4" = 1'-0"

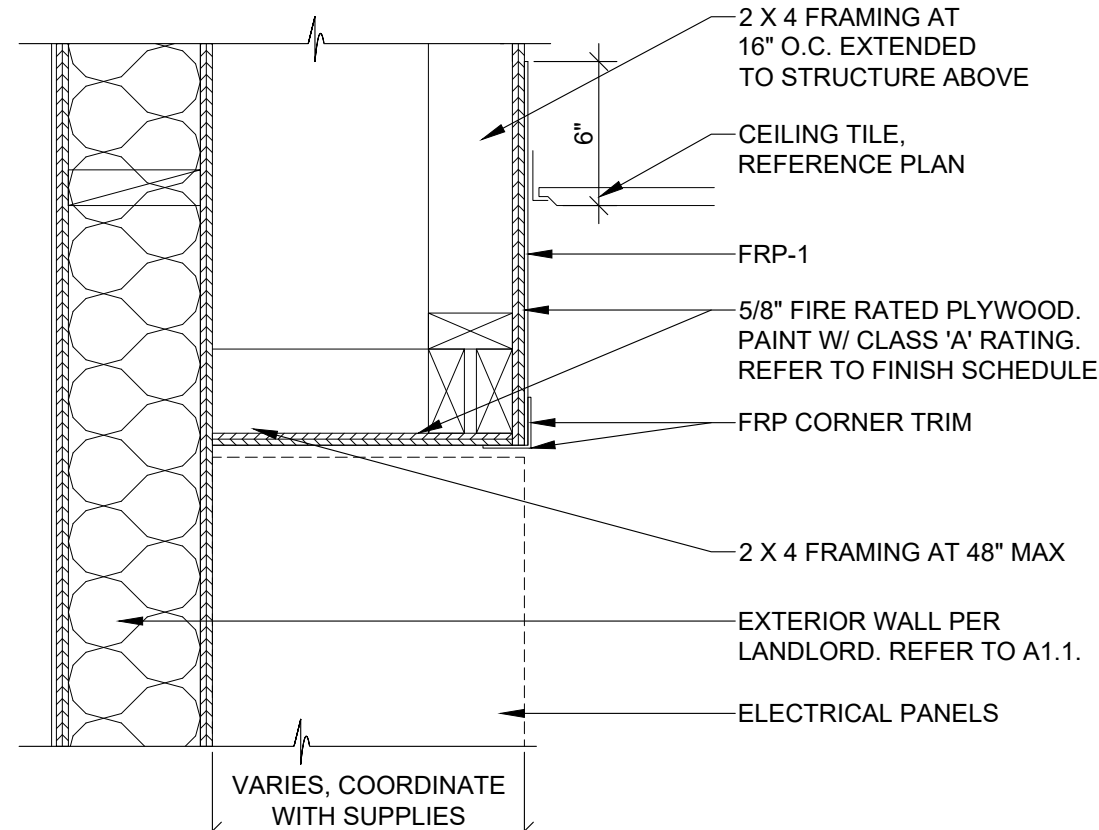


03 SOFFIT - ELEC. PANELS

SCALE: 1-1/2" = 1'-0"

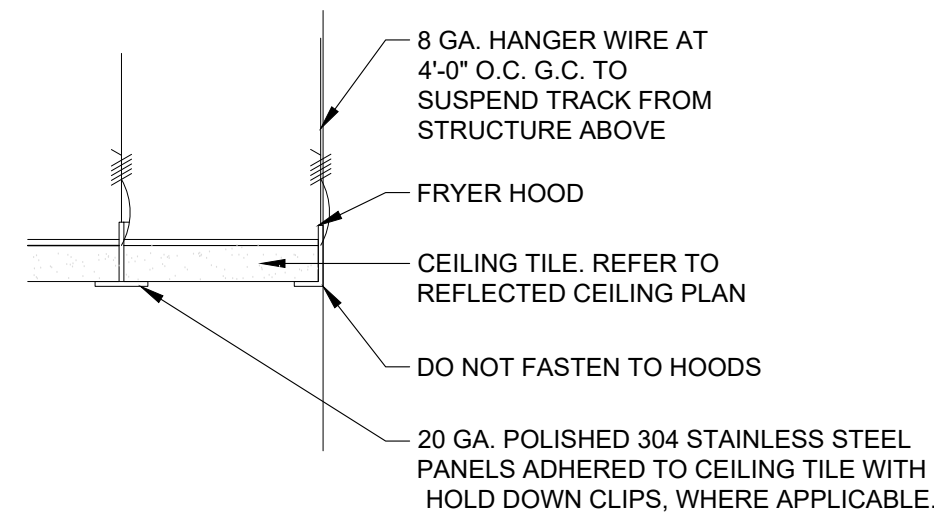

02 CEILING DETAIL @ HOOD

SCALE: 3" = 1'-0"

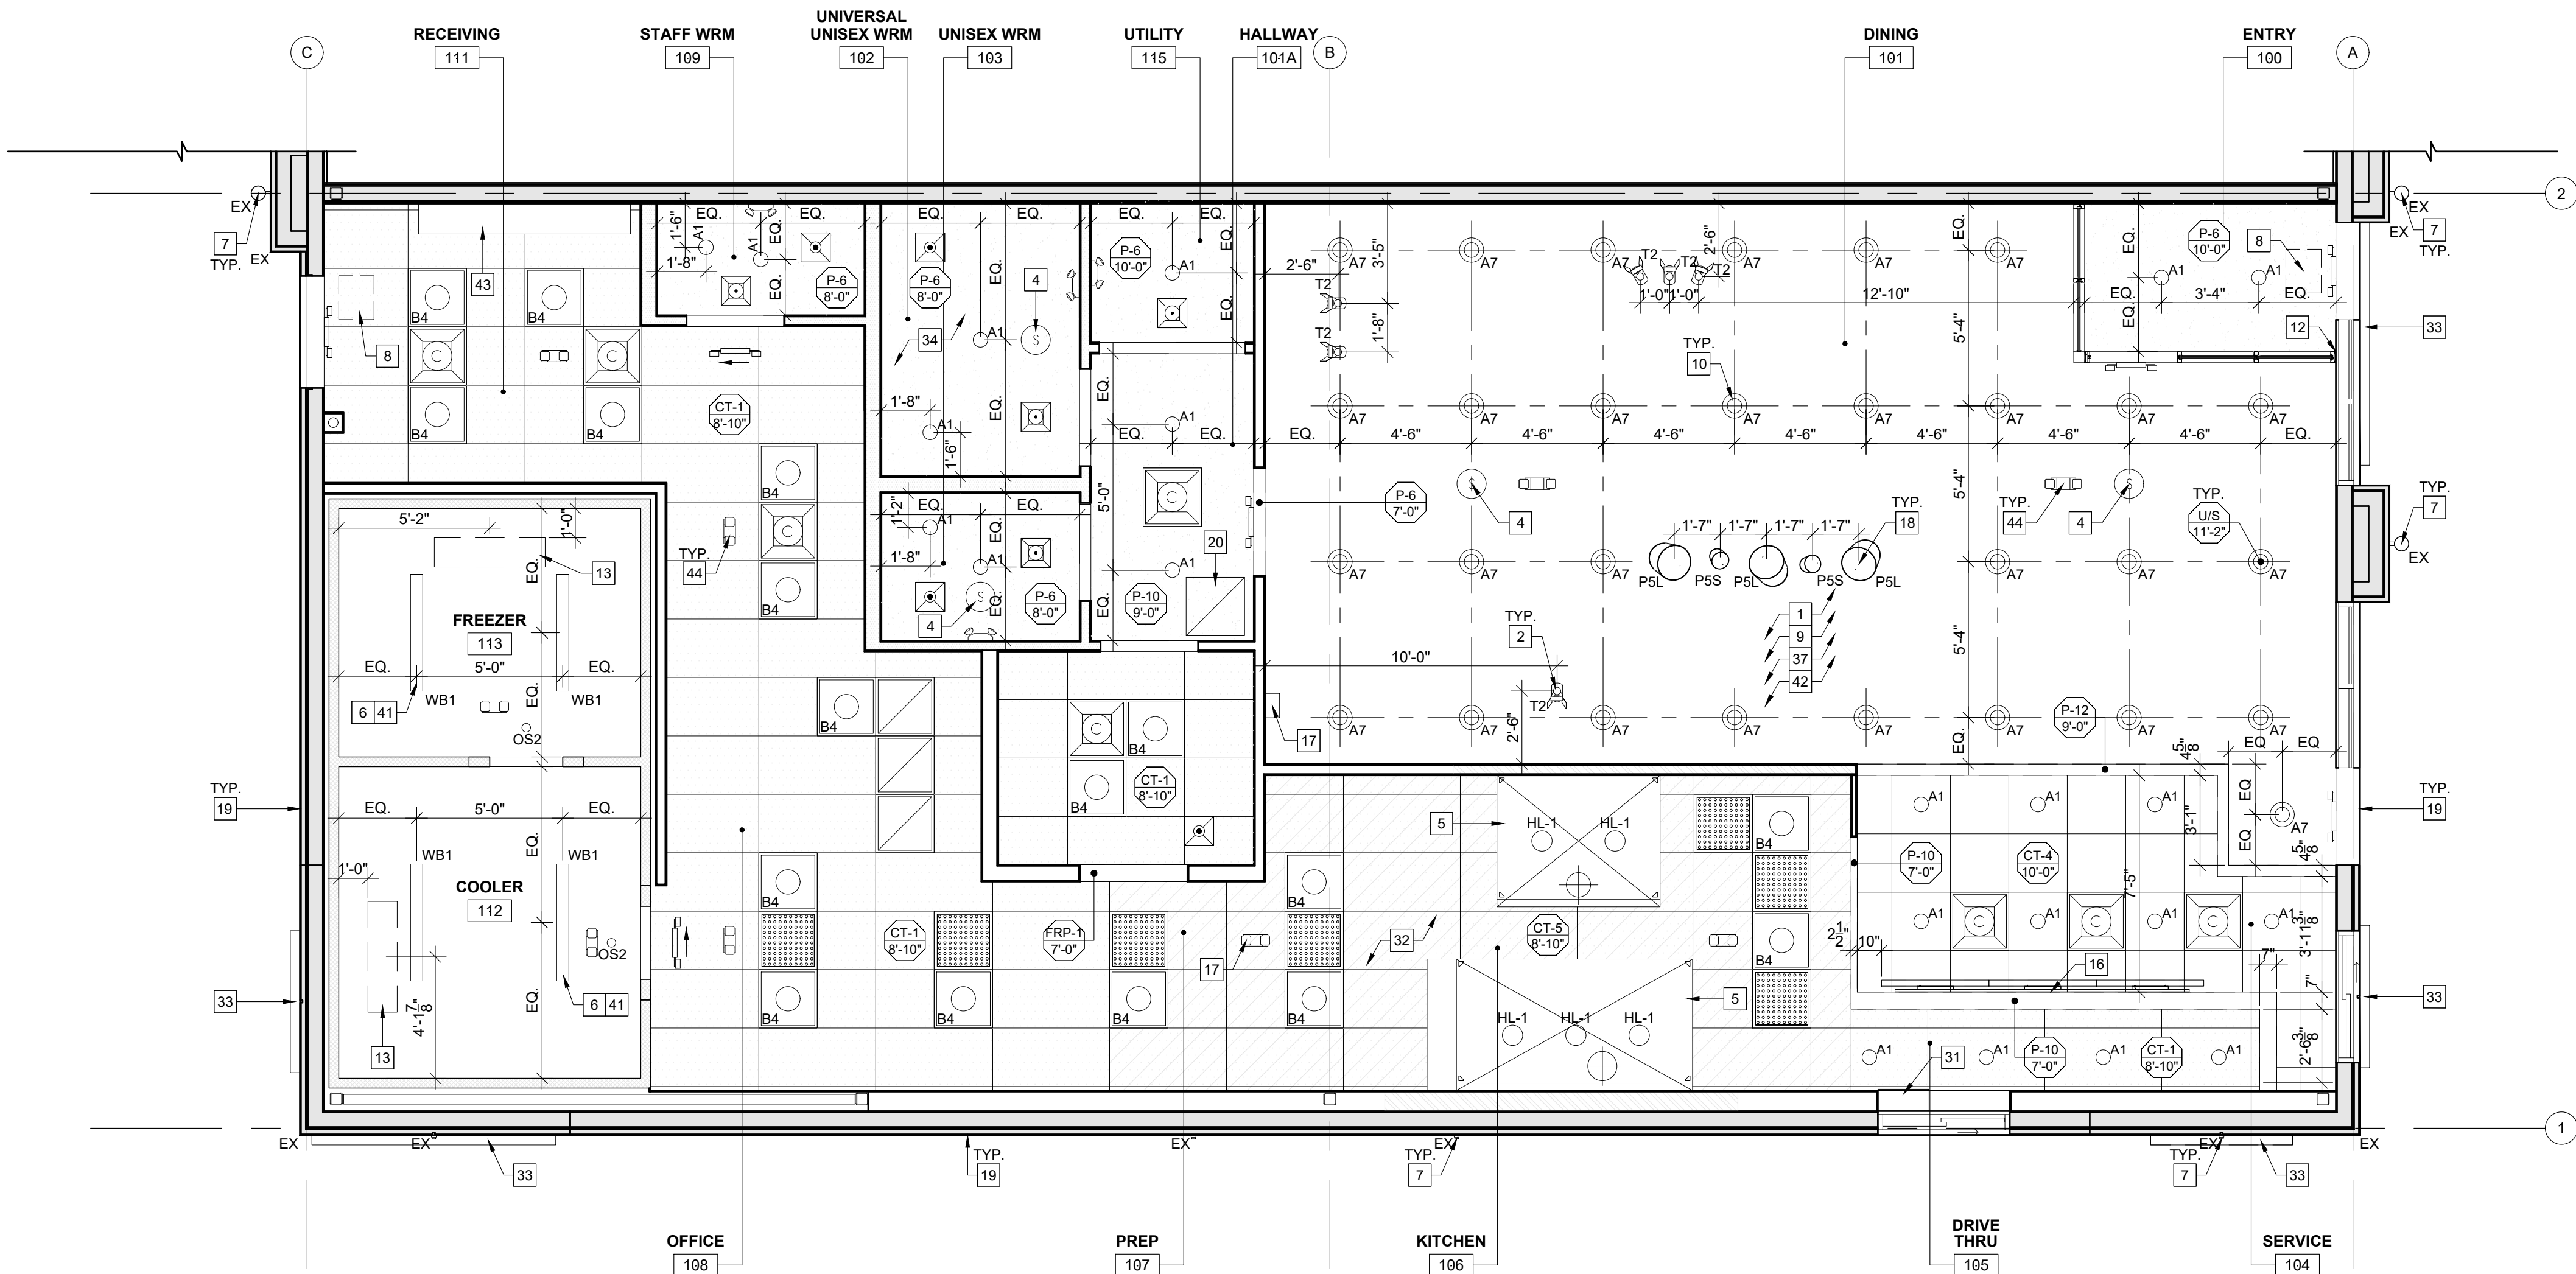

01 REFLECTED CEILING PLAN

SCALE: 1/4" = 1'-0"

GENERAL NOTES:

- SEE INTERIOR FINISH SCHEDULE FOR ALL CEILING FINISHES.
- DO NOT SCREW THE CEILING GRID TO THE STAINLESS STEEL HOODS. REFER TO DETAIL 2/A1.2.
- REFER TO ELECTRICAL AND/OR HVAC DRAWINGS FOR ADDITIONAL INFORMATION REGARDING ALL FIXTURES, DEVICES AND EQUIPMENT SHOWN ON THIS PLAN.
- VERIFY CONFIGURATION OF MUSIC SYSTEM IN DINING ROOM. COORDINATE REQUIREMENTS WITH WENDY'S I.T. CONTACT.
- VERIFY CONFIGURATION OF WIFI SYSTEM. COORDINATE REQUIREMENTS WITH WENDY'S I.T. CONTACT.
- ALL LIGHT FIXTURES MOUNTED IN CEILING TILES ARE TO BE CENTERED IN THE TILE U.N.O.
- ALL CEILING AND WALL PENETRATIONS SHALL BE NO LARGER THAN 1/8". G.C. IS RESPONSIBLE FOR ALL SEALING AND CAULKING.

CODED NOTES:

- EXPOSED STRUCTURAL TRUSS. REFER TO STRUCTURAL DRAWINGS. BY LANDLORD.
- STEM MOUNTED SPOTLIGHT. SUPPLY AND INSTALL BY G.C. STEM TO BE MOUNTED AT U/S OF JOIST OR DECK. TRACK TO BE MOUNTED AT 11'-2" A.F.F. REFER TO ELECTRICAL DRAWINGS FOR FIXTURE INFORMATION.
- LIGHT FIXTURES IN CANOPY SUPPLY AND INSTALL BY G.C. REFER TO ELECTRICAL DRAWINGS.
- SPEAKER SUPPLY BY OWNER AND INSTALL BY VENDOR. PROVIDE BLOCKING AS REQUIRED.
- EXHAUST HOODS - SUPPLY BY OWNER AND INSTALL BY G.C. REFER TO MECHANICAL DRAWINGS.
- G.C. TO PROVIDE AND INSTALL LIGHTING FOR COOLER/FREEZER/RECEIVING UNITS W/ MOTION SENSOR.
- REFER TO EXTERIOR ELEVATIONS FOR MOUNTING LOCATION OF WALL MOUNTED LIGHT FIXTURES (TYP.) BY LANDLORD.
- ELECTRIC HEATER. REFER TO ELECTRICAL DRAWINGS.
- PAINT WALLS ABOVE 10'-3 1/2" (ABOVE TRIM), EXPOSED STRUCTURE, CONDUITS, J-BOXES, WIRING, PIPING, DUCTS AND REGISTERS, W/ PAINT INDICATED ON FINISH PLAN. COLOUR TO BE P-12.
- PENDANT LIGHTING WITH CORD/POST. BOTTOM OF FIXTURE TO BE MOUNTED AT 11'-2" A.F.F. REFER TO ELECTRICAL DRAWINGS.
- EQUIPMENT CHASE. REFER TO ELECTRICAL AND MECHANICAL DRAWINGS.
- EXTEND GYP. BD. TIGHT TO DECK ABOVE.
- FREEZER/COOLER EVAPORATOR. REFER TO MECHANICAL DRAWINGS.
- PATIO HEATERS. REFER TO ELECTRICAL DRAWINGS. PATIO HEATER LOCATIONS TO BE FIELD COORDINATED TO MEET MANUFACTURER'S CLEARANCE REQUIREMENTS TO COMBUSTIBLES.
- G.G. TO SUPPLY AND INSTALL HEAT TRACING ABOVE CANOPY.
- DIGITAL MENU BOARD SUPPLY BY OWNER AND INSTALL BY SUPPLIER. G.C. TO INSTALL BLOCKING IN WALLS FOR SUPPORT AND PROVIDE FINAL CONNECTION. REFER TO ELECTRICAL DRAWINGS.
- STAINLESS STEEL CHASE TIED INTO UNDERSIDE OF SOFFIT FOR DRINK LINES BY KED.
- PENDANT GROUPING TO BE CENTER OVER BOOTH SEATING BELOW. REFER TO DETAIL 6/A1.2 FOR HEIGHTS. PROVIDE BLOCKING AS REQUIRED.
- LED STRIP LIGHT AT CORNICE/PARAPET CAP. SUPPLY AND INSTALL BY G.C. REFER TO ELECTRICAL DRAWINGS. BY LANDLORD.
- NEW 24"x24" ACCESS DOOR IN G.W.B. DUCT CLEANOUT. CEILING. SUPPLY AND INSTALL BY G.C.
- LINE OF A CANOPY. SUPPLIED BY MANUFACTURER AND INSTALLED BY G.C. REFER TO DETAILS AND STRUCTURAL DRAWINGS BY LANDLORD.
- AIR CURTAIN UNIT. REFER TO ELECTRICAL DRAWINGS.
- 22GA. STAINLESS STEEL PANEL ON CEILING TILE W/ HOLD DOWN CLIP. DO NOT FASTEN TO EXHAUST HOOD. ANY DAMAGE TO THE EQUIPMENT HOOD WILL BE AT THE COST OF G.C. G.C. TO CONFIRM WITH WENDY'S PM/FR IF REQUIRED.
- NEW ILLUMINATED SIGNAGE ABOVE. LANDLORD TO PROVIDE WOOD BLOCKING. FINAL ELEC. CONNECTION, AND JUNCTION BOX BY G.C. REFER TO ELECTRICAL DRAWINGS.
- MOTION SENSOR LIGHTING FIXTURE IN UNIVERSAL WASHROOM. REFER TO ELECTRICAL DRAWINGS.
- N/A.
- RAINWATER LEADER. REFER TO MECHANICAL DRAWINGS. BY LANDLORD.
- DUCTS TO BE INSTALLED AS TIGHT AS POSSIBLE TO UNDERSIDE OF ROOF STRUCTURE. UNDERSIDE OF DUCT @ MINIMUM 10'-11" A.F.F.
- N/A.
- N/A.
- PARAPET MOUNTED FLOOD LIGHT. REFER TO ELECTRICAL DRAWINGS. REFER TO A1.3.
- FOR NORBEC WALK-IN LIGHTING, SUPPLY AND INSTALL BY G.C. FOR IGS/EVERIDGE LIGHTING. SUPPLY AND INSTALL BY MANUFACTURER.
- G.C. TO INSTALL UNISTRUT AROUND HVAC DUCTWORK FOR COMMUNITY TABLE LIGHTING FIXTURE.
- NEW GYPSUM BOARD BULKHEAD ABOVE ELECTRICAL PANELS. BULKHEAD TO BE FINISH WITH FRP-1.
- EMERGENCY LIGHT AND EXIT PATH LIGHTING QUANTITY. LOCATION, HEIGHT, LIGHTING LEVEL AS PER CODE REQUIREMENT.

RCP LEGEND

	AIR DIFFUSER		LED LIGHT FIXTURE
	SUSPENDED PENDANT LIGHT FIXTURE		RECESSED CAN LIGHT FIXTURE
	STEM MOUNTED SPOT LIGHT		CEILING MOUNTED HEATER
	EXIT LIGHT		STRING LIGHT
	SUB WOOFER		DIRECTIONAL LIGHT
	SPEAKER		WIB LIGHT
	EXTERIOR LINEAR LIGHT		HOOD LAMP
	LED STRIP LIGHT		EXHAUST FAN
	BOOTH PENDANT LIGHT		EXISTING LED WALL PACK
	EMERGENCY EGRESS LIGHT		





- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ON-SITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON-SITE.

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

#	Date	Description	Dwn

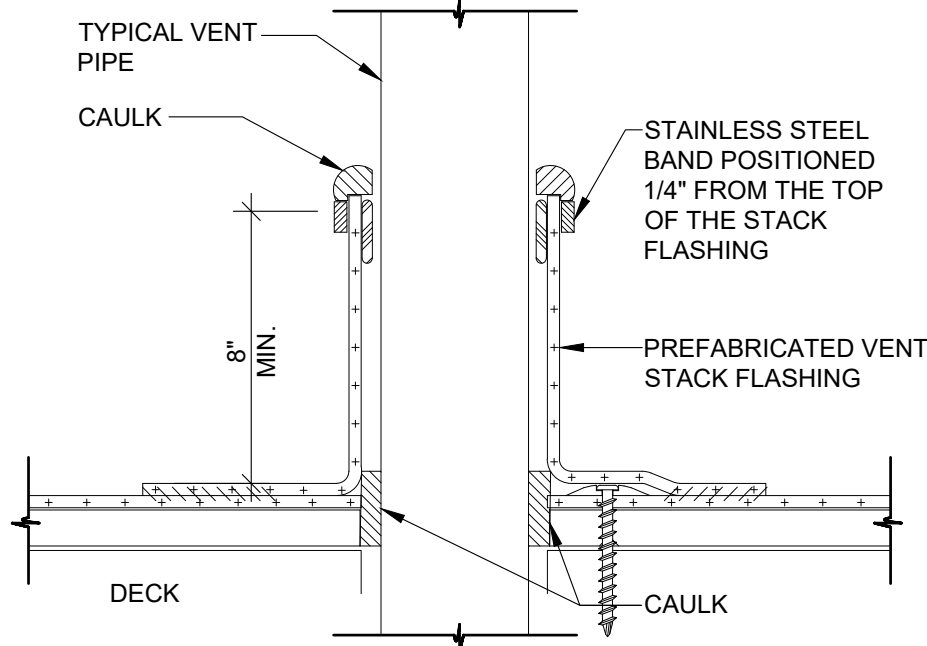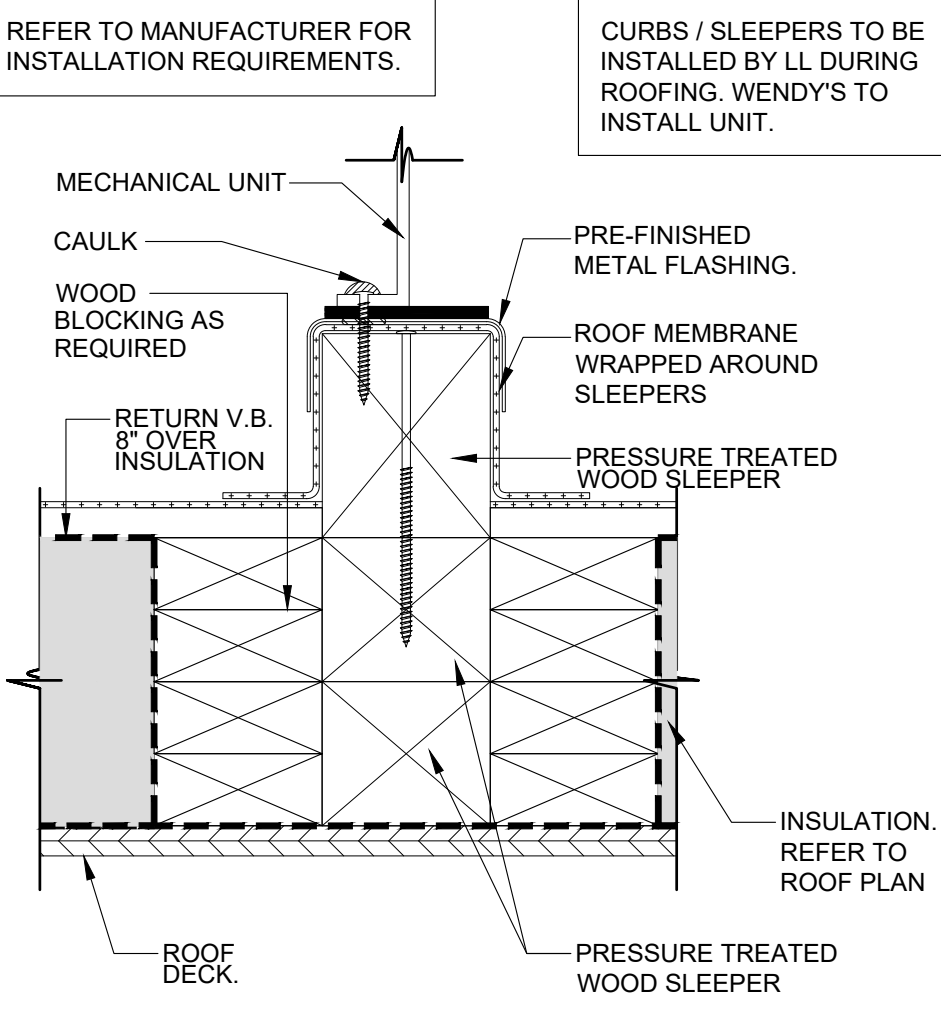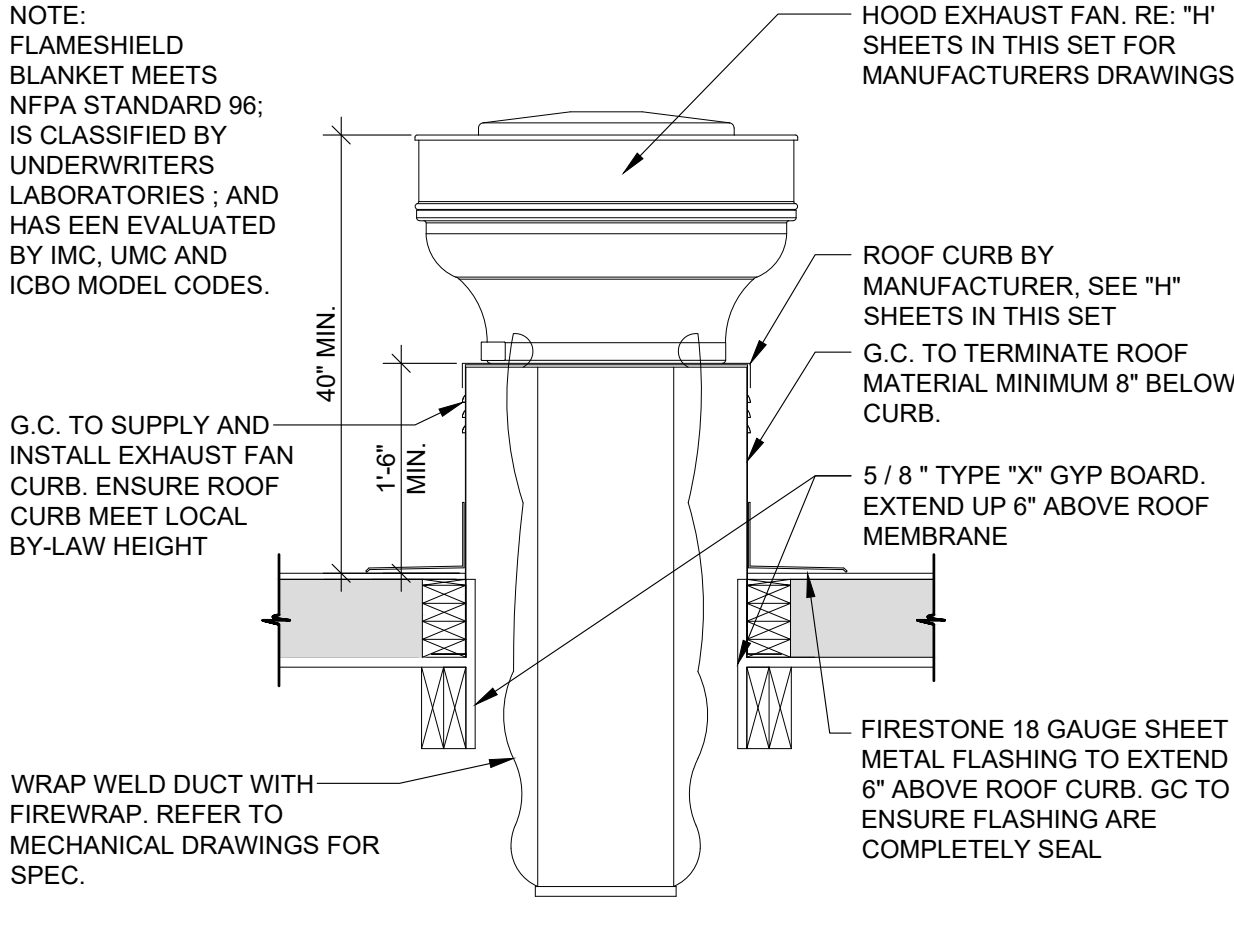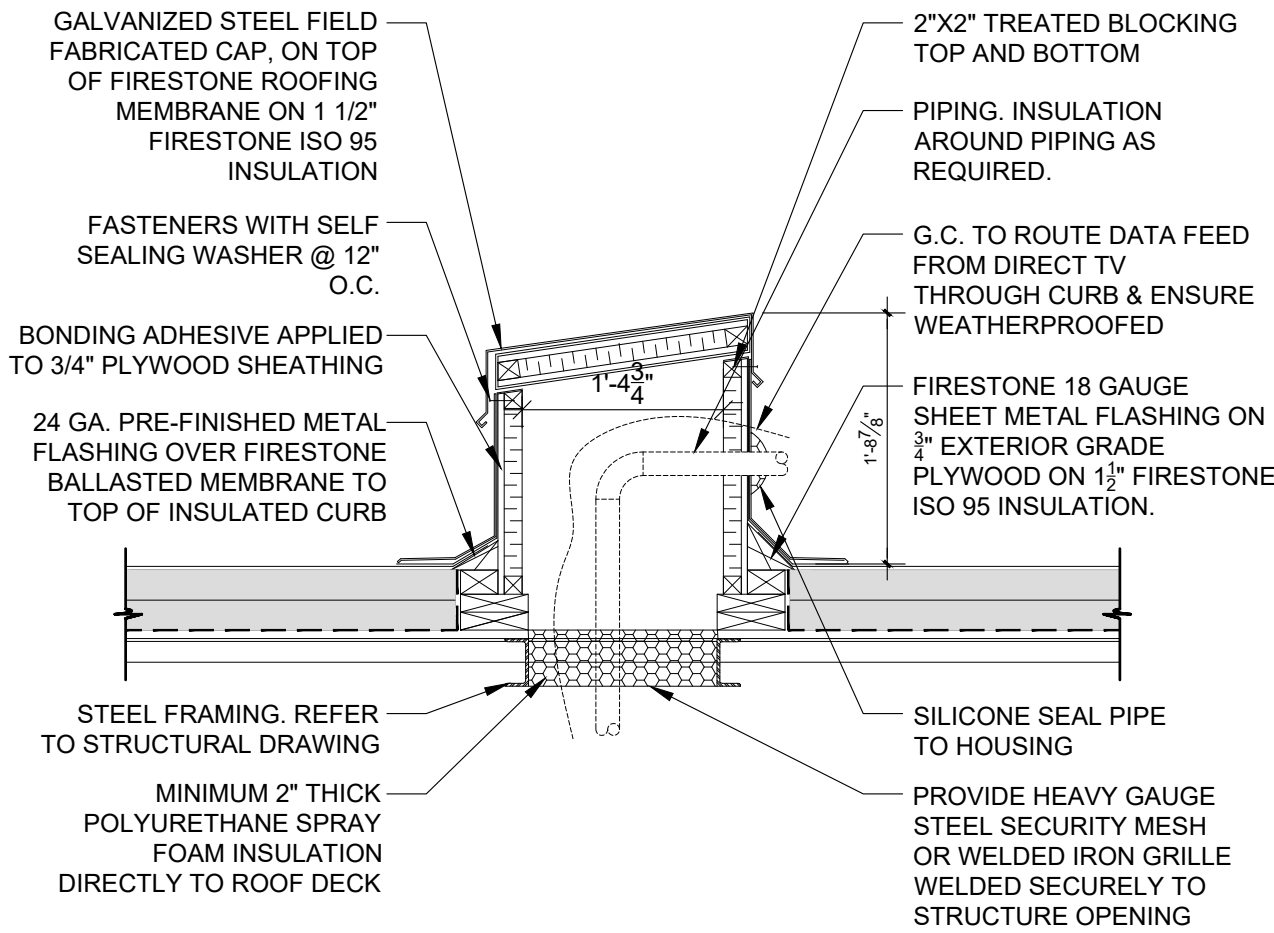


02 ROOF DETAIL - CONDENSER PIPE (A)
SCALE: 3/4" = 1'-0"

03 EXHAUST FAN DETAIL
SCALE: 3/4" = 1'-0"

04 CONDENSER UNIT DETAIL
SCALE: 3" = 1'-0"

05 ROOF DETAIL - TYPICAL PIPE
SCALE: 1 1/2" = 1'-0"

NOTE: ROOF DETAILS ON THIS PAGE ARE GENERIC DETAILS FOR REFERENCE ONLY. CONDITIONS / CONSTRUCTION MAY VARY. REFER TO BASE BUILDING DRAWINGS FOR MORE INFO ON ROOF ASSEMBLY.

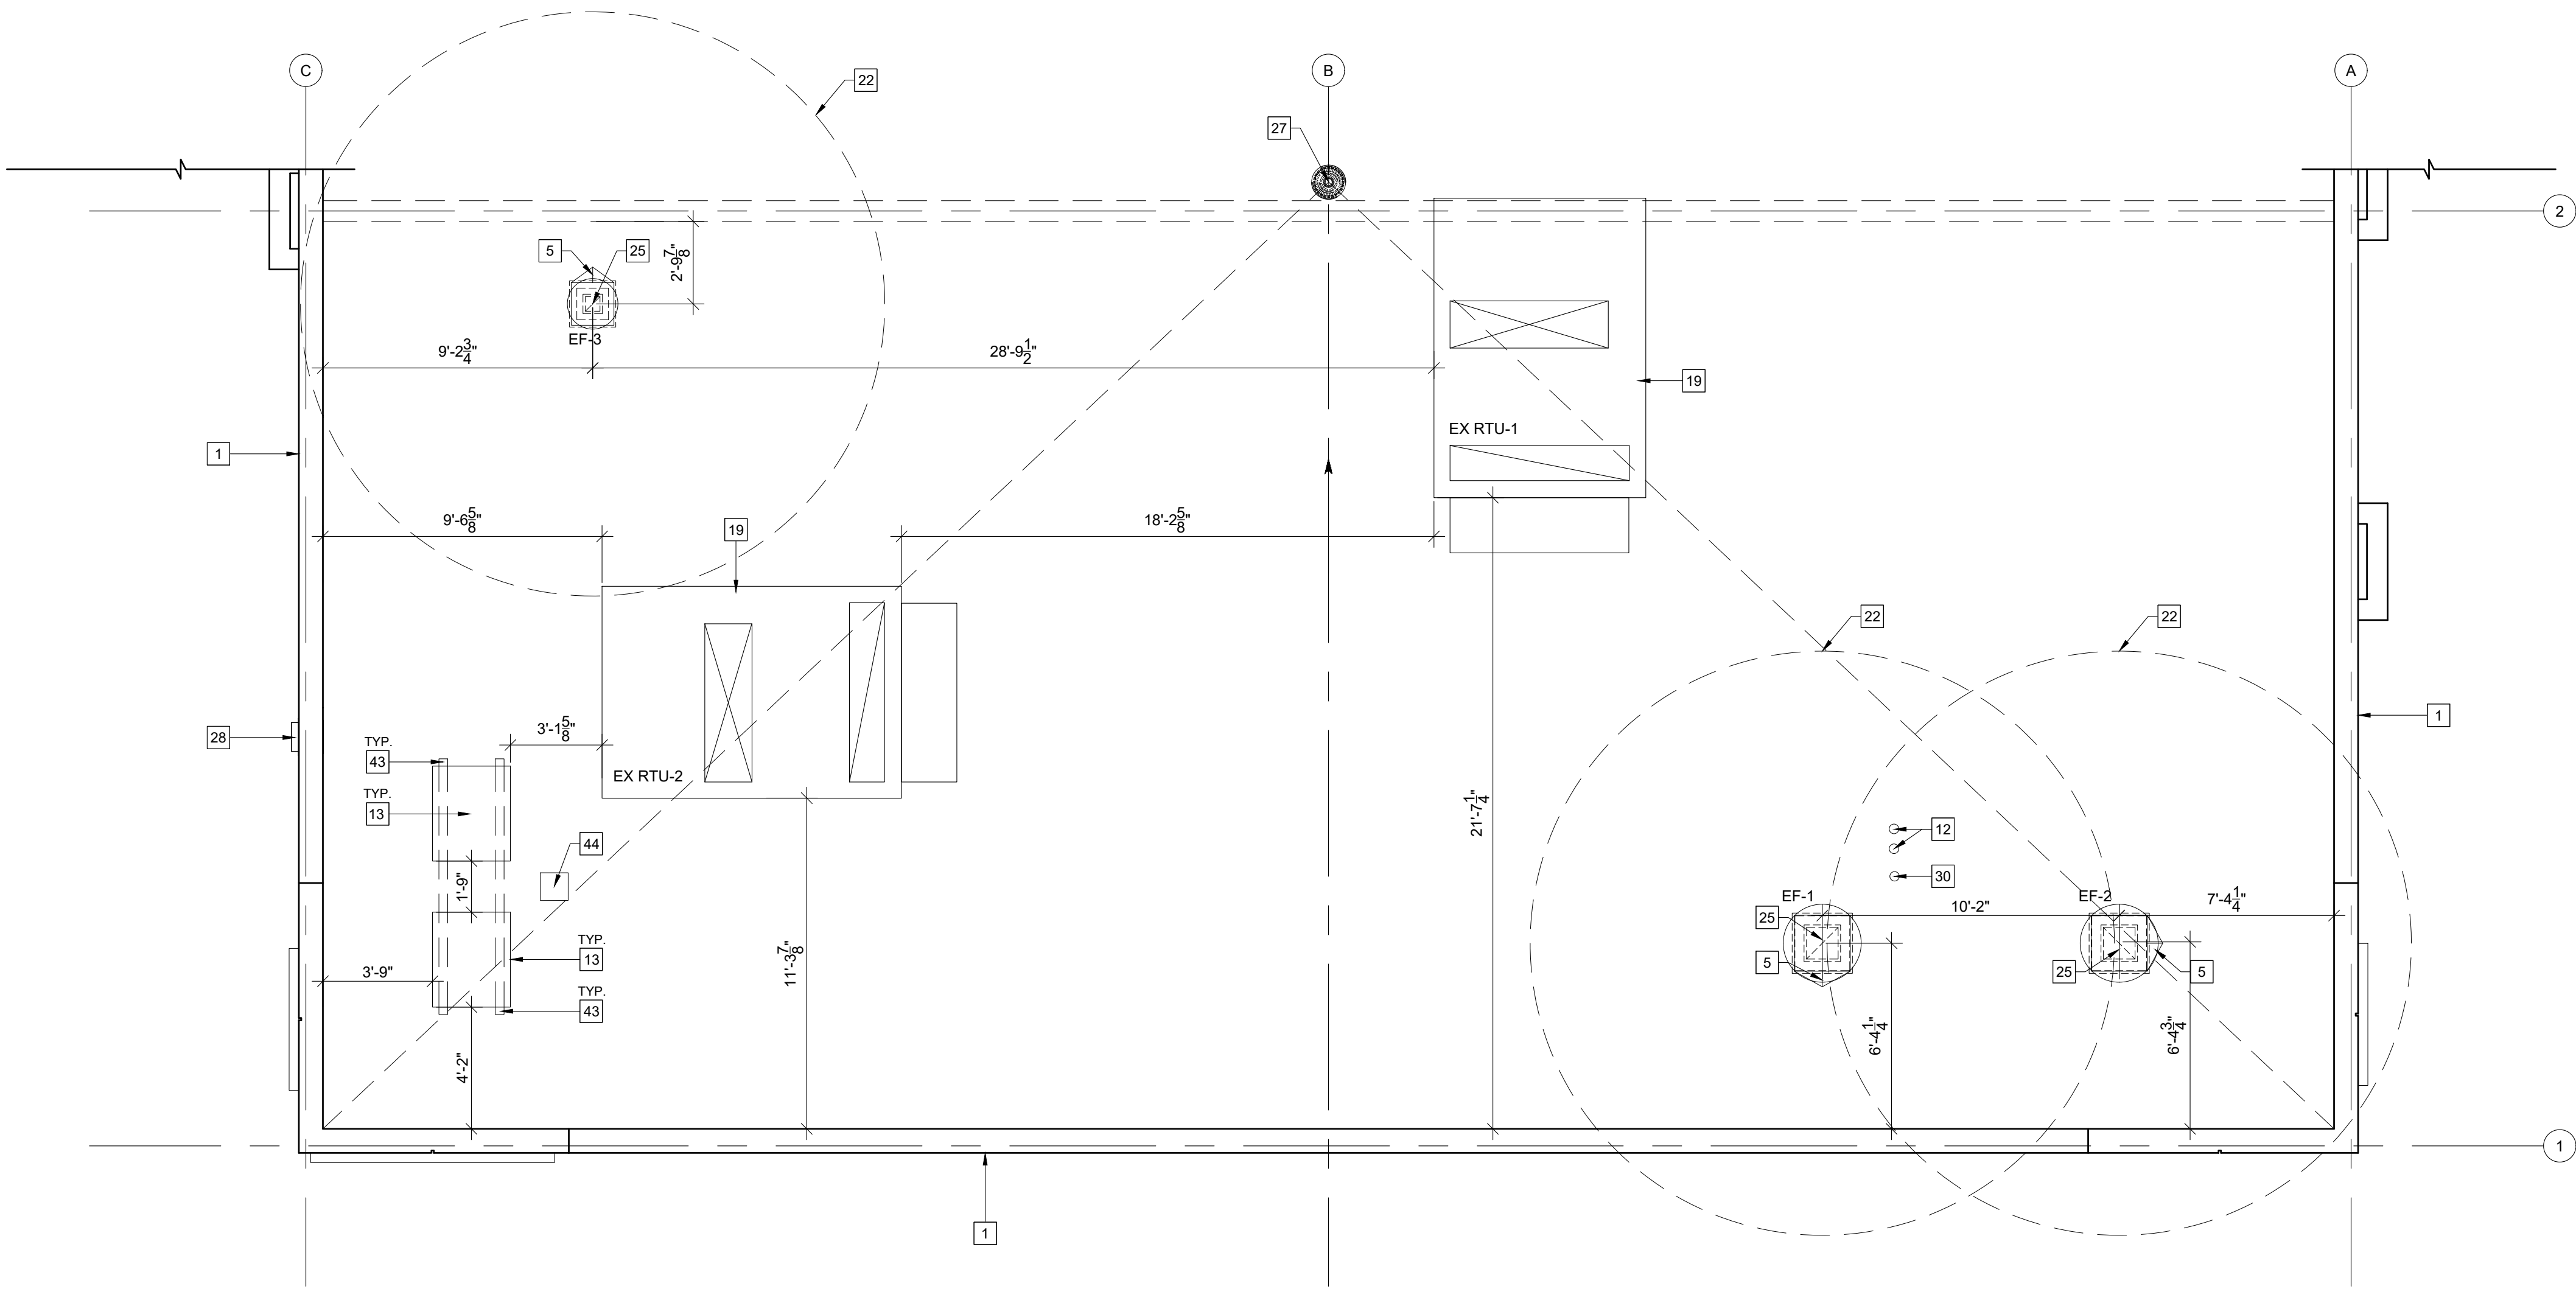

01 ROOF PLAN
SCALE: 1/4" = 1'-0"

CODED NOTES:

- 1 LINE OF EXTERIOR WALL BELOW. BY LANDLORD.
- 2 N/A.
- 3 EXTEND SINGLE-PLY MEMBRANE ROOF-TO TERMINATION BAR UNDER COUNTER FLASHING TO PROVIDE WEATHER TIGHT SEAL. REFER TO DETAIL 01A4.3:
- 4 EXTERIOR WALK-IN COOLER/FREEZER/RECEIVING UNIT SUPPLIED AND INSTALLED BY OTHERS. WALK-IN BOX PROVIDER IS RESPONSIBLE FOR INSTALLATION OF ROOFING SYSTEM ON PANELIZED COOLER/FREEZER SYSTEM. MEMBRANE ROOF ON W.B. BY MANUFACTURER. G.G. TO PROVIDE AND INSTALL COUNTER FLASHING. G.G. TO PAINT DOOR AND FRAME.
- 5 PROVIDE POSITIVE DRAINAGE AROUND ALL ROOF CURBS. BY LANDLORD.
- 6 INSTALL PIPE FLASHING FOR ROOF MOUNTED CONDENSERS LINES. REFER TO DETAIL 4/A4.3:
- 7 ICE MACHINE CONDENSER FOR DINING ROOM FREESTYLE MACHINE. REFER TO DETAIL 5/A4.3 FOR CURB.
- 8 ROOF MOUNTED TRANSFORMER. SUPPLY AND INSTALL BY G.G. REFER TO ELECTRICAL AND STRUCTURAL DRAWINGS. BY LANDLORD.
- 9 PRE-FINISHED ALUMINUM DOWNSPOUT & GUTTER. REFER TO MECHANICAL DRAWINGS:
- 10 PARAPET VENTING BY ROOF MEMBRANE MANUFACTURER. MIN. 1 VENT PER DRAFTSTOPPED AREA.
- 11 MECHANICALLY FASTEN SINGLE-PLY ROOF MEMBRANE OVER CONTINUOUS RIGID BOARD INSULATION OVER PLYWOOD SHEATHING/METAL DECK.
- 12 PLUMBING VENT PIPE. REFER TO DETAIL 05/A1.3 FOR REQUIRED FLASHING REQUIREMENTS.
- 13 WALK-FREEZER/COOLER REMOTE CONDENSER. REFER TO ELECTRICAL DRAWINGS. INSTALLED BY WALK-IN MANUFACTURER AND FINAL CONNECTION BY G.G.
- 14 LOCATION OF ROOF LADDER ACCESS GATE. SUPPLY AND INSTALL BY G.G. REFER TO DETAIL 01/A4.3. PLATFORM TO BE METAL WITH NON-SLIP ROOFING TREAD. BY LANDLORD.
- 15 EXTEND ROOF MEMBRANE UP OVER PARAPET & FLASH TO PRE-FINISHED ALUMINUM ROOF DRIP EDGE OR GRAVEL STOP. REFER TO WALL SECTIONS:
- 16 ROOF MEMBRANE OVER FANFOLD INSULATION ON PATIO ROOF.
- 17 METAL CANOPY//AWNING. REFER TO EXTERIOR ELEVATIONS AND WALLS SECTIONS FOR MORE DETAIL. BY LANDLORD.
- 18 WALKWAY PAD. BY LANDLORD.
- 19 ROOFTOP UNIT. REFER TO DETAIL 6/A4.3 AND MECHANICAL DRAWINGS. BY LANDLORD.
- 20 PRE-FINISHED ALUMINUM DRIP EDGE. REFER TO WALL SECTIONS:
- 21 HATCH PATTERN INDICATES AREAS OF TAPERED INSULATION OVER SPECIFIED RIGID THERMAL INSULATION AS REQUIRED TO PROVIDE ROOF DRAINAGE. G.G. TO COORDINATE ACTUAL EXTENTS OF TAPERED INSULATION MATERIALS WITH ROOF-INSTALLER PROPER GOUNTS SLOPE AS REQUIRED BY G.G.DE.
- 22 DASHED LINE INDICATES CLEAR AREA REQUIRED FOR THE HVAC UNIT AIR INTAKE. LOCATE ALL EXHAUST AIR DEVICES OUTSIDE OF 10'-0" RADIUS (TYP.)
- 23 N/A.
- 24 RTU MOUNTED SCREENING (ONLY WHERE REQUIRED)
- 25 EXHAUST FAN. G.G. TO TERMINATED ROOFING MATERIALS MINIMUM 8" BELOW TOP OF CURB. REFER TO DETAIL 03/A1.3 AND MECHANICAL DRAWINGS. REINFORCEMENTS AND OPENINGS BY LANDLORD.
- 26 OVERFLOW DRAIN. REFER TO DETAIL 13/A4.3. FILED LOCATE TO BE 2" HIGHER THAN MAIN DRAIN.
- 27 ROOF DRAIN. REFER DETAIL 13/A4.3. CONNECT LEADER TO UNDERGROUND STORM SYSTEM. REFER TO MECHANICAL DRAWINGS. BY LANDLORD.
- 28 PRE-MANUFACTURED THRU WALL SCUPPER. 8" H x 12" W MINIMUM. BASE TO BE 2" ABOVE ROOF MEMBRANE TO ALLOW WATER TO "PASS THRU". G.G. TO EXTEND SCUPPER 4" PASS EXTERIOR WALL. BY LANDLORD.
- 29 LED UPLIGHT. REFER TO ELECTRICAL DRAWINGS:
- 30 CONCENTRIC COMBUSTION FLUE FOR HOT WATER TANK. REFER TO MECHANICAL DRAWINGS.
- 31 N/A.
- 41 G.G. TO CUT BACK ROOF MEMBRANE AND SUBSTITUTE PLYWOOD SHEATHING WITH DENDECK ROOF BOARD AT THIS PARAPET. G.G. TO SUPPLY AND INSTALL BREAK METAL/ STAINLESS STEEL PANEL AT PARAPET WALL BY EXHAUST FAN.
- 42 LOCATION OF ROOF LADDER ACCESS GATE. SUPPLY AND INSTALL BY G.G.
- 43 ROOF CURBS **MUST BE PERPENDICULAR** TO ROOF JOIST DIRECTION. BY LANDLORD.
- 44 "DOG HOUSE" TYPE FOR ROOF MOUNTED CONDENSERS LINES. REFER TO DETAIL 02/A1.3.
- 45 HEAT TRACE ON CANOPIES THROUGHOUT. SUPPLY AND INSTALL BY G.G.
- 46 LINE OF PARAPET BRACING
- 47 RADON VENT BY LANDLORD. REFER TO MECHANICAL DRAWINGS AND BASE BUILDING DRAWINGS:
- 48 DASHED LINE INDICATES CLEAR AREA REQUIRED FOR RADON PIPE. NO INLET ALLOWED WITHIN THE 10'-0" RADIUS.

EXISTING ROOF TYPE LEGEND

ROOF ASSEMBLY 01 (REFER TO BASE BUILDING DWGS):

- 2-PLY SBS MODIFIED BITUMEN MEMBRANE
- TYPE 1 POLYSTYRENE ROOF INSULATION (R40)
- 6MIL. POLY VAPOUR BARRIER
- 1/2" EXTERIOR GRADE PLYWOOD SHEATHING
- 1 1/2" 20GA. STEEL DECK
- ON O.W.S.J. (SEE STRUCTURAL DRAWINGS)

ROOF TYPE LEGEND (FOR REFERENCE ONLY). REFER TO BASE BUILDING DRAWINGS FOR LATEST INFO

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ONSITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

#	Date	Description	Dwn
---	------	-------------	-----

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

#	Date	Description	Dwn
---	------	-------------	-----


DRAWING TITLE:

ROOF PLAN

PRINT DATE:	SCALE:
6/19/2026	AS NOTED
DRAWN BY:	DRAWING NO:
DB	
CHECKED BY:	
MO	
PROJECT NO:	
17037	


A1.3

NOTE: ALL EXTERIOR BASE BUILDING FINISHES BY LANDLORD. ELEVATIONS SHOWN FOR SIGNAGE LOCATION.

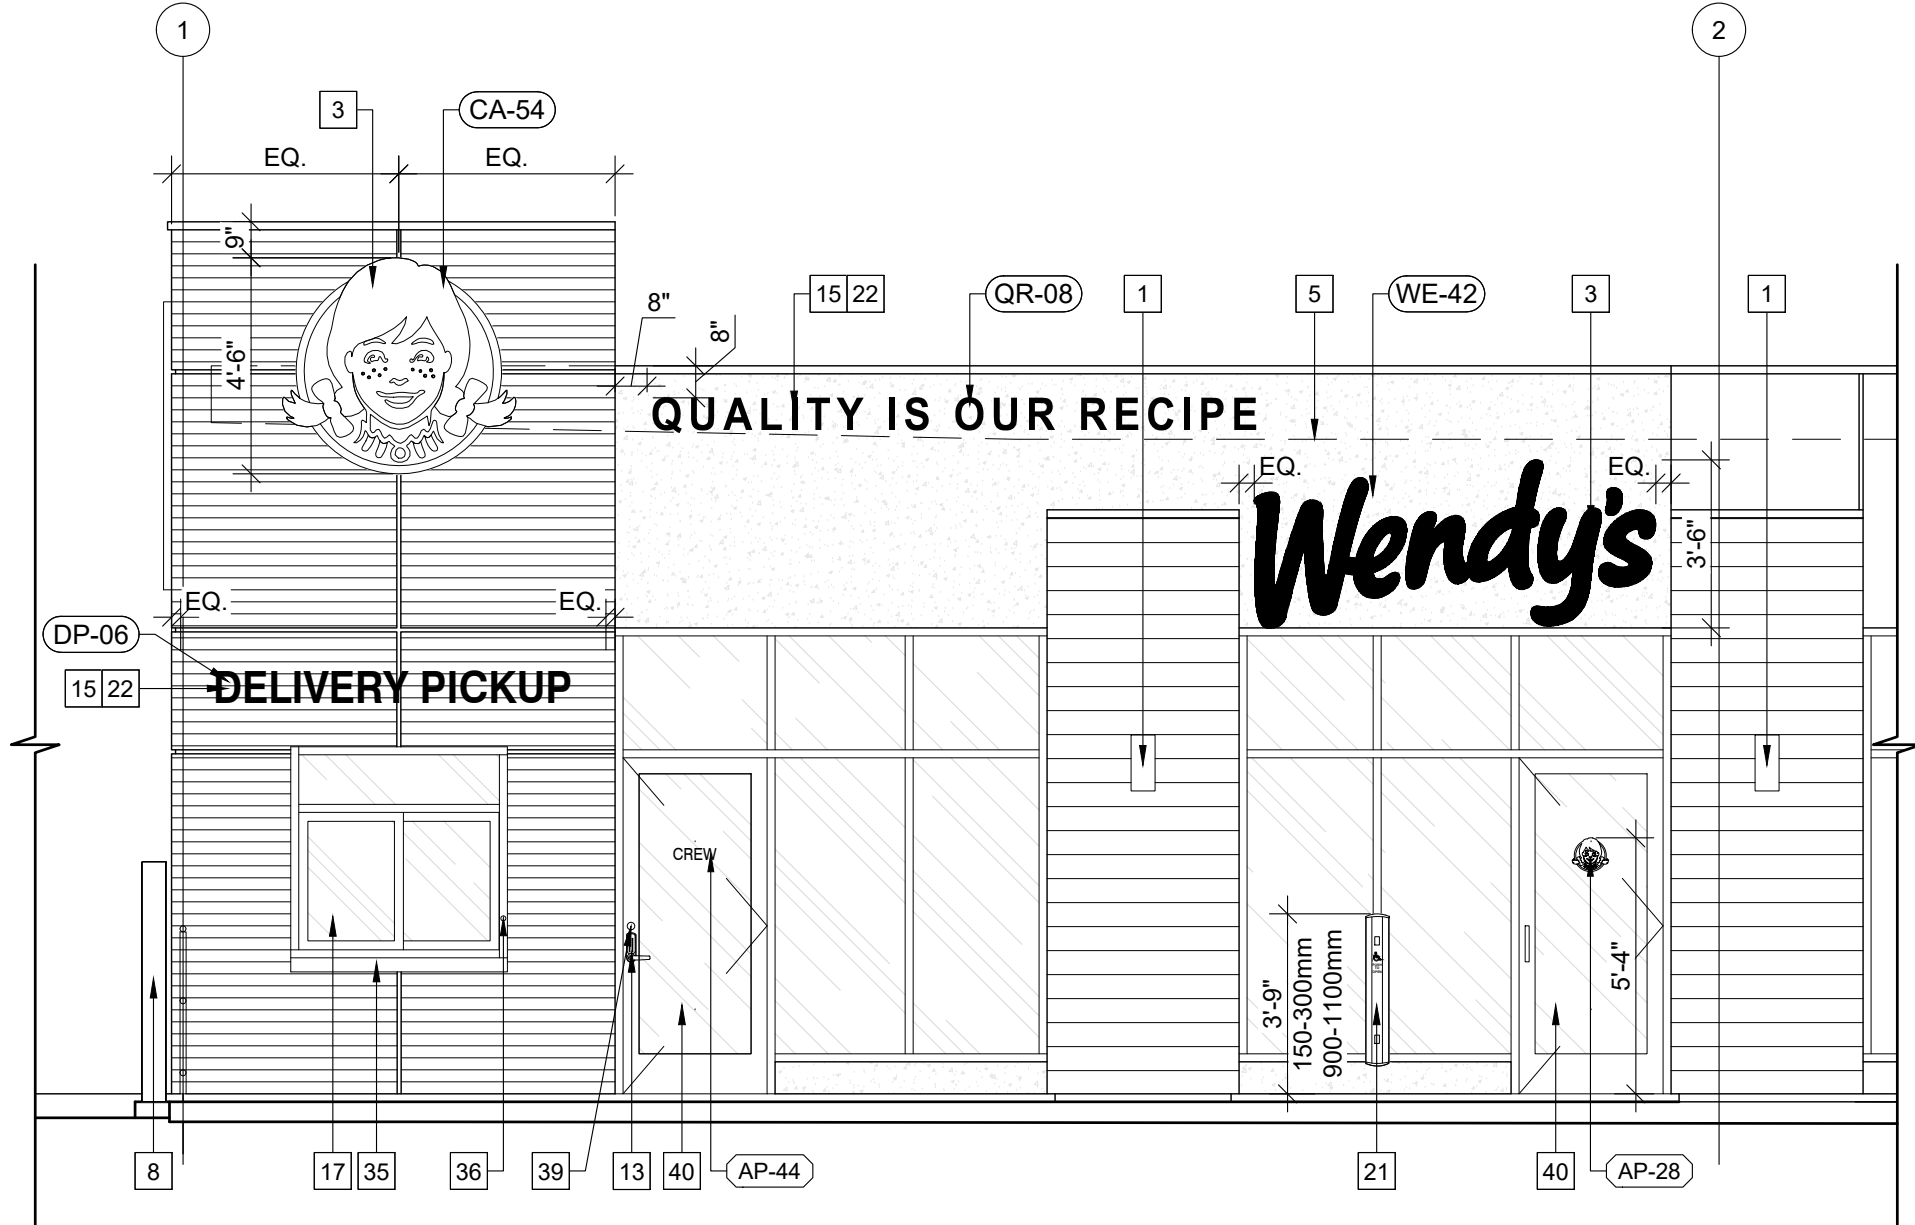


01 ENTRANCE SIDE ELEVATION

SCALE: 1/4" = 1'-0"

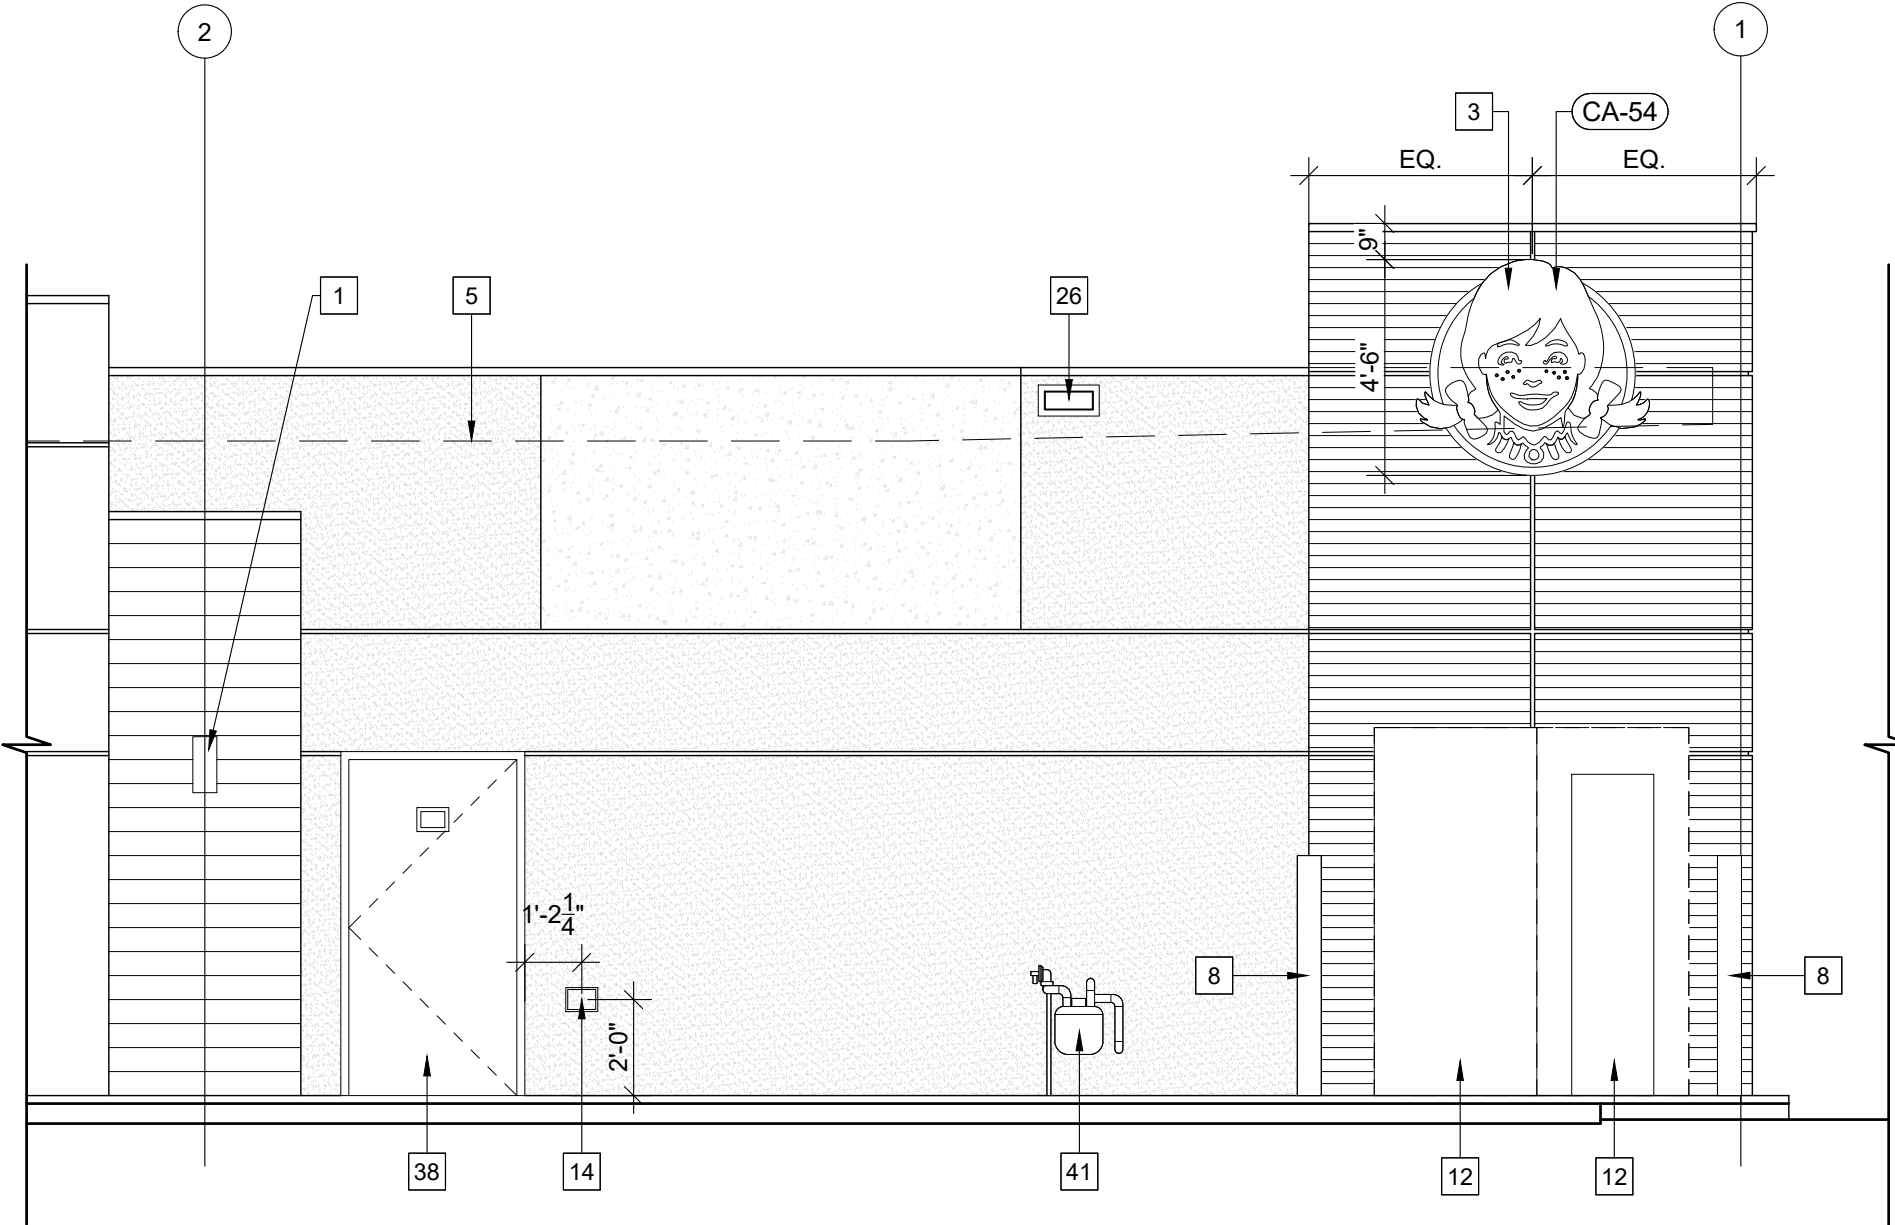

02 REAR ELEVATION

SCALE: 1/4" = 1'-0"

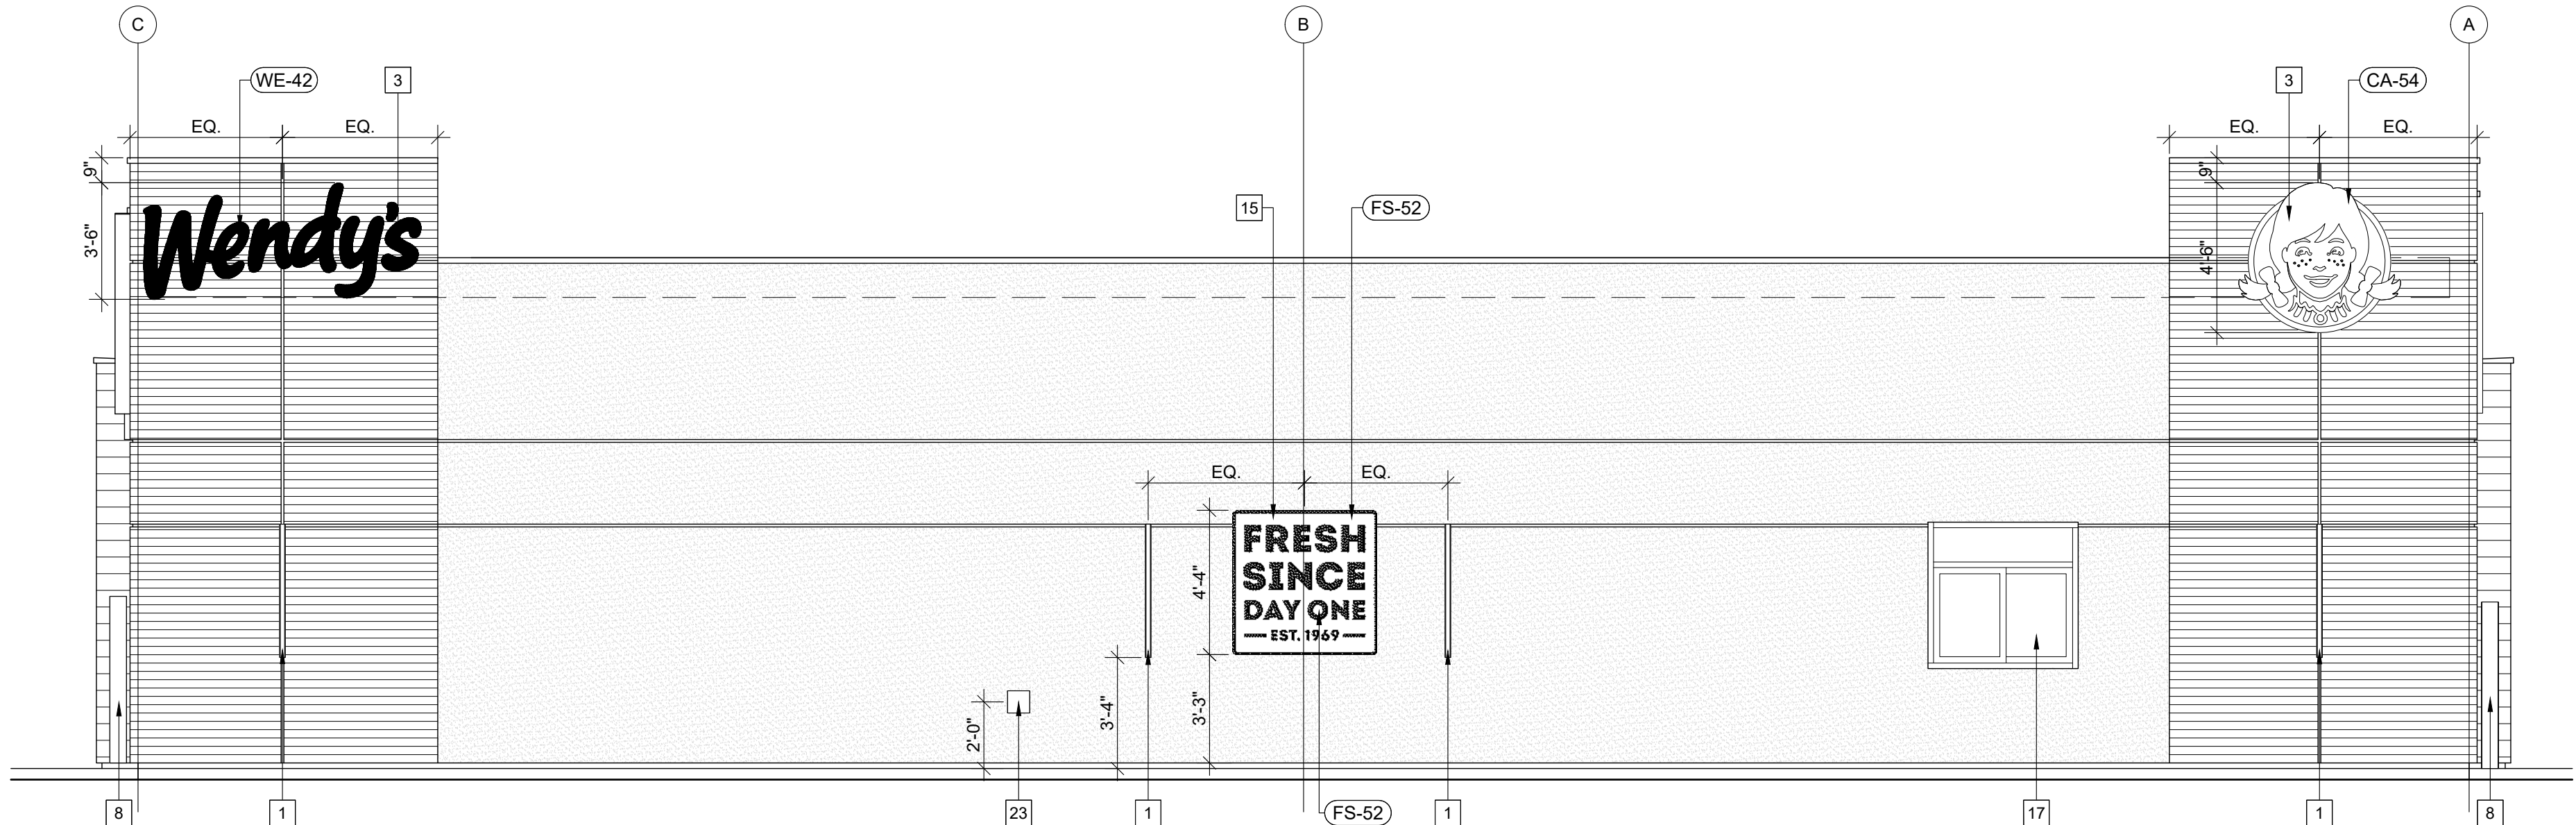

03 DRIVE-THRU SIDE ELEVATION

SCALE: 1/4" = 1'-0"

EXTERIOR SIGNAGE SCHEDULE

CA-54	INTERNALLY ILLUMINATED CAMEO 54"
WE-42	INTERNALLY ILLUMINATED WAVE 42" (WHITE OR RED FACED)
FS-52	FRESH SINCE DAY ONE
QR-08	NON-ILLUMINATED WHITE QIOR LETTER SIGN 8" (CANADA MARKETS)
DP-06	NON-ILLUMINATED DELIVERY PICKUP LETTER SIGN 8"

EXTERIOR ELEVATION CODED NOTES

- WALL MOUNTED LIGHT FIXTURE. TYP. REFER TO ELECTRICAL DRAWINGS: LIGHT FIXTURE MOUNTED TO RECESSED JUNCTION BOX. BY LANDLORD.
- STREET NUMBER TO BE LOCATED PER LOCAL JURISDICTIONAL REQUIREMENTS: 6" HIGH NON-REFLECTIVE BRUSHED ALUMINUM NUMBERS
- WENDY'S ILLUMINATED SIGNAGE TO BE PROVIDED AND INSTALLED BY SIGNAGE SUPPLIER. LANDLORD TO PROVIDE WOOD BLOCKING. FINAL ELEC. CONNECTION AND PLATFORM SERVING TRANSFORMER BY G.C. CONFIRM SIGNAGE SIZES, STYLE, MOUNTING HEIGHT AND LOCATION W/ APPROVED SIGNAGE DWGS. G.C. TO INFILL VOID BEHIND FINISH WITH PLYWOOD SHEATHING FOR ALL SIGNAGE.
- EXTERIOR VIGWEST WALL FINISH TO START 2" A.F.F.
- DASHED LINE INDICATES ROOF LINE. BY LANDLORD.
- ROOF TOP UNITS. REFER TO ROOF PLAN AND MECHANICAL DRAWINGS.
- ROOF LADDER W/ SAFETY GATE. COLOUR TO BE PEX-12. REFER TO DETAIL ON SHEET A4.3. BY LANDLORD.
- 6" DIA. CONCRETE FILLED METAL PIPE BOLLARD W/ BOLLARD SLEEVE. BY LANDLORD.
- OVERHANG CANOPY. REFER TO DETAILS AND STRUCTURAL DRAWINGS BY LANDLORD.
- PAINT COLUMNS PEX-13 (PATIO ONLY).
- PRE-FINISHED WALK-IN COOLER/ FREEZER. PREFINISH COLOUR TO BE PEX-12.
- USED COOKING OIL TANK AND CO2 ENCLOSURE. PRE-FINISHED PEX-12. REFER TO MECHANICAL DRAWINGS.
- EMPLOYEE KEY PAD.
- REMOTE SUCTION FOR GREASE INTERCEPTOR C/W LOCKABLE DUST CAP.
- NON-ILLUMINATED SIGNAGE. SUPPLY AND INSTALL BY SIGN COMPANY.
- PREFINISHED METAL PARAPET CAP W/ DRIP EDGE (BEYOND). ENSURE METAL FLASHING OVER LAP 6" MIN. ON EXTERIOR FINISHES.
- DRIVE-THRU / WALK-UP PICK UP WINDOW. REFER TO WINDOW SCHEDULE ON SHEET A6.3. BY LANDLORD.
- DOOR HARDWARE TO BE INCLUDED WITH WALK-IN COOLER/FREEZER BOX. REFER TO DOOR SCHEDULE ON SHEET A6.3.
- FOUNDATION WALL AND FOOTING. REFER TO STRUCTURAL DRAWINGS FOR SIZE AND DEPTH.
- G/T CABINET & ELECTRICAL METER. PAINTED PEX-12.
- 36" TALL BARRIER FREE COLUMN PUSH PLATE DOOR ACTUATOR. MOUNTING HEIGHT OF 150-300mm and 900-1100mm AFF.
- 8" FLUSH PIN MOUNTED NON-ILLUMINATED LETTER. COLOUR TO BE WHITE. SUPPLY AND INSTALL BY SIGN COMPANY.
- HOSE BIB AND ENCLOSURE. REFER TO PLUMBING DWGS. BY LANDLORD.
- 8" FLUSH PIN MOUNTED NON-ILLUMINATED LETTER. COLOUR TO BE WHITE. SUPPLY AND INSTALL BY SIGN COMPANY.
- N/A.
- OVERFLOW SCUPPER. REFER TO DETAIL 12/A4.3. BY LANDLORD.
- N/A.
- N/A.
- N/A.
- N/A.
- PRE-ENGINEERED DRIVE-THRU CANOPY WITH SNOW MELT SYSTEM. SUPPLIED BY MANUFACTURER AND INSTALLED BY G.C.
- VIGWEST FINISH REVEAL. TYP.
- BRAKE METAL FINISH SEAMS.
- LED TAPE LIGHTING IN CORNICE. REFER TO ELECTRICAL DRAWINGS.
- STAINLESS STEEL SHELF.
- DOOR BELL.
- PARGE COAT (GREY) AT ALL EXPOSED CURB. TYP.
- SERVICE DOOR. BY LANDLORD. G.C. TO ENSURE ALL HARDWARE IS PER WENDY'S STANDARD. REFER TO DOOR SCHEDULE.
- THUMB TURN LOCK TO BE INSTALLED IN ADDITION TO CODE LOCK (THUMB TURN ON INTERIOR SIDE).
- DOOR BY LANDLORD. G.C. TO ENSURE ALL HARDWARE IS PER WENDY'S STANDARD. REFER TO DOOR SCHEDULE.
- GAS METER. BY LANDLORD.

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE AS AMENDED AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ONSITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

Date Description Dwn

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

Date Description Dwn

DRAWING TITLE:

EXTERIOR ELEVATIONS

PRINT DATE: SCALE:

6/19/2026 AS NOTED

DRAWN BY: DRAWING NO:

DB

CHECKED BY: MO

PROJECT NO: 17037

A2.1

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ONSITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK
#	Date	Description	Dwn

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION







#	Date	Description	Dwn

DRAWING TITLE:


FRONT COUNTER DETAILS

PRINT DATE:	SCALE:
6/19/2026	AS NOTED
DRAWN BY:	DRAWING NO:
DB	
CHECKED BY:	
MO	
PROJECT NO:	
17037	

A4.1

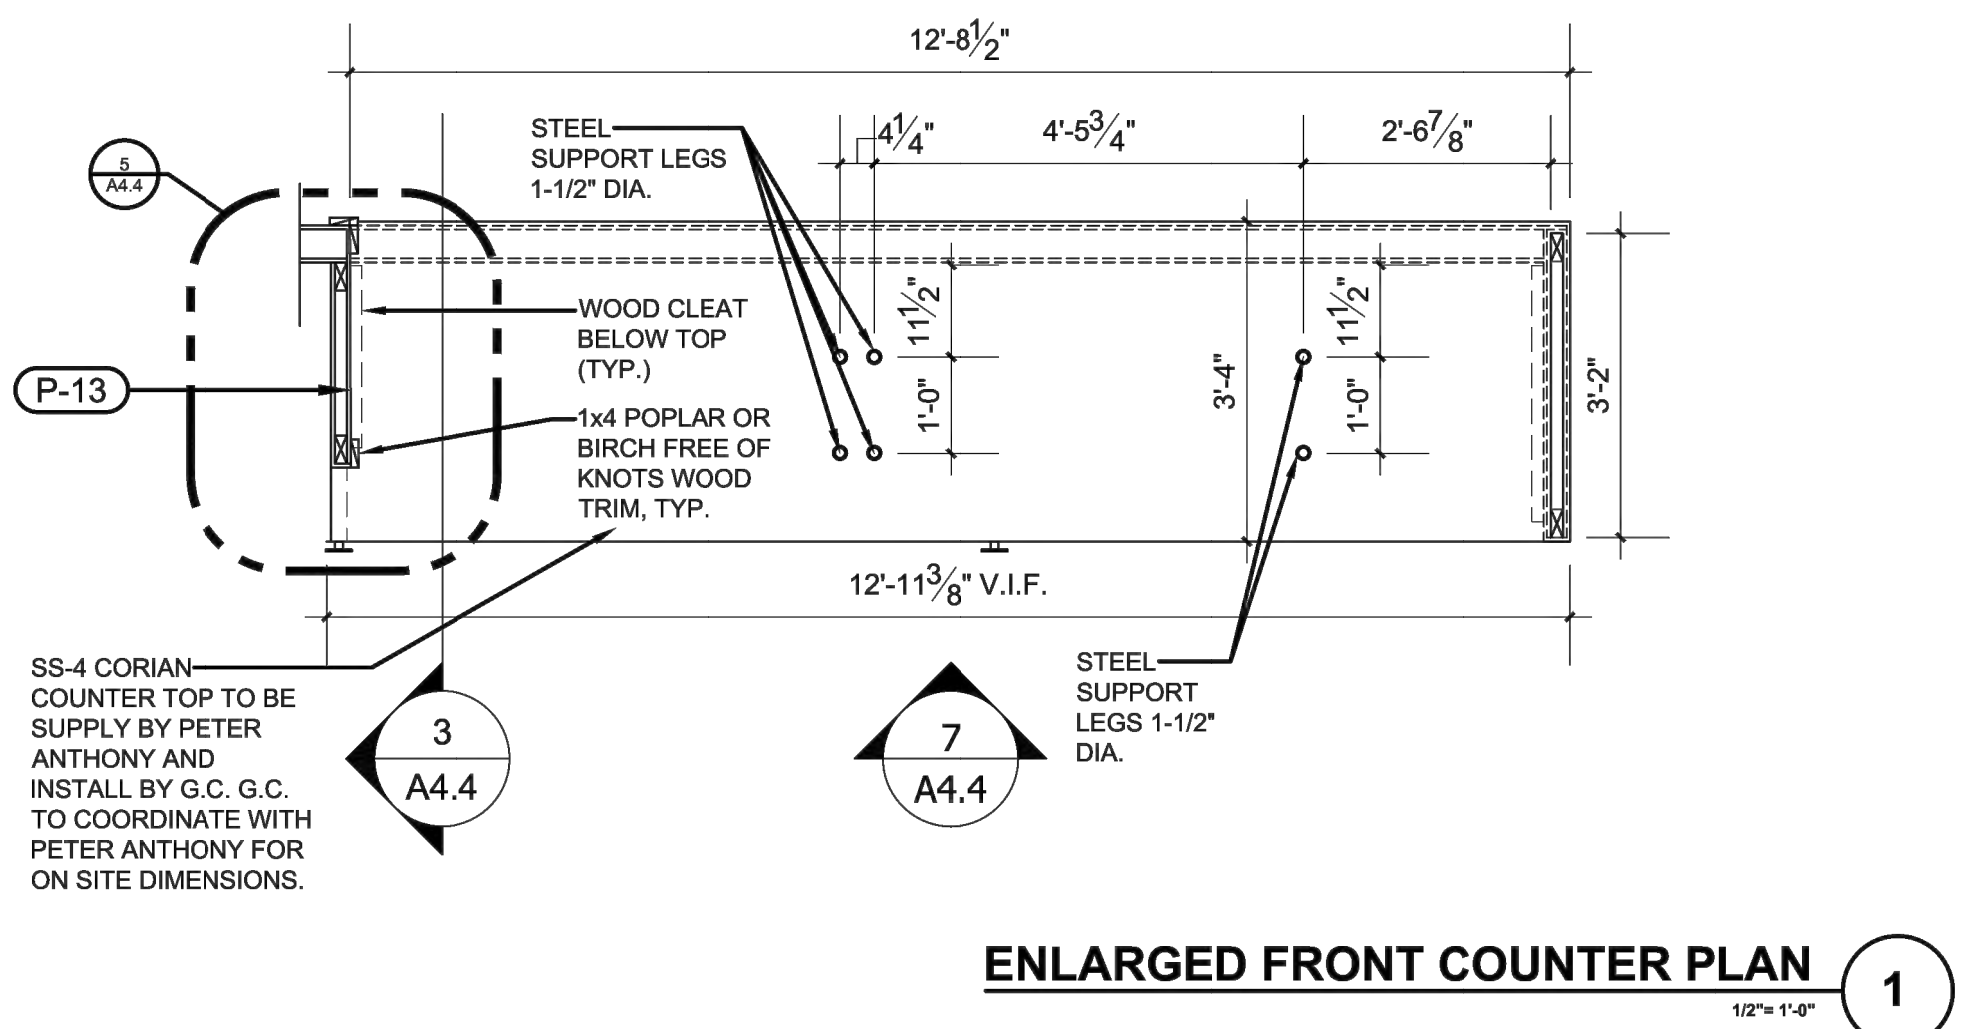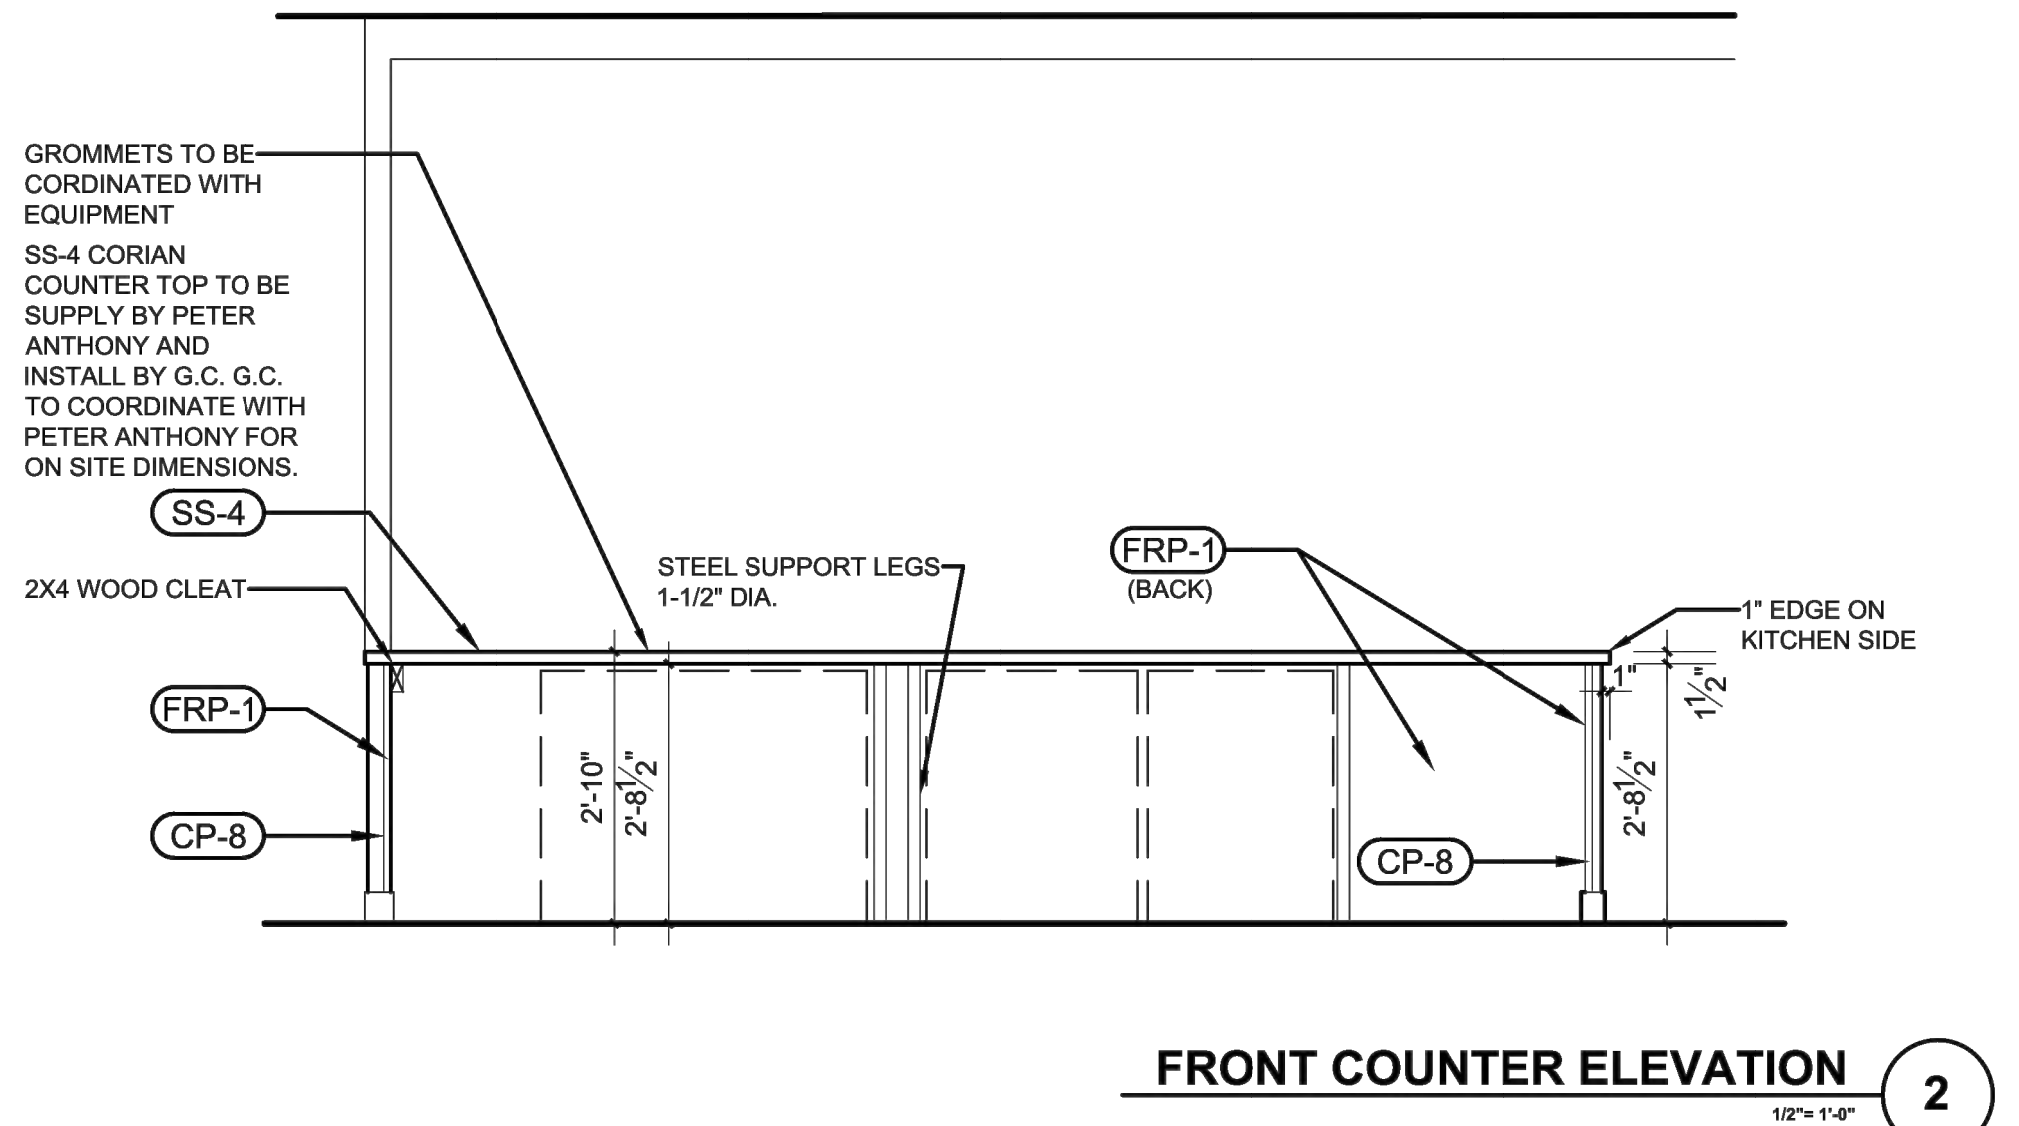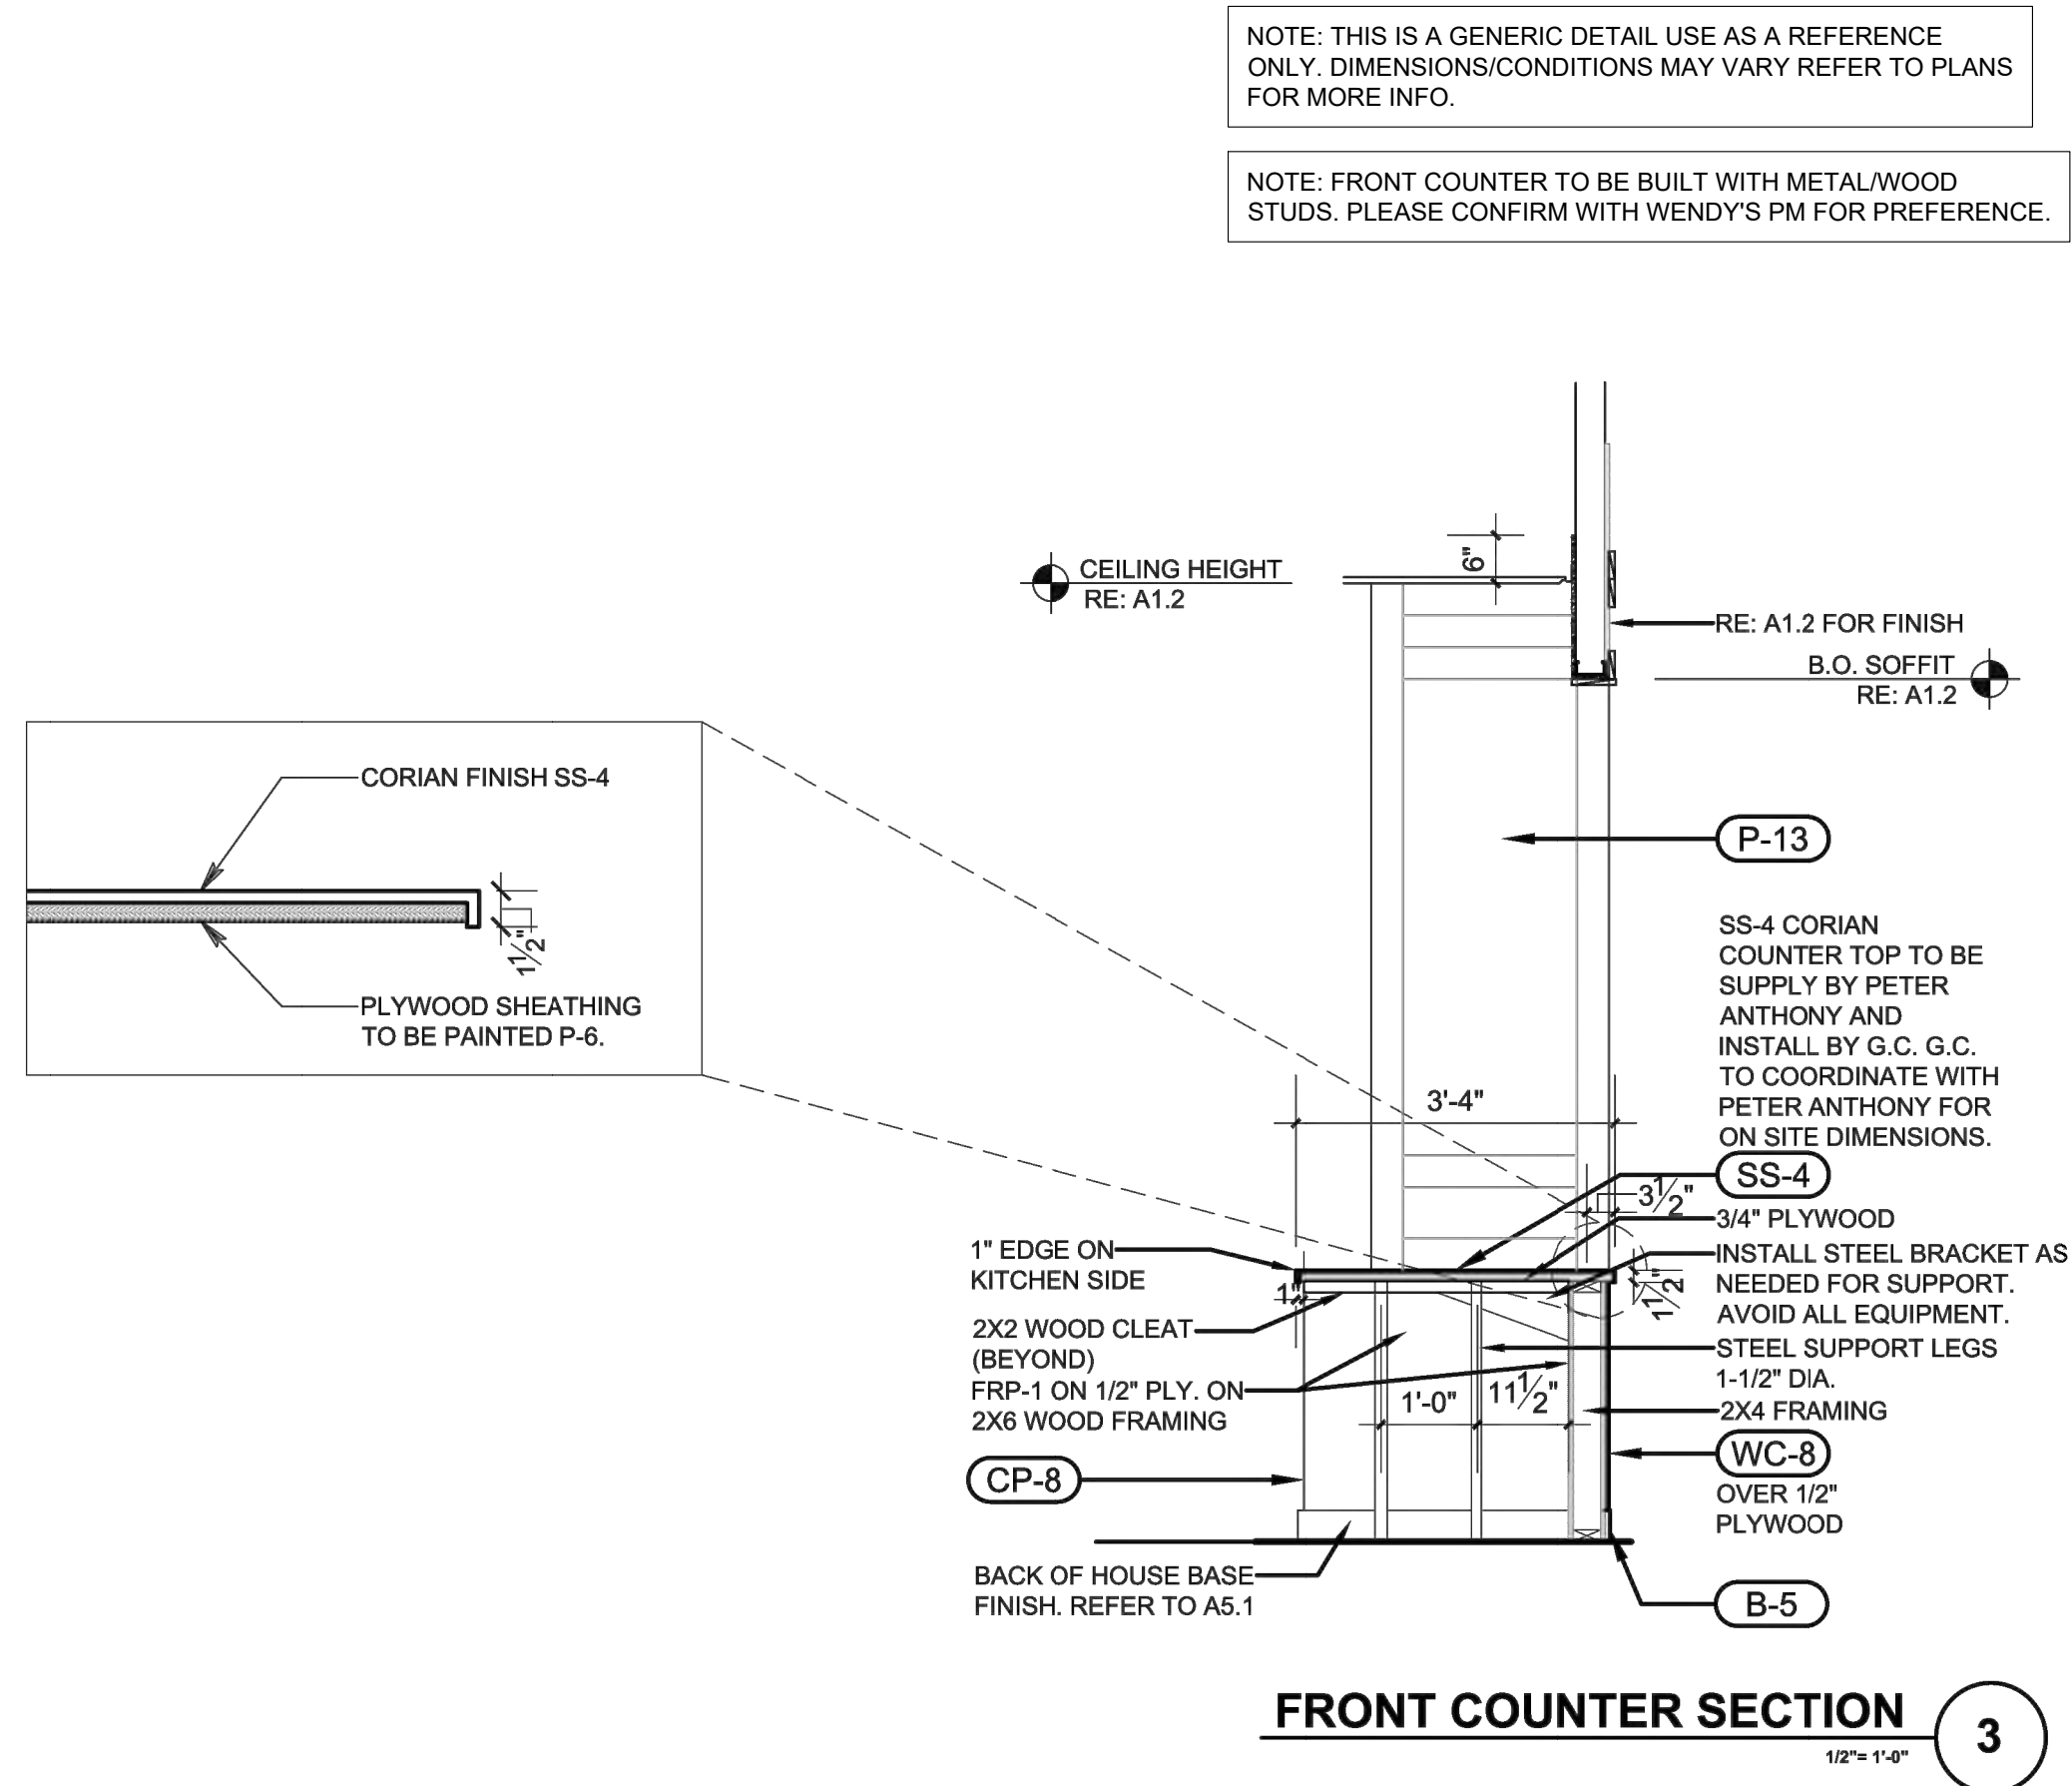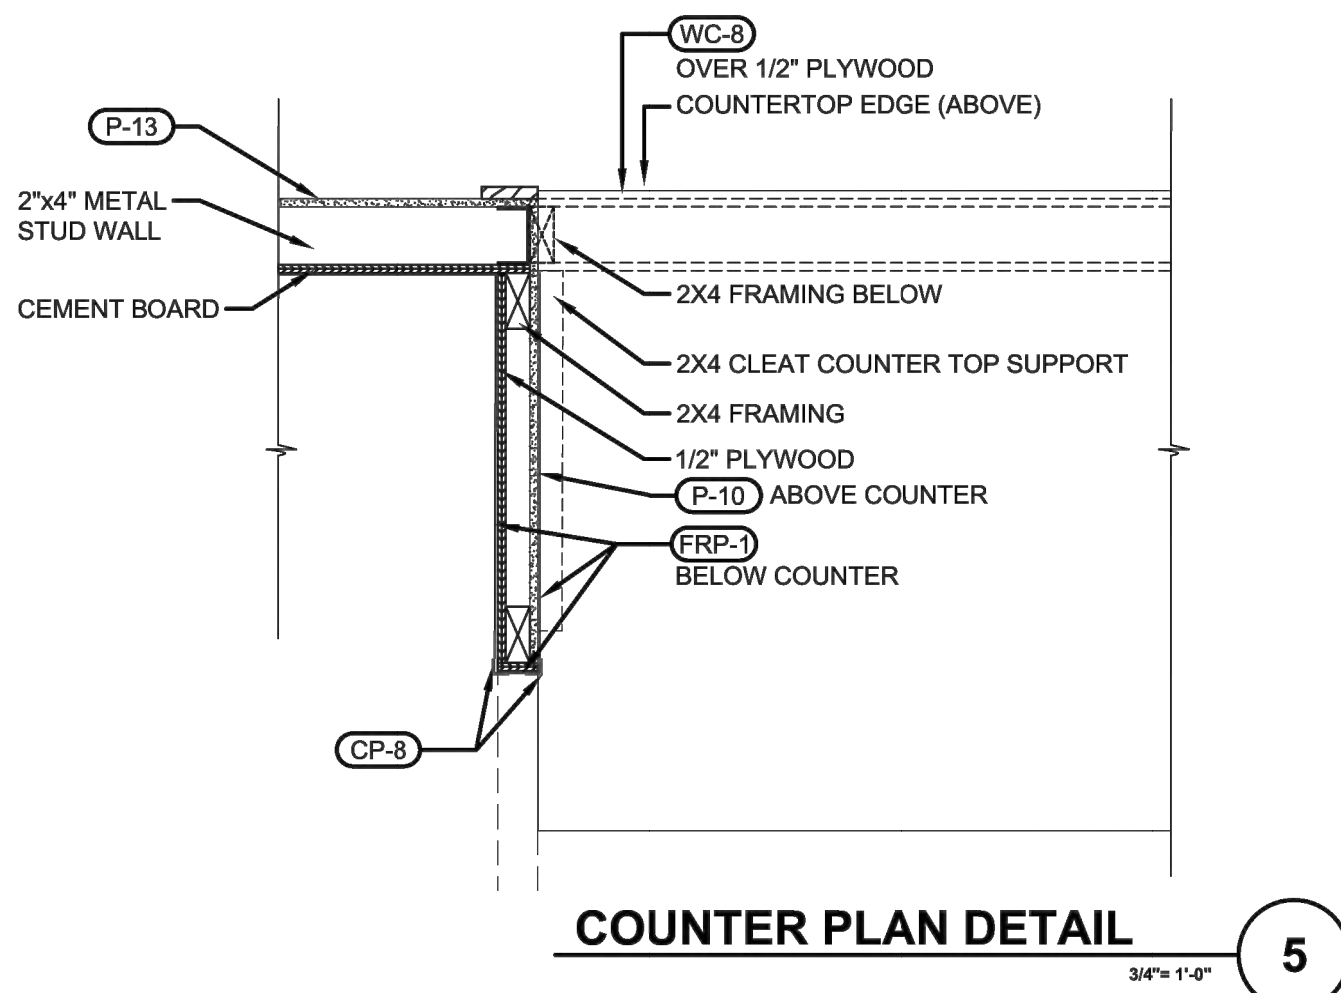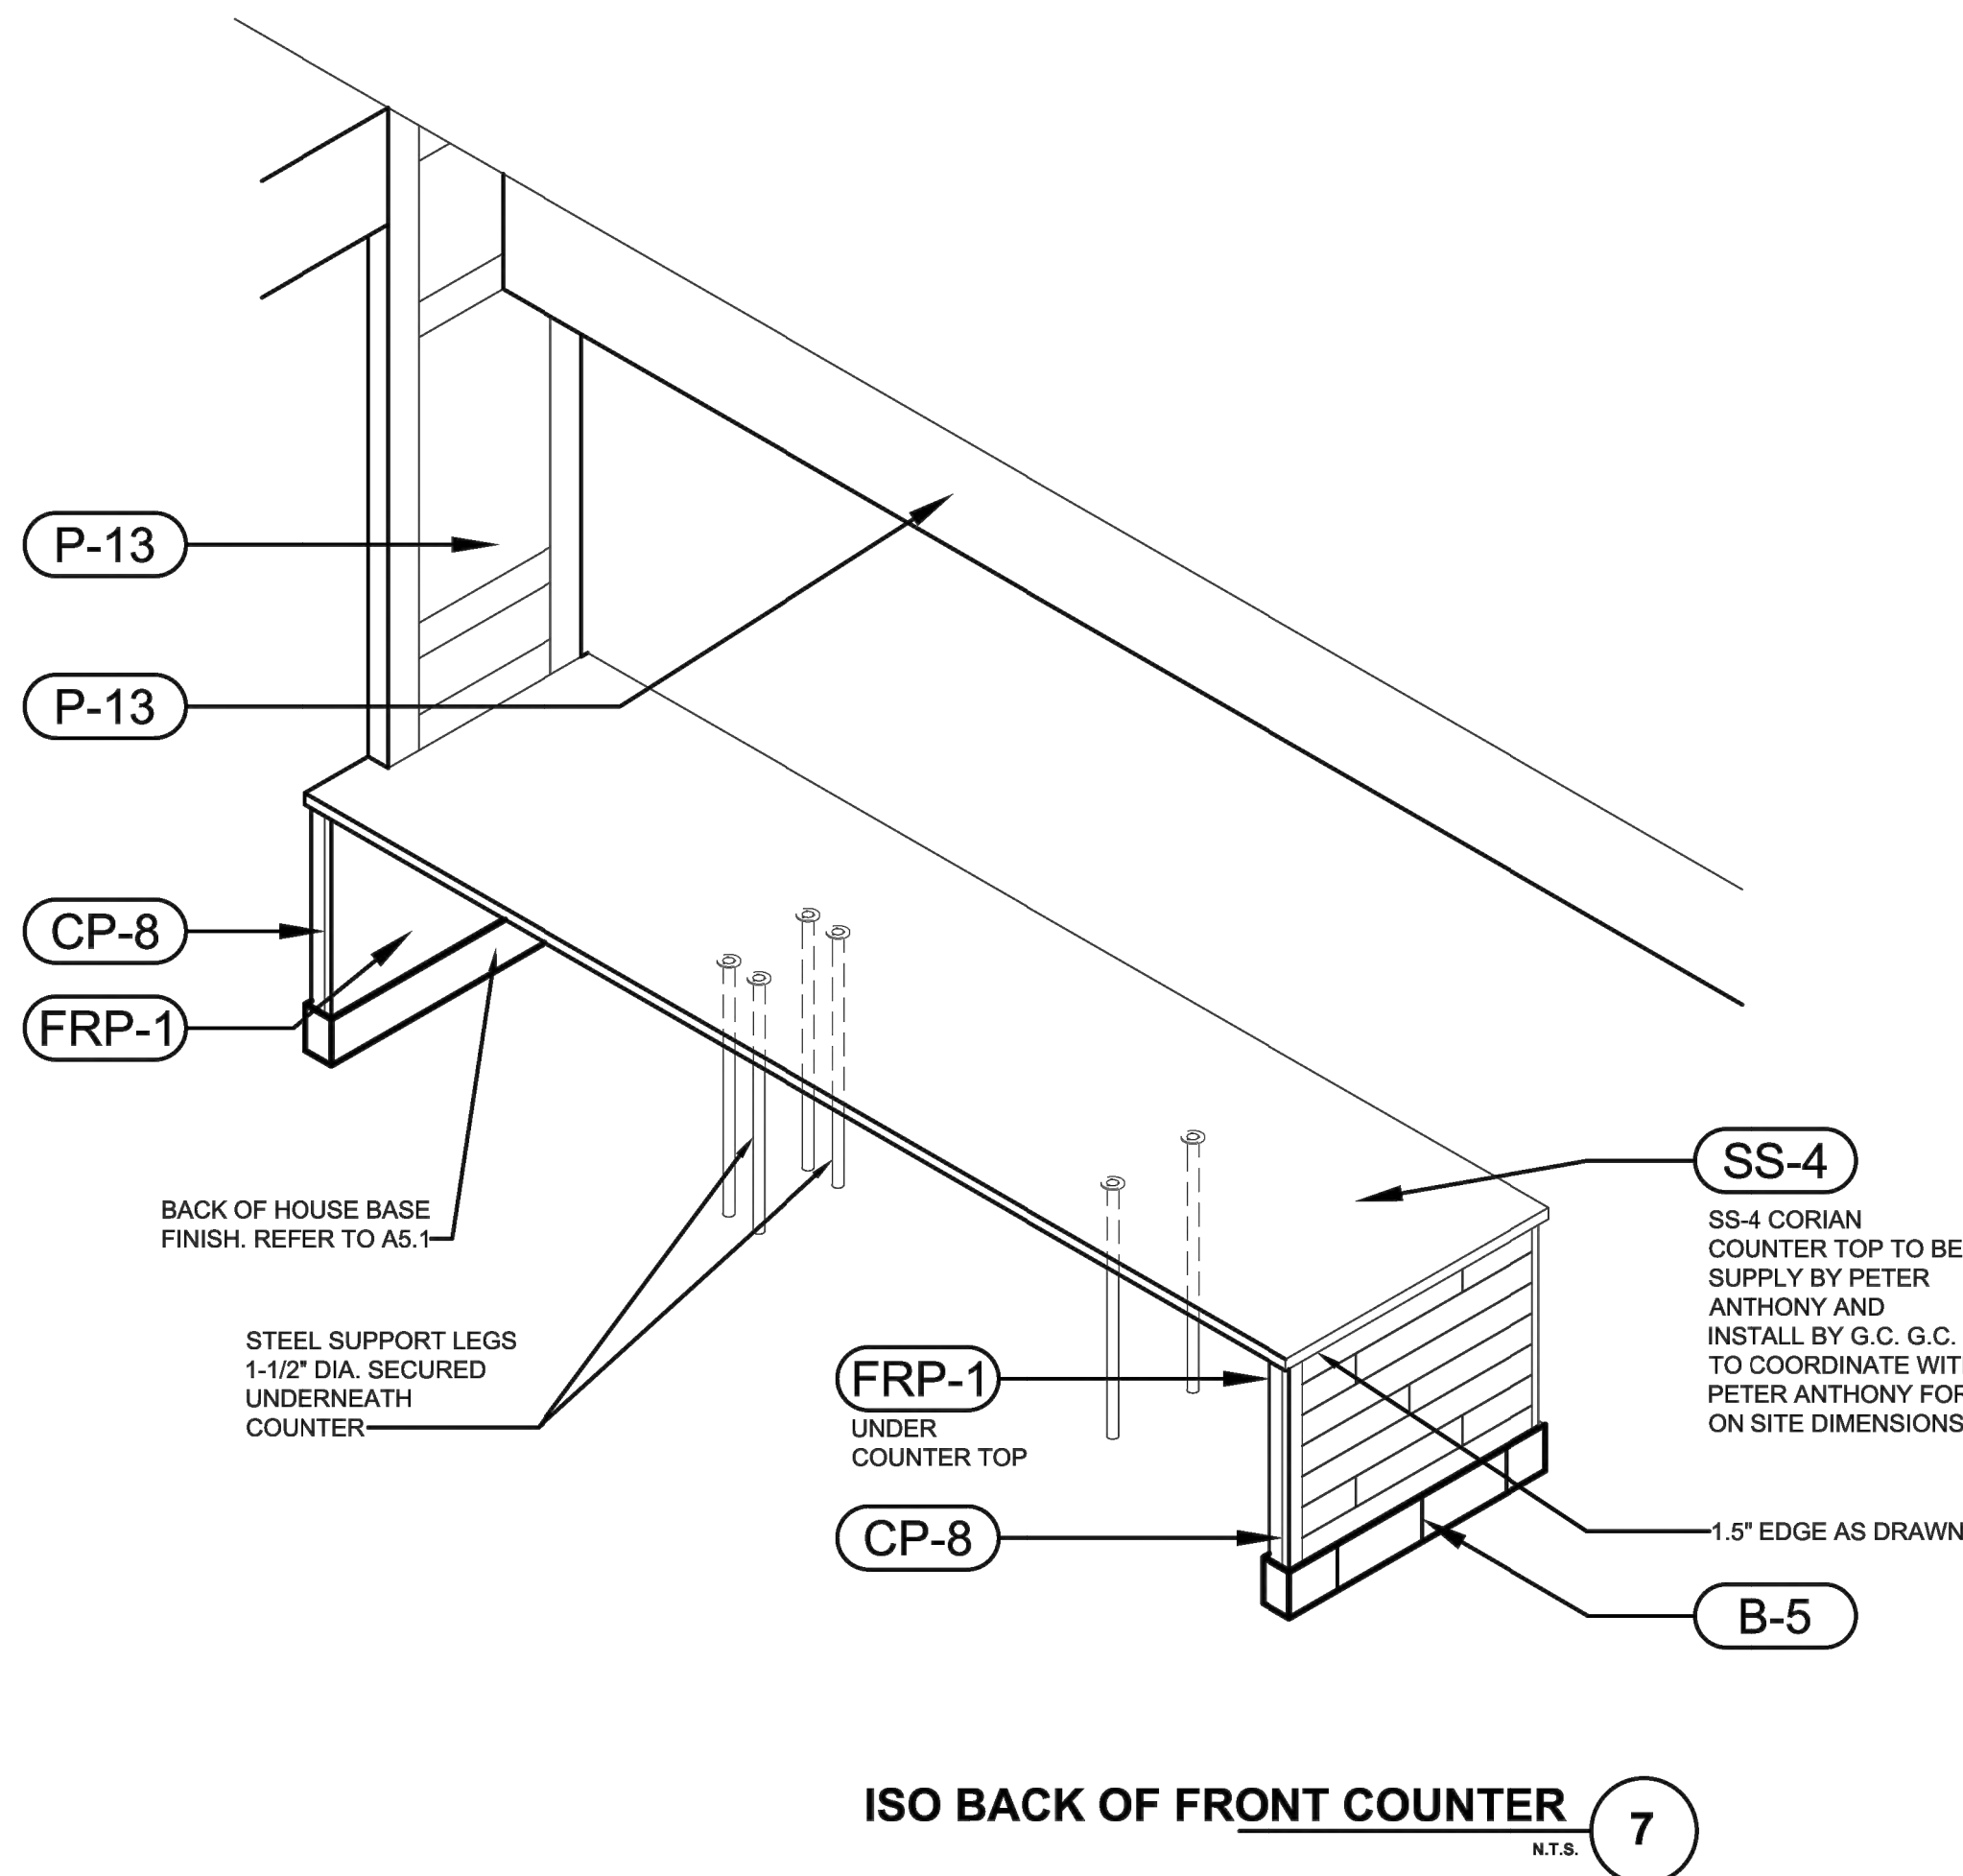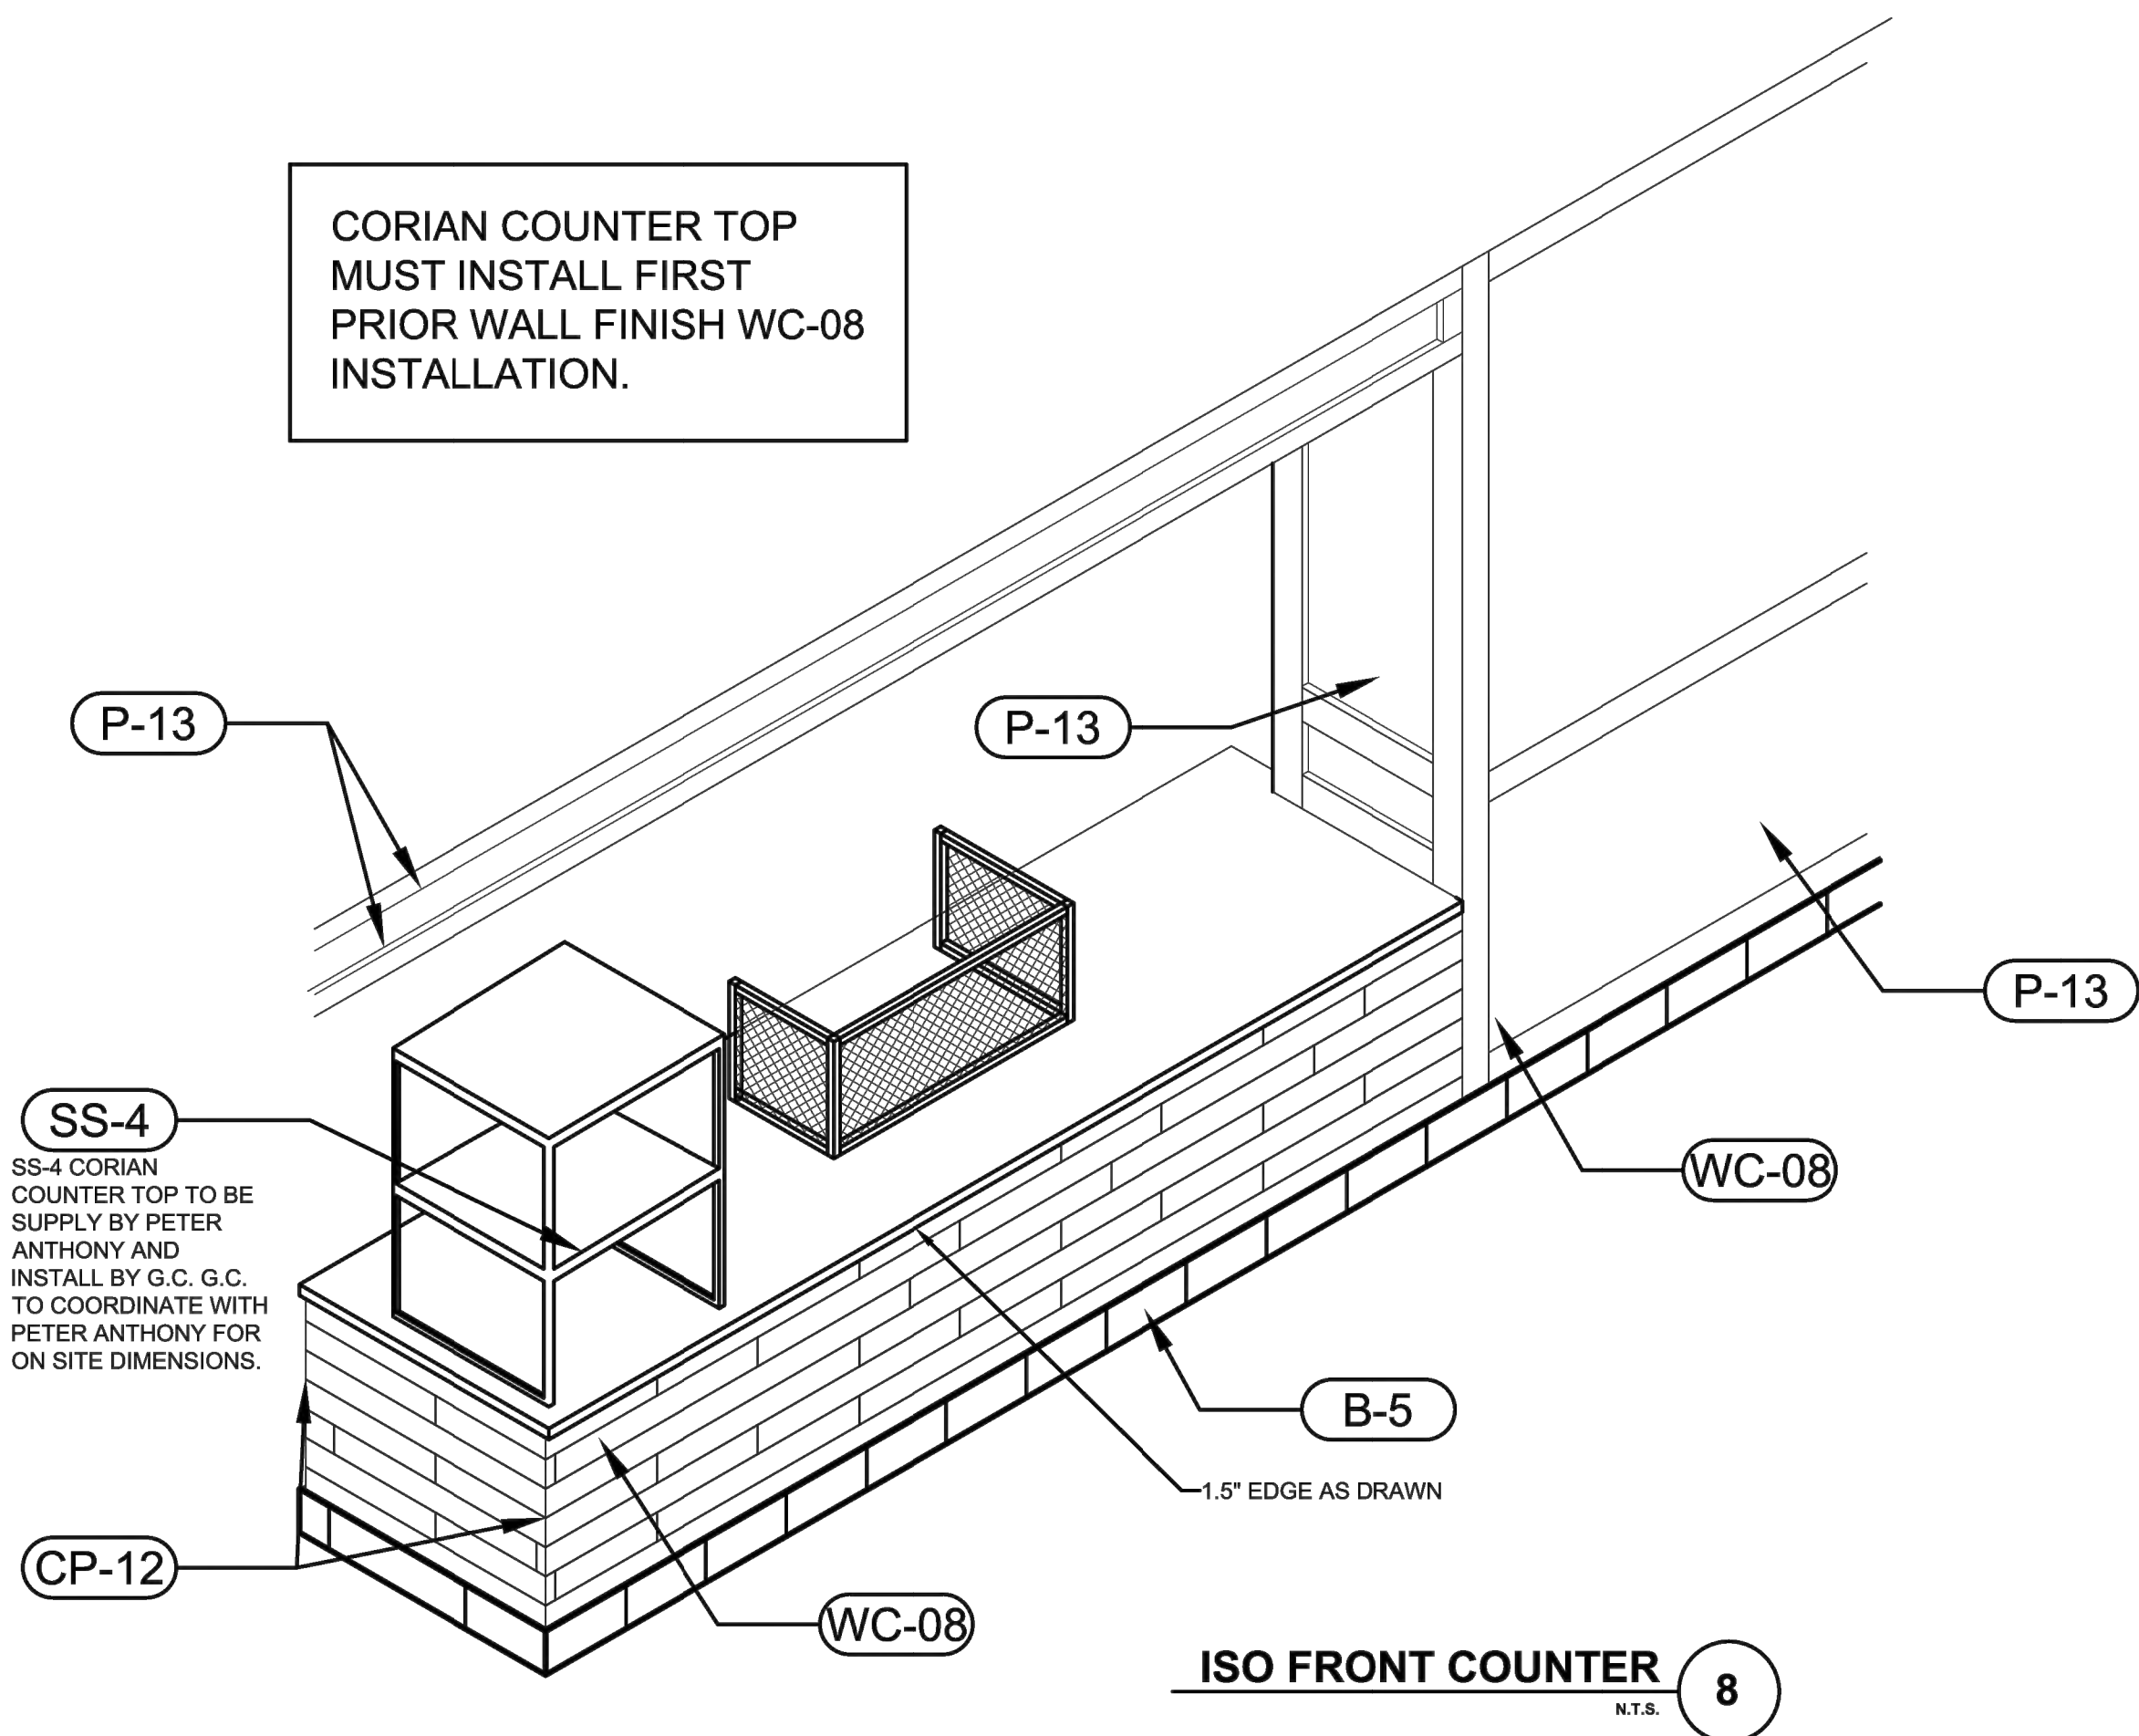


WALL TYPES

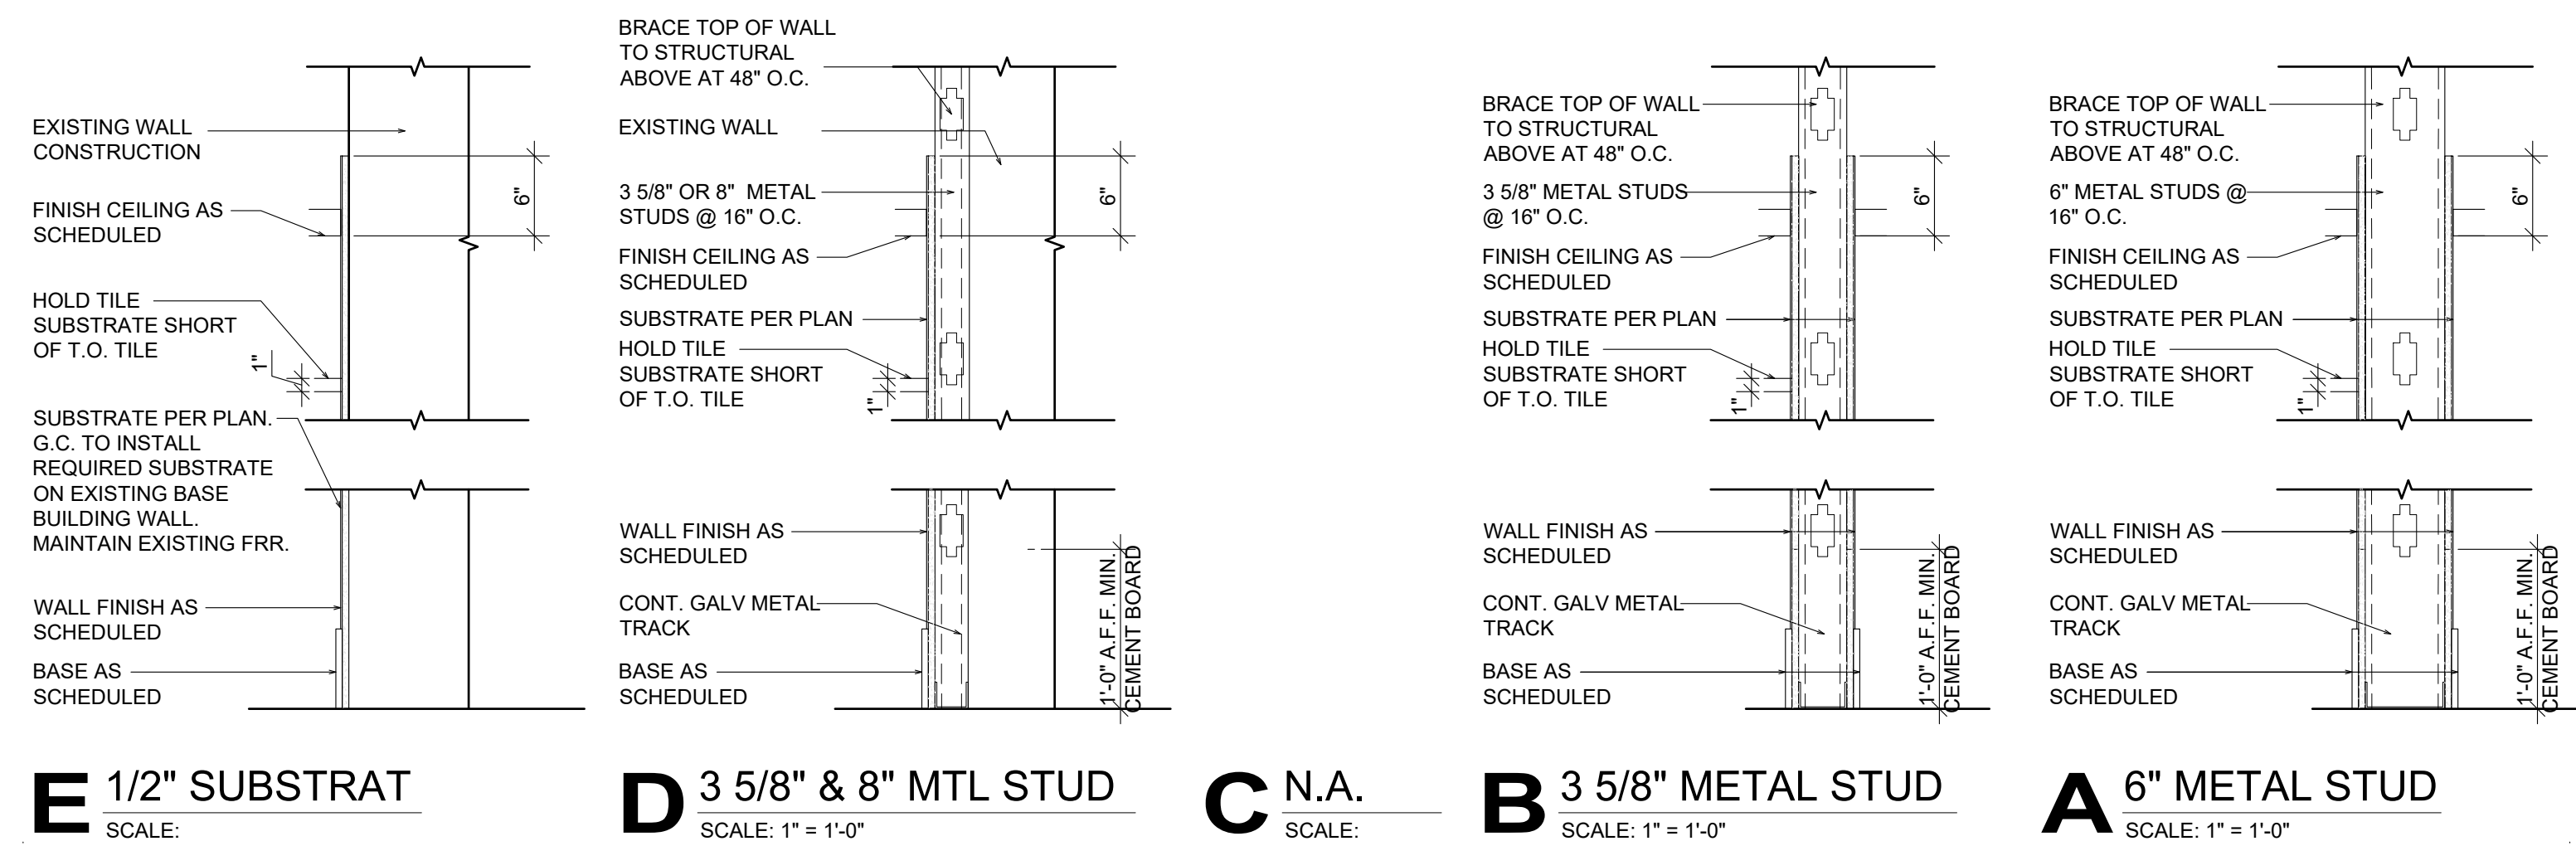

02 MOP SINK DETAIL

SCALE: 3/4" = 1'-0"

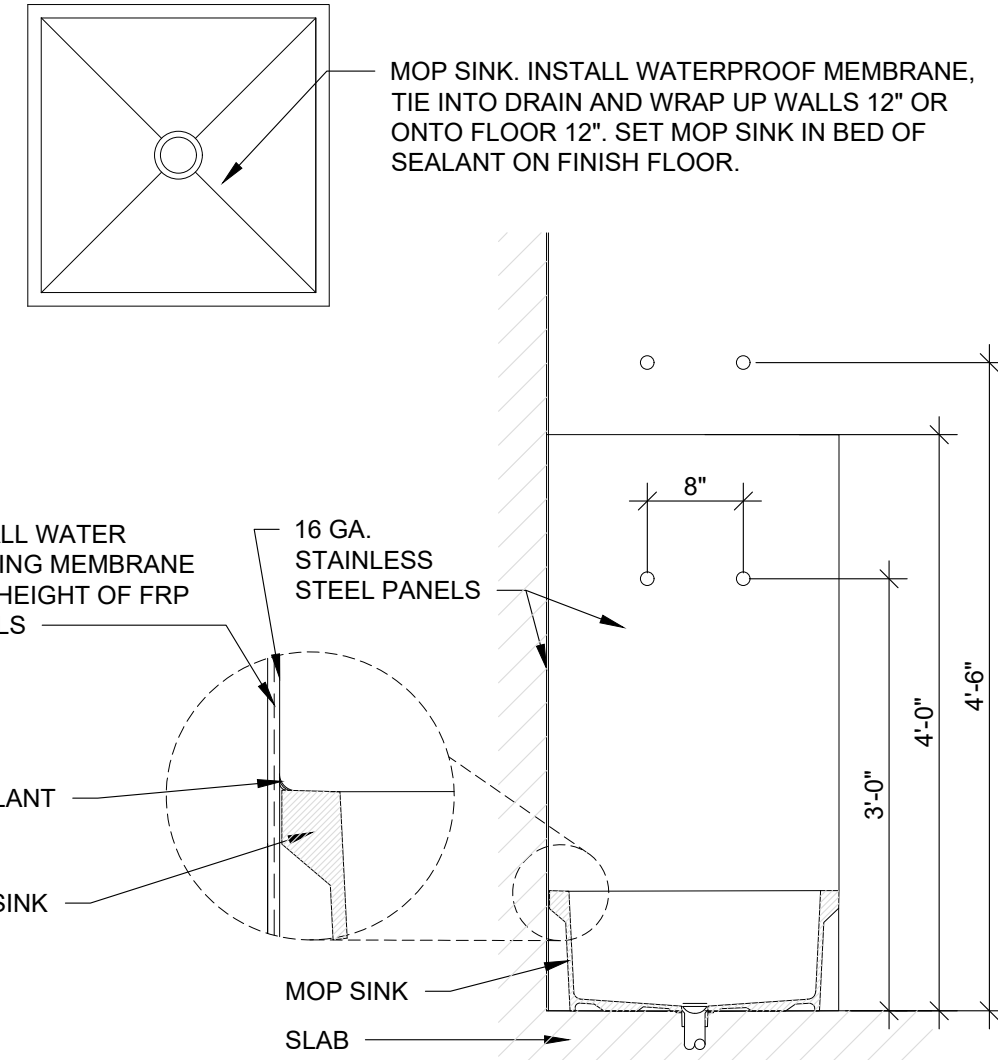

ARTPACK & WAYFINDING LEGEND

MARK	DESCRIPTION	MARK	DESCRIPTION
AP-28	CAMEO DECAL	AP-50.31G	FROSTY
AP-29	WE DONT CUT THESE	AP-50.31G	FRY
AP-33	ORDER HERE	AP-50.31B	BURGER
AP-39	VESTIBULE DECAL	WF-20	EXIT SIGN
AP-41	MOBILE PICKUP	WF-22	FAMILY ROOM SIGN
AP-42	DONT FORGET YOUR COFFEE DECAL	WF-22 A	FAMILY ROOM SIGN (ACCESSIBLE)
AP-44 B	DELIVERY PICK UP DOOR DECAL	WF-29	ORDER THIS WAY VINYL
AP-44	CREW DOOR DECAL	WF-30	MOBILE PICK UP VINYL
AP-48 B	FRESH SINCE DAY ONE (UNLIT)	WF-33	EMPLOYEES ONLY

REFER TO RESPONSIBILITY SCHEDULE FOR ARTPACK INFORMATION. REFER INTERIOR ELEVATIONS FOR LOCATIONS

CODED NOTES:

- 6" CONCRETE CURB. 1/2" LESS @ EXPOSE SIDES THAN IFS PANEL. PROVIDE BASE ON FACE OF CURB. REFER TO DETAIL 8/A5.2.
- PROVIDE WATERPROOFING MEMBRANE AS SCHEDULED AND AT ALL WET AREAS, TYP. REFER TO DETAIL 2/A5.1 FOR INSTALLATION OF MEMBRANE AT MOP SINK.
- CONTINUE FLOOR TILE UNDER FIXTURES, CURBS, CASEWORK AND EQUIPMENT.
- LINE OF SOFFIT ABOVE.
- STAINLESS STEEL COVER BASE PROVIDED BY WIB SUPPLIER.
- N/A.
- N/A.
- STAINLESS STEEL PANEL TO BE INSTALLED BEHIND AND BESIDE MOP SINK. SUPPLY AND INSTALL BY G.C.
- STAINLESS STEEL SILL AT DRIVE-THRU WINDOW. RETURN WALL TILES ON SIDE AND ABOVE DRIVE-THRU WINDOW.
- N/A.
- LOCATION OF FLOOR TILE TRANSITION. ENSURE TRANSITION OCCURS BELOW FRONT COUNTER.
- INSTALL FRP CORNER TRIM AT EDGE OF BULKHEAD.
- G.C. INSTALL DOOR THRESHOLD FLUSH WITH FLOOR TILES TO ENSURE THERE ARE NO TRIPPING HAZARD. REFER TO DETAIL 4/A5.2.
- REFER TO DETAIL 1/A6.1 FOR WALL TILE PATTERN.
- G.C. TO FEATHER UP SILIKAL FLOORING FINISH GRADUALLY TO MEET WITH NEW FLOOR TILES ON CORRIDOR SIDE. SILIKAL FLOOR FINISH ONLY.
- 4" HIGH STEPS. SUPPLIED AND INSTALLED BY WALK-IN BOX MANUFACTURER.
- STAINLESS STEEL PANELS SUPPLIED AND INSTALLED BY G.C.

GENERAL NOTES


- PROVIDE AND INSTALL CRACK ISOLATION MEMBRANE AT CONTROL JOINT LOCATIONS TILES. CRACK ISOLATION MEMBER TO BE "HYDRO-BAN" BY LATIOTRE. REFER TO TONA FOR JOINT STANDARDS. CONTACT LATIOTRE AT (203) 378-8113. REFER TO STRUCTURAL SHEET S4-1, FOUNDATION PLAN.
- PAINTER IS RESPONSIBLE FOR REMOVING HARDWARE, SWITCH AND OUTLET COVERS PRIOR TO PAINTING. PAINTER TO REINSTALL AFTER PAINT IS DRY.
- RETOUCH OR REFINISH SURFACES DAMAGED BY SUBSEQUENT WORK. THE COST OF SUCH RESTORATION WORK SHALL BE BORNE BY THE CONTRACTOR.
- PROVIDE PROPER PROTECTION AGAINST DAMAGE TO FURNITURE, ADJACENT FINISHED WORK, FLOORING, ETC. IF APPLICABLE.
- FLOOR TRANSITIONS MUST BE FLUSH AND LEVEL. VINYL OR RUBBER REDUCER STRIPS NOT PERMITTED IN CUSTOMER AREA. NIBBLE SLAB AND FEATHER AS REQUIRED TO PROVIDE IMPERCEPTIBLE TRANSITION.
- REFER TO REFLECTED CEILING PLAN FOR ALL CEILING HEIGHTS.
- PROVIDE SCHLUTER CORNER TRIM AT ALL TILE CORNERS PER DETAIL ON SHEET A5.2.
- NO FLOOR TILE SHALL BE LESS THAN HALF A TILE. REVIEW LAYOUT ON SITE WITH OWNER'S REP.

LEGEND

SYMBOL	DESCRIPTION
CLG WALL FLOOR BASE	ROOM FINISH. REFER TO FINISH SCHEDULE
X-X	FINISH TAG. REFER TO FINISH SCHEDULE
FT-3 FC-2	FLOOR TRANSITION

TILE ACCESSORIES
*PROVIDE TRIM FOR CONDITIONS NOTED BELOW:

OUTSIDE CORNER	- QUADEC BY SCHLUTER
EXPOSED EDGE	- SHIENE BY SCHLUTER
ADJACENT FINISH THINNER THAN TILE	- SHIENE BY SCHLUTER

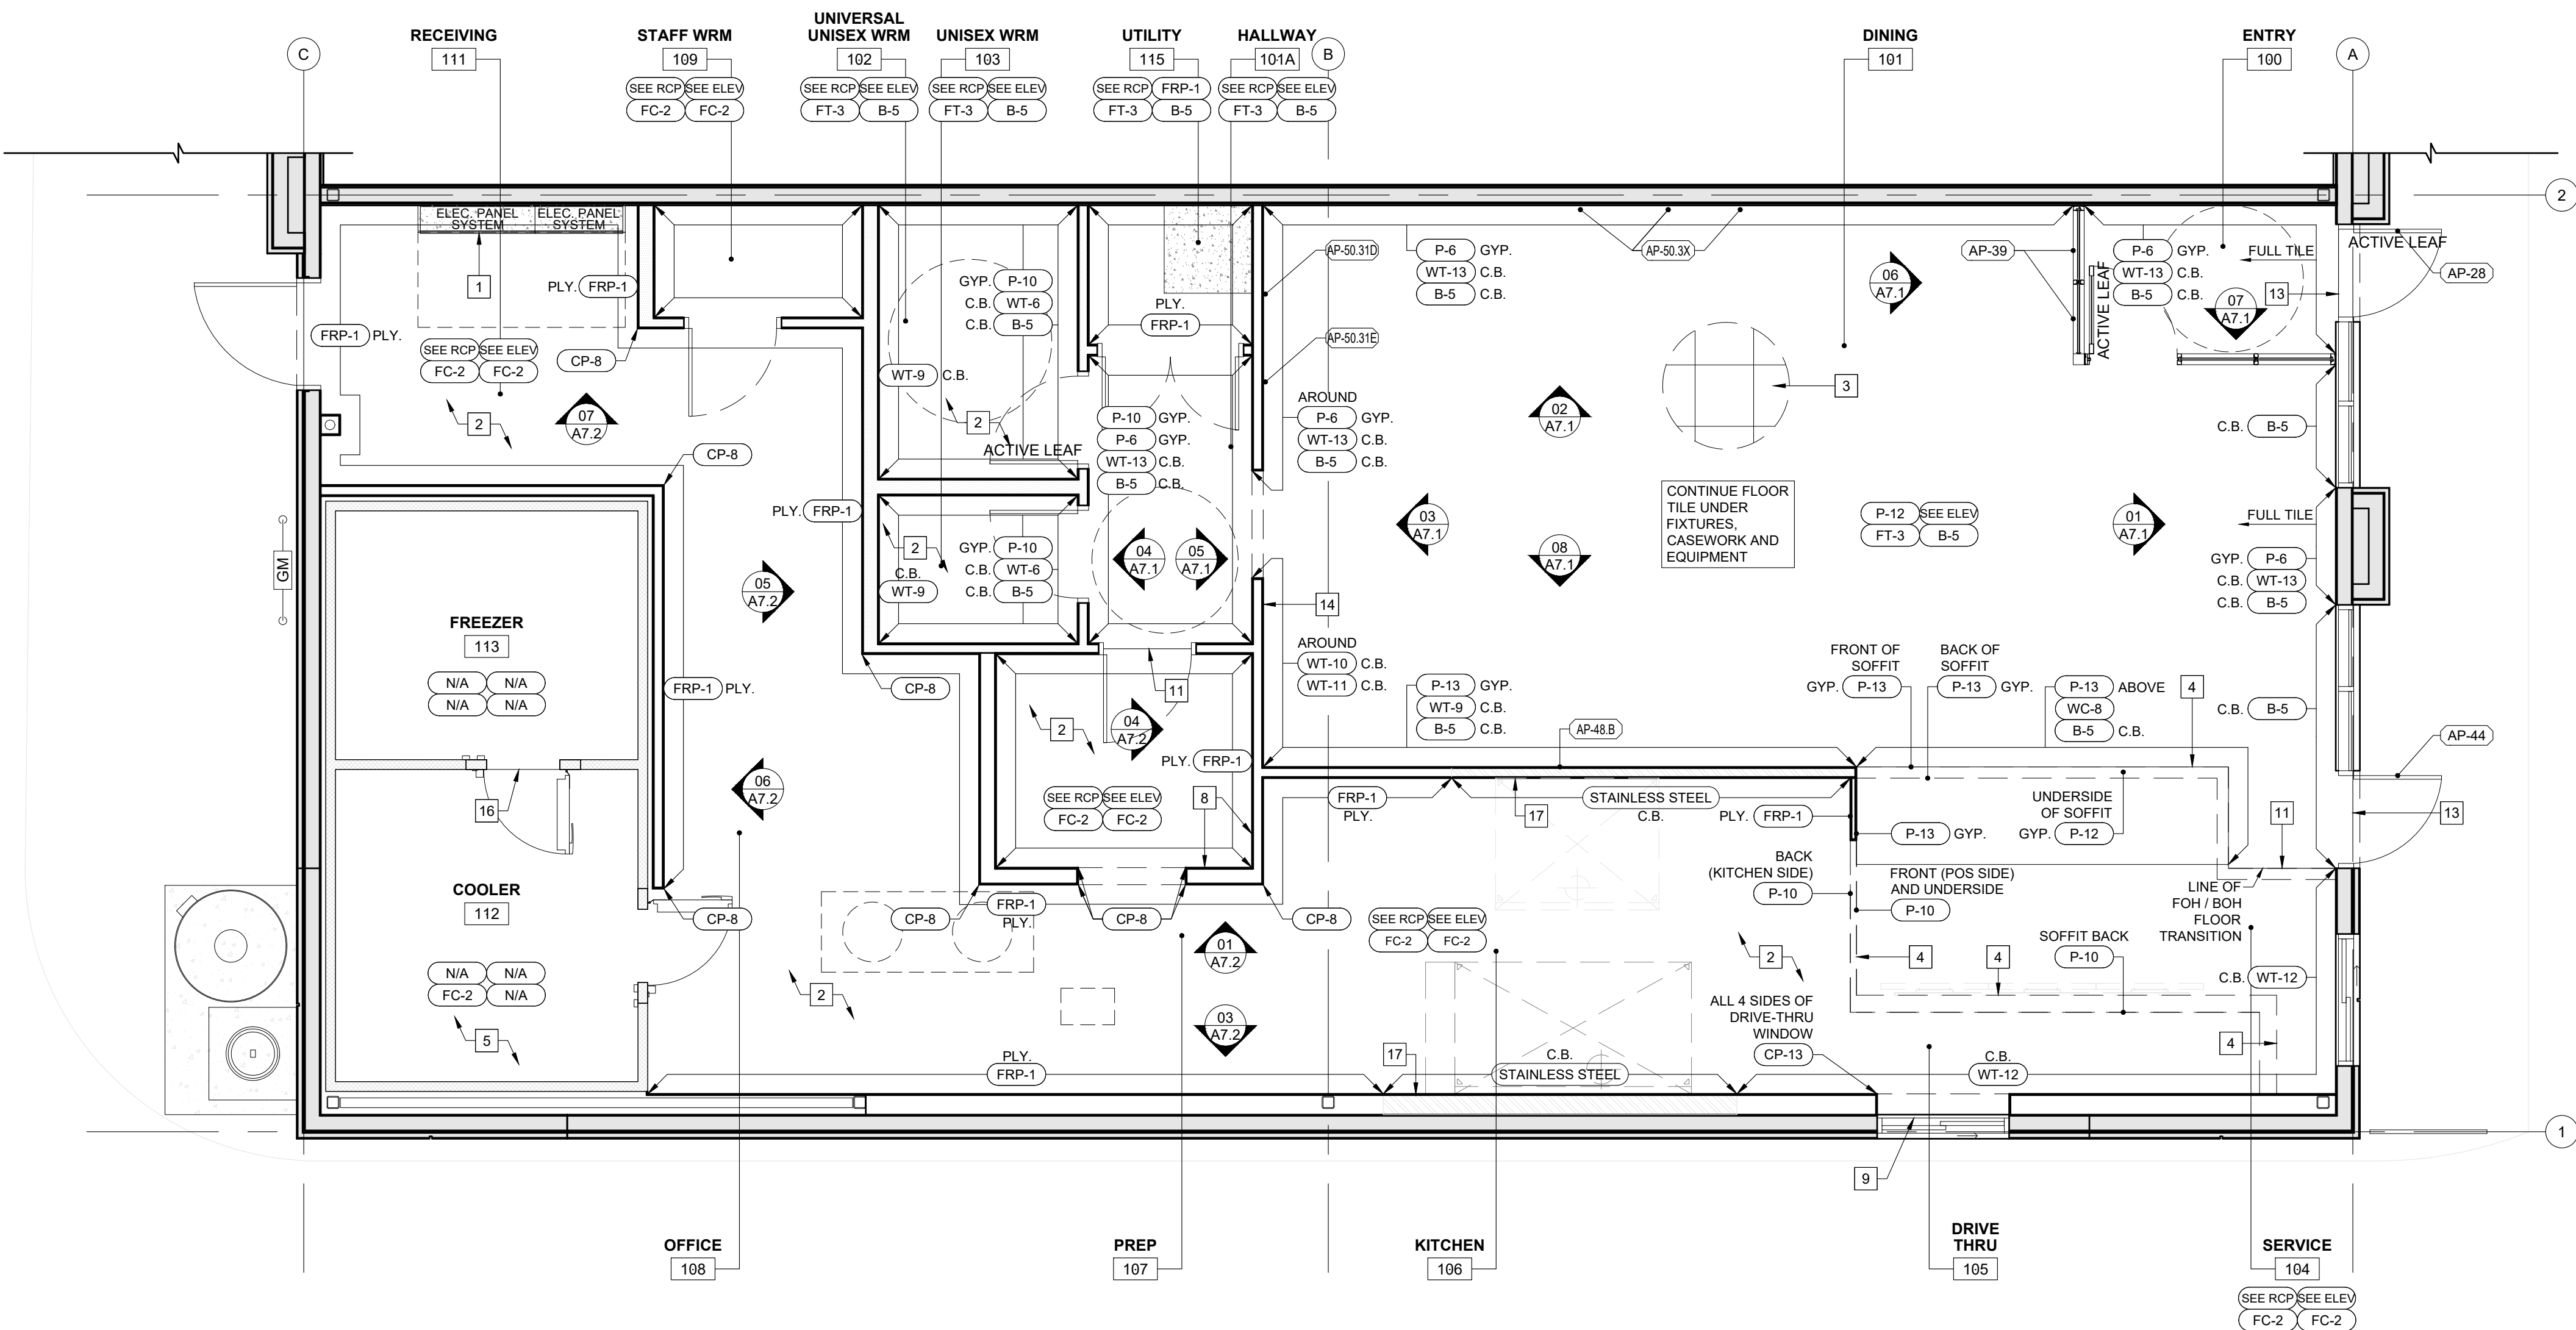

01 FINISH PLAN

SCALE: 1/4" = 1'-0"

G.L. SMITH



Wallfacer Architecture Inc.

4711 Yonge Street, Suite 801
Toronto, Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE AS AMENDED AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ON-SITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON-SITE.

ISSUE

4 JUN 18, 2026	ISSUED FOR TENDER	MM
3 APR 29, 2026	ISSUED FOR PERMIT	DB
2 FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1 DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

Date Description Dwn

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

Date Description Dwn

DRAWING TITLE:

FINISH PLAN

PRINT DATE: 6/19/2026 SCALE: AS NOTED

DRAWN BY: DB DRAWING NO:


CHECKED BY: MO

PROJECT NO: 17037


A5.1



EXTERIOR		10/06/2021		
COLOR		SHERWIN WILLIAMS	PPG	BENJAMIN MOORE
PER-1	WENDYS DARK BRONZE	BROOKSTONE CUSTOM COLORS: "MISSESSIPPI BRONZE"	PPG 1002-7 "PHANTOM MIST"	"MONZETONE"
PER-2	RED	SW 6322 "RED BAY"	PPG 13-16 "BLAZE"	HC 185 "HERITAGE RED"
PER-3	PRE-FINISHED: DARK BRONZE	SIGN CABINETS - MATCHES PER-1 NO SUBSTITUTIONS AVAILABLE (THROUGH SIGN VENDOR ONLY)	SIGN CABINETS - MATCHES PER-1 NO SUBSTITUTIONS AVAILABLE (THROUGH SIGN VENDOR ONLY)	SIGN CABINETS - MATCHES PER-1 NO SUBSTITUTIONS AVAILABLE (THROUGH SIGN VENDOR ONLY)
PER-4	LIGHT GRAY	SW 7022 "ALPACA"	PPG 1025-3 "WHISKERS"	CC 28 "COLLINGWOOD"
PER-5	SAFETY YELLOW	"SAFETY YELLOW"	"SAFETY YELLOW"	"SAFETY YELLOW"
PER-6	PRE-FINISHED: DARK BRONZE	WALK-IN COOLER / FREEZER - MATCHES PER-1 PRE-FINISHED BY MANUFACTURER, NO SUBSTITUTIONS FOR NONBEC. COLOUR TO BE CHARCOAL 17-5425)	WALK-IN COOLER / FREEZER - MATCHES PER-1 PRE-FINISHED BY MANUFACTURER, NO SUBSTITUTIONS FOR NONBEC. COLOUR TO BE CHARCOAL 17-5425)	WALK-IN COOLER / FREEZER - MATCHES PER-1 PRE-FINISHED BY MANUFACTURER, NO SUBSTITUTIONS FOR NONBEC. COLOUR TO BE CHARCOAL 17-5425)
PER-7	FIELD BROWN	SW 9051 "TANBARK"	PPG 100-07 "SOUTHERN WOOD"	1223 "TRENTWOOD"
PER-8	ACCENT BROWN	SW 9058 "TRIDENT BROWN"	PPG 16-23 "TAMPOCO BROWN"	1224 "CHOCOLATE TRAIL"
PER-9	SILVER - SATIN	"SILVER BRIGHT" ALUMINUM PAINT	PPG 6-230 "BRIGHT ALUMINUM"	P22 78 "SILVER URETHANE ALKID"
PER-10	POWDER COAT "BLACK"	SW 6258 "TRICORN BLACK"	PPG 1001-7 "BLACK MAGIC"	HC 19 "BLACK"
PER-11	TAN	SW 6109 "HOPSACK"	PPG 1005-5 "SALTED MUSHROOM"	1005 "ALCONQUIN TRAIL"
PER-12	DARK GRAY	SW 7674 "PEPPER CORN"	PPG 1001-6 "NIGHTS ARMOUR"	1211-10 "GRAY"
PER-13	LIGHT TAN (ACCENT FOR PER-11)	SW 6106 "YUM BEGE"	PPG 14-17 "ARMADILLO"	BM 1128 "ARMADILLO"
PER-14	BROWN	SW 6090 "JAWA"		
EXTERIOR PRIMER				
BASE	SHEEN	SHERWIN WILLIAMS	PPG	BENJAMIN MOORE
STUCCO / EPS	SATIN	PRIME: LUSTON CONCRETE & MASONRY PRIMER FINISH: 1-100 EXTERIOR LATEX SATIN	PRIME: PPG SEAL GRP 17-32131 ACRYLIC UNIVERSAL PRIMER FINISH: PPG SPEED HIDE 6-2045H EXTERIOR SATIN ACRYLIC	PRIME: 1023 FRESH START ALL PURPOSE PRIMER FINISH: 631 ALURA WATERBORNE EXTERIOR SATIN FINISH
METAL RAILING	SEMI-GLOSS	PRIME: PROCRYL UNIVERSAL METAL PRIMER FINISH: SHER-CRYL HP4 (SEMI-GLOSS)	PRIME: HP04 METAL PRIMER OR SELF PRIME HP25 METAL PRIMER FINISH: HP23 DTM ACRYLIC SEMI-GLOSS ENAMEL	
WOOD	SATIN	PRIME: ALDO ALLOYD EXTERIOR WOOD PRIMER FINISH: 1-100 EXTERIOR LATEX SATIN	PRIME: PPG SEAL GRP 17-32131 ACRYLIC UNIVERSAL PRIMER FINISH: PPG SPEED HIDE 6-2045H EXTERIOR SATIN ACRYLIC	PRIME: 1023 FRESH START All Purpose Primer Finish: 631 Alura Waterborne Exterior Satin Finish
PLASTIC (HERITAGE II)	SATIN	PRIME: EXTREME BOND PRIMER FINISH: SHER-CRYL HP4 (SATIN-GLOSS)	PRIME: PPG SEAL GRP 17-32131 ACRYLIC UNIVERSAL PRIMER FINISH: PPG SPEED HIDE 6-2045H EXTERIOR SATIN ACRYLIC	PRIME: 1023 FRESH START ALL PURPOSE PRIMER FINISH: 631 ALURA WATERBORNE EXTERIOR SATIN FINISH
WROUGHT IRON	GLOSS	PRIME: PROCRYL UNIVERSAL METAL PRIMER FINISH: SHER-CRYL HP4 (GLOSS)	PRIME: PPG RIT-TECH PLUS 4020PF ACRYLIC METAL PRIMER FINISH: PPG RIT-TECH PLUS 40-1306 SAFETY YELLOW DTM GLOSS	PRIME: 1023 FRESH START ALL PURPOSE PRIMER FINISH: 631 ALURA WATERBORNE EXTERIOR SATIN FINISH
ALUMINUM / METAL STOREFRONT PRIMER				
ALUMINUM STOREFRONT	GLOSS	RECOMMENDED TO USE PPG PRIME: PROCRYL UNIVERSAL METAL PRIMER FINISH: SHER-CRYL HP4 (SEMI-GLOSS OR GLOSS)	COLOR: PPG "STATUARY BROWN" RECOMMENDED PRIME: PPG RIT-TECH PLUS 4020 PF ACRYLIC METAL PRIMER RECOMMENDED FINISH: PPG RIT-TECH PLUS 42-2140S SEMI-GLOSS DTM ACRYLIC	HP04 ACRYLIC METAL PRIMER ALTERNATE PRIME: V135 WATERBORNE BONDING PRIMER ALTERNATE FINISH: P22-54 BROOKSTONE URETHANE GLOSS ENAMEL
METAL	SATIN	RECOMMENDED TO USE PPG PRIME: PROCRYL UNIVERSAL METAL PRIMER FINISH: SHER-CRYL HP4 (SEMI-GLOSS)	RECOMMENDED PRIME: PPG RIT-TECH PLUS 4020 PF ACRYLIC METAL PRIMER RECOMMENDED FINISH: PPG RIT-TECH PLUS 42-2140S SEMI-GLOSS DTM ACRYLIC	HP04 ACRYLIC METAL PRIMER ALTERNATE PRIME: SELF PRIME WITH P23-60 ALTERNATE FINISH: P23-60 DTM ALLOYD LOW LUSTER ENAMEL
PER-9 PRIMER				
METAL	SATIN	PRIME: PROCRYL UNIVERSAL METAL PRIMER FINISH: SILVER-BRITE ALUMINUM PAINT (2 COATS) #B59511	PRIME: PPG RIT-TECH PLUS 4020PF ACRYLIC METAL PRIMER FINISH: PPG RIT-TECH 99-474 DTM SATIN ACRYLIC ENAMEL	PRIME: HP04 ALLOYD METAL PRIMER FINISH: HP25 DTM ACRYLIC LOW LUSTER ENAMEL
WOOD	SATIN	PRIME: ALDO ALLOYD WOOD PRIMER FINISH: SILVER-BRITE ALUMINUM PAINT (2 COATS) #B59511	PRIME: PPG SEAL GRP 17-32131 ACRYLIC UNIVERSAL PRIMER FINISH: PPG SPEED HIDE 6-2045H EXTERIOR SATIN ACRYLIC	PRIME: 1023 FRESH START ALL PURPOSE PRIMER FINISH: 631 ALURA WATERBORNE EXTERIOR SATIN FINISH
INTERIOR PAINT SPECIFICATIONS				
COLOR		SHERWIN WILLIAMS	PPG	BENJAMIN MOORE
P-1	BEIGE - EGGSHELL	SW7009 "ACCESSIBLE BEIGE"	PPG 1028-4 "MOTH GRAY"	CC 15 "BARK FAINT"
P-2	RED - EGGSHELL	SW 6322 "RED BAY"	PPG 13-16 "BLAZE"	CPS 1155 "FLAMENCOT"
P-3	CEILING WHITE - FLAT	SW 7005 "EXTRA WHITE"	PPG 1001-1 "DELICATE WHITE"	PM-1 "SILVER WHITE"
P-4	TAUPE - EGGSHELL	SW 7039 "VIRTUAL TAUPE"	PPG 1024-6 "TRUSTIC TAUPE"	999 "TRUSTIC TAUPE"
P-5	LIGHT GRAY - EGGSHELL	SW 7003 "ARGOS"	PPG 1009-4 "GRAY STONE"	2134-50 "GULL WING GRAY"
P-6	WHITE - EGGSHELL	SW 8911 "SHELL WHITE"	PPG 18-09 "SARLIC CLOVE"	CC 17 "WHITE DOVE"
P-7	GRAY - EGGSHELL	SW 7070 "CITY SCAPE"	PPG 1009-5 "THOSENK FOSSEL"	2134-40 "WHALE GRAY"
P-8	WOOD STAIN	SW MINIMAX PERFORMANCE SERIES WATER BASED POLYURETHANE	DFT29 SATIN DEFT INTERIOR POLYURETHANE WATER BASED	N423 STAYS CLEAR ACRYLIC POLYURETHANE LOW LUSTER
P-9	DARK GRAY - FLAT	SW 7674 "PEPPER CORN"	PPG 1001-6 "NIGHTS ARMOUR"	1211-10 "GRAY"
P-10	BLUE - EGGSHELL	SHERWIN WILLIAMS SW 9138 "STARDEW"	PPG 1007-3 "SPECIAL DELIVERY"	AF 545 "SOUTLUE"
P-11	BRONZE - EGGSHELL	BROOKSTONE CUSTOM COLORS: "MISSESSIPPI BRONZE"	PPG 1002-7 "PHANTOM MIST"	P23-60 "BRONZETONE"
P-12	BLACK-FLAT	SW 7069 IRON ORE	PPG 1001-7 "BLACK MAGIC"	BM 1128-10 "BLACK BEAUTY"
P-13	BLACK-EGGSHELL	SW 7069 IRON ORE	PPG 1001-7 "BLACK MAGIC"	BM 1128-10 "BLACK BEAUTY"
INTERIOR PRIMER				
BASE	SHEEN	SHERWIN WILLIAMS	PPG	BENJAMIN MOORE
GYP-SUM BOARD	EGGSHELL	PRIME: PROMAR 200 ZERO VOC PRIMER FINISH: PROMAR 200 ZERO VOC EGGSHELL	PRIME: PPG SPEEDHIDE 6-2 INTERIOR 02 ACRYLIC PRIMER FINISH: PPG SPEEDHIDE 6-411 INTERIOR EGGSHELL	PRIME: 1023 FRESH START ALL PURPOSE PRIMER FINISH: 485 ULTRA SPEC SCOP-F4 EGGSHELL
METAL DECK	FLAT	PRIME: SELF PRIMING, RUST INHIBITIVE PRO INDUSTRIAL DTM ACRYLIC	PRIME: SELF PRIMING, RUST INHIBITIVE, PPG RIT-TECH 99-474 DTM SATIN FINISH	PRIME: SELF PRIMING, RUST INHIBITIVE, HP 25 DTM LOW LUSTRE
WOOD DECK	FLAT	PRIME: 1 COAT SW PROMAR WALL & WOOD PRIMER FINISH: 2 COATS SW PROMAR 200 ZERO VOC FLAT	PRIME: PPG SEAL GRP PRIMER AS BASE COAT, TINT PRIMER TO "NIGHTS ARMOUR" FINISH: PPG SPEEDHIDE ZERO VOC FLAT	PRIME: 1023 FRESH START ALL PURPOSE
BEDROOM & KITCHEN GYP-SUM BOARD	SEMI-GLOSS	PRIME: PROMAR 200 VOC PRIMER FINISH: PROMAR 200 VOC SEMI-GLOSS	PRIME: PPG SPEEDHIDE 6-2 INTERIOR 02 ACRYLIC PRIMER FINISH: PPG SPEEDHIDE 6-501 INTERIOR SEMI-GLOSS	PRIME: 1023 FRESH START ALL PURPOSE PRIMER FINISH: 487 ULTRA SPEC SCOP-F4 SEMI-GLOSS

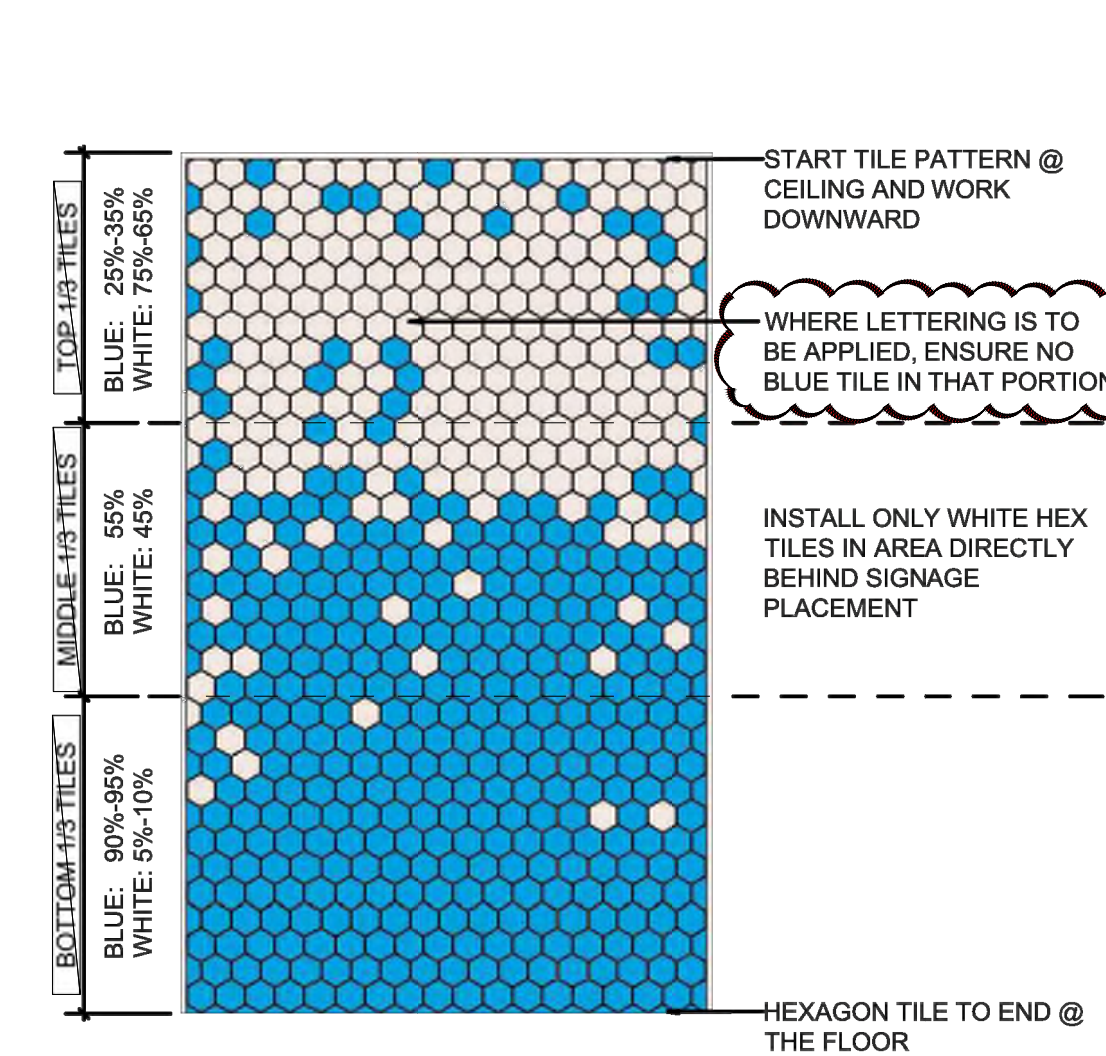

01 HEX TILE LAYOUT
SCALE: 1/2" = 1'-0"

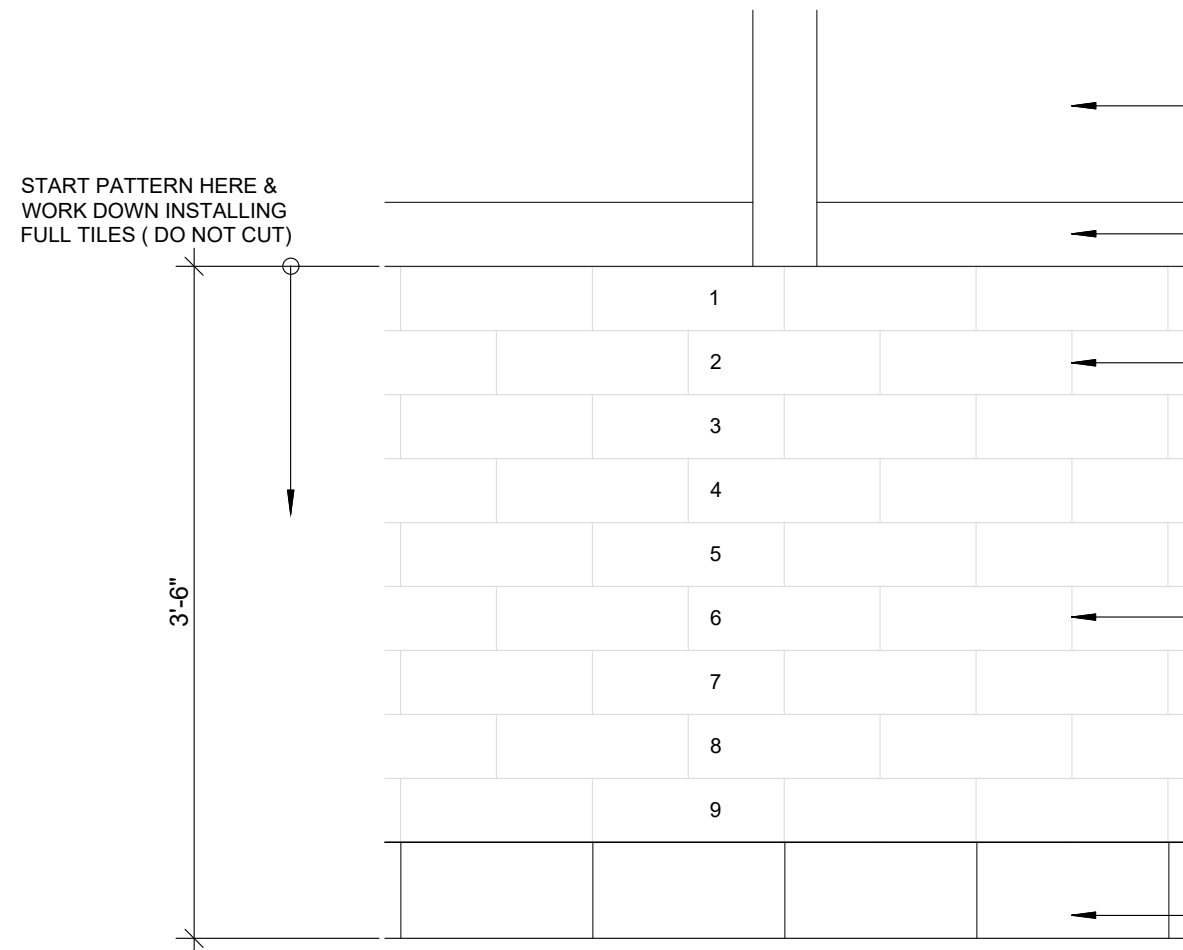

02 WT-13 WALL PATTERN DETAIL
SCALE: 1" = 1'-0"

JOINT TREATMENT SCHEDULE

(SEE SPECIFICATIONS - DIVISION 7 FOR CLARIFICATION OF TYPES)

EXT: "E"	INT: "I"	CONDITION	TYPE
E		PERIMETER JOINTS OF DOOR FRAMES, WINDOW FRAMES, STOREFRONT, AND/OR WINDOW WALL FRAME ASSEMBLIES, LOUVERS, FIXTURES, AND OTHER PENETRATIONS IN THE BUILDING ENCLOSURES NOT OTHERWISE SEALED WATERTIGHT, U.N.O. PROVIDE CONTINUOUS SEALANT UNDER EXTERIOR DOOR THRESHOLDS AND WINDOW SYSTEMS THAT REST DIRECTLY ON THE FLOOR SLAB	JS-1
E		MASONRY / CONCRETE CONTROL JOINTS IN WALLS	JS-1
E		E.I.F.S. JOINTS IN WALLS	JS-1
E		EXPANSION JOINTS IN AND AROUND CONCRETE PAVEMENT, UNIT PAVEMENT, CURBS, OR OTHER HORIZONTAL SURFACES	JS-3
E		PERIMETER JOINTS AND OTHER OPEN JOINTS AT EXTERIOR SOFFITS	JS-1
E		INTERSECTION OF DISSIMILAR MATERIALS THAT ALLOW AIR OR WATER INFILTRATION	JS-1
E		INTERSECTION OF DISSIMILAR MATERIALS IN WHICH INSTALLATION IS NOT UNIFORM OR WHERE WORKMANSHIP DOES NOT MEET ACCEPTABLE CONSTRUCTION TOLERANCES, BUT SUCH WORKMANSHIP IS ACCEPTED BY THE ARCHITECT	JS-1
I		PERIMETER JOINTS ON INTERIOR SIDE OF DOOR FRAMES, WINDOW FRAMES, AND OTHER FRAMED MATERIALS IN WALLS WITH NO FINISHED EDGE FLANGE	JS-2
I		OPEN JOINTS AT PENETRATIONS THROUGH WALLS, CONCRETE, PLASTER, OR GYPSUM BOARD CEILINGS WHERE INTENDED TO BE TIGHT SEALED JOINTS	JS-2
I		OPEN JOINT BETWEEN DISSIMILAR MATERIALS WHERE INTENDED TO BE TIGHT SEALED JOINTS.	JS-2
I		JOINTS WHERE EDGE TRIM OF GYPSUM BOARD ABUTS IRREGULAR SURFACES OR OTHER SURFACES AND LEAVES OPEN JOINTS	JS-2
I		EXPOSED JOINTS AT JUNCTURES OF COUNTERTOPS, CABINETS, OR OTHER "BUILT-IN" WORK WITH IRREGULAR SURFACES INTENDED TO BE TIGHT SEALED JOINT	JS-2
I		ANY WALL AND CEILING PENETRATIONS LARGER THAN 1/8"	JS-2
I		EXPOSED JOINTS AT JUNCTURES OF WALL MOUNTED PLUMBING FIXTURES AND/OR TOILET ACCESSORIES WITH IRREGULAR SURFACES AND INTENDED TO BE TIGHT SEALED JOINT	JS-5
I		CONTROL JOINTS SAWN JOINTS AND OPEN JOINTS IN AND AROUND CONCRETE SLABS AND CURBS	JS-4

JOINT TREATMENT NOTES

- THE JOINT TREATMENT SCHEDULE IS INTENDED TO ILLUSTRATE ALL JOINT CONDITIONS WHICH ARE MEANT TO BE SEALED WHETHER REFERENCED FROM OTHER DETAILS OR NOT.
- AT METAL FRAME LOCATIONS (DOORS, WINDOWS, ETC.) HOLD FRAME BACK FROM SUBSTRATE 3/8" @ HEAD & SILL AND 3/16" @ JAMB TO ALLOW FOR SEALANT, TYPICAL U.N.O. THIS INCLUDES DIMENSIONS FOR STEEL LINTELS WHERE APPLICABLE.
- PROVIDE PROPER SEALERS AS REQUIRED TO FULLY CLOSE JOINTS THAT ARE INTENDED TO BE TIGHT AND AS SHOWN ON THE DRAWINGS.
- PROVIDE CLOSED CELL BACKER ROD AS REQUIRED TO ACHIEVE PROPER SEALANT THICKNESS PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- CAUTION, DO NOT SEAL WEEPS AND DRAINAGE CHANNELS IN STOREFRONT OR OTHER ASSEMBLIES.

GS

G.L. SMITH

4711 Yonge St.
Suite 800
Toronto, ON.
M2N 6K8
T.416.497.3662
info@glsmith.ca
www.glsmith.ca

WALLFACER

Wallfacer Architecture Inc.
4711 Yonge Street, Suite 801
Toronto, Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ON-SITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON-SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

#	Date	Description	Dwn
---	------	-------------	-----

PAINT, TILE,
BUILDING INSULATION
& JOINT TREATMENT SCHEDULE

PRINT DATE:	SCALE:
6/19/2026	AS NOTED
DRAWN BY:	DRAWING NO:
DB	
CHECKED BY:	
MO	
PROJECT NO:	
17037	

A6.1

TABLEAU DES FINIS / FINISH SCHEDULE			
FLOORS			
FT-3	FLOOR TILE (DINING, RESTROOM)	PRODUCT: CROSSVILLE: "CEMENTED RELATIONSHIP" SWCR/ 12x24UPS; MATTE FINISH SIZE: 24" x 24" GROUT: GR-7 MORTAR: MR-1 WATERPROOFING: VM-1; EXTEND 6" UP & 6" OUT PERIMETER WALLS (RESTROOM AREAS ONLY) JOINTS: 1/8" TRIM: SCHLUTER: QUADREC (SATIN NICKEL ANOD. ALUM.)	
FT-4	FLOOR TILE (BACK OF HOUSE)	PRODUCT: CROSSVILLE: CROSS-THREAD (CTS); R001 "GREY MINGLE" SIZE: 6" x 6" GROUT: GR-8 MORTAR: MR-1 WATERPROOFING: VM-1; EXTEND 6" UP & 6" OUT PERIMETER WALLS AND UNDER FULL EXTENT OF MOP SINK JOINTS: 1/8"	
FC-2	QUARTZ FLOORING (BACK OF HOUSE) MATCHES FT-3	PRODUCT: CERAL, CUSTOM COLOR QUARTZ FLOORING "HONEY LUM BRIGHT BLEND" COLOR: 10% FAWN, 50% LIGHT GRAY, 30% SILVER GRAY, 5% SAND, YELLOW (BEVERED COLOUR-11-08-19) THICK: 3/16" (2)	
	QUARTZ FLOORING (BACK OF HOUSE) MATCHES FT-3 (ALTERNATE)	PRODUCT: POLYFLO: POLYSAFE APEX 5; 3mm VINYL SAFETY FLOORING COLOR: CHROMITE 4032 FINISH: POLYSAFE APEX	
WALL BASE			
B-4	TILE BASE (KITCHEN)	PRODUCT: CROSSVILLE: COVE BASE, R001 "GREY MINGLE"; CROSS SHEEN FINISH SIZE: 6" x 6"; PROVIDE COVE BASE CORNERS, LEFT, RIGHT, AND INSIDE AS REQUIRED GROUT: GR-6 MORTAR: MR-1 WATERPROOFING: VM-1; EXTEND 6" UP & 6" OUT PERIMETER WALLS JOINTS: 1/8"	
B-5	TILE COVE BASE (FRONT OF HOUSE)	PRODUCT: CROSSVILLE: BASE, COLOUR BLOX 2.0; "I SEE THE MOON" SIZE: 6 x 12" GROUT: GR-7 MORTAR: MR-1 WATERPROOFING: VM-1; EXTEND 6" UP & 6" OUT PERIMETER WALLS (RESTROOM AREAS ONLY) JOINTS: 1/8"	
B-6	TILE BASE (FRONT OF HOUSE)	PRODUCT: CROSSVILLE: COVE BASE, COLOUR BLOX 2.0; "I SEE THE MOON" SIZE: 6" x 12" GROUT: GR-7 MORTAR: MR-1 WATERPROOFING: VM-1; EXTEND 6" UP & 6" OUT PERIMETER WALLS (RESTROOM AREAS ONLY) JOINTS: 1/8"	
WALLS			
ACM	ALUMINUM COMPOSITE MATERIAL	(SEE EXTERIOR FINISH SCHEDULE FOR PRODUCT INFORMATION)	
FRP-1	FRP (BACK OF HOUSE)	PRODUCT: MARLITE, FRP, CLASS C (CLASS A, WHERE REQUIRED) SIZE: 4' x 9' FINISH: PEBBLED, WHITE TRIM: WHITE PVC (STANDARD TRIM PROFILES TO MATCH)	
FRP-2	FRP (BACK OF HOUSE)	PRODUCT: MARLITE, ENVUE FRP, CLASS C SIZE: 4' x 9' FINISH: SMOOTH, H-RES PRINT, 6"X6" STACKED TILE PATTERN (WHITE TILE, GRAY GROUT) TRIM: WHITE PVC (STANDARD TRIM PROFILES TO MATCH)	
FRP-3 (ALTERNATE OPTION FOR WT-12 IN KITCHEN)	FRP (BACK OF HOUSE, SERVICE AREA)	PRODUCT: HANGLOCK, INTERLOCKING BRICK PANEL SIZE: 47.5" x 95.5" FINISH: 1/4 MIL STARLIGHT WHITE TRIM: WHITE PVC (STANDARD TRIM PROFILES TO MATCH)	
WC-8	WOOD PLANK WALLCOVERING	PRODUCT: HAYWOODS PLANK NEUTRO, HW16401 THICKNESS: 3/8" SIZE: 31 1/2" - 55 1/8" X 4 3/4" GRADE: SELECT TRIM(HORIZONTAL & VERTICAL): CP-12; SCHLUTER "VINPRO"; COLOR: NICKEL ANOZIDED	
WT-3	WALL TILE (DINING, HALLWAY)	PRODUCT: CROSSVILLE: "WIND WHIPPED" (SWWW; 1050BS) SIZE: 4" x 8" PATTERN: SEE INTERIOR ELEVATIONS GROUT RELEASE: AQUA MIX GROUT RELEASE BY CUSTOM BUILDING PRODUCTS OR EQUAL (MUST BE USED PRIOR GROUTING) GROUT: GR-7 MORTAR: MR-1 JOINTS: 1/32" TRIM: SCHLUTER: QUADREC (SATIN NICKEL ANOD. ALUM.)	
WT-6	WALL TILE (RESTROOM)	PRODUCT: CROSSVILLE: FROST CALIBRATED (A241; 122XUPS) SIZE: 12" x 24" PATTERN: STACK BOND GROUT RELEASE: AQUA MIX GROUT RELEASE BY CUSTOM BUILDING PRODUCTS OR EQUAL (MUST BE USED PRIOR GROUTING) GROUT: GR-7 MORTAR: MR-1 JOINTS: 1/8" TRIM (HORIZONTAL): SCHLUTER, SHEINE (SATIN NICKEL ANOD. ALUM.) TRIM (OUTSIDE CORNER): SCHLUTER, QUADREC w/ CORNER INSERTS (STAIN NICKEL ANOD. ALUM.)	
WT-8	WALL TILE (UPGRADE KITCHEN TILE)	PRODUCT: CROSSVILLE: COLOURS BY NUMBERS "TEA FOR TWO" (ST11; 1080BS) SIZE: 6" x 6" FINISH: SATIN PATTERN: STACK BOND GROUT: GR-11 MORTAR: MR-1 JOINTS: 1/8"	
WT-9	WALL TILE (RESTROOM, HALLWAY, DINING)	PRODUCT: CROSSVILLE: "CHARRED" SIZE: 4" x 12" PATTERN: RUNNING BOND GROUT: GR-11 MORTAR: MR-1 JOINTS: 1/8" TRIM: SCHLUTER: QUADREC (DARK BRONZE ANOD. ALUM.)	
WT-10	WALL TILE- WHITE (DINING)	PRODUCT: HAMILTON PARKER, BLOCK "BLANCO", HEXAGON, MATTE SIZE: 5.5" x 6.5" GROUT: GR-1 MORTAR: MR-1 JOINTS: 1/8" TRIM (HORIZONTAL): SCHLUTER, SHEINE (SATIN NICKEL ANOD. ALUM.) TRIM (OUTSIDE CORNER): SCHLUTER, QUADREC w/ CORNER INSERTS (SATIN NICKEL ANOD. ALUM.) TO ORDER THIS WALL TILE FINISHES, PLEASE CONTACT REBECCA GABRICH FROM HAMILTON PARKER REBECCA GABRICH NATIONAL ACCOUNTS SPECIALIST HAMILTON PARKER 300-201-6750 RGABRICH@HAMILTONPARKER.COM	
WT-11	WALL TILE- BLUE (DINING)	PRODUCT: HAMILTON PARKER, BLOCK "BLUE (295C)", HEXAGON, MATTE SIZE: 5.5" x 6.5" GROUT: GR-1 MORTAR: MR-1 JOINTS: 1/8" TRIM (HORIZONTAL): SCHLUTER, SHEINE (SATIN NICKEL ANOD. ALUM.) TRIM (OUTSIDE CORNER): SCHLUTER, QUADREC w/ CORNER INSERTS (SATIN NICKEL ANOD. ALUM.) TO ORDER THIS WALL TILE FINISHES, PLEASE CONTACT REBECCA GABRICH FROM HAMILTON PARKER REBECCA GABRICH NATIONAL ACCOUNTS SPECIALIST HAMILTON PARKER 300-201-6750 RGABRICH@HAMILTONPARKER.COM	
WT-12	WALL TILE (BOH)	PRODUCT: CROSSVILLE: COLOR BY NUMBERS "TEA FOR TWO" (WT02; 10412G) SIZE: 4" x 12" FINISH: SATIN PATTERN: RUNNING BOND GROUT: GR-11 MORTAR: MR-1 JOINTS: 1/8" CORNER PROTECTION (OUTSIDE CORNER): CP-13)	
WT-13	WALL TILE (DINING, HALLWAY)	PRODUCT: CROSSVILLE: COLORS BY NUMBERS "THREE HOUR TOUR" WT03 SATIN FINISH SIZE: 4" x 12" PATTERN: SEE INTERIOR ELEVATIONS GROUT RELEASE: AQUA MIX GROUT RELEASE BY CUSTOM BUILDING PRODUCTS OR EQUAL (MUST BE USED PRIOR GROUTING) GROUT: GR-14 MORTAR: MR-1 JOINTS: 1/8" TRIM (INSIDE CORNER): SCHLUTER, QUADREC (SATIN NICKEL ANOD. ALUM.) TRIM (OUTSIDE CORNER): SCHLUTER, QUADREC w/ CORNER INSERTS (SATIN NICKEL ANOD. ALUM.)	
CP-8	CORNER PROTECTION (BACK OF HOUSE)	PRODUCT: STAINLESS STEEL CORNER GUARD SIZE: 2" X 2" WITH 1/4" OR 3/8" SLOUT BEND TOWARDS WALL AT EACH LEG MATERIAL: MIN 18GA TYPE 304 #4 SATIN STAINLESS STEEL NOTE: INSTALL WITH "TIGHTBOND PRO"ADVANTAGE" HEAVY DUTY CONSTRUCTION ADHESIVE (OR APPROVED EQUAL)	
CP-9	CORNER PROTECTION	PRODUCT: SCHLUTER "QUADREC"; COLOR: DARK BRONZE ANOZIDED ALUMINUM TO MATCH WT-9	
CP-11	CORNER PROTECTION - PREFERRED	PRODUCT: SCHLUTER "QUADREC"; COLOR: DARK BRONZE ANOZIDED ALUMINUM TO MATCH WT-9	
CP-11	CORNER PROTECTION - ALTERNATE	PRODUCT: HAYWOODS CLEAR MATTE FINISH BEAD MORTS	
CP-12	CORNER PROTECTION	PRODUCT: SCHLUTER "VINPRO"; VP00L, 125XATGB; 1/2" X 8-1/2 1/2"; COLOR: NICKEL ANOZIDED	

TABLEAU DES FINIS / FINISH SCHEDULE		
GROUT, MORTAR, & WATERPROOFING MEMBRANE		
GR-1	GROUT	PRODUCT: MAPEI: ULTRACOLOR PLUS FA (25LBS) COLOR: "AVALANCHE" #38 JOINTS: 1/8" (OPTIONAL) SEALER: ULTRACARE PENETRATING PLUS SB STONE, TILE AND GROUT SEALER
GR-5	GROUT	PRODUCT: MAPEI: KERAPOXY IEG CG (4906) LARGE UNIT CONTAINS 4 PART A & 4 PART B LIQUIDS, SCRUB PAD AND INSTRUCTIONS SHEET) ALSO NEED (4) 9.29 BAGS OF 4X10 POWDER, PURCHASED SEPARATELY COLOR: "CHARCOAL" #47 JOINTS: 1/8" (OPTIONAL) SEALER: ULTRACARE PENETRATING PLUS SB STONE, TILE AND GROUT SEALER
GR-7	GROUT	PRODUCT: MAPEI: ULTRACOLOR PLUS FA (25LBS) COLOR: "GRAY" #09 JOINTS: 1/8" (OPTIONAL) SEALER: ULTRACARE PENETRATING PLUS SB STONE, TILE AND GROUT SEALER
GR-10	GROUT	PRODUCT: MAPEI: KERAPOXY IEG CG (4906) LARGE UNIT CONTAINS 4 PART A & 4 PART B LIQUIDS, SCRUB PAD AND INSTRUCTIONS SHEET) ALSO NEED (4) 9.29 BAGS OF 4X10 POWDER, PURCHASED SEPARATELY COLOR: "GRAY" #09 JOINTS: 1/8"
GR-11	GROUT	PRODUCT: MAPEI: ULTRACOLOR PLUS FA (25LBS) COLOR: "BLACK" #10 JOINTS: 1/8"
GR-12	GROUT	PRODUCT: MAPEI: FLEXCOLOR DESIGN (2 GALLON) COLOR: "WENDY'S BLUE" #001 JOINTS: 1/8"
GR-14	GROUT	PRODUCT: MAPEI: ULTRA COLOR PLUS FA (25 LB) COLOR: "COBBLESTONE" #103 JOINTS: 1/8" ALTERNATE PRODUCT: LATICRETE: PERMACOLOR (25 LB) COLOR: "SMOKE GREY" #89 JOINTS: 1/8"
MR-1	MORTAR	PRODUCT: MAPEI: KERAFLX SUPER (44LBS)
MR-2	MORTAR	PRODUCT: LATICRETE: 4-XLT: 4XLT GRAY POLYMER THINSET 50LB BAG
WM-1	WATERPROOFING MEMBRANE	PRODUCT: MAPEI: MAPELASTIC AQUADEQUE 5 GALLON (01968)
CEILING		
CT-1	CEILING TILE (KITCHEN / FOOD PREP AREAS)	PRODUCT: ARMSTRONG VINYLCLAD SQUARE LAY-IN: BP670; 24" x 48" x 1/2"; COLOR: WHITE GRID: PRELUDE 15/16", WHITE
CT-4	CEILING TILE (SERVING AREA, CONDIMENT AREA (ONLY IF REQUIRED BY HEALTH DEPT.))	PRODUCT: ARMSTRONG VINYLCLAD SQUARE LAY-IN: BP671; 24" x 24" x 1/2"; COLOR: WHITE GRID: PRELUDE 15/16", WHITE
CT-5	CEILING TILE (KITCHEN FRYER AREA; WASHABLE NON-COMBUSTABLE)	PRODUCT: ARMSTRONG; GERAMAGUARD 605; 24" x 48" X 5/8"; COLOR: WHITE GRID: PRELUDE 15/16", WHITE SURFACE FINISH: SCRUBBABLE FACTORY APPLIED PAINT FINISH (WITHIN 18" OF GREASE HOODS ONLY, WHERE NON-COMBUSTIBLE MATERIALS ARE REQUIRED)
LAMINATE		
L-5	LAMINATE	PRODUCT: PONITE; COLOR: "MOROCCHELLA HUNT"; TEXTURE: LINE 2; WO740-LZ-G49
L-6	LAMINATE	PRODUCT: WILSONART; COLOUR: "WHERE'S THE AAAK"; Y0812-16
SOLID SURFACE		
SS-4	SOLID SURFACE	PRODUCT: CORIAN; CONCRETE: "NEUTRAL CONCRETE" (C1)
MISCELLANEOUS		
WS-1	DINING ROOM WINDOW SHADES (OPTIONAL)	PRODUCT: ROLL-A-SHADE SIGNATURE SERIES 5% OPENNESS, COLOR: 1241 CHARCOALBRONZE SIZE: 4" FASCIA AND BRACKETS TO MATCH STOREFRONT NOTE: INCLUDE STAINLESS STEEL BEADED ADJUSTMENT CHAIN WITH SAFETY TENSION DEVICE
STOREFRONT / GLAZING		
SF-1	STOREFRONT	PRODUCT: US ALUMINUM: IT451451 "DARK BRONZE" ANODIZED ALUMINUM ALTERNATE: KAWNEER TRIFAB VQ 4514T451; #40 "DARK BRONZE" ANODIZED ALUMINUM EQUALS BY TUBELITE & OLDCASTLE
	STOREFRONT (IMPACT RATED)	PRODUCT: US ALUMINUM: IT600 "DARK BRONZE" ANODIZED ALUMINUM ALTERNATE: KAWNEER IR 501UT; #40 "DARK BRONZE" ANODIZED ALUMINUM EQUALS BY TUBELITE & OLDCASTLE
G-1	1" INSULATED GLASS	OPTION #1: GUARDIAN GLASS (HEAT STRENGTHENED AS REQUIRED, TEMPERED WHERE INDICATED) OUTBOARD LITE: GUARDIAN "SN 68" (#2) ON 1/4" CLEAR INBOARD LITE: GUARDIAN 1/4" CLEAR SPACE: 1/2" AIR OPTION #2: VITRO (PPG) ARCHITECTURAL GLASS (HEAT STRENGTHENED AS REQUIRED, TEMPERED WHERE INDICATED) OUTBOARD LITE: VITRO ARCHITECTURAL GLASS "SOLARBAN 60" (#2) ON 1/4" CLEAR GLASS INBOARD LITE: VITRO ARCHITECTURAL GLASS 1/4" CLEAR SPACE: 1/2" AIR
G-3	1/4" CLEAR GLASS	PRODUCT: 1/4" CLEAR FLOAT GLASS, EQUALS THRU GUARDIAN & VITRO (PPG) ARCHITECTURAL GLASS (HEAT STRENGTHENED AS REQUIRED, TEMPERED WHERE INDICATED)
G-5	1" INSULATED GLASS (FROSTED)	OPTION #1: GUARDIAN GLASS (HEAT STRENGTHENED AS REQUIRED, TEMPERED WHERE INDICATED) OUTBOARD LITE: GUARDIAN "SN 68" (#2) ON 1/4" CLEAR GLASS INBOARD LITE: GUARDIAN "SATIN DECO" (ACID ETCHED) (#3) ON 1/4" "EXTRACLEAR" SPACE: 1/2" AIR OPTION #2: VITRO (PPG) ARCHITECTURAL GLASS (HEAT STRENGTHENED AS REQUIRED, TEMPERED WHERE INDICATED) OUTBOARD LITE: VITRO ARCHITECTURAL GLASS "SOLARBAN 60" (#2) ON 1/4" CLEAR GLASS INBOARD LITE: WALKER TEXTURES "VELOUR" (ACID ETCHED) (#3) ON 1/4" CLEAR GLASS SPACE: 1/2" AIR
PUW	PICK-UP WINDOW	FINISH: TO MATCH STOREFRONT
METALS		
M-1	BRAKE METAL	PRODUCT: EXCEPTIONAL METALS SPECIFICATIONS: 24 GA GALVALUME STEEL COLOR: PRE-FINISHED "DARK BRONZE" REFINISH: P5-X1 (SEE PAINT SCHEDULE)
M-2	CORRUGATED METAL PANEL	PRODUCT: AGWAY METAL: 6-150 NF SPECIFICATIONS: 26 GA GALVALUME STEEL COLOR: PRE-FINISHED, "DARK BROWN"
M-3	ROOF EDGE	PRODUCT: EXCEPTIONAL METALS - TWO PIECE COMPRESSION EDGE SPECIFICATIONS: 24 GA GALVALUME STEEL COLOR: PRE-FINISHED, "BRIGHT RED"
M-4	ROOF EDGE	PRODUCT: EXCEPTIONAL METALS SPECIFICATIONS: 24 GA GALVALUME STEEL COLOR: MILL FINISH, "SILVER METALLIC"
M-5	ALTERNATE FOR ACM-4	PRODUCT: BRAKE METAL COLOR: CLEAR ANODIZED
M-7	COPING	PRODUCT: EXCEPTIONAL METALS COLOR: MILL FINISH "DARK GREY"
M-8	COPING	PRODUCT: EXCEPTIONAL METALS COLOR: MILL FINISH, "MID-NIGHT BRONZE"
M-9	FABRICATED COVE LIGHTING	PRODUCT: PRE-FABRICATED COVE LIGHTING COLOR: CLEAR ALUMINUM

TABLEAU DES FINIS / FINISH SCHEDULE		
EXTERIOR CLADDING		
NP-1	NICHHA - FIBER CEMENT PANEL	PRODUCT: NICHHA: VINTAGE WOOD SERIES COLOR: CEDAR SIZE: 18" x 10" x 5/8" SEALANT: ADFAST ADSEAL 4580 SERIES
NP-2	NICHHA - FIBER CEMENT PANEL	PRODUCT: NICHHA: ILLUMINATION SERIES COLOR: BLAZE (RED) SIZE: 18" x 6" x 5/8" SEALANT: ADFAST ADSEAL 4580 SERIES
NP-3	NICHHA - FIBER CEMENT PANEL	PRODUCT: NICHHA: ILLUMINATION SERIES COLOR: KNIGHTS ARMOR SIZE: 18" x 6" x 5/8" SEALANT: ADFAST ADSEAL 4580 SERIES
VW-1	VICWEST SYSTEM	PRODUCT: VICWEST PROFILE: AD-300-R, GAUGE 22 COLOR: 18-8F15 DARK CEDAR PVDF FINISH TYPE: PRINTS (CW ALL REQUIRED TRIM)
VW-2	VICWEST SYSTEM	PRODUCT: VICWEST PROFILE: AD-300-SR, GAUGE 22 COLOR: 56072 CHARCOAL WVL FINISH TYPE: WEATHERAL
VW-3	VICWEST SYSTEM	PRODUCT: VICWEST PROFILE: AD-300-SR, GAUGE 22 COLOR: 56064 DARK RED WVL FINISH TYPE: WEATHERAL
VW-4	VICWEST SYSTEM	PRODUCT: VICWEST PROFILE: AD-300, GAUGE 22 COLOR: OC7500 SILVER POLYURETHANE PAINT SYSTEM FINISH TYPE: WEATHERAL
LC-1	PREFINISHED ALUMINUM CLADDING	PRODUCT: LUXYCLAD PROFILE: 2"x2", 24" LONG COLOR: LIGHT CHERRY, LCF 0102 FINISH TYPE: WOOD GRAIN
KW-1	PREFINISHED ALUMINUM CLADDING	PRODUCT: KNOTWOOD COLOR: LIGHT OAK SIMULATED WOOD NOTE: REFER TO FINISH DETAILS SHEET FOR PENETRATION DETAILS.
ACM SYSTEM		
ACM-1	ALUM. COMPOSITE MATERIAL	PRODUCT: ARONIC REYNBOND PE, 4MM, ROUTE & RETURN COLOR: PRE-FINISHED, COLORWELD 300, "BRITE RED", (RB4CW3BR) ALTERNATE: ALUCOBOND PE, 1" ROUTE & RETURN COLOR: PVDF-3, "RED FIRE COOL", GLOSS LEVEL: 30
ACM-4	ALUM. COMPOSITE MATERIAL	PRODUCT: ARONIC, REYNBOND PE, 4MM, ROUTE & RETURN COLOR: PRE-FINISHED, COLORWELD 500, COLOR: "ANODIC CLEAR" ALTERNATE: ALUCOBOND PE, 1" ROUTE & RETURN COLOR: MATCH ARONIC SPEC (ABOVE)
ACM-5	ALUM. COMPOSITE MATERIAL	PRODUCT: ARONIC REYNBOND PE, 4MM, ROUTE & RETURN COLOR: PRE-FINISHED, COLORWELD 500, COLOR: "STORMY GRAY" ALTERNATE: ALUCOBOND PE, 1" ROUTE & RETURN COLOR: MATCH ARONIC SPEC (ABOVE)
EIFS SYSTEM		
E-1 THRU E: 9	EIFS (EXTERIOR INSULATION FINISH SYSTEM)	PRODUCT: STO: StoTHERM ESSENCE NEXT SYSTEM TEXTURE: FINE SAND (U.N.O.); SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION COATING: TOP COAT WITH 2 COATS OF STO COAT/ACRYL PLUS IN SPECIFIED COLOR; TWO ADDITIONAL COATS OF STO COAT ACRYL PLUS CLEAR MATT; IMPACT PROVED "ARMOR MAT" REINFORCING MESH UP TO 6'-9" ABOVE GRADE COLORS: E-1: LIGHT GRAY (STO #NA13-0042); SEE XT-2 FOR APPROVED ALTERNATE (FEATURE WINDOW ONLY) E-2: WENDY'S RED (STO #NA13-0040); SEE ACM-1 FOR APPROVED ALTERNATE E-3: (OBSOLETE) E-4: FIELD BROWN (STO #NA14-0011) E-5: ACCENT BROWN (STO #NA14-0012) E-6: DARK BRONZE (STO #NA14-0014) E-7: DARK GREY (STO #NA18-0004) E-8: TAN (STO #NA17-0047) E-9: SILVER (STO #NA19-0003); "SMOOTH" TEXTURE ALTERNATE (AS APPROVED BY OWNER): DRYVIT, "OUTSULATION PLUS MD SYSTEM" TEXTURE: SANDPERBLE FINE (U.N.O.) COATING: OUTSULATION PLUS MD SYSTEM; HIGH IMPACT "PANZER MESH" REINFORCING COLORS: MATCH STO COLORS (ABOVE)
MASONRY		
BR-1	FACE BRICK	OPTION #1: BOWSTERN SHALE COMPANY SERIES: "OLD ENGLISH" (MODULAR) OPTION #2: GLEN-GARY SERIES: "OLDE DETROIT" (MODULAR) OPTION #3: BELDEN SERIES: "BELCREST" 560A (MODULAR) MORTAR PRODUCT: CEMEX RICH/COLOR 56-H "LIMESTONE" (OR APPROVED EQUAL)
EXTERIOR MISC.		
BL-1	BOLLARD SLEEVE	PRODUCT: PAWLING, PROTEK COLOR: SAFETY YELLOW SIZE: 6" DIA, 48" HEIGHT NOTE: CONTACT HJC
CF-1	CONCRETE FINISH (PATIO)	PRODUCT: SCOPFIELD: LITHOCHROME COLOR HARDENER COLOR: SCOPFIELD: LITHOCHROME, A-33 "CLASSIC GREY" FINISH: ARCHITECTURAL CONCRETE DESIGN, 24" x 24" SLATE, LIGHT TEXTURE (OR EQUAL)
CF-2	CONCRETE FINISH (PATIO)	PRODUCT: SCOPFIELD: LITHOCHROME COLOR HARDENER COLOR: A-55 "PECAN TAN" FINISH: BROOM, APPLY TWO COATS SCOPFIELD CURESEAL-W
CF-3	CONCRETE FINISH (PUW, TRASH ENCLOSURE, ORDER STATION CANOPY)	PRODUCT: SCOPFIELD COLOR (OPTIONAL): SCOPFIELD LITHOCHROME, A-33 "CLASSIC GREY" SEALER: SCOPFIELD, CEMENTONE, CLEAR SEALER

TABLEAU DES FINIS / FINISH SCHEDULE					
EXTERIOR FURNITURE					
PATIO: TABLE AND CHAIRS	PRODUCT: RECYCLE DESIGN - INFINITY SERIES FRAME: POWDER COAT GRAY, SLATS: CEDAR HDPE TABLE #1: W.INF.PT.308X-47' (29" x SEAT) TABLE #2: W.INF.PT.41x1.41' (41" x SEAT) TABLE #3: W.INF.PT.41x1.41' (41" x SEAT) TABLE #4: W.INF.PT.3029.27' (29" x SEAT) TABLE #5: W.INF.PT.2429.27' (24" x SEAT) TABLE #6: W.INF.RT.7912.72" (SEAT RAIL) ADA TABLE #1: W.INF.PT.41x1.3T ADA (41" x SEAT, ADA) ADA TABLE #2: W.INF.PT.41x1.5T ADA (41" x SEAT, ADA) ADA TABLE #3: W.INF.PT.6229.4T ADA (42" x SEAT, ADA, WALL) BENCH: W.INF.BE.6016' SIDE TABLE: W.INF.ST.2232 NOTE: MINIMUM OF 1 TABLE MUST BE BARRIER FREE ACCESSIBLE				
PATIO: TABLE AND CHAIRS	PRODUCT: CROW WORKS COLOR: BROWN; TABLES: R350B: 38" X 28"; 2 TOP R350P: 38" SQ WITH UMBRELLA HOLE; 4 TOP CHAIRS: R3607: WARREN OUTDOOR DINING CHAIR				
PATIO: UMBRELLA	PRODUCT: RECYCLE DESIGN FABRIC: SUNBRELLA JOCKEY RED; COLOR GRADE(B) OPTION #1: W.INF.UMB.732 (OCTAGONAL) OPTION #2: W.INF.UMB.772 (HALF-WALL) OPTION #3: W.INF.UMB.782 (SQUARE)				
PATIO: TRASH RECEPTACLE	PRODUCT: RECYCLE DESIGN: INFINITY SERIES (W.INF.WR.035) FINISH: CEDAR HDPE, STAINLESS STEEL, GRAY; NOTE: LINER SOLD SEPARATE FROM KEYS				
PATIO: RAILING	PRODUCT: PREFINISHED ALUMINIUM BLACK GLOSS; Fortress RAILING, AL 13 SERIES (OR EQUAL.)				
PATIO: ACCESSORIES	PRODUCT: RECYCLE DESIGN (PREFERRED); INFINITY SERIES FRAME: POWDER COAT GRAY, SLATS: CEDAR HDPE SMOKE STAND: W.INF.SMST.383 PLANTERS: V.INF.PLNT.1622/242Z BBQ STAND: W.INF.BBK.E3618				
PATIO: 3-STREAM FRONT LOAD RECEPTACLE	PRODUCT: RECYCLE DESIGN (PREFERRED); INFINITY SERIES PRODUCT NUMBER: W.INF.WR.30T FRAME: POWDER COAT GRAY, SLATS: CEDAR HDPE SURFACE MOUNT REQUIRED EZ INSTALL BASE				
GENERAL NOTES - All dimensions are given as approximate. - All materials shall conform to applicable industry standards. - All fasteners shall be stainless steel or galvanized steel. - HANNAH REVIEW BUILD OTHER MUST SIGN CON ALL A # DO PROJ E DRAWN CHECKED BY DATE PROJECT NO. SHEET NO. TOTAL SHEETS SCALE NOTES TO ARCHITECT					

 G.L. SMITH		4711 Yonge St. Suite 800 Toronto, ON. M2N 6K8 T.416.497.3662 info@glsmith.ca www.glsmith.ca	
 WALLFACER			
Wallfacer Architecture Inc.			
4711 Yonge Street Suite 801 Toronto Ontario M2N 6K8 647 547 6060			
PROFESSIONAL STAMPS:			
GENERAL NOTES:			
• ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS. • ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT • I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES. • REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY. • DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT • CONTRACTOR CANNOT COMMENCE ANY ON SITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE			
ISSUE			
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK
#	Date	Description	Dwn
PROJECT TITLE:			
			
WENDY'S NEXT GEN 30 CRU 1 11332 266 STREET, ACHESON, AB CANADA (17037)			
REVISION			
#	Date	Description	Dwn
DRAWING TITLE:			
FINISH SCHEDULE			
PRINT DATE:		SCALE:	
6/19/2026		AS NOTED	
DRAWN BY:		DRAWING NO:	
DB			
CHECKED BY:		A6.2	
MO			
PROJECT NO:		17037	


NOTES

1. ALL EXTERIOR DOORS AND PENETRATION SHALL MEET THE REQUIREMENTS OF TABLES 3.2.2.3. AND 4, NECB 2020.
2. AIR LEAKAGE REQUIREMENT FOR DOOR AND PENETRATION AS PER 3.2.4.3. OF NECB 2020.
3. LANDLORD TO REFER TO DOOR HARDWARE FOR WENDY'S HARDWARE STANDARDS. BASE BUILDING DOORS UNDER THE LANDLORD SCOPE SHOULD BE INSTALLED PER WENDY'S STANDARDS.


DOOR SCHEDULE

DOOR MARK	ROOM	DOOR						FRAME		SAFETY GLASS	REMARKS
		WD	SIZE HGT	THK	HDW GROUP	GLAZ TYPE	TYPE	MATL	TYPE	MATL	
01	ENTRANCE (MAIN)		EXISTING		11	G-3	A	EXISTING		ALUM	NOTE: 8.9,10,11
02	VESTIBULE	3'-0"	7'-0"	1 3/4"	02			ALUM	11	ALUM	NOTE: 8.9,10,11
03	VESTIBULE	3'-0"	7'-0"	1 3/4"	02	G-3	A	ALUM	11	ALUM	NOTE: 8.9,10,11
04	REAR SERVICE DOOR		EXISTING		03			EXISTING			NOTE: 9
05	UNISEX WRM	3'-0"	6'-8"	1 3/4"	07	-	B	PL	00	ALUM	NOTE: 1.9
06	UNIVERSAL UNISEX WRM	3'-0"	6'-8"	1 3/4"	12	-	B	PL	00	ALUM	NOTE: 1.9,10,11
07	UTILITY	2'-4" (2)	6'-8"	1 3/4"	05	-	B	PL	00	ALUM	NOTE: 1.9
08	STAFF WASHROOM	3'-0"	6'-8"	1 3/4"	07	-	E	HM	00	HM	NOTE: 9,19
09	PREP AREA	3'-0"	6'-8"	1 3/4"	08	-	G	PL	00	ALUM	NOTE: 1.15,16,20
10	DELIVERY PICK-UP		EXISTING		01B			EXISTING			NOTE: 17,18
DOOR GENERAL NOTES											
1. USE 3-1/2" SCREWS ON ALL DOOR HINGES											
2. COORDINATE LOCKSET CORE REQUIREMENTS WITH OWNER.											
DOOR SCHEDULE NOTES											
1. MARLITE AAA SERIES 500 DOOR AND FRAME. WENDY'S WOOD LAMINATE, MORCHELLA HUNT BY NEVAMAR OR EQUAL											
2. TOILET ROOM SIGN: SUPPLIED BY OWNER, INSTALLED BY G.G.											
3. "EMPLOYEES ONLY" SIGN: SUPPLIED BY OWNER, INSTALLED BY G.G.											
4. "EMERGENCY EXIT ONLY-ALARM WILL SOUND" SIGN: SUPPLIED BY OWNER, INSTALLED BY G.G.											
5. PROVIDE HICK PLATE ON BOTH SIDES.											
6. "EXIT ONLY" APPLIED TO INTERIOR FACE AND LEGIBLE TO EXTERIOR.											
7. DOOR SPECIFICATION:											
OLD CASTLE - WS-500 WIDE-STILE DOORS: FINISH: TO MATCH SP-4.											
TUBELITE (ALTERNATE) - 6878 WIDE-STILE ENTRANCE: TOP RAIL 1/2" VERTICAL STILE 5" BOTTOM RAIL 10"x1 3/4" THICK: HARDWARE GROUP 1 PROVIDED IN TUBELITE CAPPUCCINO WOOD GRAIN FINISH:											
8. DOOR MUST BE PURCHASE FROM NATIONAL ACCOUNT.											
9. LOCK CYLINDERS BY "FALCON" OR AS DIRECTED BY THE OWNER. ENSURE CLEAR OPENING INCLUDING HARDWARE AND STOPS.											
10. AUTOMATIC DOOR OPENER PUSH PLATES: BEA 10BPS#1 SERIES.											
11. AUTOMATIC DOOR OPENER: HORTON AUTOMATICS SERIES HD4100/7100 EASY ACCESS SURFACE MOUNTED OPERATOR. (DARK BRONZE TO MATCH FRAME)											
12. THRESHOLD: PEMKO 1700 (OR EQUAL).											
13. 1 HR FIRE-RATED DOOR & FRAME: PROVIDE LOCKING PINS ON IN-ACTIVE LEAF.											
14. REAR SERVICE DOOR TO BE PROVIDED BY COOLER SUPPLIER.											
15. G.C. TO PROVIDE 1 WAY VISION DOOR VIEWER FOR PREP AREA DOOR.											
16. G.C. TO PURCHASE ELECTRONIC KEYLESS ACCESS LOCK FROM HAMILTON PARKER.											
17. G.C. TO PROVIDE EMPLOYEE DOOR BELL.											
18. ALUMINUM DOOR TO MATCH STOREFRONT W/ FROSTED GLASS W/ "CREW" SIGN.											
19. PAINT STAFF WASHROOM HW DOOR WHITE, PAINT COLOUR TO BE P. 6.											
20. G.C. TO ENSURE DOOR VIEWER TO BE ONE WAY GLASS.											
21. DOOR PULL IS NOT TO BE INSTALLED AT THIS VESTIBULE DOOR.											
22. EXCLUDE THE PULL HANDLE INSTALL FOR THIS DOOR.											


HDWR MOUNTING HTS.

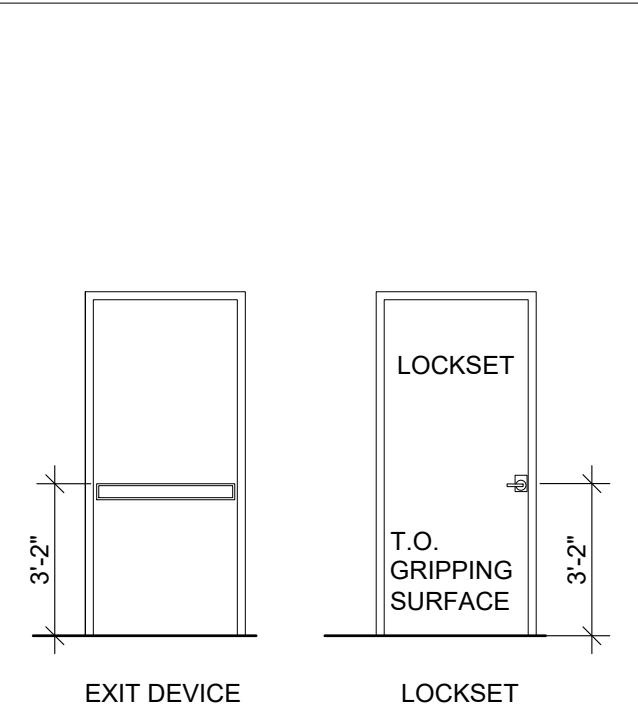

DOOR TYPES

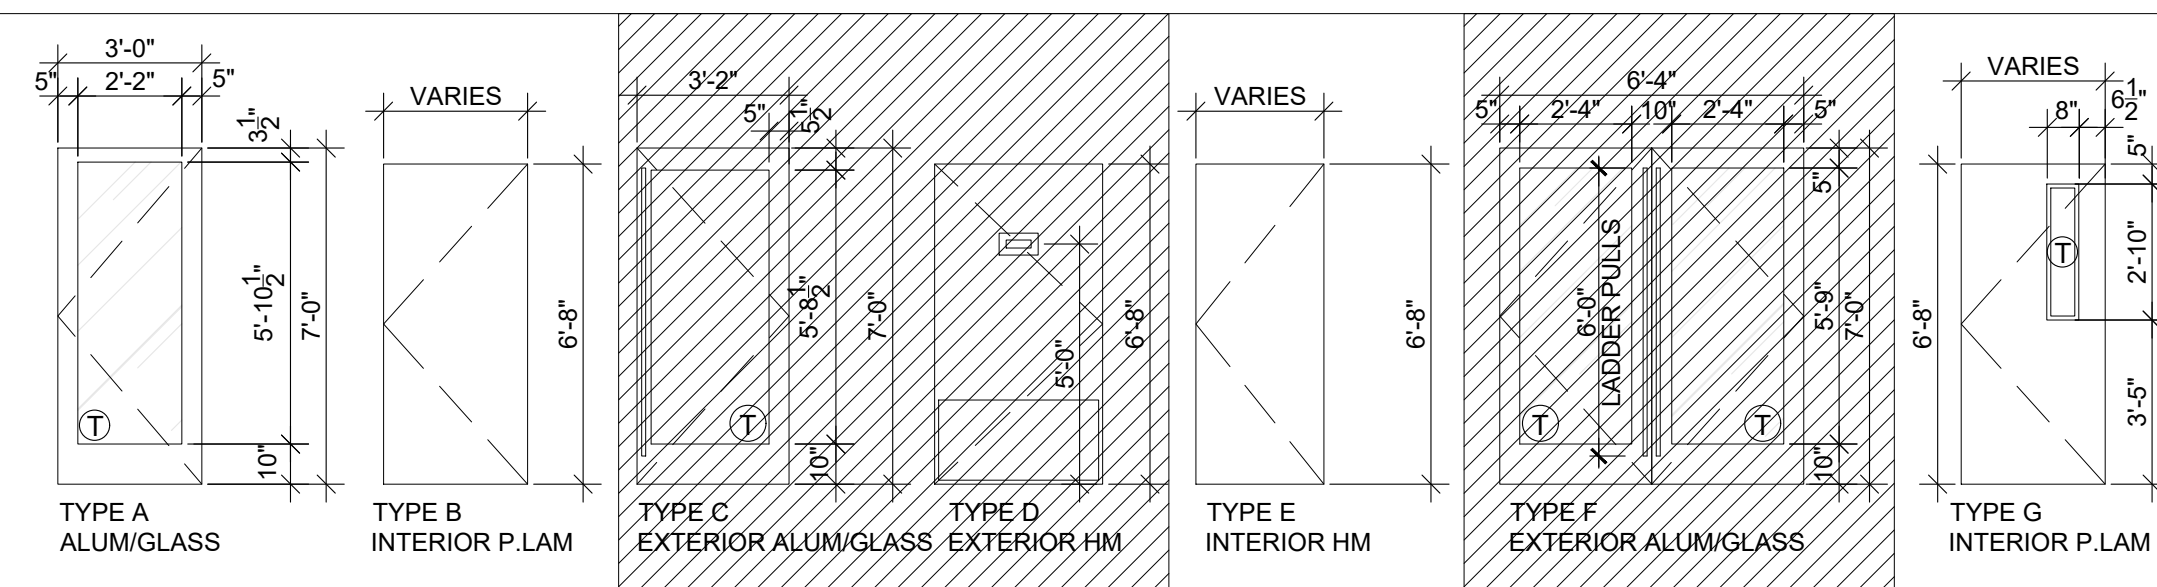


FRAME TYPES

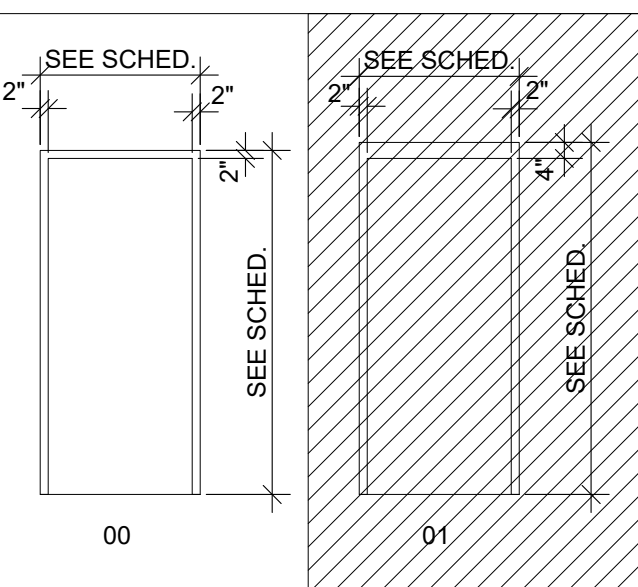

DOOR HARDWARE SCHEDULE

QNTY.	DESCRIPTION	MODEL	FINISH	MFR.	BY	QNTY.	DESCRIPTION	MODEL	FINISH	MFR.	BY	QNTY.	DESCRIPTION	MODEL	FINISH	MFR.	BY
SET 01 - EXTERIOR STOREFRONT ENTRANCE - (WITH SIDE PATIO OPTION)						SET 03 - REAR SERVICE DOOR						OPTION BELOW IS FOR USE OF PRIVACY LOCK IN LIEU OF KEYED WASHROOM LOCK					
3	EA. HINGES	BB1191 4 1/2" x 4 1/2" BUTT HINGE	US10B	HAGER	LL	1	EA. ROTON HINGE SURFACE MOUNT	70-210HD-84	ALUMINUM	ROTON	LL	1	EA. HAGER PRIVACY	3540 WTN	26D / 626	HAGER	GC
1	EA. EXIT DEVICE	1792NL	26D/626	FALCON	LL	1	EA. EXIT DEVICE RIM SURFACE MOUNT	4501-48-26D	26D / 626	HAGER	LL	NOTE: THE ITEM BELOW IS A DEADLOCK IS REQUIRED AT CERTAIN LOCATIONS					
1	EA. PULL	BF153 OFFSET PULL	26D/626	ROCKWOOD	LL	1	EA. CLOSER 5100 HOLD OPEN STOP	5100-HDHOS-ALUM	ALUMINUM	HAGER	LL	1	EA. DEADLOCK THUMB TURN BY OCCUPANCY INDICATOR	3216	32D	HAGER	GC
1	EA. CLOSER	SC70-18	DBRZ	FALCON	LL	1	EA. ARMOR PLATE 20"x40" S.S.	190S-20X40-32D	32D	HAGER	LL	SET 08 - SERVICE AREA DOOR					
1	EA. FLOOR STOP	441	10B	HAGER	LL	1	EA. WEATHER STRIPPING NEOPRENE	873S-N-4284-MILL	ML	HAGER	LL	3	PR. HINGES	ECBB 1100 4 1/2"x4 1/2"	26D / 626	HAGER	GC
1	EA. THRESHOLD	350	32D	HAGER	LL	1	EA. DOOR BOTTOM SWEEP NEOPRENE	750SN-42-CLR	CL	HAGER	LL	1	EA. PRIVACY LOCKSET	3540 WTN	26D / 626	HAGER	GC
1	EA. DOOR SWEEP	200N	32D	HAGER	LL	1	EA. NGP STEEL SECURITY ASTRAGAL 83"	1392SP 83" USP	PRIME COAT	NGP	LL	1	EA. QUICK CODE ACCESS	CL610	BRUSHED STEEL	CODE LOCKS	GC
SET 01A - EXTERIOR STOREFRONT ENTRANCE - (OPTIONAL VESTIBULE)						1	EA. DOOR LITE 9x5 6"x2" VISION	L-VGLF-WD GP2	PRIME COAT	NGP	LL	SET 11 - EXTERIOR STOREFRONT ENTRANCE - DOUBLE					
3	EA. HINGES	BB1191 4 1/2" x 4 1/2" BUTT HINGE	US10B	HAGER	LL	1	EA. HALF SADDLE THRESHOLD 5"x12"x42"	431S-42-MIL	MIL	HAGER	LL	3	PR. HINGES	BB1191 4 1/2" x 4 1/2" NRP BUTT HINGE	US10B	HAGER	LL
1	EA. EXIT DEVICE	1792NL	26D/626	FALCON	LL	1	EA. OVERHEAD RAIN DRIP GUARD	810S-46-MIL	ALUMINUM	HAGER	LL	1	EA. EXIT DEVICE	1692	DC13	FALCON	LL
1	EA. CLOSER	SC70-18	DBRZ	FALCON	LL	SET 03A - ENHANCED REAR SERVICE DOOR (BY WBS SUPPLIER)						1	EA. EXIT DEVICE	1690	DC13	FALCON	LL
1	EA. FLOOR STOP	441	10B	HAGER	LL	1	EA. ROTON HINGE SURFACE MOUNT	70-210HD-84	ALUMINUM	ROTON	LL	1	EA. 60" LADDER PULL	60LPBS	26D / 626	CRL	LL
1	EA. THRESHOLD	350	32D	HAGER	LL	1	EA. EXIT DEVICE RIM SURFACE MOUNT	4501-48-26D	26D / 626	HAGER	LL	1	EA. CLOSER	SC70-18	DBRZ	FALCON	LL
1	EA. DOOR SWEEP	200N	32D	HAGER	LL	1	EA. CLOSER 5100 HOLD OPEN STOP	5100-HDHOS-ALUM	ALUMINUM	HAGER	LL	1	EA. OH STOP	100S	SP313	GLY	LL
SET 01B - EXTERIOR DELIVERY PICK-UP DOOR						1	EA. ARMOR PLATE 20"x40" S.S.	190S-20X40-32D	32D	HAGER	LL	1	EA. THRESHOLD	350	32D	NGP	LL
3	EA. HINGES	BB1191 4 1/2" x 4 1/2" BUTT HINGE	US10B	HAGER	LL	1	EA. WEATHER STRIPPING NEOPRENE	873S-N-4284-MILL	ML	HAGER	LL	1	EA. DOOR SWEEP	200NA	32D	NGP	LL
1	EA. EXIT DEVICE (INTERIOR)	CAL ROYAL 9800 SERIES	US10B/613 .640	CODE LOCKS	LL	1	EA. DOOR BOTTOM SWEEP NEOPRENE	750SN-42-CLR	CL	HAGER	LL	1	EA. PERIMETER SEAL	160S	DKB	NGP	LL
1	EA. QUICK CODE ACCESS	CL600PK	BRUSHED STEEL	CODE LOCKS	GC	1	EA. NGP STEEL SECURITY ASTRAGAL 83"	1392SP 83" USP	PRIME COAT	NGP	LL	1	EA. ASTRAGAL	672	DKB	NGP	LL
1	EA. DEADLOCK	MS1850S KEYLESS DEADBOLT	STAINLESS STEEL	ADAMS RITE	LL	1	EA. DOOR LITE 9x5 6"x2" VISION	L-VGLF-WD GP2	PRIME COAT	NGP	LL	1	EA. AUTOMATIC DOOR OPENER PUSH PLATES	BEA 10BPS61	ALUMINUM	BEA GROUP	GC
1	EA. THUMBTURN	ADAMS RITE 4066	313	ADAMS RITE	LL	1	EA. HALF SADDLE THRESHOLD 5"x12"x42"	431S-42-MIL	MIL	HAGER	LL	1	EA. AUTOMATIC DOOR	HD4100-EASY ACCESS SURFACE MOUNTED OPERATOR OR EQUAL	ALUMINUM	HORTON	GC
1	EA. WHITE BUTTON	EDWARDS EDW 690W	WHITE BUTTON	CODE LOCKS	GC	NOTE: NO EXTERIOR KEY OR HANDLE ON THE DOOR, G.C. TO PROVIDE DOOR AND HARDWARE FOR LOCATIONS WITH SIDE PATIO CONFIGURATION											
1	EA. TRANSFORMER	EDWARDS EDW 598		CODE LOCKS	GC	SET 05 - CLOSET DOOR											
1	EA. PLATE FOR TRANSFORMER	EDWARDS EDW 593		CODE LOCKS	GC	1 1/2	PR. HINGES	EC00 1100 4 1/2"x 4 1/2"	26D / 626	HAGER	GC	1	EA. LOCKSET (AUTO)	AL80PD ORB 10-025MS	626	SCHLAGE	GC
1	EA. DOOR BUZZER	EDWARDS EDW 730		CODE LOCKS	GC	1	EA. STOREROOM LOCKSET	3580 26D WTN SFIC	26D / 626	HAGER	GC	1	EA. DOOR STOP	474 (76" A.F.F.)	26D / 626	ROCKWOOD	GC
1	EA. CLOSER	SC70-18	DBRZ	FALCON	LL	1	EA. SFIC COMBINATED 7 PIN KD	3982 C KA	26D / 626	HAGER	GC	1	EA. UNIVERSAL WASHROOM SYSTEM	SINGLE HANDICAP WASHROOM KIT: CX-WC17 INCLUDED: (1)CX-33, (1)CX-MDA, (2)CM-AF503, (2)CM-7536/4, (1)CM-7526/88		MICOM	GC
1	EA. FLOOR STOP	441	10B	IVES	LL	2	EA. 3984 CONTROL KEY	3984	BRASS	HAGER	GC	NOTE: FOR INCLUDED ELECTRIC STRIKE, USE KIT CX-WC17-PS					
1	EA. FLOOR STOP	350	32D	NGP	LL	1	EA. CONCAVE WALL STOP	236W	32D	HAGER	GC						
SET 02 - INTERIOR STOREFRONT ENTRANCE						SET 07 - RESTROOM DOOR (SINGLE USER)											
1 1/2	EA. HINGES	BB1279 4 1/2" x 4 1/2"	US10B	HAGER	GC	1 1/2	PR. HINGES	ECBB 1100 4 1/2"x4 1/2"	26D / 626	HAGER	GC	1	EA. DOOR PULL	DON JO #36	626	DON JO	GC
1	EA. PUSH/PULL	11047	313/710	ROCKWOOD	GC	1	EA. OFFICE LOCK GRADE 2 LESS SFIC	3550 WTN IC	26D / 626	HAGER	GC	1	EA. AUTOMATIC DOOR OPENER	7100 - EASY ACCESS SURFACE MOUNTED OPERATOR OR EQUAL	ALUMINUM	HORTON AUTOMATIC	GC
1	EA. CLOSER	SC70-18	DBRZ	FALCON	GC	1	EA. SFIC CORE COMBINATED 7	3982 C KD	26D / 626	HAGER	GC						
1	EA. FLOOR STOP	438	US10B	ROCKWOOD	GC	1	EA. 3984 CONTROL KEY	3984	BRASS	HAGER	GC						
1	EA. AUTOMATIC DOOR OPENER PUSH PLATES	CM-7536SS	ALUMINUM	BEA GROUP	GC	1	EA. CLOSER 5200 ALUM.	5200	ALUMINUM	HAGER	GC						
1	EA. AUTOMATIC DOOR OPENER	7100 - EASY ACCESS SURFACE MOUNTED OPERATOR	ALUMINUM	HORTON AUTOMATIC	GC	1	EA. CONCAVE WALL STOP	236W	32D	HAGER	GC						

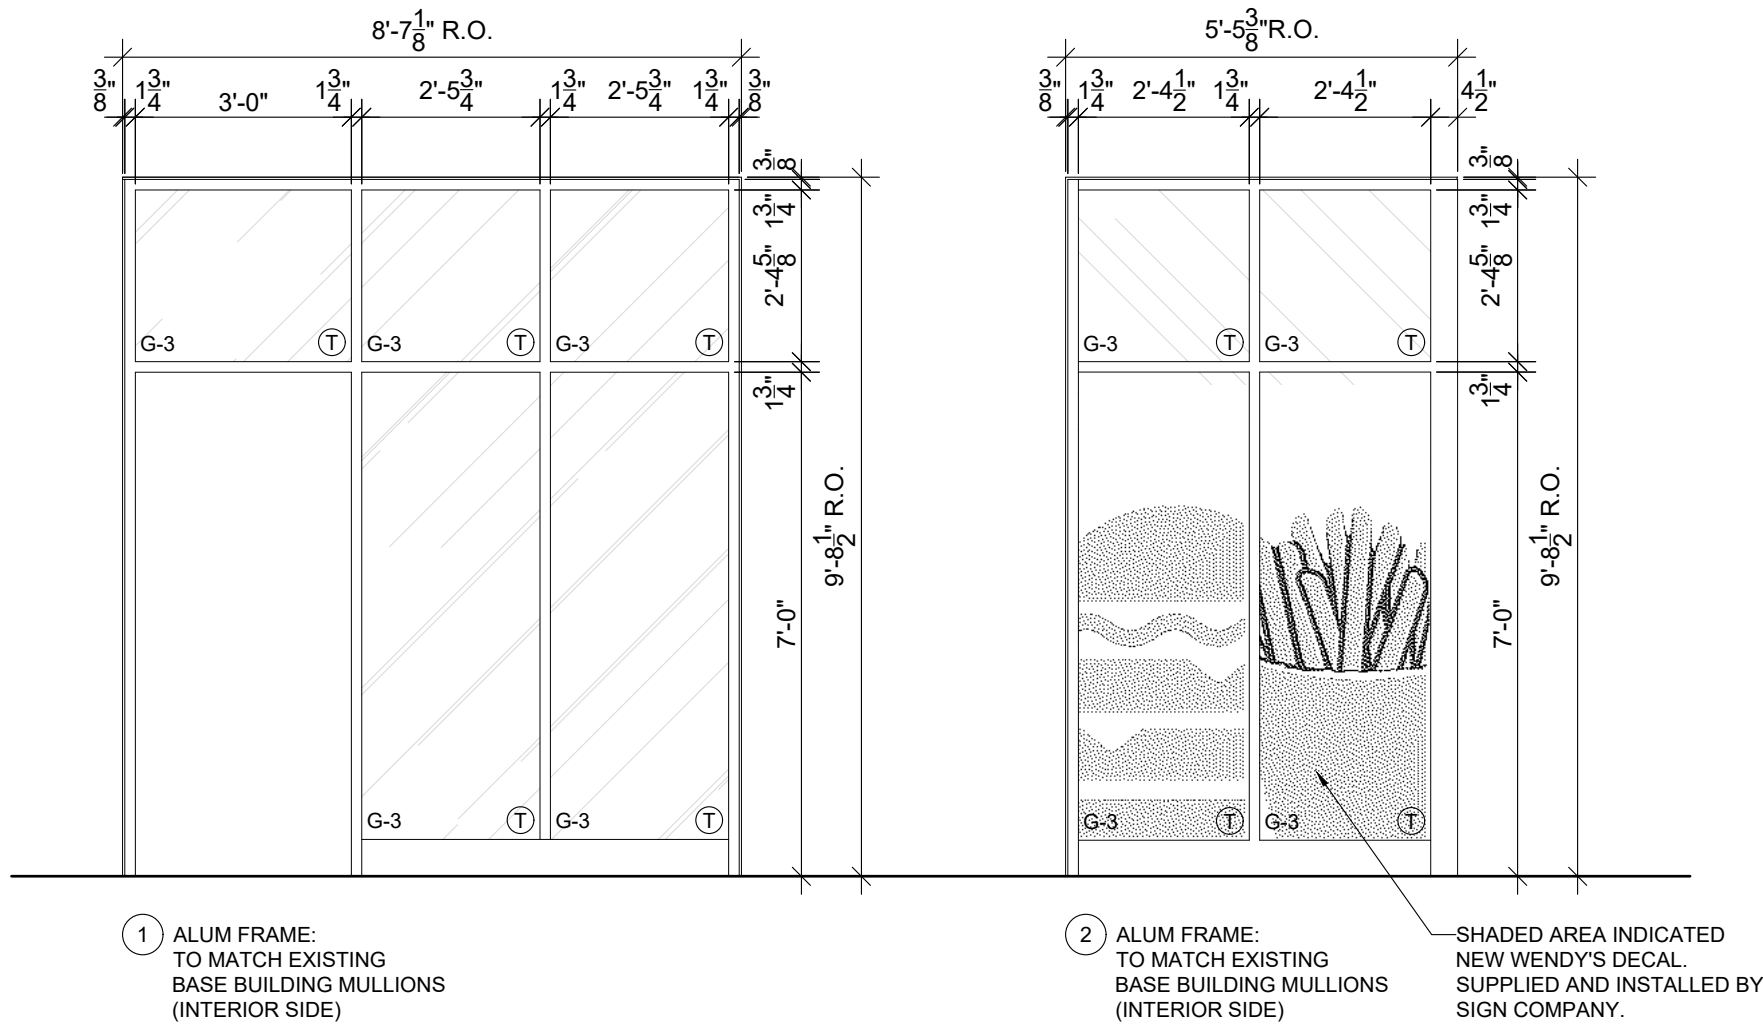

ACCESSORY SCHEDULE					
MARK	QTY	DESCRIPTION	MODEL	FINISH	NOTES
(L)	0	WASTE RECEPTACLE (4" PROJECTION, 4" RECESSED) - SEMI-RECESSED, 12 GALLONS	ASI 0458		
(M)	1	AUTOMATIC ROLL PAPER TOWEL DISPENSER, BATTERY OPERATED - SEMI-RECESSED	BOBRICK B-3974		
(N)	0	LIGHTED MIRROR - SIDELIGHT FROSTED EDGE	REFER TO HJC ORDER FORM		
(P)	1	FIRE EXTINGUISHER CABINET, SEMI-RECESSED	POTTER ROEMER, 7023		GC PROVIDED AND INSTALLED
(Q)	1	FIRE EXTINGUISHER 5LB - 3A-40-BC DRY CHEMICAL EXTINGUISHER (N0101)	SENTRY 5, MODEL AA05S-1(#442257)		GC PROVIDED AND INSTALLED
(R)	1	TOUCHFREE SOAP DISPENSER (C0204)	ECOLAB		SUPPLIED BY KED, GC INSTALLED 41" MOUNTING HEIGHT
(S)	0	FULL-LENGTH ANGLED MIRROR	73" x 21.9" M0208 (14" CLEAN CUT W/ CAT-2 MOUNTING TAPE)		
(T)	1	FIRE EXTINGUISHER 6 LITER TYPE K- WET CHEMICAL	ANSUL K GUARD MODEL K01-3 (#434909) WITH BRACKET		GC PROVIDED AND INSTALLED
(U)	1	FLY LIGHT	GILBER 2000GT (WHITE)		SUPPLY AND INSTALLED BY OWNER.
(V)	1	AUTOMATIC HAND DRYER (OPTIONAL)	WORLD DRYER, BRUSHED STAINLESS Q-973-A		SUPPLY AND INSTALLED BY G.C.

NOTE: GC RESPONSIBLE FOR INITIAL TAGGING AND INSPECTION OF FIRE EXTINGUISHERS.
REFER TO SUPPLIER SHEET FOR BUILDING MATERIAL CONSOLIDATOR INFORMATION.

ARTPACK & WAYFINDING LEGEND			
MARK	DESCRIPTION	MARK	DESCRIPTION
(AP-28)	CAMEO DECAL	(A6-50.310)	FROSTY
(AP-29)	WE DON'T CUT THESE	(AP-50.310)	FRY
(AP-33)	ORDER HERE	(AP-50.31B)	BURGER
(AP-39)	VESTIBULE DECAL	(WF-20)	EXIT SIGN
(AP-41)	MOBILE PICKUP	(WF-22)	FAMILY ROOM SIGN
(AP-42)	DON'T FORGET YOUR COFFEE DECAL	(WF-22.A)	FAMILY ROOM SIGN (ACCESSIBLE)
(AP-44.B)	DELIVERY PICK UP DOOR DECAL	(WF-29)	ORDER THIS WAY VINYL
(AP-44)	CREW DOOR DECAL	(WF-30)	MOBILE PICKUP VINYL
(AP-48.B)	FRESH SINCE DAY ONE (UNLIT)	(WF-33)	EMPLOYEES ONLY

REFER TO RESPONSIBILITY SCHEDULE FOR ARTPACK INFORMATION

INTERIOR ELEVATION CODED NOTES

- 1

ELECTRICAL PANELS. REFER TO ELECTRICAL DRAWINGS.
- 2

PROVIDED FIRE RATED PLYWOOD BACKING BEHIND MODULAR PANEL SYSTEM.
- 3

CONTINUE FINISHES AROUND CORNER TO WINDOW FRAME.
- 4

GLAZING AND FRAMES. REFER TO WINDOW SCHEDULE ON DRAWING A6.3
- 5

BREAK METAL PANELS (M-1). REFER TO FINISH SCHEDULE ON DRAWING A6.2.
- 6

PREFABRICATED STAINLESS STEEL SURFACE MOUNTED MOP SINK AND SURROUND. REFER TO DETAIL 2/A5.1 AND MECHANICAL DRAWINGS.
- 7

BARRIER FREE DOOR ACTUATOR LOCATION. REFER TO FLOOR PLAN, DOOR SCHEDULE AND ELECTRICAL DRAWINGS
- 8

BACK OF HOUSE WALLS TO BE COMPLETED WITH PLYWOOD SHEATHING AS SUBSTRATE EXCEPT 18" AROUND HOODS AND TILE AREA TO BE COMPLETE WITH CEMENT BOARD.
- 9

PROVIDE WOOD BLOCKING IN WALLS AS REQUIRED TO SUPPORT GRAPHIC FRAMES.
- 10

FRP FINISH (FRP-1). REFER TO FINISH SCHEDULE ON DRAWING A6.2.
- 11

ALL QUAD OUTLET AND DATA OUTLET IN DINING AREA TO BE TAMPER RESISTANT. TAMPER RESISTANT OUTLET COVERS ARE NOT APPROVED. REFER TO ELECTRICAL DRAWINGS.
- 12

WALL PAINT (P-6). REFER TO FINISH SCHEDULE ON A6.1.
- 13

WALL PAINT (P-12). REFER TO FINISH SCHEDULE ON A6.1.
- 14

PROPOSED LOCATION OF REVERSE OSMOSIS SYSTEM. SUPPLIED BY OWNER, INSTALLED BY KED.
- 15

TAMPER RESISTANT OUTLET AND COVER PLATE: COLOUR TO BE BLACK. REFER TO ELECTRICAL DRAWINGS.
- 16

WALL TILES (WT-10&11) REFER TO DETAIL ON A6.1 AND FINISH SCHEDULE ON SHEET A6.2.
- 17

G.C. TO REFER TO SHELVING INSTALLATION MANUAL PROVIDED BY KED.
- 18

STAINLESS STEEL PANELS BY G.C. PROVIDE PANELS BEHIND AND BESIDE FRYERS. EXTEND 18" MIN. ABOVE HOOD AND HORIZONTALLY 18" MIN. BEYOND HOOD.
- 19

FREESTYLE MACHINE. PROVIDED BY OWNER AND INSTALLED BY COCA-COLA.
- 20

FREESTYLE LINES TO RUN BEHIND EQUIPMENT THROUGH THE WALL BEHIND. NO LINES SHOULD BE VISIBLE TO THE PUBLIC.
- 21

POLYFLOR FLOOR FINISH TO EXTEND 6" ON ALL WALL. REFER TO FINISH DETAILS ON A5.2 AND FINISH SCHEDULE ON DRAWING A6.2.
- 22

SCHULTER 'JOLLY' TRIM AT WALL TILE CORNERS.
- 23

RECESSED FIRE EXTINGUISHER, CABINET TO BE ORDERED THROUGH HJC. SUPPLIED AND INSTALLED BY G.C. REFER TO EQUIPMENT PLAN ON SHEET EQ.1.1.
- 24

RECESSED OUTLET. REFER TO ELECTRICAL DRAWINGS.
- 25

WALL COVERING (WC-8). REFER TO FINISH SCHEDULE ON SHEET A6.2.
- 26

CONDIMENT STAND. PROVIDED BY KED AND INSTALLED BY G.C.
- 27

WALL TO BE FRP.
- 28

WALL TILES (WT-9) REFER TO FINISH SCHEDULE ON SHEET A6.2.
- 29

GORIAN CAP (SS-4) SUPPLIED AND INSTALLED BY G.C. REFER TO FINISH SCHEDULE ON SHEET A6.2.
- 30

HOT WATER TANK TO SIT ON 4" HIGH CONCRETE SLAB.
- 31

PAINT GRADE 1" x 4" POPLAR OR BIRCH FREE OF KNOTS WOOD TRIM. PATTERN AS SHOWN ON DRAWINGS. SUPPLY AND INSTALL BY G.C.
- 32

DIGITAL MENU BOARD. SUPPLIED BY OWNER AND INSTALLED BY SUBPLIER. G.C. TO PROVIDE WOOD BLOCKING FOR SUPPORT AND FINAL CONNECTION. VERIFY FINAL LOCATION W/ WENDY'S REPRESENTATIVE.
- 33

SHADED AREA INDICATED FROSTED GRAPHIC AT THE LOWER LEVEL AREA. SUPPLY AND INSTALL BY SIGN COMPANY.
- 34

AUDIO / VISUAL SIGNAL DEVICE. REFER TO DOOR SCHEDULE ON SHEET A6.3.
- 36

HORIZONTAL PLANE OF SILL TO BE COMPLETED WITH BASE TILE (B-5).
- 37

G.C. TO COORDINATE WITH ARTPACK VENDOR FOR SIZING AND FORMATTING.
- 38

DIFFUSERS TO MATCH COLOR P-12 DARK GREY.
- 39

FLYLIGHT. SUPPLY AND INSTALL BY G.C. REFER TO ELECTRICAL FOR RECEPTACLE. G.C. TO PROVIDE WOOD BLOCKING FOR SUPPORT AND ENSURE RECEPTACLE INSTALLED BEHIND FLYLIGHT.
- 40

STAINLESS STEEL TRIM FOR WALL FINISHES TRANSITION. SUPPLY AND INSTALL BY G.C.
- 41

NEW STEM MOUNTED SPOTLIGHT. G.C. TO ENSURE ALL SPOTLIGHT TO BE ANGLE TO RESPECTIVE GRAPHIC
- 42


PAINT GRADE 1" x 4" POPLAR OR BIRCH FREE OF KNOTS WOOD TRIM ON SIDE WALL AND BULKHEAD. REFER TO DETAILS ON DRAWING A4.4.
- 43

KED TO ATTACHED DROP BOXES TO CART.
- 44

G.C. TO INCLUDE 9' CORD/PLUG.
- 45


ADDITIONAL THUMB TURN LOCK. TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED.
- 46

SIGN TO BE POSTED NEAR INTERIOR DOOR STATING "DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED". LOCATION TO BE CONFIRMED ON SITE. G.C. TO SUPPLY AND INSTALL.

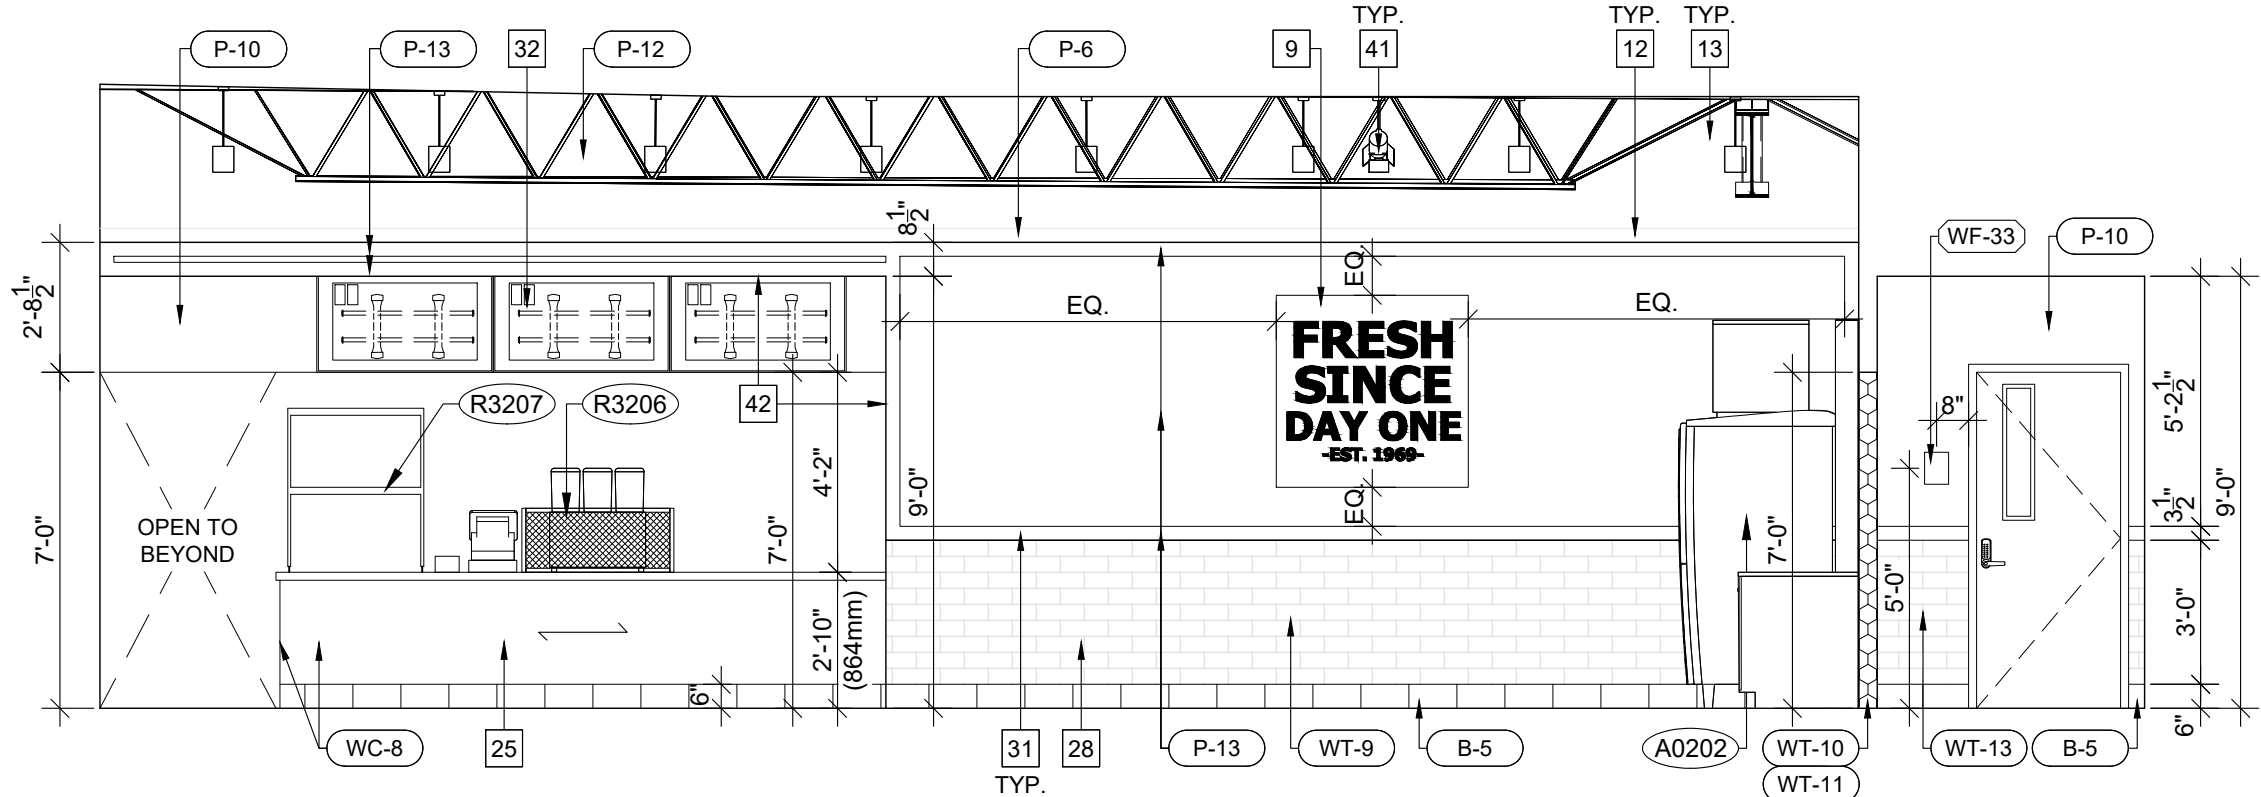

08 ORDER AND PICK UP

SCALE: 1/4" = 1'-0"

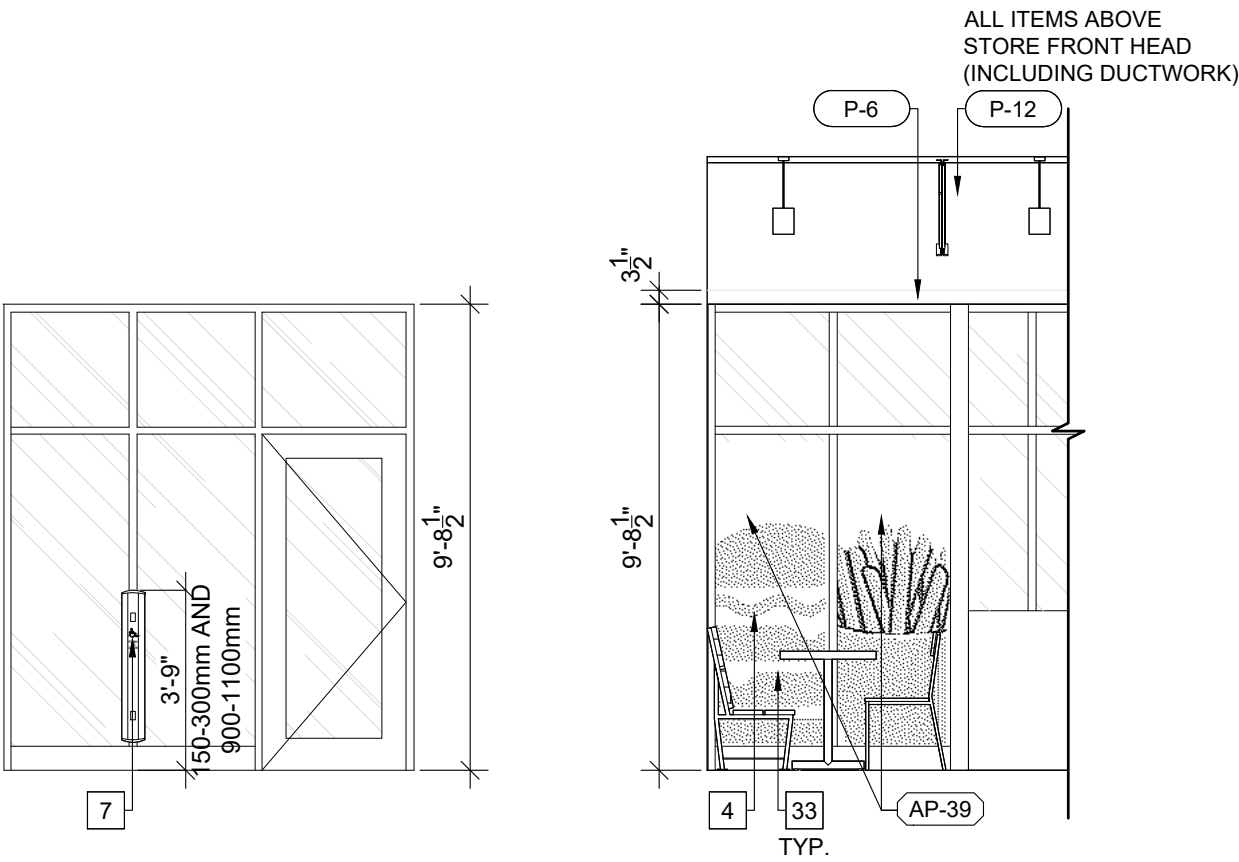


07 VESTIBULE

SCALE: 1/4" = 1'-0"

06 DINING / VESTIBULE

SCALE: 1/4" = 1'-0"

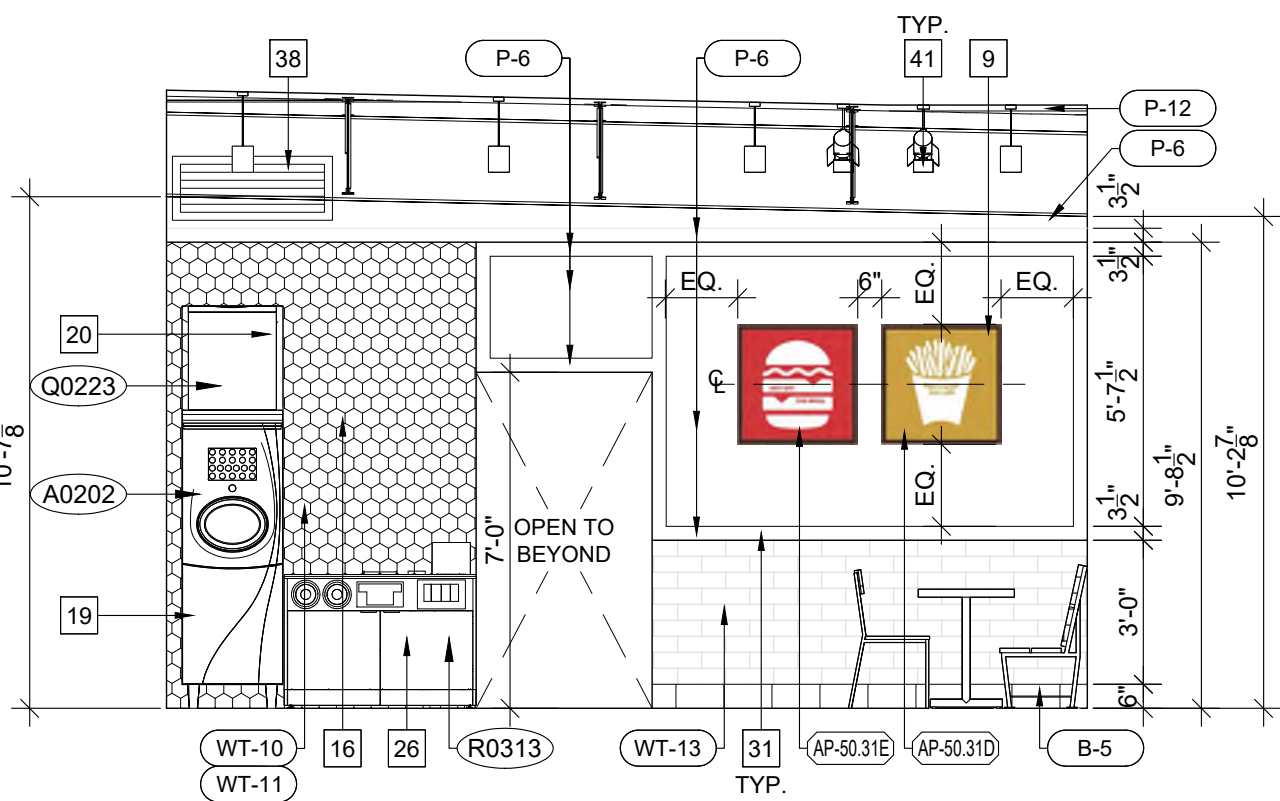


03 DINING AND HALLWAY

SCALE: 1/4" = 1'-0"

05 HALLWAY

SCALE: 1/4" = 1'-0"

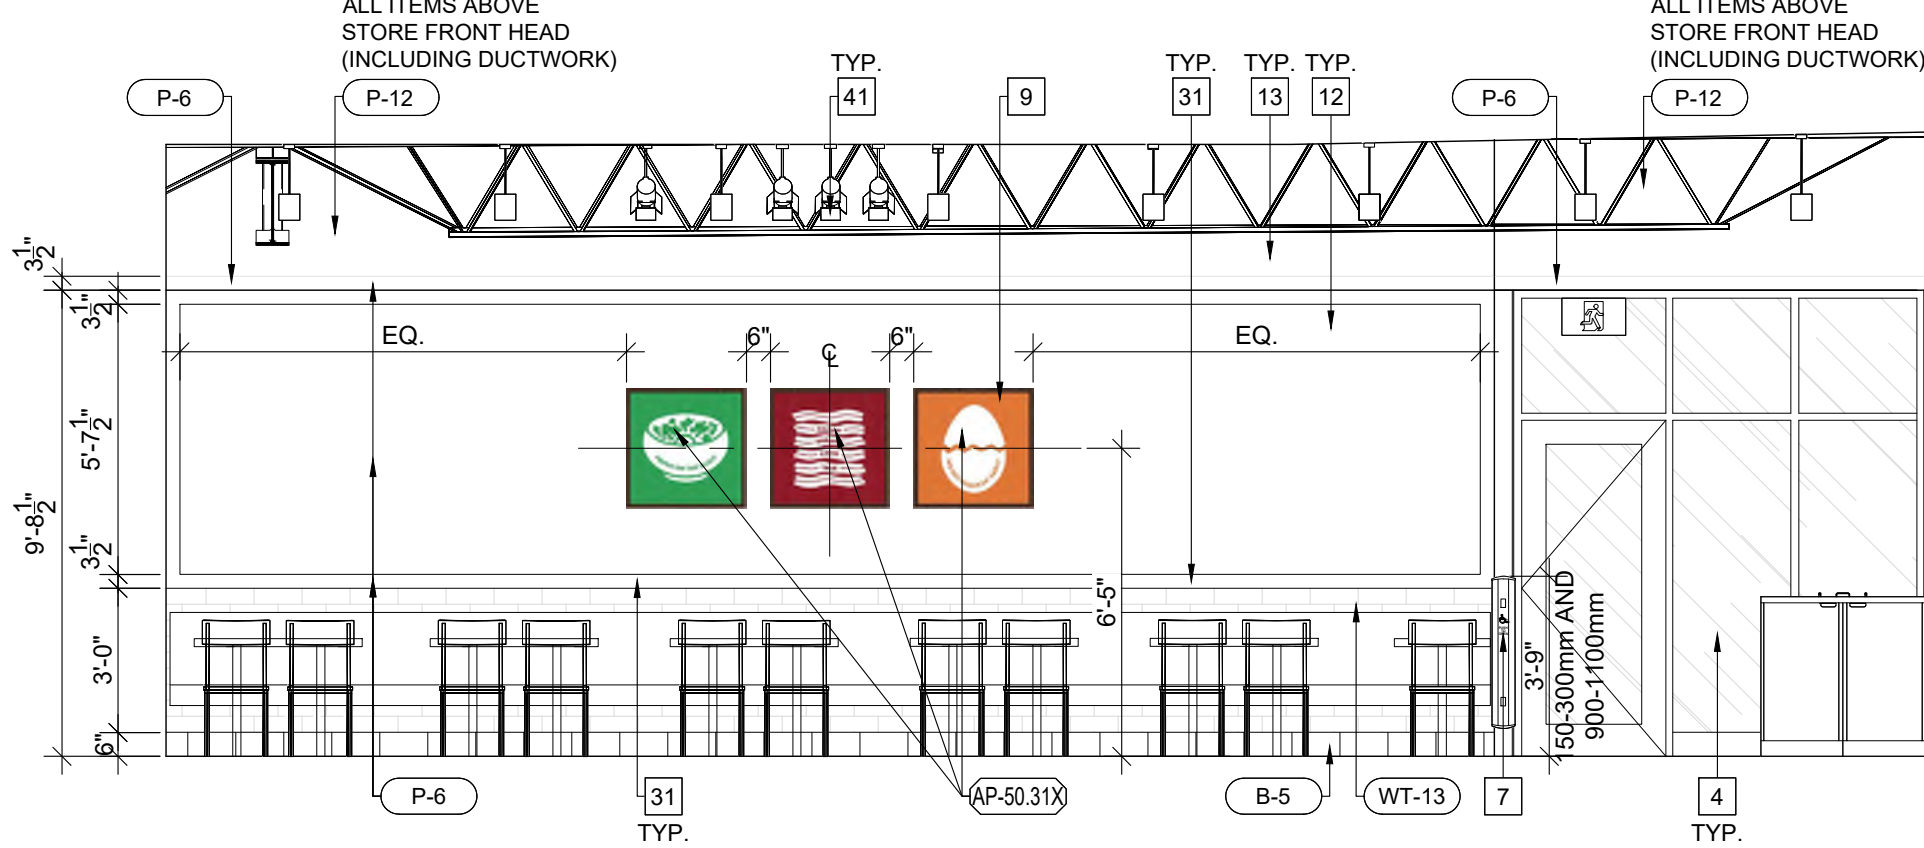


02 DINING AND VESTIBULE

SCALE: 1/4" = 1'-0"


04 HALLWAY

SCALE: 1/4" = 1'-0"

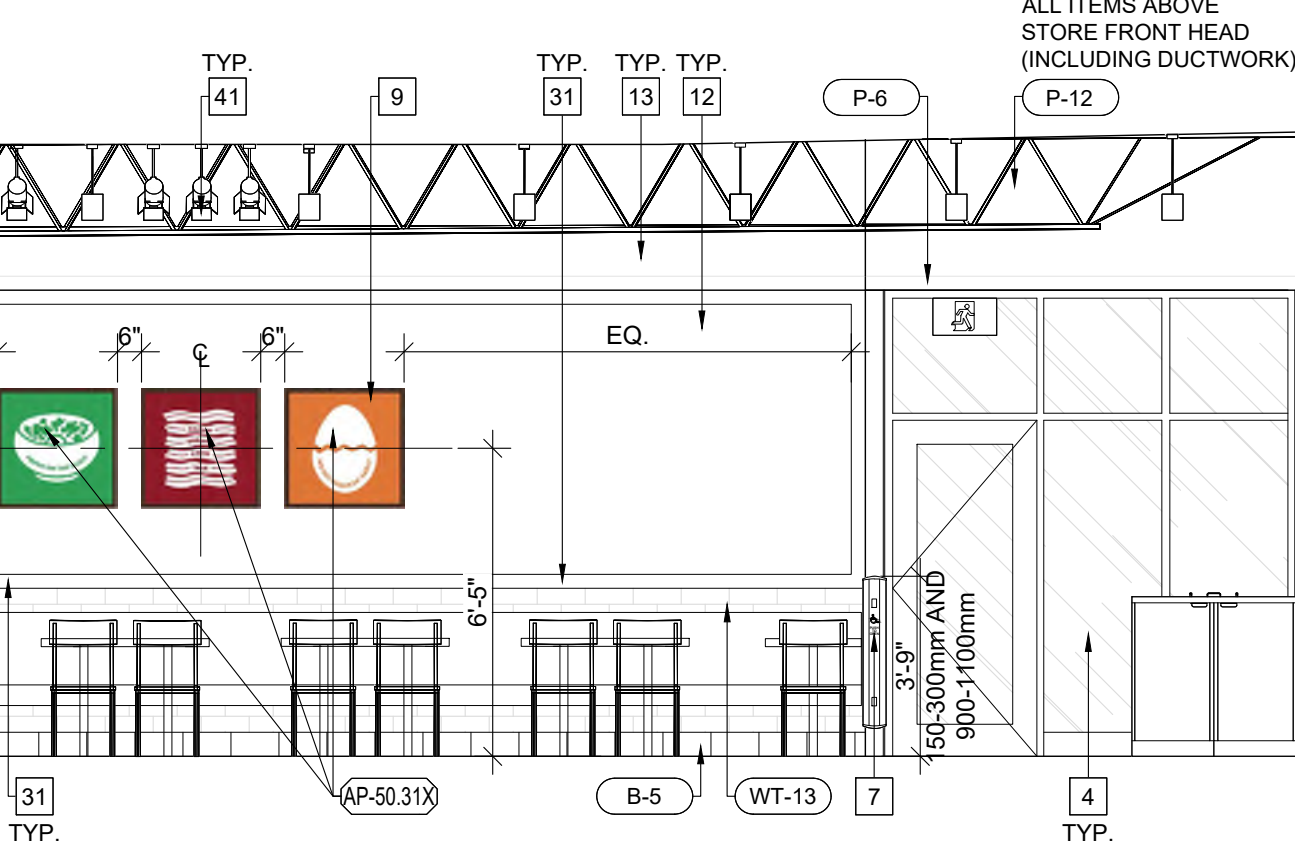

01 DINING, DELIVERY AND PICK-UP WINDOW

SCALE: 1/4" = 1'-0"

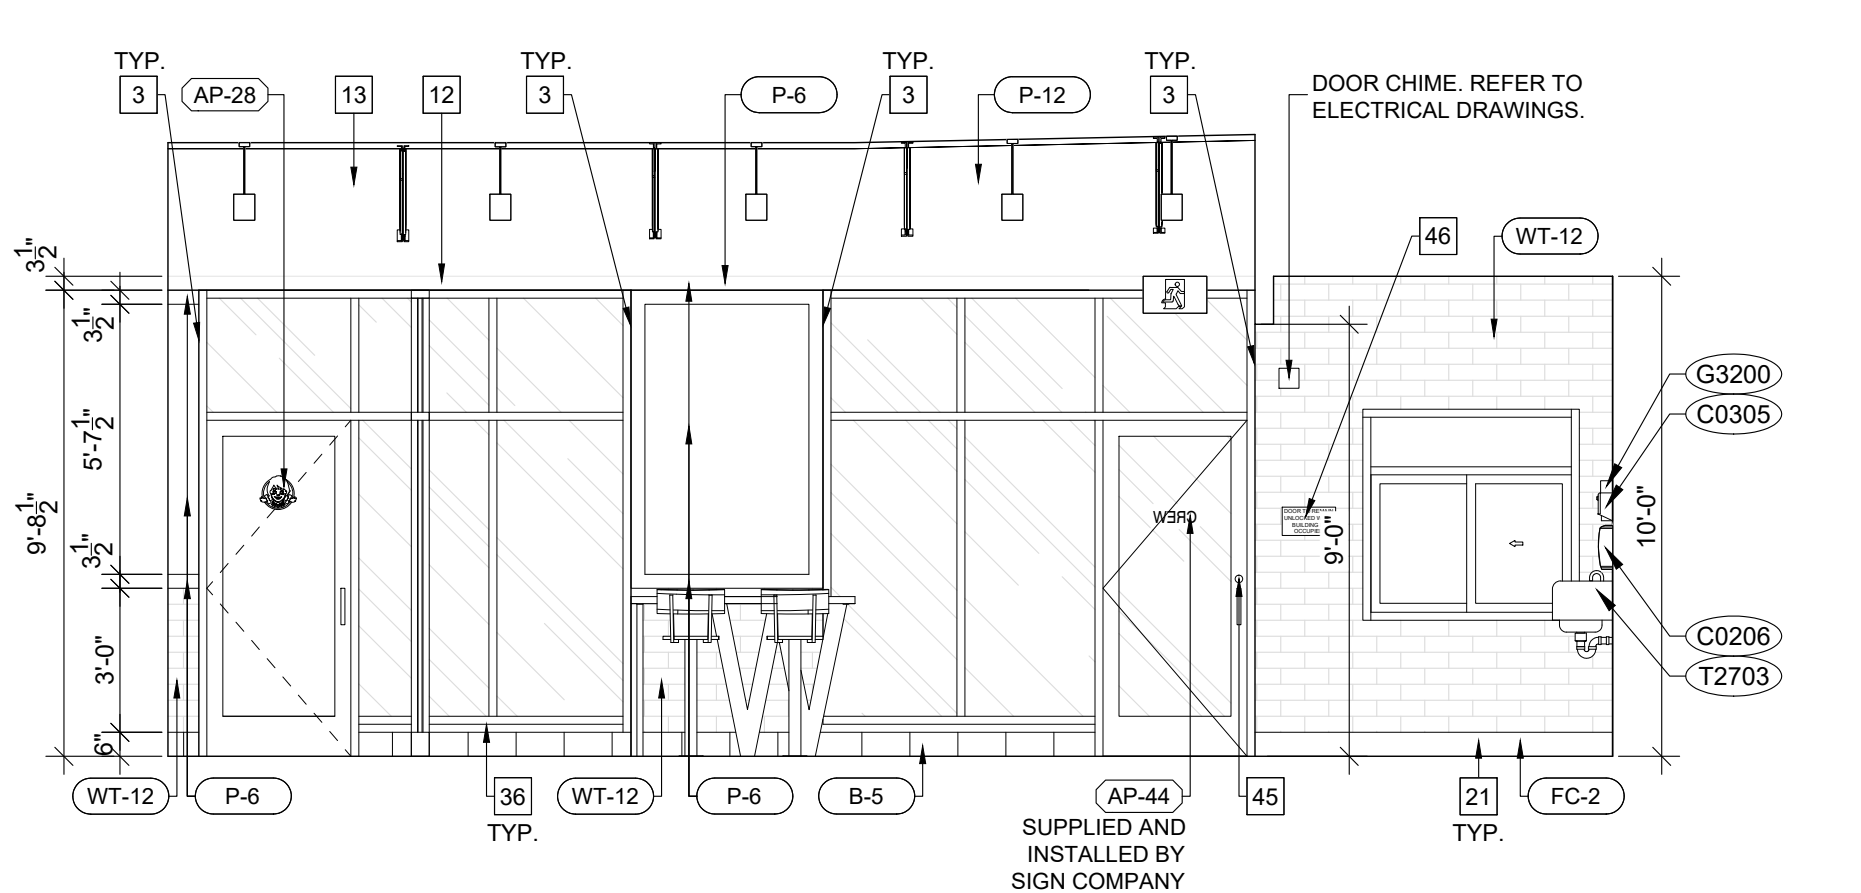

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ONSITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

#	Date	Description	Dwn
---	------	-------------	-----

DRAWING TITLE:


INTERIOR ELEVATIONS

PRINT DATE:	SCALE:
6/19/2026	AS NOTED
DRAWN BY:	DRAWING NO:
DB	
CHECKED BY:	
MO	
PROJECT NO:	
17037	

A7.1


07 RECEIVING

SCALE: 1/4" = 1'-0"

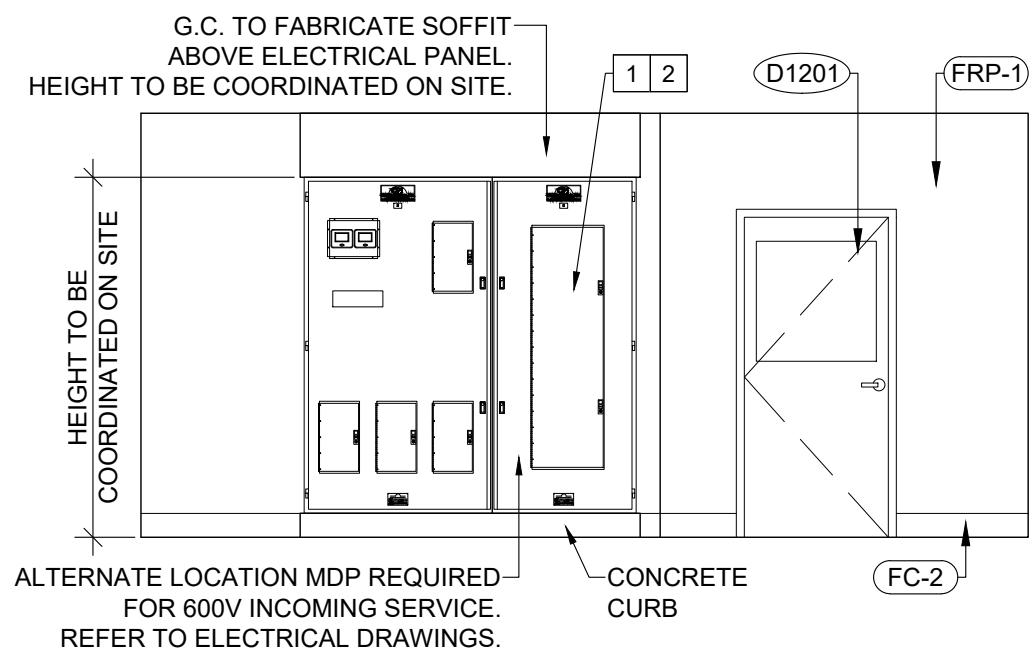

06 EMPLOYEE / RECEIVING

SCALE: 1/4" = 1'-0"

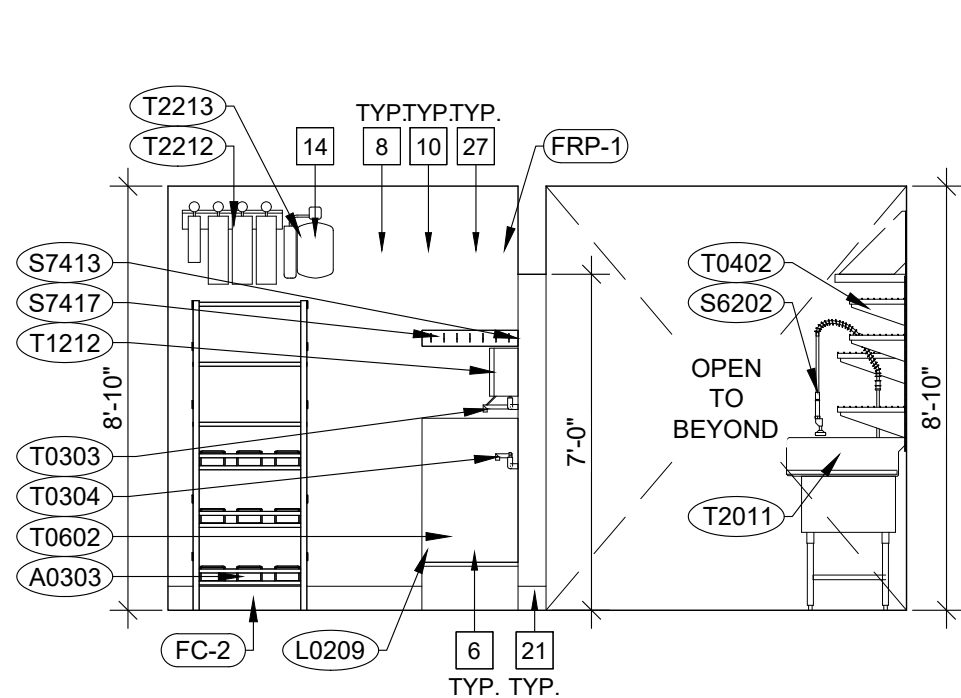

04 PREP AREA

SCALE: 1/4" = 1'-0"




02 N/A

SCALE: N/A

03 PREP AREA/KITCHEN-FRY LINE/DRIVE-THRU WINDOW/OFFICE

SCALE: 1/4" = 1'-0"

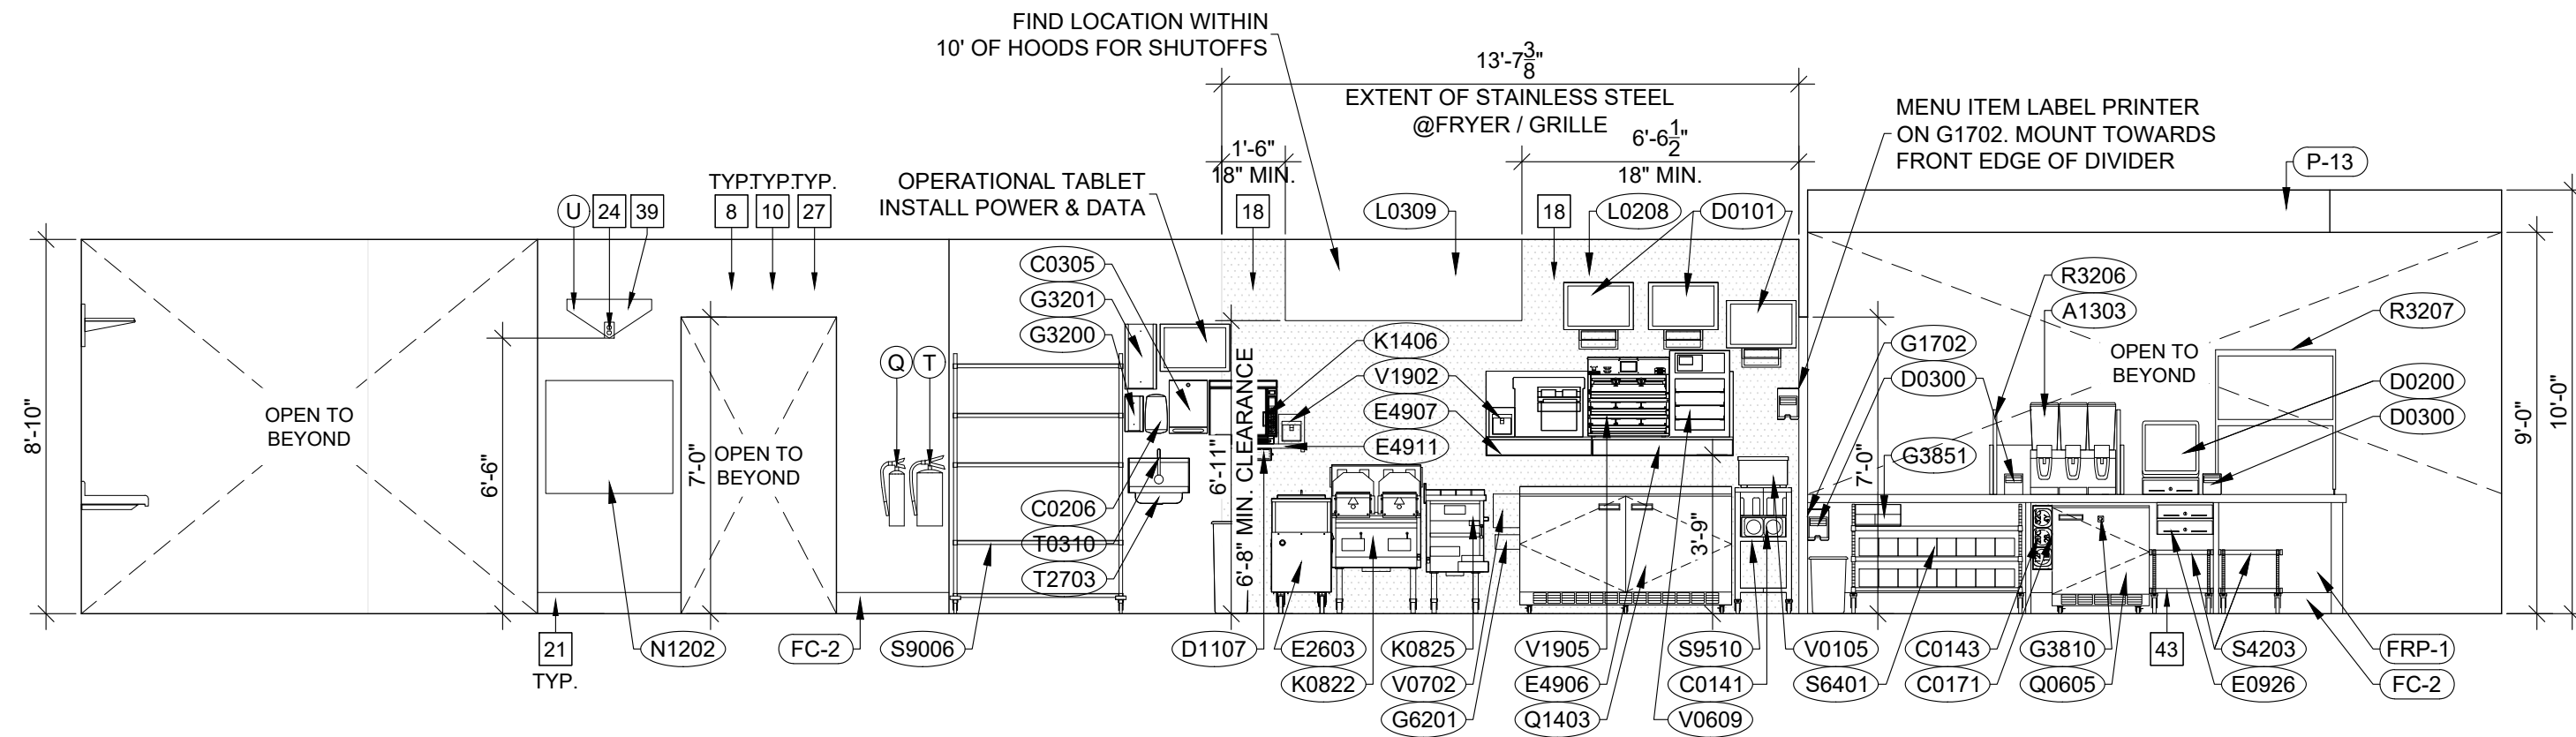


01 PREP / KITCHEN-GRILL LINE /SERVICE AREA

SCALE: 1/4" = 1'-0"

05 PREP AREA

SCALE: 1/4" = 1'-0"

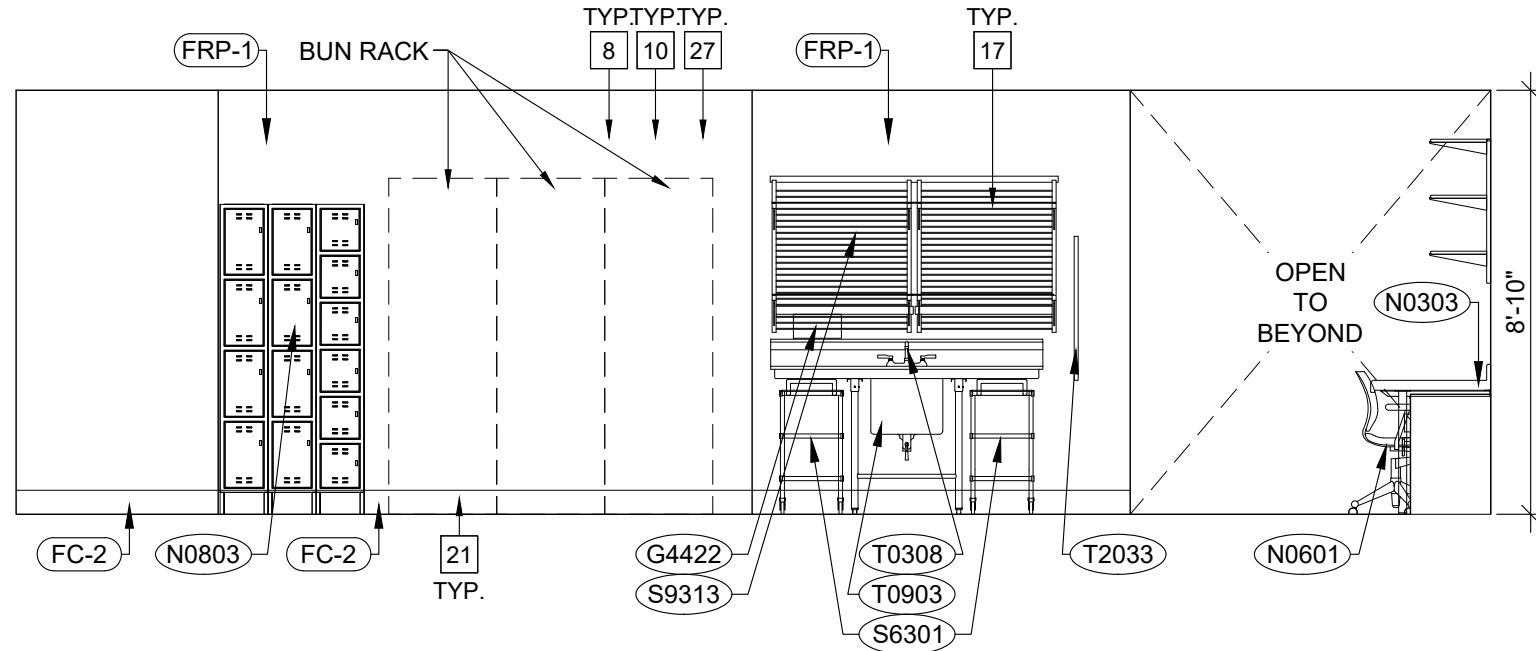

ACCESSORY SCHEDULE

MARK	QTY	DESCRIPTION	MODEL	FINISH	NOTES
L	0	WASTE RECEPTACLE (4" PROJECTION, 4" RECESSED) - SEMI-RECESSED, 12 GALLONS	ASI 0468		
M	1	AUTOMATIC ROLL PAPER TOWEL DISPENSER, BATTERY OPERATED - SEMI-RECESSED	BOBRICK B-3074		
N	0	LIGHTED MIRROR - SIDELIGHT FROSTED EDGE	REFER TO HJC ORDER FORM		
P	1	FIRE EXTINGUISHER CABINET, SEMI-RECESSED	POTTER ROEMER: 7023		GC PROVIDED AND INSTALLED
Q	1	FIRE EXTINGUISHER 5LB - 3A-40-BC DRY CHEMICAL EXTINGUISHER (N0101)	SENTRY 5. MODEL AA05S-1(#442257)		GC PROVIDED AND INSTALLED
R	1	TOUCHFREE SOAP DISPENSER (C0204)	ECOLAB		SUPPLIED BY KED. GC INSTALLED 41" MOUNTING HEIGHT
S	0	FULL-LENGTH ANGLED MIRROR (104" CLEAN CUT W/ CAT. 2 MOUNTING TAPE)	73"x21"x" M0288		
T	1	FIRE EXTINGUISHER 6 LITER TYPE K- WET CHEMICAL	ANSUL K GUARD MODEL K01-3 (#434909) WITH BRACKET		GC PROVIDED AND INSTALLED
U	1	FLY LIGHT	GILBER 20000GT (WHITE)		SUPPLY AND INSTALLED BY OWNER.
V	1	AUTOMATIC HAND DRYER (OPTIONAL)	WORLD DRYER, BRUSHED STAINLESS, Q-973-A		SUPPLY AND INSTALLED BY G.C.

NOTE: GC RESPONSIBLE FOR INITIAL TAGGING AND INSPECTION OF FIRE EXTINGUISHERS. REFER TO SUPPLIER SHEET FOR BUILDING MATERIAL CONSOLIDATOR INFORMATION.

INTERIOR ELEVATION CODED NOTES

- ELECTRICAL PANELS. REFER TO ELECTRICAL DRAWINGS.
- PROVIDED FIRE RATED PLYWOOD BACKING BEHIND MODULAR PANEL SYSTEM.
- CONTINUE FINISHES AROUND CORNER TO WINDOW FRAME.
- GLAZING AND FRAMES. REFER TO WINDOW SCHEDULE ON DRAWING A6.3
- BREAK-METAL-PANELS (M-1): REFER TO FINISH SCHEDULE ON DRAWING A6.2.
- PREFABRICATED STAINLESS STEEL SURFACE MOUNTED MOP SINK AND SURROUND. REFER TO DETAIL 2/A5.1 AND MECHANICAL DRAWINGS.
- BARRIER FREE DOOR ACTUATOR LOCATION. REFER TO FLOOR PLAN, DOOR SCHEDULE AND ELECTRICAL DRAWINGS
- BACK OF HOUSE WALLS TO BE COMPLETED WITH PLYWOOD SHEATHING AS SUBSTRATE EXCEPT 18" AROUND HOODS AND TILE AREA TO BE COMPLETE WITH CEMENT BOARD.
- PROVIDE WOOD BLOCKING IN WALLS AS REQUIRED TO SUPPORT GRAPHIC FRAMES.
- FRP FINISH (FRP-1). REFER TO FINISH SCHEDULE ON DRAWING A6.2.
- ALL QUAD OUTLET AND DATA OUTLET IN DINING AREA TO BE TAMPER RESISTANT. TAMPER RESISTANT OUTLET COVERS ARE NOT APPROVED. REFER TO ELECTRICAL DRAWINGS.
- WALL PAINT (P-6). REFER TO FINISH SCHEDULE ON A6.1.
- WALL PAINT (P-12). REFER TO FINISH SCHEDULE ON A6.1.
- PROPOSED LOCATION OF REVERSE OSMOSIS SYSTEM. SUPPLIED BY OWNER, INSTALLED BY KED.
- TAMPER RESISTANT OUTLET AND COVER PLATE. COLOUR TO BE BLACK. REFER TO ELECTRICAL DRAWINGS.
- WALL TILES (WT-10&11) REFER TO DETAIL ON A6.1 AND FINISH SCHEDULE ON SHEET A6.2.
- G.C. TO REFER TO SHELVING INSTALLATION MANUAL PROVIDED BY KED.
- STAINLESS STEEL PANELS BY G.C. PROVIDE PANELS BEHIND AND BESIDE FRYERS. EXTEND 18" MIN. ABOVE HOOD AND HORIZONTALLY 18" MIN. BEYOND HOOD.
- FREESTYLE MACHINE. PROVIDED BY OWNER AND INSTALLED BY COCA-COLA.
- FREESTYLE LINES TO RUN BEHIND EQUIPMENT THROUGH THE WALL BEHIND. NO LINES SHOULD BE VISIBLE TO THE PUBLIC.
- POLYFLOOR FLOOR FINISH TO EXTEND 6" ON ALL WALL. REFER TO FINISH DETAILS ON A5.2 AND FINISH SCHEDULE ON DRAWING A6.2.
- SCHULTER "JOLLY" TRIM AT WALL TILE CORNERS.
- RECESSED FIRE EXTINGUISHER. CABINET TO BE ORDERED THROUGH HJC. SUPPLIED AND INSTALLED BY G.C. REFER TO EQUIPMENT PLAN ON SHEET P-1.
- RECESSED OUTLET. REFER TO ELECTRICAL DRAWINGS.
- WALL COVERING (WC-8). REFER TO FINISH SCHEDULE ON SHEET A6.2.
- CONDIMENT STAND. PROVIDED BY KED AND INSTALLED BY G.C.
- WALL TO BE FRP.
- WALL TILES (WT-9) REFER TO FINISH SCHEDULE ON SHEET A6.2.
- GORIAN CAP (SS-4) SUPPLIED AND INSTALLED BY G.C. REFER TO FINISH SCHEDULE ON SHEET A6.2.
- HOT WATER TANK TO SIT ON 4" HIGH CONCRETE SLAB.
- DIGITAL MENU BOARD. SUPPLIED BY OWNER AND INSTALLED BY SUPPLIER. G.C. TO PROVIDED WOOD BLOCKING FOR SUPPORT AND FINAL CONNECTION. VERIFY FINAL LOCATION W/ WENDY'S REPRESENTATIVE.
- SHADED AREA INDICATED FROSTED GRAPHIC AT THE LOWER LEVEL AREA. SUPPLY AND INSTALL BY SIGN COMPANY.
- AUDIO/VISUAL SIGNAL DEVICE. REFER TO DOOR SCHEDULE ON SHEET A6.3.
- HORIZONTAL PLANE OF SILL TO BE COMPLETED WITH BASE TILE (B-5).
- G.C. TO COORDINATE WITH ARTPACK VENDOR FOR SIZING AND FORMATTING.
- DIFFUSERS TO MATCH COLOR P-12 DARK GREY.
- FLYLIGHT. SUPPLY AND INSTALL BY G.C. REFER TO ELECTRICAL FOR RECEPTACLE. G.C. TO PROVIDE WOOD BLOCKING FOR SUPPORT AND ENSURE RECEPTACLE INSTALLED BEHIND FLYLIGHT.
- STAINLESS STEEL TRIM FOR WALL FINISHES TRANSITION. SUPPLY AND INSTALL BY G.C.
- NEW STEM MOUNTED SPOTLIGHT. G.C. TO ENSURE ALL SPOTLIGHT TO BE ANGLE TO RESPECTIVE GRAPHIC
- PAINT GRADE 1" x 4" POPLAR OR BIRCH FREE OF KNOTS WOOD TRIM ON SIDE WALL AND BULKHEAD. REFER TO DETAILS ON DRAWING A4.4.
- KED TO ATTACHED DROP BOXES TO CART.
- G.C. TO INCLUDE 9' CORD/PLUG.
- ADDITIONAL THUMB TURN LOCK. TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED.
- SIGN TO BE POSTED NEAR INTERIOR DOOR STATING "DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED". LOCATION TO BE CONFIRMED ON SITE. G.C. TO SUPPLY AND INSTALL.

4711 Yonge St.
Suite 800
Toronto, ON.
M2N 6K8
T.416.497.3662
info@glsmith.ca
www.glsmith.ca

G.L. SMITH



Wallfacer Architecture Inc.

4711 Yonge Street Suite 801
Toronto Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE AS AMENDED AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ON-SITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON-SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)


REVISION

#	Date	Description	Dwn


INTERIOR ELEVATIONS

PRINT DATE:	SCALE:
6/19/2026	AS NOTED
DRAWN BY:	DRAWING NO:
DB	
CHECKED BY:	
MO	
PROJECT NO:	
17037	


A7.2

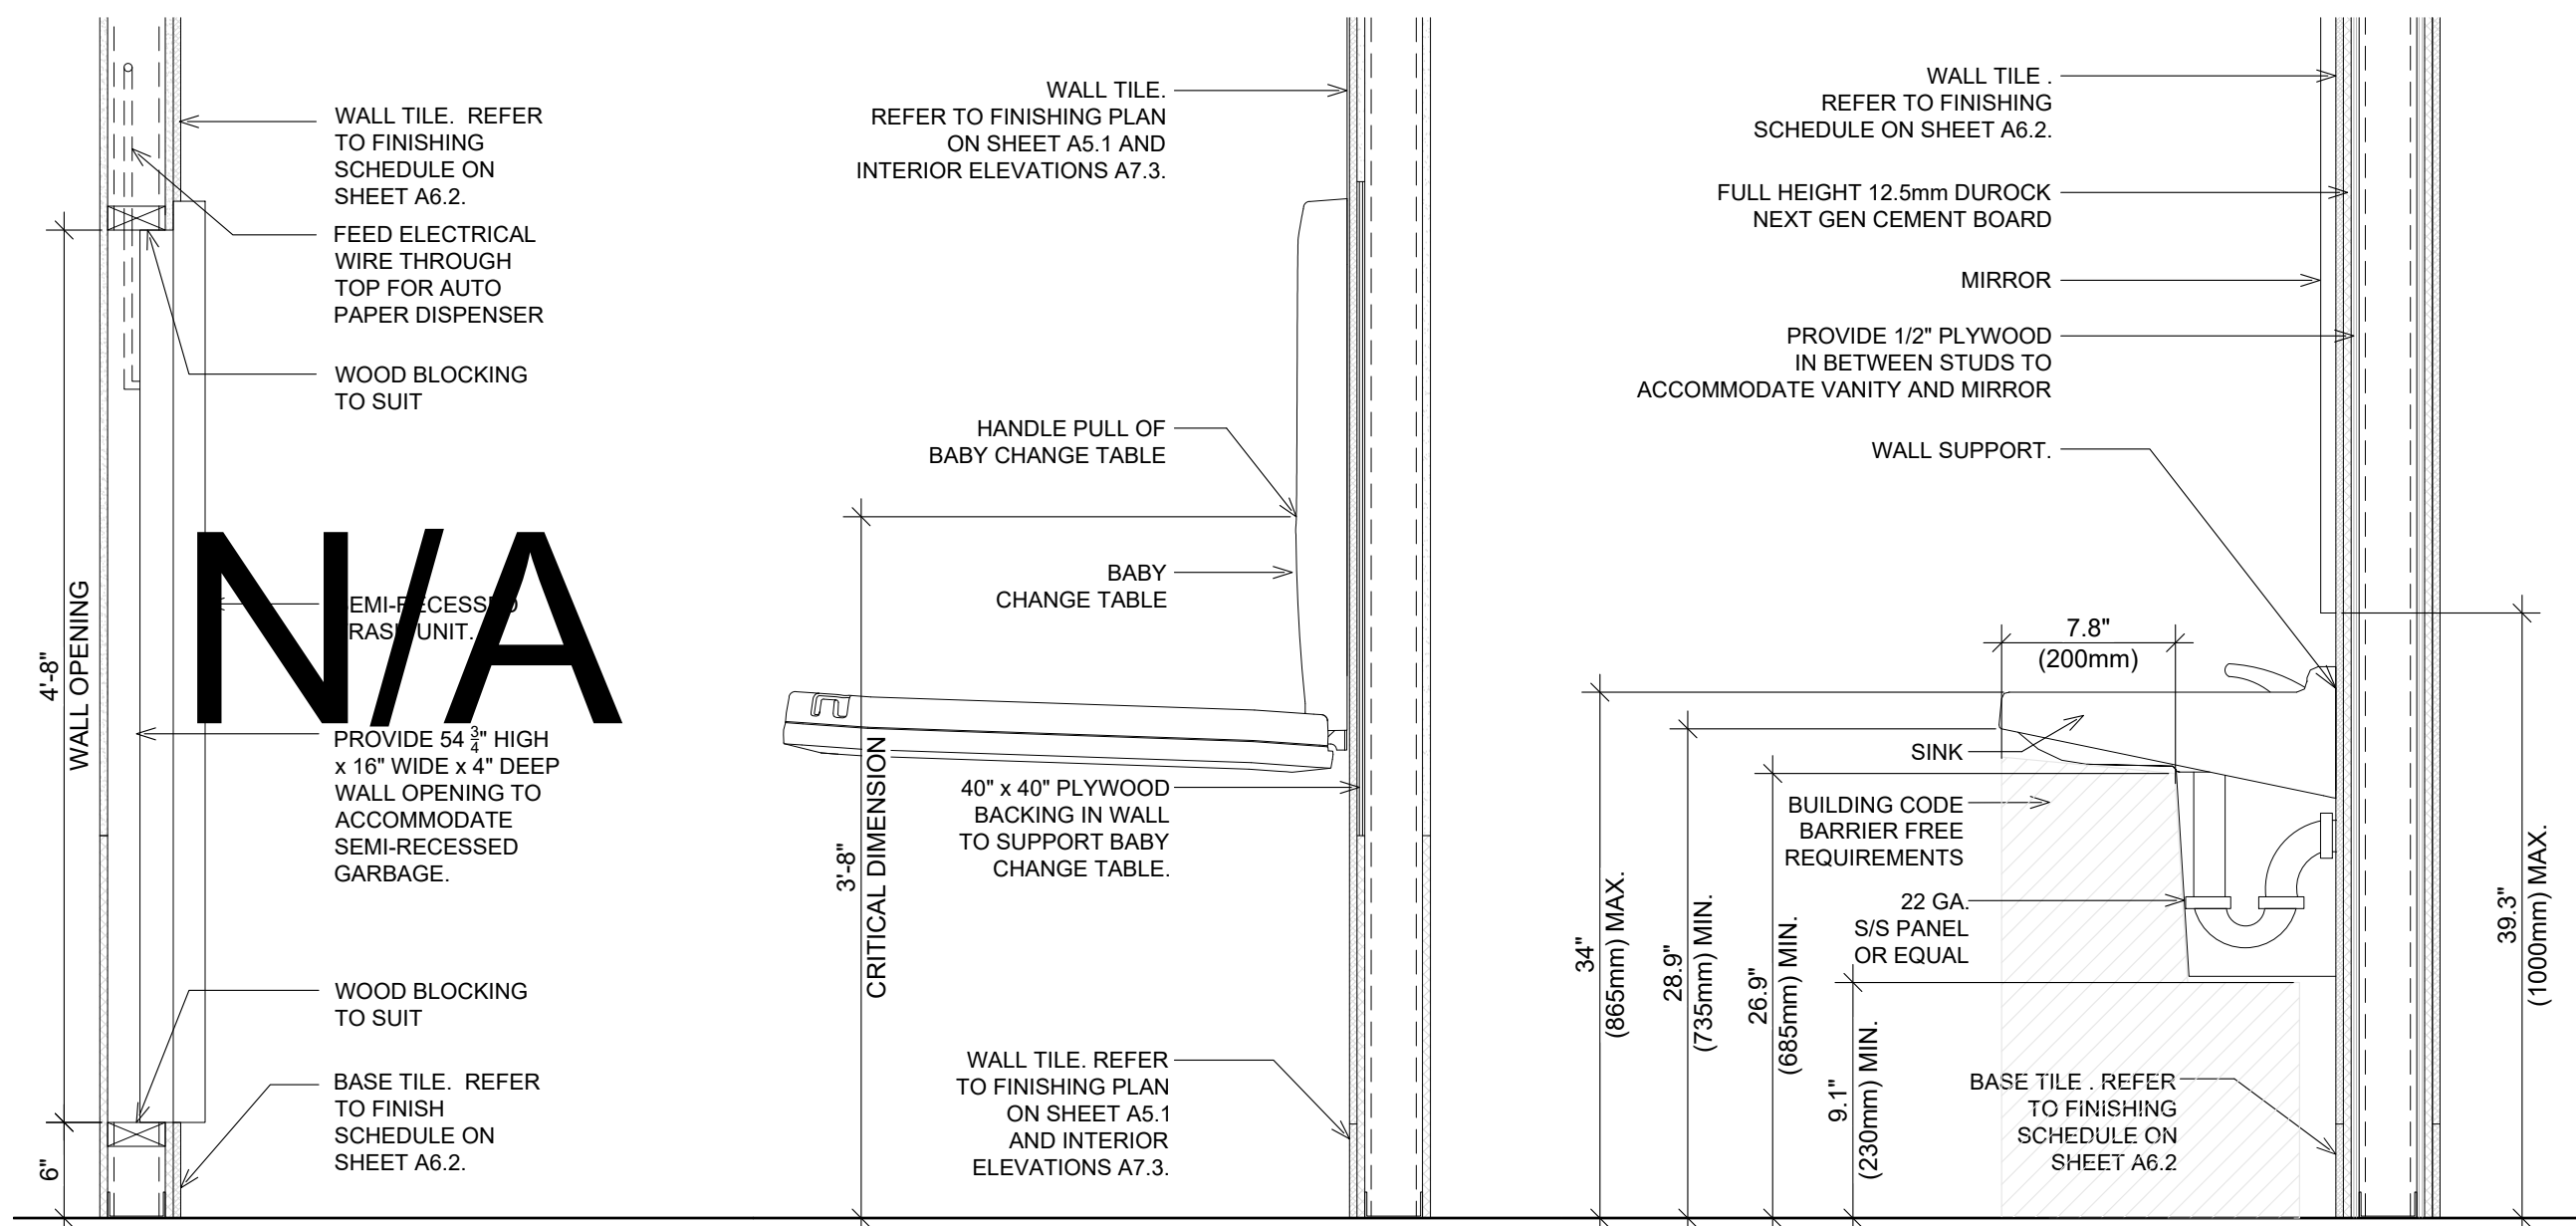


NOTE: CONTRACTOR TO PROVIDE 2x6 WOOD BLOCKING IN WALL FOR ANCHORAGE OF GRAB BARS AS REQUIRED. AOR TO DETERMINE GRAB BAR REQUIREMENT AS PER PROVINCIAL BUILDING CODE. ALL GRAB BARS MUST BE PURCHASED FROM HJC.

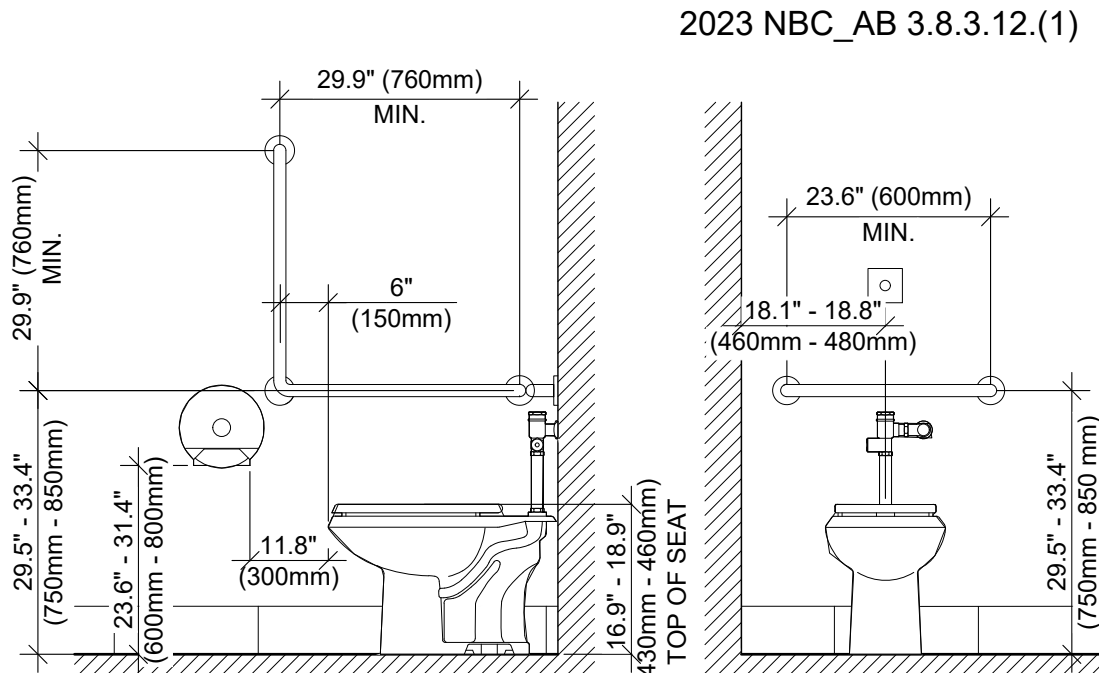


16 DTL @ PAPER TOWEL
SCALE: 1" = 1'-0"

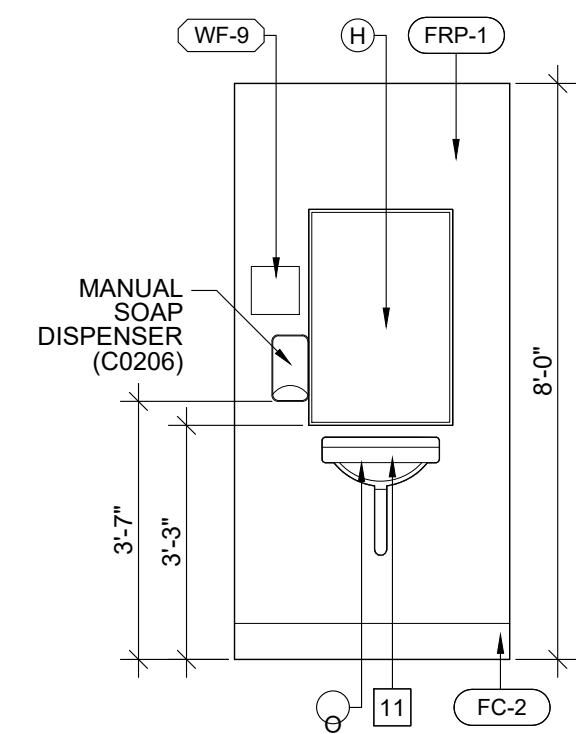


12 STAFF WRM
SCALE: 3/8" = 1'-0"

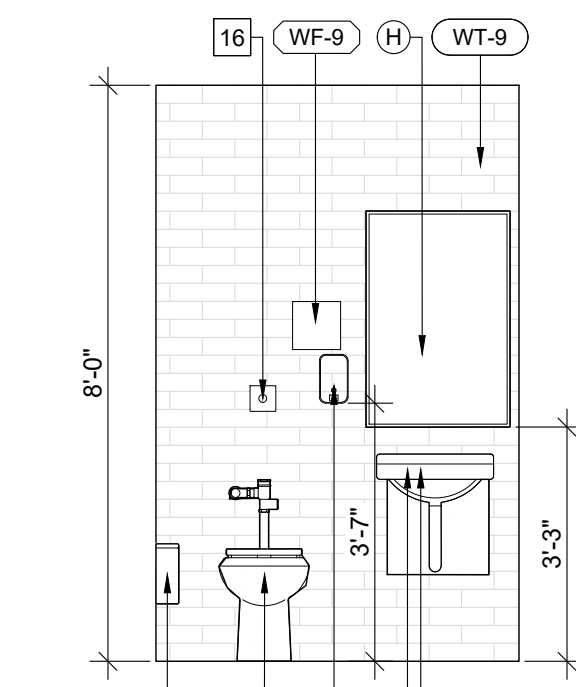


08 UNI-SEX WRM
SCALE: 3/8" = 1'-0"

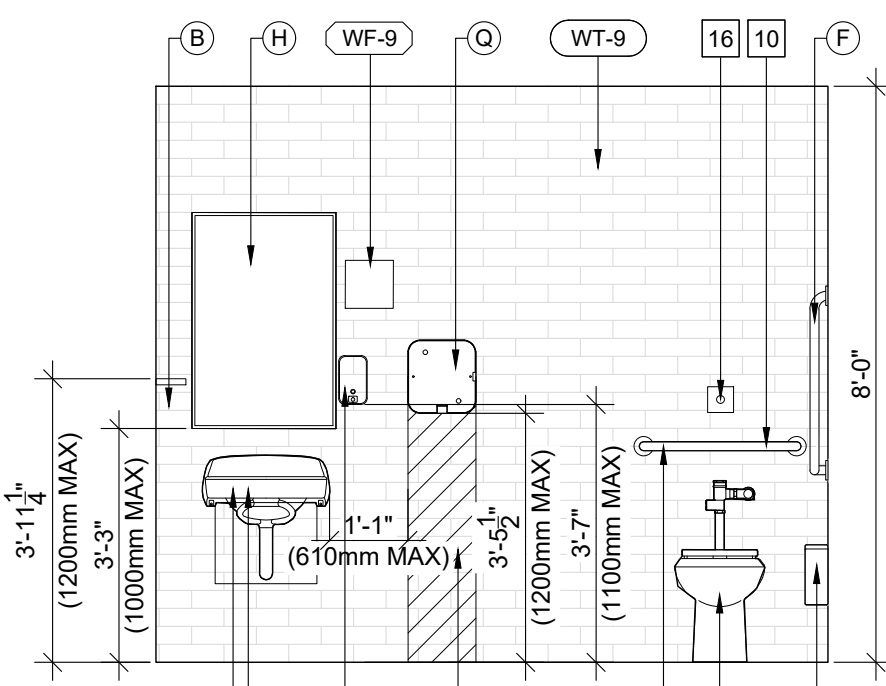


04 UNIVERSAL UNI-SEX WRM
SCALE: 3/8" = 1'-0"

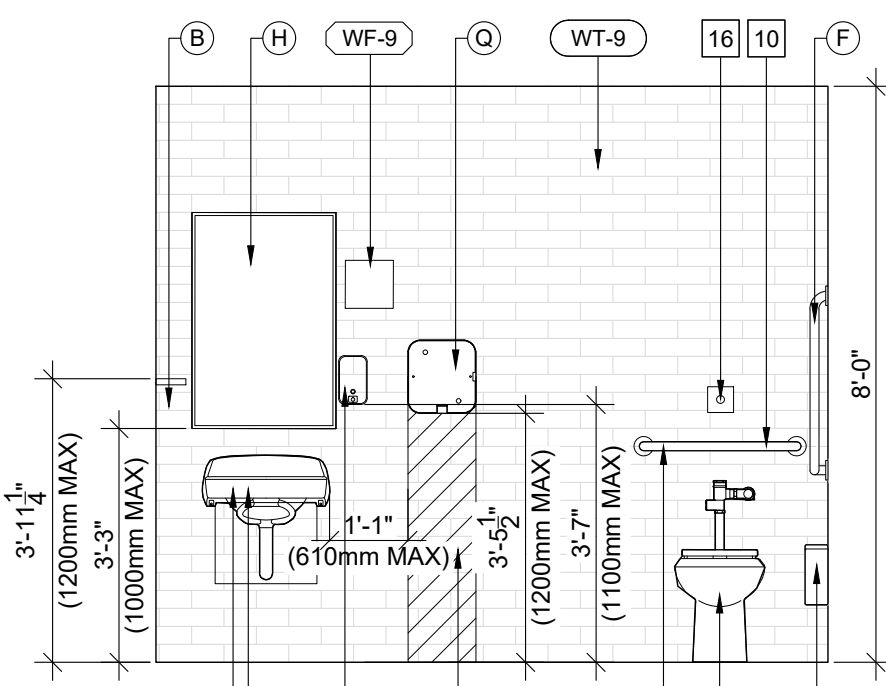


15 DETL @ BCT
SCALE: 1" = 1'-0"

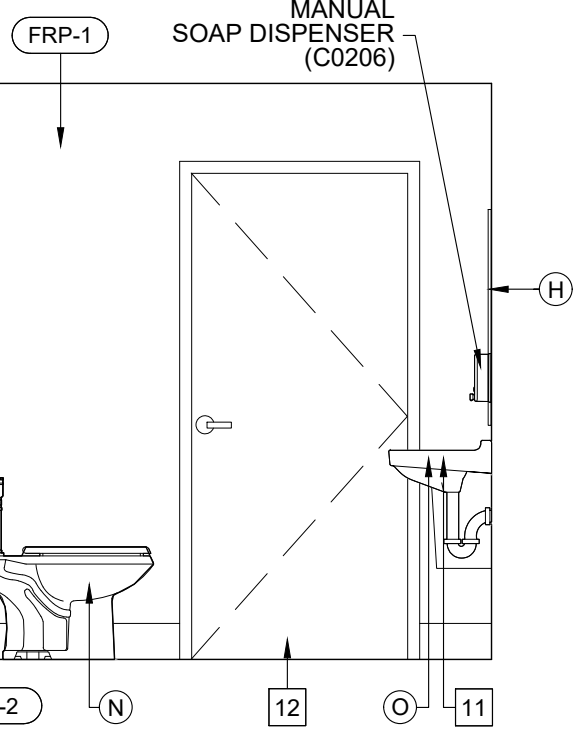


11 STAFF WRM
SCALE: 3/8" = 1'-0"

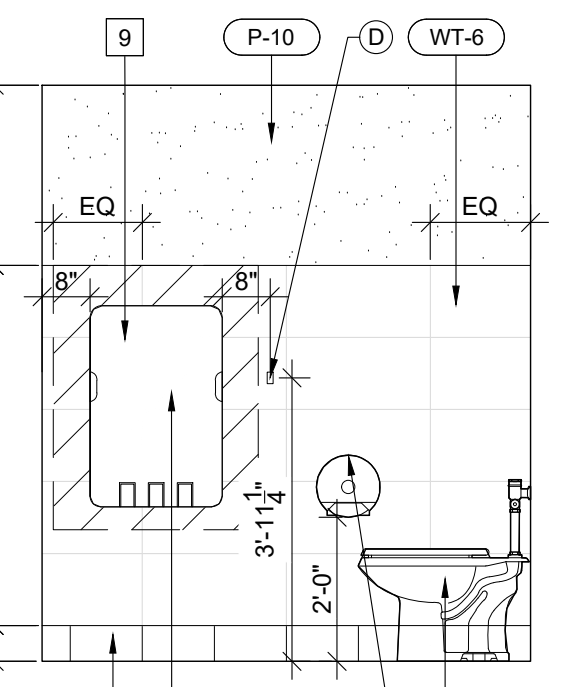


07 UNI-SEX WRM
SCALE: 3/8" = 1'-0"

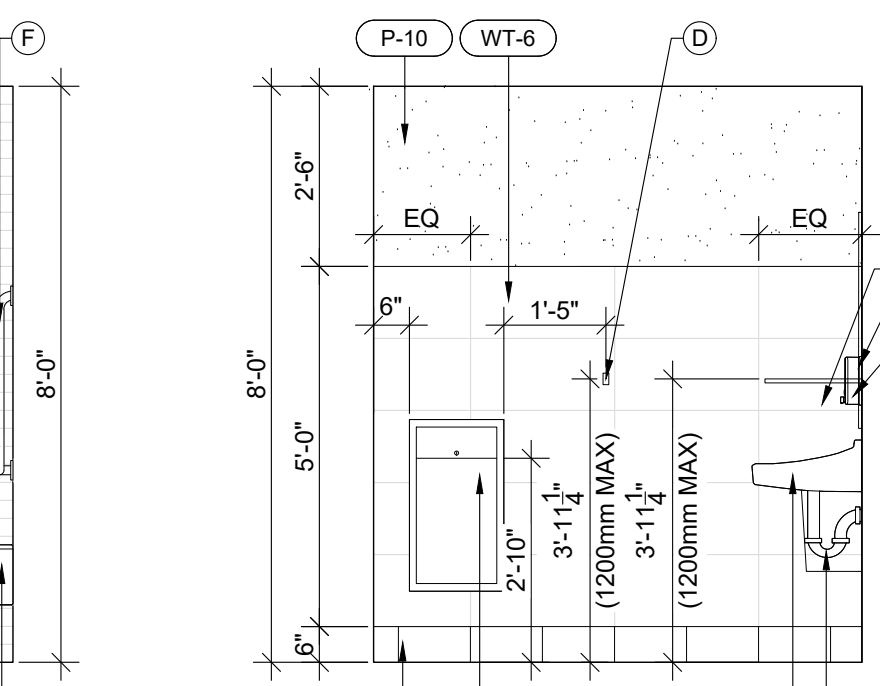


03 UNIVERSAL UNI-SEX WRM
SCALE: 3/8" = 1'-0"

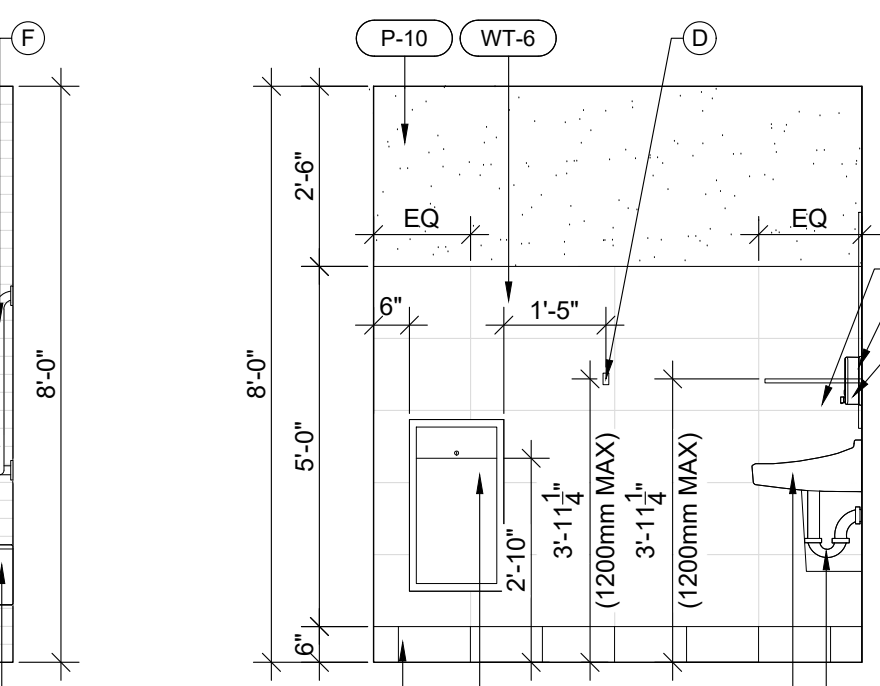


14 DETL @ LAVATORY
SCALE: 1" = 1'-0"

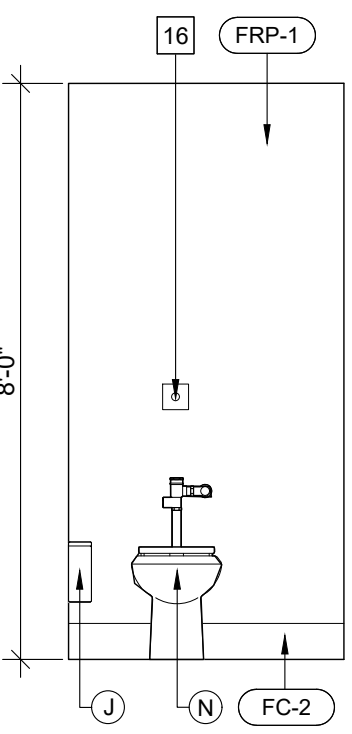


10 STAFF WRM
SCALE: 3/8" = 1'-0"

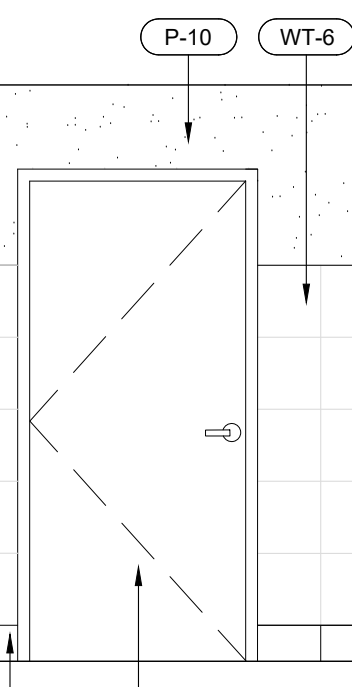


06 UNI-SEX WRM
SCALE: 3/8" = 1'-0"

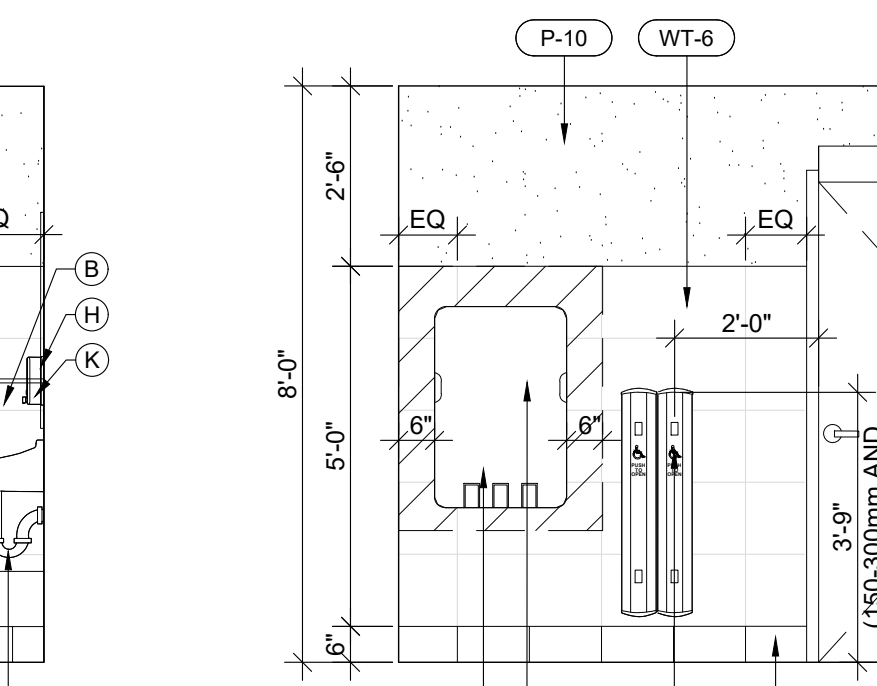


02 UNIVERSAL UNI-SEX WRM
SCALE: 3/8" = 1'-0"

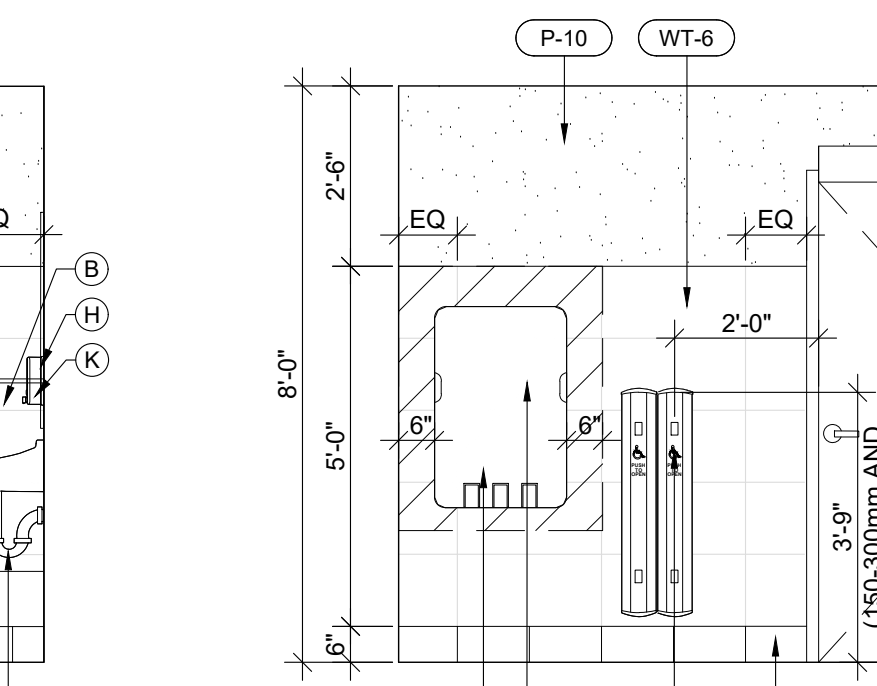


13 GRAB BAR DETL
SCALE: 1/2" = 1'-0"

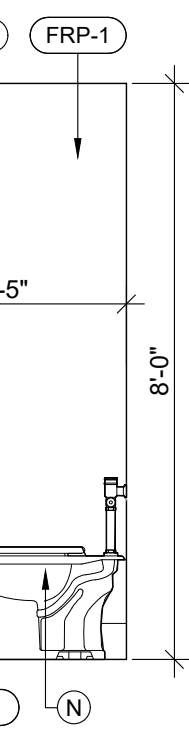


09 STAFF WRM
SCALE: 3/8" = 1'-0"

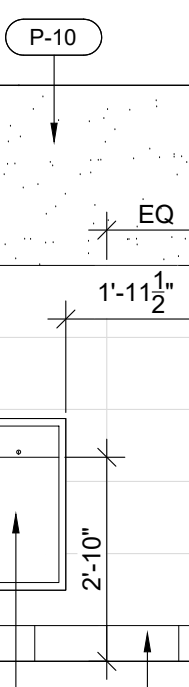

05 UNI-SEX WRM
SCALE: 3/8" = 1'-0"



01 UNIVERSAL UNI-SEX WRM
SCALE: 3/8" = 1'-0"

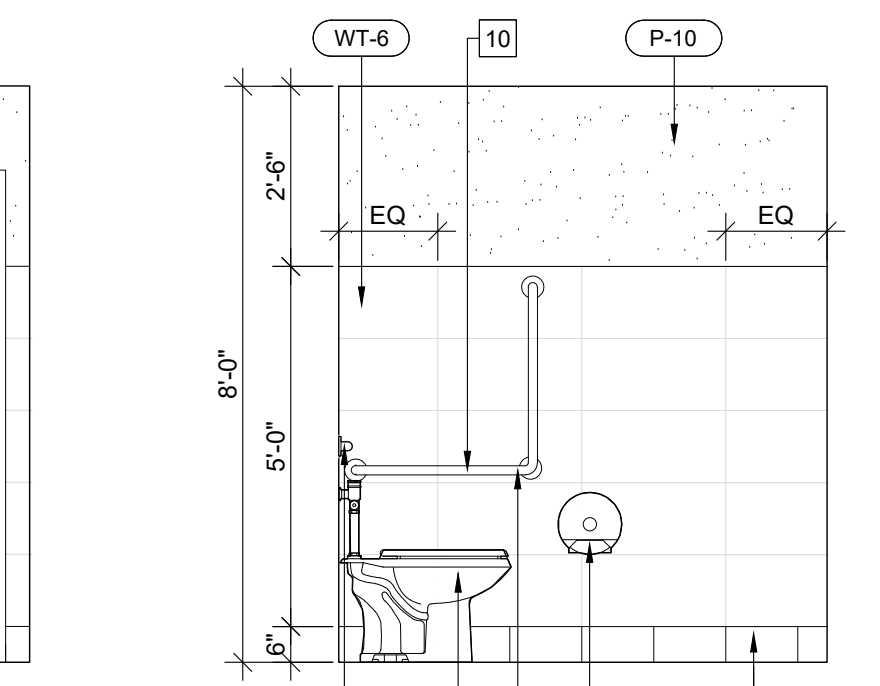

RESTROOM FIXTURE AND HARDWARE SCHEDULE

* G.C. TO COORDINATE ACCESSORIES AVAILABLE THROUGH HJC. REFER TO SUPPLIER SHEET

MARK	DESCRIPTION	MODEL	FINISH	NOTES
A	RECESSED PAPER TOWEL & WASTE RECEPTACLE	BOBRICK B-3974	STAINLESS STEEL	ENSURE MODEL IS HARDWIRED
	WASTE RECEPTACLE	AMERICAN SPECIALTIES INC. MODEL #0458	STAIN	REQUIRED WHEN OPTIONAL HAND DRYER IS USED
B	STAINLESS STEEL SHELF	BOBRICK B-298	STAINLESS STEEL	OR APPROVED EQUAL. G.C. TO SUPPLY SHELF AS PER LOCAL CODE REQUIREMENTS
C	TOILET PAPER DISPENSER: SURFACE MOUNTED JUMBO ROLL TOILET TISSUE DISPENSER	ASI MODEL NO.0042	STAIN	OUTER CABINET, STAINLESS STEEL
D	COAT HOOK	BRADLEY 9114-0000000	STAIN	1-IN FAMILY'S WASHROOM; 1-IN UNIVERSAL WASHROOM: HOOK TO BE MOUNTED AT 1200mm MAX. A.F.F.
E	VERTICAL BABY CHANGING STATION	KOALA KARE KB301-01 GREY	LIGHT GRAY	
F	30"x30" L' SIDE GRAB BAR	BOBRICK B6898.99	STAIN	PEENED GRIPPING SURFACE
G	24" REAR GRAB BAR	BRADLEY 8122-001240	STAIN	PEENED GRIPPING SURFACE
H	MIRROR	MEEK M2513	STAIN	24"x36" FIXED TILT MIRROR
J	SANITARY NAPKIN DISPOSAL	BOBRICK SERIES No. B-270	STAINLESS STEEL	
K	WALL MOUNTED "ECOLAB" HANDS-FREE SOAP DISPENSER	NEXA TOUCH FREE DISPENSER	BLACK	SUPPLIED BY OWNER AND INSTALLED BY G.C. (ECOLAB INSTALLED IN WESTERN REGION)
L	LAVATORY	ZURN Z5321 WHITE VITREOUS CHINA WITH SINGLE FAUCET HOLE		WALL HUNG SINK 23" X 20-1/4" CENTER SET BARRIER FREE. SUPPLIED AND INSTALLED BY G.C.
N	WATER CLOSET	ZURN Z5665-BWL1 COMPLETE WITH OPEN FRONT SEAT AND SEAT COVER		FLOOR MOUNT, 1.6 GPF, WHITE MADERA BOWL ELONGATED, 1-1/2" TOP SPUD, & RIM HEIGHT 17" A.F.F. WITH ZURN ZEMS600AV-HET AQUASENSE EXPOSED HARDWIRED SENSOR FLUSH VALVE.
O	LAVATORY - NON BARRIER FREE WASHROOM	ZURN Z5351 WHITE VITREOUS CHINA WITH SINGLE FAUCET HOLE		WALL HUNG SINK 19" X 17" CENTER SET NON BARRIER FREE. SUPPLIED AND INSTALLED BY G.C.
P	SURFACE MOUNTED PAPER TOWEL DISPENSER - STAFF WASHROOM ONLY			ROLL PAPER DISPENSER SUPPLIED BY OWNER AND INSTALLED BY G.C.
Q	HAND DRYER	EXCEL XL-SB XLERATOR BRUSHED STAINLESS STEEL SENSOR OPERATED SURFACE MOUNTED HAND DRYER		OPTIONAL ADA RECESS KIT (40502) AVAILABLE

INTERIOR ELEVATION NOTES

- N/A.
- N/A.
- N/A.
- N/A.
- POWER DOOR OPERATOR. REFER TO DOOR SCHEDULE ON SHEET A6.3.
- 36" TALL BARRIER FREE COLUMN PUSH PLATE DOOR ACTUATOR AND EMERGENCY CALL BUTTON LOCATION AND SIGNAGE ABOVE. REFER TO FLOOR PLAN, DOOR SCHEDULE, HARDWARE SCHEDULE AND ELECTRICAL DRAWINGS.
- N/A.
- N/A.
- BABY CHANGE TABLE. REFER TO DETAIL 15/A7.3.
- GRAB BARS. REFER TO DETAIL 13/A7.3.
- LAVATORY. REFER TO DETAIL 14/A7.3.
- DOOR STOP. PROVIDE EXTENDER AS REQUIRED.
- RECESSED PAPER TOWEL & WASTE RECEPTACLE. REFER TO DETAIL 16/A7.3.
- EMERGENCY CALL SIGNAGE. REFER TO GENERAL NOTE.
- EMERGENCY CALL SYSTEM: AUDIBLE AND VISUAL SIGNAL DEVICES INSIDE AND OUTSIDE OF THE WASHROOM THAT ARE ACTIVATED BY A CONTROL DEVICE INSIDE THE WASHROOM. REFER TO ELECTRICAL DRAWINGS.
- FLUSH SENSOR. G.C. TO ENSURE CLEAR HEIGHT OF TOILET SEAT COVER AND GRAB BAR.
- CORIAN PANEL ON TILE UNDER HAND DRYER. SUPPLIED BY OWNER'S MILL WORKER AND INSTALLED BY G.C.


GENERAL NOTE

- CONTRACTOR TO PROVIDE 2x WOOD BLOCKING IN WALL FOR ANCHORAGE OF TOILET ACCESSORIES AND PARTITIONS.
- G.C. TO SUPPLIED AND INSTALLED ITEMS LISTED ABOVE. UNO, G.C. TO ENSURE ALL WASHROOM ACCESSORIES ARE HARDWIRE IF NECESSARY PRIOR ORDERING.
- REFER TO PLUMBING DRAWING FOR PLUMBING FIXTURE SPEC.
- SIGNAGE TO BE PROVIDED ABOVE EMERGENCY CALL BUTTON WITHIN THE UNIVERSAL WASHROOM, CONTAINING WORDS "IN THE EVENT OF AN EMERGENCY PUSH EMERGENCY BUTTON AND AUDIBLE AND VISUAL SIGNAL WILL ACTIVATE" IN LETTERS AT LEAST 1" HIGH WITH A 9.2" STROKE.
- FLUSH AUTOMATICALLY OR BE EQUIPPED WITH A FLUSHING CONTROL. REFER 3.8.3.14. (1)(b) - NBC 2023_ALBERTA EDITION

ARTPACK & WAYFINDING LEGEND

MARK	DESCRIPTION
WF-9	CREW MUST WASH HANDS SIGNAGE

*REFER TO RESPONSIBILITY SCHEDULE FOR ARTPACK INFORMATION

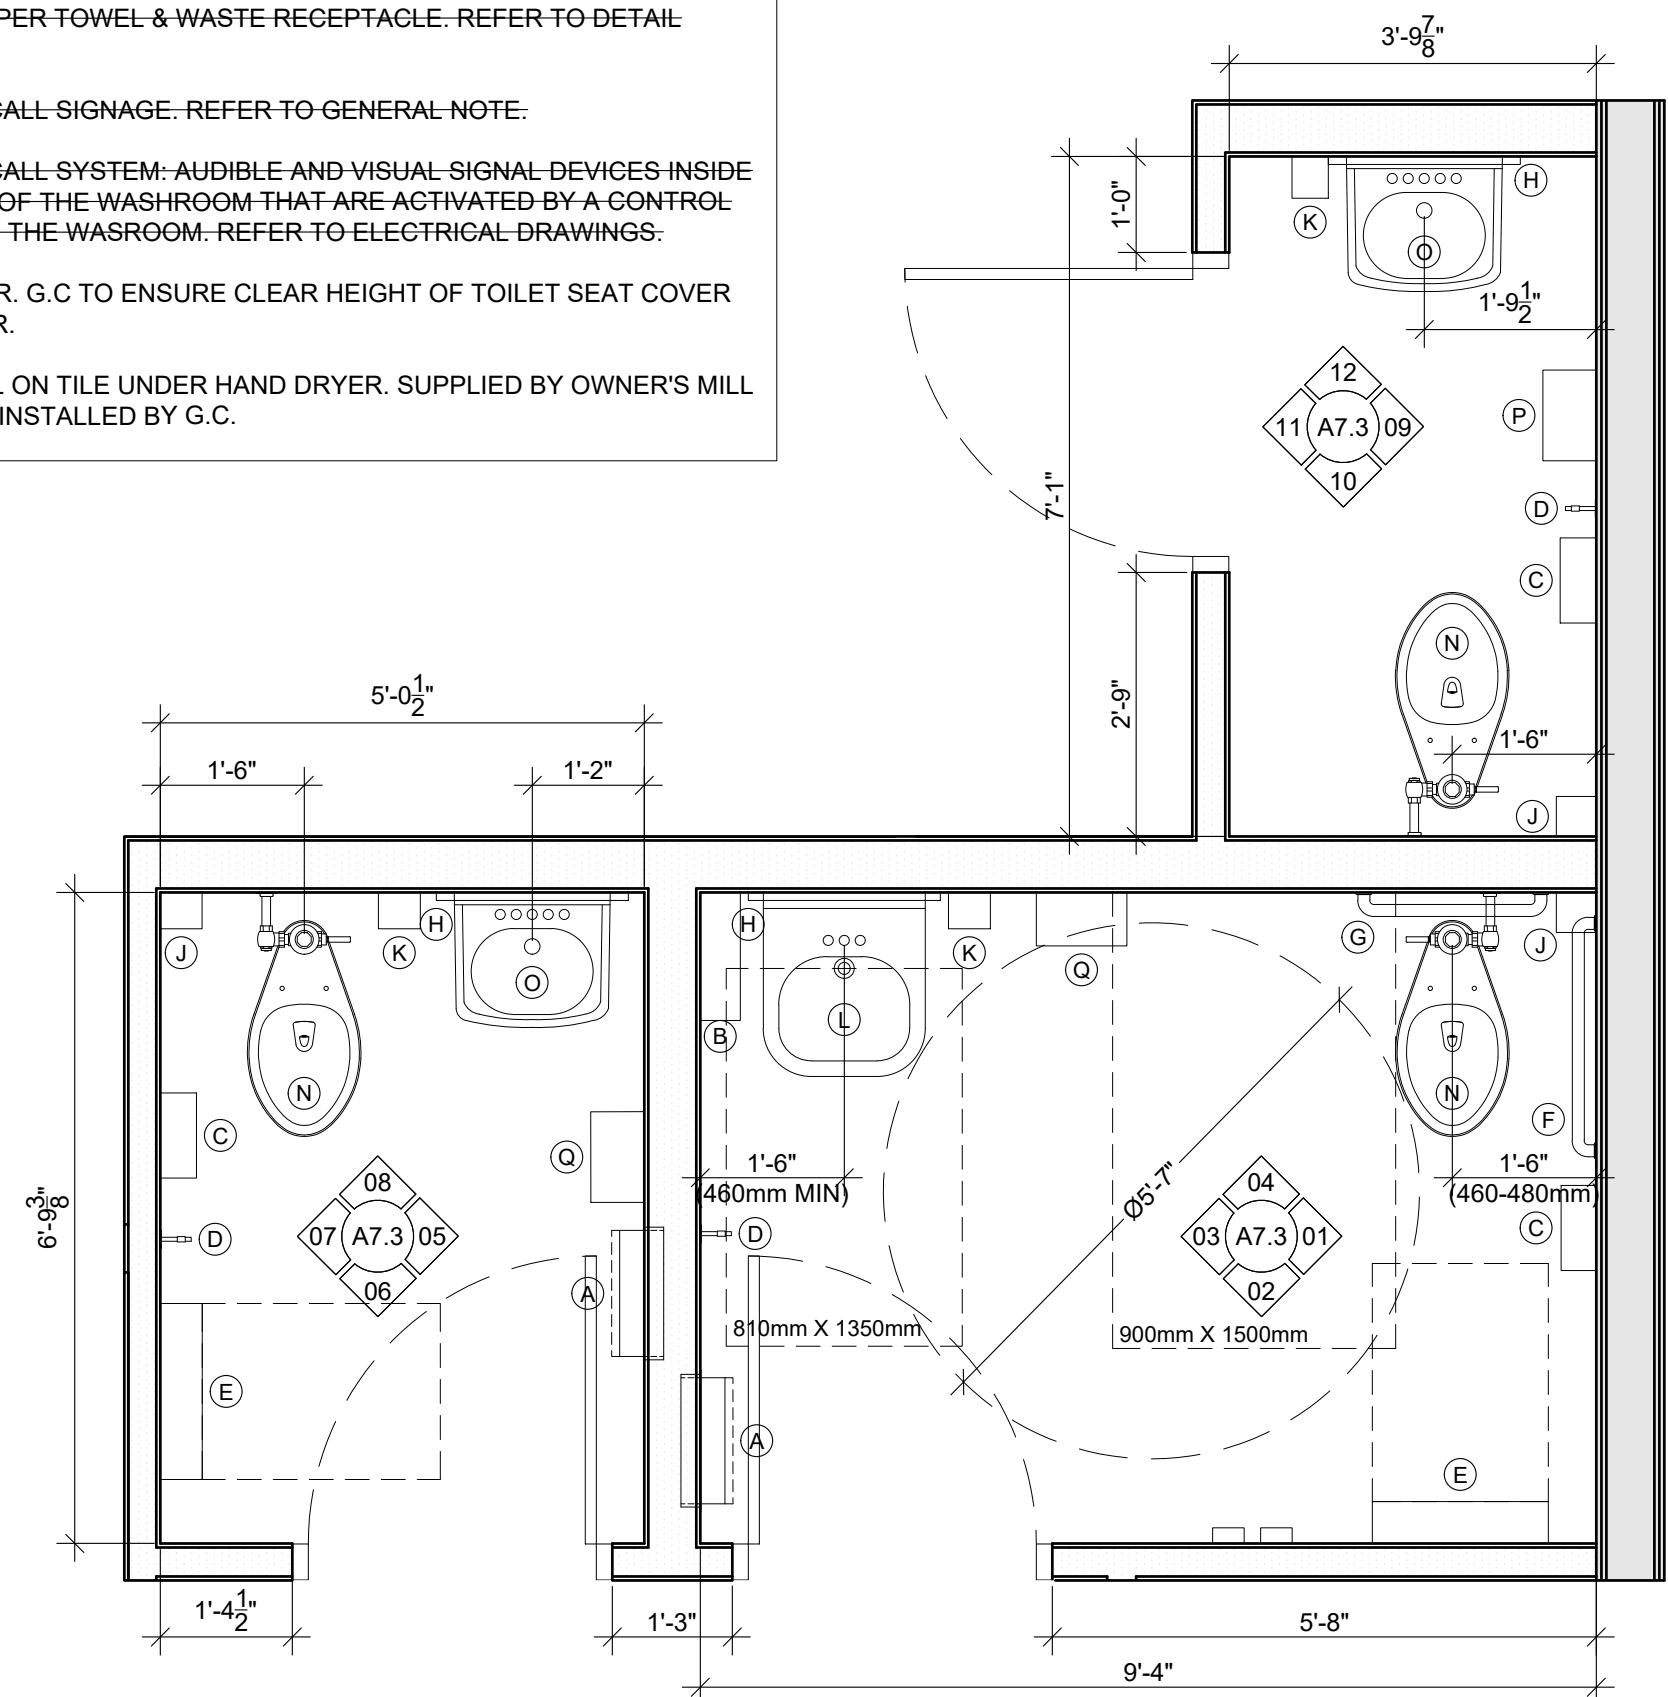

NOTE: INTERIOR DIMENSIONS IN ENLARGED WASHROOM PLAN ARE TO FINISHED FACE OF WALLS.

A ENLARGED WASHROOM PLAN
SCALE: 1/2" = 1'-0"

G.L. SMITH



Wallfacer Architecture Inc.

4711 Yonge Street Suite 801
Toronto Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE AS AMENDED AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY CONSTRUCTION WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

#	Date	Description	Dwn

DRAWING TITLE:

INTERIOR ELEVATIONS

PRINT DATE:

6/19/2026

SCALE:

AS NOTED

DRAWN BY:

DB

DRAWING NO:

CHECKED BY:

MO


PROJECT NO:

17037

A7.3

01 EQUIPMENT PLAN

SCALE: 1/4" = 1'-0"

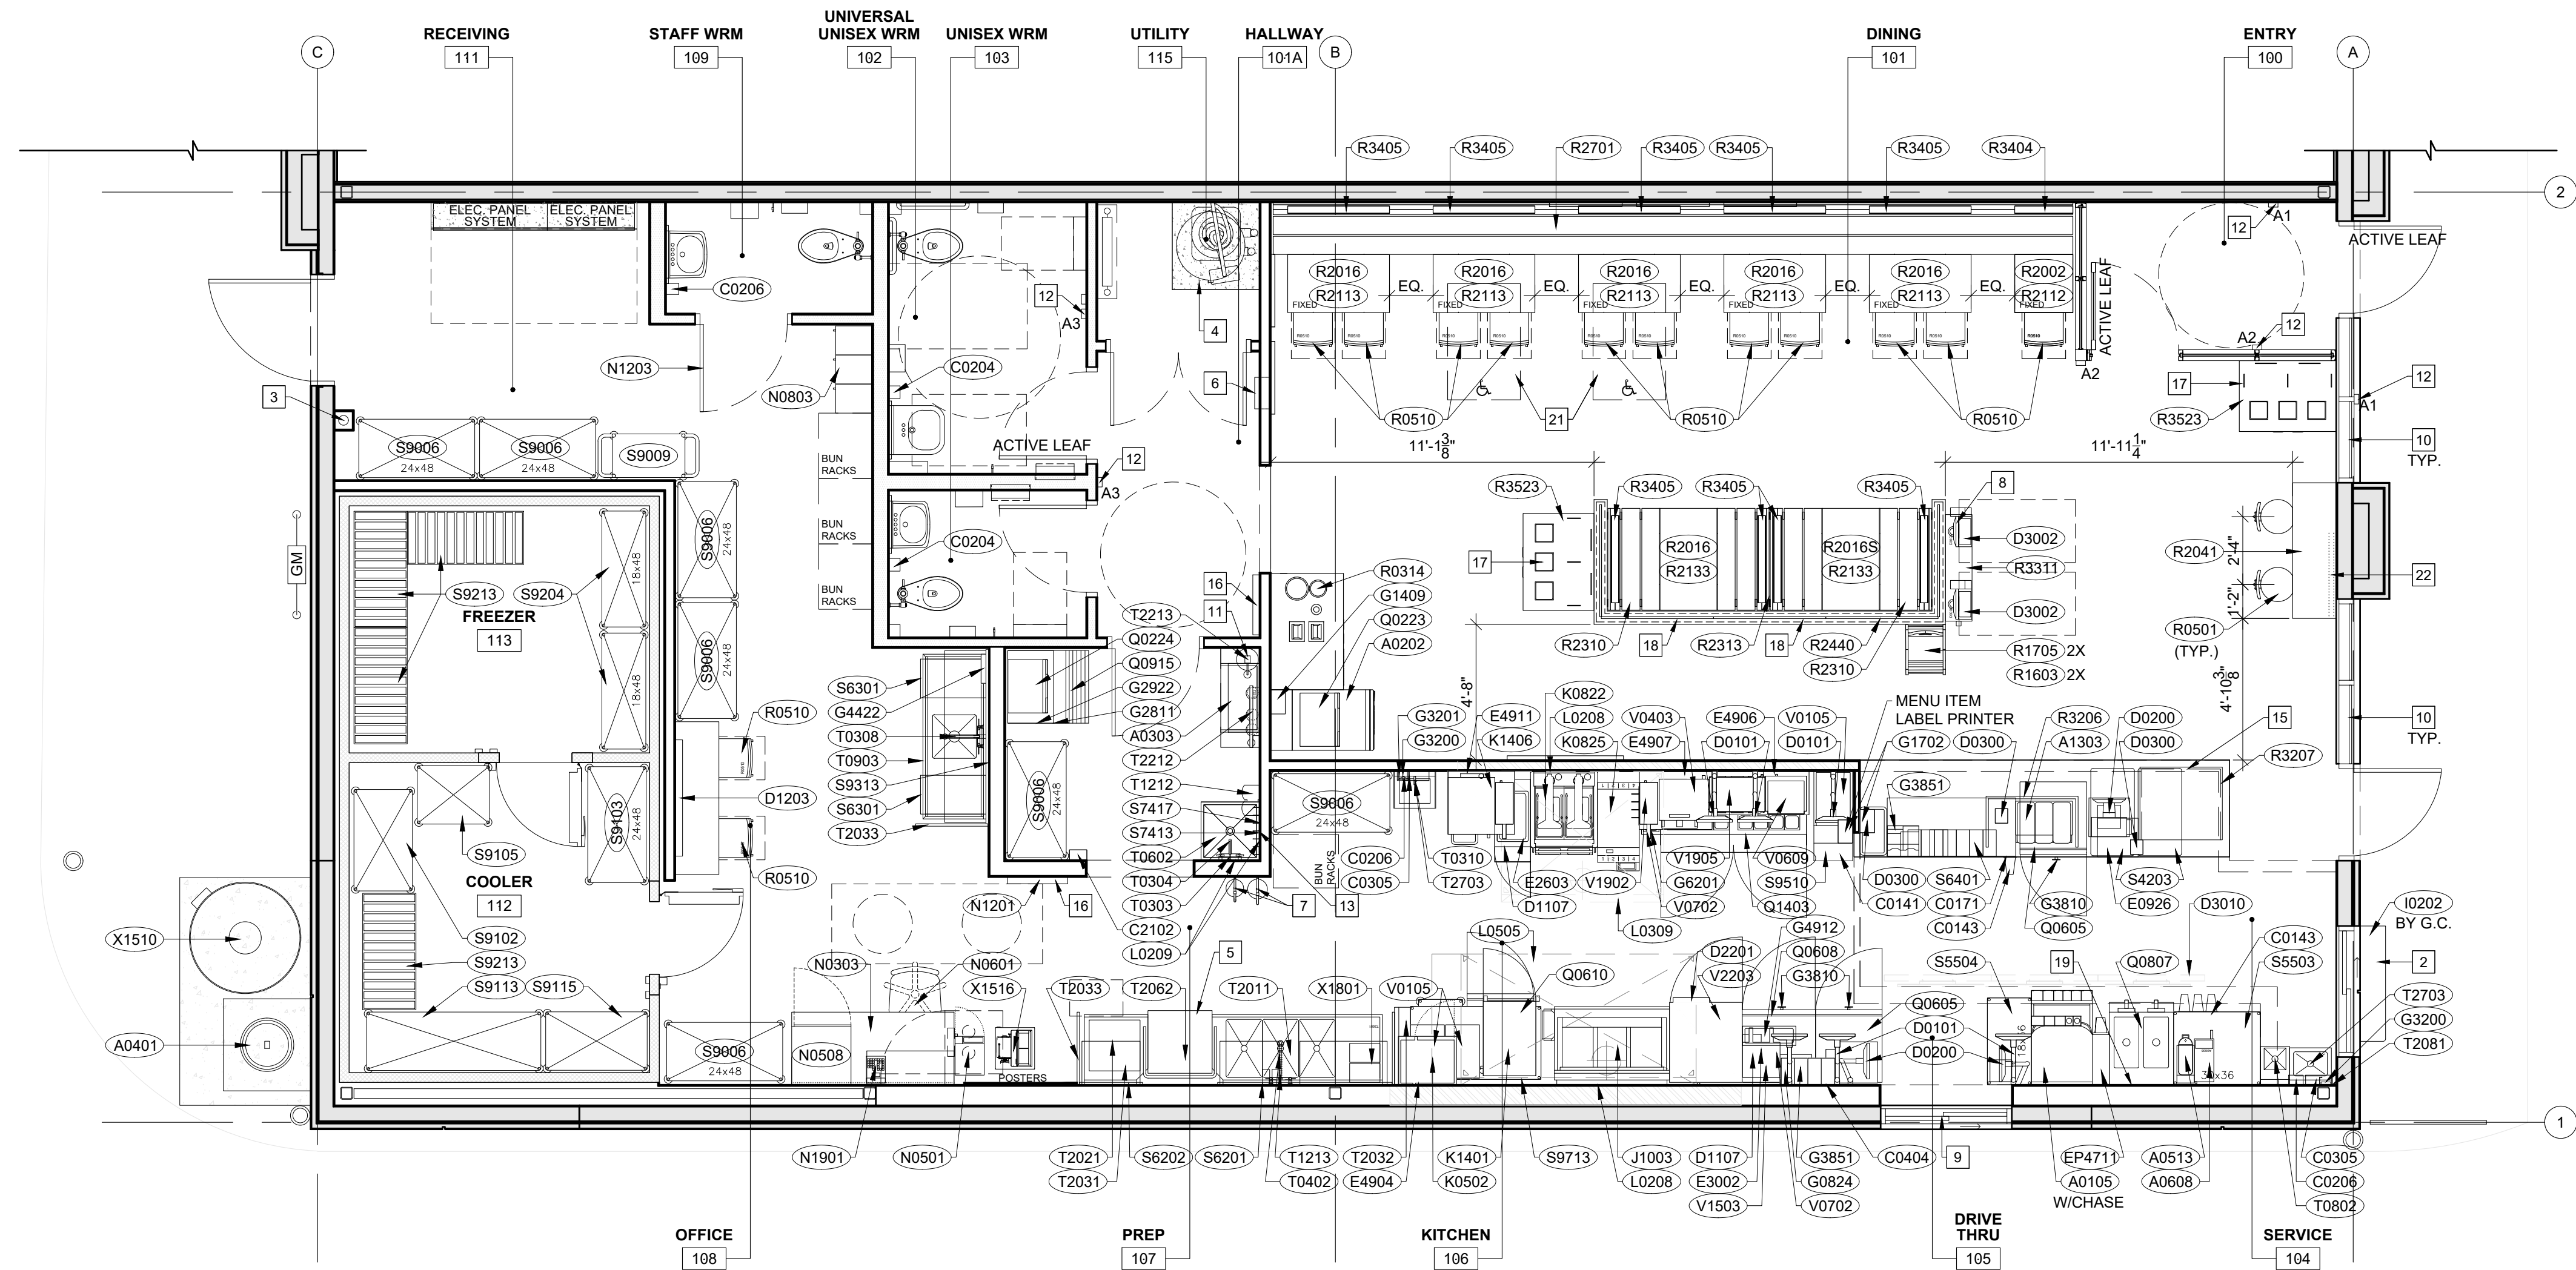

GENERAL NOTES:

- G.C. SHALL COORDINATE ALL REQUIREMENTS OF MILLWORK, SPECIALTIES, EQUIPMENT, AND FURNISHINGS WITH OWNER PRIOR TO START OF WORK.
- ALL ELECTRICAL & PLUMBING REQUIREMENTS FOR THE INSTALLATION OF MILLWORK, SPECIALTIES, EQUIPMENT AND FURNISHINGS IS THE RESPONSIBILITY OF THE G.C.
- REFER TO EQ1.2 FOR ALL EQUIPMENT SUPPLIER AND INSTALLER.
- KITCHEN EQUIPMENT SUPPLIER TO PROVIDE LABOUR FOR UNCRATING, ASSEMBLY AND SETTING OF EQUIPMENT.
- KITCHEN EQUIPMENT DISTRIBUTOR WILL SUPPLY CRITICAL DIMENSIONS, PLUMBING AND ELECTRICAL SPECIFICATIONS FOR EQUIPMENT SUPPLIED AND INSTALLED BY THE KITCHEN EQUIPMENT DISTRIBUTOR.
- ELECTRICAL AND PLUMBING CONTRACTOR TO MAKE FINAL CONNECTION TO EQUIPMENT.
- SEE INTERIOR ELEVATIONS FOR ARTPACK GRAPHIC LOCATIONS. CONFIRM WITH OWNER OR WENDY'S REPRESENTATIVE.
- SIGNAGE TO BE SUBMITTED UNDER SEPARATE PERMIT BY OWNER.
- THE CONTRACTOR SHALL PROVIDE AND INSTALL SOLID WOOD BLOCKING FOR ALL WALL MOUNTED ITEMS, SIGNAGE, EQUIPMENT, MILLWORK, ETC. COORDINATE LOCATIONS WITH OWNER'S CONSTRUCTION REPRESENTATIVE AS NECESSARY.
- KED TO SUPPLY AND INSTALL ALL BOH EQUIPMENT UNLESS NOTED OTHERWISE. ALL FURNITURE TO BE SUPPLIED BY KED AND INSTALLED BY GC. MILLWORK TO BE SUPPLIED AND INSTALLED BY GC.
- G.C. TO COORDINATE WITH ECOLAB FOR INSTALLATION OF ALL SOAP DISPENSERS UNLESS NOTED OTHERWISE.
- G.C. TO CONFIRM LOCATION OF ALL BLEND CENTER AND CHEMICAL RACKS WITH WENDY'S PRIOR INSTALLATION.

EQUIPMENT PLAN NOTE

- G.C. TO PROVIDE ADDITIONAL RECEPTACLES. CONFIRM FINAL LOCATION WITH WENDY'S GM. SUPPLY AND INSTALL BY G.C. REFER TO ELECTRICAL DRAWINGS FOR INFORMATION.
- 12"x 54" STAINLESS STEEL SHELF. SUPPLY BY KED AND INSTALL BY G.C.
- NEW REMOTE GREASE SUCTION PORT. REFER TO MECHANICAL DRAWINGS.
- 4'-0" HIGH PRE-FABRICATED METAL PLATFORM. SUPPLY AND INSTALL BY G.C. G.C TO PROVIDE SHOP DRAWINGS FOR REVIEW PRIOR FABRICATION.
- NEW WAREWASH UNIT. SUPPLY AND INSTALL BY KED. REFER TO MECHANICAL DRAWINGS.
- LOCATION OF RECESSED FIRE EXTINGUISHER AND CABINET. SUPPLY AND INSTALL BY G.C. REFER TO INTERIOR ELEVATIONS ON SHEET A7.1
- TYPE A AND K FIRE EXTINGUISHERS IN BACK OF HOUSE TO BE SUPPLY AND INSTALL BY G.C. G.C. TO CONFIRM FINAL LOCATION WITH CITY INSPECTOR.
- KIOSK. REFER TO ELECTRICAL DRAWINGS.
- STAINLESS STEEL SILL, JAMB AND HEADER. SUPPLIED AND INSTALLED BY G.C.
- G.C. TO SUPPLY AND INSTALL WINDOW BLINDS FOR WINDOWS IN DINING AREA. REFER TO FINISH SCHEDULE FOR SPEC.
- REVERSE OSMOSIS SYSTEM. REFER TO MECHANICAL DRAWINGS.
- LOCATION OF BARRIER-FREE PUSH BUTTON ACTUATOR. REFER TO ELECTRICAL DRAWINGS.
- MOP HOOKS TO BE INSTALL ON SIDE WALL. SUPPLY AND INSTALL BY G.C.
- N/A.
- NEW MOBILE PICK UP SHELF. 30" WIDE X 24" DEEP. SUPPLY AND INSTALL BY KED.
- FLYLIGHT. SUPPLY AND INSTALL BY G.C. REFER TO ELECTRICAL FOR RECEPTACLE. G.C. TO ENSURE RECEPTACLE INSTALLED BEHIND FLYLIGHT.
- WASTE RECEPTACLE MODEL TO BE CONFIRMED BY FRANCHISEE BASED ON LOCAL WASTE COLLECTION PROGRAM PRIOR TO ORDERING.
- G.C. TO INSTALL OUTLETS ON KNEE WALL ABOVE TABLES. REFER TO ELECTRICAL DRAWINGS.
- G.C. TO INCLUDE P9' CORD/PLUG.
- NEW USED OIL TANK SUCTION PORT. REFER TO MECHANICAL DRAWINGS.
- BARRIER-FREE TABLES ARE TO BE CLEARLY MARKED/INDICATED.
- G.C. TO PROVIDE SMALL L-BRACKET AT THE "W" SIDE TO SECURE THE TABLE TO ADJACENT WALL. ENSURE BRACKET IS CONCEALED BELOW THE TABLE TOP. BRACKET FINISH TO MATCH TABLE LEGS. CONFIRM DETAILS WITH WENDY'S PM.



Wallfacer Architecture Inc.

4711 Yonge Street Suite 801
Toronto Ontario M2N 6K8
647 547 6060

PROFESSIONAL STAMPS:

GENERAL NOTES:

- ALL CONSTRUCTION ACTIVITIES MUST FULLY COMPLY WITH THE PROVINCIAL BUILDING CODE, AS AMENDED, AND TO ALL OTHER APPLICABLE LAWS.
- ALL DRAWINGS AND SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND NO COPY AND/OR REPRODUCTION IS PERMITTED UNLESS A WRITTEN CONSENT HAS BEEN PROVIDED BY THE ARCHITECT.
- I HAVE EXERCISED RESPONSIBLE CONTROL WITH RESPECT TO DESIGN REVIEW ACTIVITIES.
- REVIEW WORK PERTAINS TO COMPLIANCE TO THE PROVINCIAL BUILDING CODE FOR ARCHITECTURAL WORK ONLY. DRAWINGS OF OTHER PROFESSIONAL ENGINEERS INCLUDING STRUCTURAL, MECHANICAL, ELECTRICAL AND OTHER PROFESSIONAL DESIGNERS MUST BE REFERENCED ACCORDINGLY.
- DRAWINGS MAY BE USED FOR CONSTRUCTION, ONLY WHEN SIGNED AND SEALED BY THE ARCHITECT.
- CONTRACTOR CANNOT COMMENCE ANY ON-SITE WORK UNLESS ALL APPLICABLE BUILDING PERMITS ARE DISPLAYED ON-SITE.

ISSUE

#	Date	Description	Dwn
4	JUN 18, 2026	ISSUED FOR TENDER	MM
3	APR 29, 2026	ISSUED FOR PERMIT	DB
2	FEB 12, 2026	ISSUED FOR CLIENT AND LANDLORD REVIEW	KK
1	DEC 19, 2025	ISSUED FOR PRELIMINARY DESIGN REVIEW	KK

PROJECT TITLE:



WENDY'S NEXT GEN 30
CRU 1
11332 266 STREET,
ACHESON, AB
CANADA
(17037)

REVISION

DRAWING TITLE:

EQUIPMENT PLAN

PRINT DATE:	SCALE:
6/19/2026	AS NOTED
DRAWN BY:	DRAWING NO:
DB	
CHECKED BY:	
MO	
PROJECT NO:	
17037	

EQ1.1

EQUIPMENT SCHEDULE					FR=FRANCHISEE GC=GENERAL CONTRACTOR KED= KITCHEN EQUIPMENT DISTRIBUTOR	
	#	Name	Remarks	Furnished By	Installed By	
SERVICE FRONT - GLOBAL NEXT GEN						
A1303	1	Bubbler - 3 Bowl	Ugolini	KED	KED	
C0143	1	Cup Dispenser - 3 hole		KED	KED	
C0171	1	Bracket - Cup Dispenser		KED	KED	
C0404	0	Napkin Holder		KED	KED	
E0907	0	Bracket, Drop Box, Wall Mount		KED	KED	
E0926	1	POS Cash Box Shelf		KED	KED	
G1702	1	Expo Printer Bracket		KED	KED	
G3810	1	Shopping Bag Holder - Single		KED	KED	
G3851	1	Bag Holder - Single		KED	KED	
I0202	1	Shelf, Delivery, Drive-thru only		KED	KED	
P2501	16	Condiment Bins		Smallwares	FR	
Q0605	1	Refrigerator (Under Counter) - Atosa	Caster set 1"H Included	KED	KED	
R3206	1	Bubbler Shroud		KED	GC	
R3207	1	Mobile Order Pickup Shelve		Millwork	GC	
S4203	2	18"x36"x18" Wire Shelf		KED	KED	
S6401	1	48"x30"x18" Storage Rack		KED	KED	
SERVICE BACK - GLOBAL NEXT GEN						
A0105	1	PUW Freestyle		Coke	Coke	
A0513	1	Stand - Beverage Um - 2 Tier Stacked		Smallwares	Smallwares	
A0608	1	Coffee Brewer - Axion	Check Valve by GC	KED	KED	
C0143	1	Cup Dispenser - 3 Hole		KED	KED	
C1900	1	Cream Dispenser		Smallwares	FR	
C2000	1	Sugar Dispenser		Smallwares	FR	
C0204	1	Soap Dispenser - Touch-free		EcoLab	EcoLab	
C0206	1	Soap Dispenser - Manual		EcoLab	EcoLab	
C0305	1	Paper Towel Dispenser (Hands-free)		Distribution Center	GC	
EP4711	1	Freestyle Package - GNG		KED	KED	
G3200	1	Holder, Glove Box - Plastic		KED	KED	
Q0807	1	Dual Head Frosty Machine	Extended cord by GC	KED	KED	
S5503	1	36"x30"x34" Tea/Coffee Table		KED	KED	
S5504	1	18"x36"x40" Drive-Thru Order Table		KED	KED	
T0802	1	Dump Sink - Manual Faucet		KED	GC	
T2081	1	Sink Shroud		KED	GC	
T2703	1	Hand Sink - Manual Faucet	Optional	KED	GC	
DUAL HOOD FRY SIDE - GLOBAL NEXT GEN						
C0404	1	Napkin Holder		KED	KED	
C1115S	1	Fry Carton Dispenser - Value		KED	KED	
C1125S	1	Fry Carton Dispenser - Medium		KED	KED	
C1145S	1	Fry Carton Dispenser - Large		KED	KED	
C1155S	1	Fry Carton Dispenser - Small		KED	KED	
D1107	2	Small Kitchen Timer	For V1503 & V2203	KED	KED	
D2201	1	3 Lane Fry Timer		KED	KED	
E3002	1	10" Riser Warming Cabinet		KED	KED	
E4904	1	24" Microwave Shelf		KED	KED	
G0824	1	Wall Cleats		KED	KED	
G3810	2	Shopping Bag Holder - Single		KED	KED	
G3851	1	Bag Holder - Single		KED	KED	
G4912	1	Fry Boat Holder		KED	KED	
G4913	1	Transition Strip / Gap Filler		KED	KED	
G4914	1	Nugget Pan Holder		KED	FR	
J0510	1	Basket, Open Fryer - 30lb.		Smallwares	FR	
J0512	1	Weight, Fry Basket - LTO Product		Smallwares	FR	
J0514	1	Fry Assy - Kit		KED	KED	
J1003	1	Open Fryer - 3 Vat	Gas Unit	KED	KED	
K0502	1	Microwave - Medium Duty		KED	KED	
K1401	1	Oven, Combi		KED	KED	
L0208	3	Wall Panel Kit		GC	GC	
L0505	1	Exhaust Hood - Fry Line	Fans & curbs included	Captive Aire	GC	
P2501	16	Condiment Bins		Smallwares	FR	
Q0605	1	27" Under Counter Refrigerator - Atosa	Field Reversible Doors	KED	KED	
Q0608	1	5' Freezer - Atosa		KED	KED	
Q0610	1	27" Under Counter Freezer - Atosa		KED	KED	
S9511	1	18"x30"x30" Bacon Cooling Cart	Sold with S9713	KED	KED	
S9713	1	Stand Wire 30"x54" w/ Bacon Cart	Sold with S9511	KED	KED	
T1214	1	Combi Oven Chemical Bracket		EcoLab	EcoLab	
T1403	1	Wall Sink, Sump - Combi Oven		KED	KED	
V0105	2	Cooker / Warmer - Chili		KED	KED	
V0702	1	Cooker / Warmer		KED	KED	
V1503	1	Fried Food Holding Cabinet		KED	KED	
V2203	1	30" Fry Dump		KED	KED	
DUAL HOOD GRILL SIDE - GLOBAL NEXT GEN						
C0141	1	Cup Dispenser - 2 Hole		KED	KED	
D1107	1	Timer, Programmable - 7" Display		KED	KED	
E2603	1	17" Beef Cooler		KED	KED	
E4906	1	40"x18" Over Shelf		KED	KED	
E4907	1	30"x22" Toaster Shelf w/ Egg Rings		KED	KED	
E4911	1	27" High Speed Oven Shelf		KED	KED	
G1702	1	Expo Printer Bracket		KED	KED	
G8201	1	Shelf, Sandwich Station - Food Warmer & Sanitizer, Left		KED	KED	
L0208	3	Wall Panel Kit - Grill Line		GC	GC	
L0309	1	Exhaust Hood - Grill Line		Captive Aire	GC	
K0821	1	3 Platen DSG 2.0		Garland	GC	
K0822	1	2 Platen DSG 2.0		Garland	GC	
K0825	1	4 Staging Lanes -208V		Garland/Taylor	GC	
K1406	1	Oven - High Speed		KED	KED	
Q1403	1	60" Sandwich Table - Atosa		KED	KED	
S9510	1	16" Chili Service Cart		KED	KED	
S9712	1	Stand, Combi and High Speed Ovens		KED	KED	
V0105	1	Cooker / Warmer		KED	KED	
V0403	1	Bun Toaster		KED	KED	
V0609	1	Bun Warmer		KED	KED	
V0702	1	Warmer - Half Size Long		KED	KED	
V1902	2	Holding Cabinet - Single Sided		KED	KED	
V1905	1	Cabinet, Holding Bin - Six 2.5" Pans & Three 4" Pans	Pads by Smallwares	KED	KED	
V1905	9	Cabinet, Holding Bins	Pads by Smallwares	Smallwares	Smallwares	
XXXXX	1	Fire Supression System (Ansul)		GC	GC	

EQUIPMENT SCHEDULE					FR=FRANCHISEE GC=GENERAL CONTRACTOR KED= KITCHEN EQUIPMENT DISTRIBUTOR	
	#	Name	Remarks	Furnished By	Installed By	
DISH - GLOBAL NEXT GEN						
S6201	1	Wall Rack, Sink		KED	KED	
S6202	1	Wall Rack, Warewash		KED	KED	
T0402	1	Faucet - Pre Rinse - Prep Sink		KED	KED	
T1213	1	Dispenser, Chemical - Warewash		EcoLab	EcoLab	
T2011	1	Table, Dish - Soiled (Sink)		KED	GC	
T2021	1	Dish Table - Reverse - Left to Right		KED	GC	
T2031	1	Dishrack Storage Shelf		KED	GC	
T2032	1	Holder, Night Cover - 60" Mega Top		KED	GC	
T2033	1	Splash Guard (Wall mounted)		KED	GC	
T2041	1	Slide, Rack - Soiled Dish Table		KED	KED	
T2062	1	Warewash Unit	Lease (EcoLab)	EcoLab	EcoLab	
X1801	1	Equipment Hooks, Personal Protective Equipment		KED	KED	
PREP - GLOBAL NEXT GEN						
C2102	1	Prep Label Printer		EcoLab / Procuero	EcoLab / Procuero	
G2811	1	Holder, Ice Bucket		Smallwares	Smallwares	
G2922	1	Holder & Bracket, Ice Scoop - Large		Smallwares	Smallwares	
G4422	1	Knife Holder		KED	KED	
S6301	2	Mobile Cart		Smallwares	Smallwares	
S9313	1	Wall Rack - Prep Sink - 72"		KED	KED	
T0308	1	Faucet, Wall Mount		KED	KED	
T0903	1	One (1) Compartment Sink - 68"		KED	GC	
T2033	2	Splash Guard - Wall mounted, GNG		KED	KED	
Q0224	1	Ice Maker, Self-Contained - 30" Wide	Manitowoc	KED	KED	
Q0915	1	Ice Bin 30" Wide		KED	KED	
Q0909	0	Ice Maker - Self Contained		KED	KED	
DINING ROOM BEVERAGE - GLOBAL NEXT GEN						
A0202	1	Dining Room Freestyle		Coke	Coke	
Q0223	1	Ice Maker (FOH) - Self-Contained	Manitowoc	KED	KED	
R0314	1	48" Condiment Stand		Millwork	Millwork	
G1409	1	Chase Freestyle		KED	KED	
WC1603 - HAND SINK						
C0204	1	Soap Dispenser - Touch-free		EcoLab	EcoLab	
C0305	1	Paper Towel Dispenser (Hands-free)		Distribution Center	GC	
G3200	1	Holder, Glove Box - Plastic		KED	KED	
G3201	1	Holder, Glove Box - Latex		KED	KED	
T0310	1	Eye Wash - Faucet Mount		KED	GC	
T2703	1	Hand Sink - Manual Faucet		KED	GC	
WC1703 - DRINK EQUIPMENT						
A0303	1	Rack, BIB Soda - Freestyle and Syrup		Coke	Coke	
A0304	0	Rack, BIB Soda - Freestyle and Syrup		Coke	Coke	
A0401	1	Tank, Bulk C02		Linde/Praxair	Linde/Praxair	
T2212	1	Water Treatment Unit, Standard Use		Coke	Coke	
WALK-IN BOX STORAGE - GLOBAL NEXT GEN (FROZEN BUN)						
S9006	7	Storage Unit, 24" x 48" x 80"		KED	KED	
S9009	1	Storage Unit, 18" x 30" x 35.5"		KED	KED	
S9102	1	Storage Unit: Cooler, 24" x 42" x 80"		KED	KED	
S9103	1	Storage Unit: Cooler, 24" x 48" x 80"		KED	KED	
S9105	1	Storage Unit: Cooler, 24" x 30" x 80"		KED	KED	
S9113	1	Storage Unit: Cooler, 24" x 72" x 80"		KED	KED	
S9115	1	Storage Unit: Cooler, 24" x 42" x 80"		KED	KED	
S9204	2	Freezer Storage Unit 18" x 48" x 69"		KED	KED	
S9213	4	Freezer/Cooler Storage Dunnage Rack (Palletier) 22" x 48" x 12"		KED	KED	
U0103	1	Label Kit		KED	KED	
WC1903 - MOP SINK/CLEANING EQUIPMENT						
L0209	1	Wall Panel Kit - Mop Sink, GNG		GC	GC	
S6102	1	Closet Storage Wall Shelves		KED	KED	
S7413	1	Wall Mount & Grid Components		KED	KED	
S7417	1	Wall Mount & Grid Components		KED	KED	
S9012	1	24 x 48 x 80 Shelving Unit, 7 Tier Mobile - Cleaning Supplies		KED	KED	
T0303	1	Faucet, Wall Mount w/ Support Bracket		KED	GC	
T0304	1	Faucet, Wall Mount - Service Sink		KED	GC	
T0602	1	Mop Sink - Splashes on Back and Left		GC	GC	
T1212	1	Chemical Blend Center		EcoLab	EcoLab	
T2213	1	Water Treatment, RO - Combi Oven		Coke	Coke	
X1412	1	Vacuum Cleaner (Cordless Type)	Kaivac	GC	GC	

EQUIPMENT SCHEDULE						FR=FRANCHISEE GC=GENERAL CONTRACTOR KED= KITCHEN EQUIPMENT DISTRIBUTOR
	#	Name	Remarks	Furnished By	Installed By	
WC2505 - OFFICE/EMPLOYEE AND SAFETY						
1203	1	TV (Optional)		FR	FR	
0303	1	Employee Desk		Millwork	Millwork	
0501*	1	Smart Safe (Optional)	Brinks	Vendor	Vendor	
0508*	1	Back Office Safe		Vendor	Vendor	
0601	1	Office Chair		FR	FR	
0701	0	Training Material Hooks		FR	FR	
0802	0	Locker - 2 stacked		KED	KED	
0803	3	Employee Lockers (Optional)		KED	KED	
0901	1	Coat Hooks (Optional)		KED	KED	
1201	1	Bulletin Board		FR	FR	
1202	1	White Board		FR	FR	
1203	1	White Board - Small		FR	FR	
1901	1	Cash Scales		FR	FR	
2701	1	PPE Fryer Cleaning Kit		Smallwares	N/A	
0510	2	Chair: Standard		Millwork	GC	
WC3016 - SEATING/DINING ROOM FIXTURES						
0105	2	Trash Receptacle (2-Bin Enclosure)		Millwork	GC	
0501	2	Stool: Bar Height		Millwork	GC	
0510	11	Chair: Standard		Millwork	GC	
2002	1	Table Top: 24" x 24"		Millwork	GC	
2016	6	Table Top: 24" x 42"		Millwork	GC	
2016S	1	Table Top: 24" x 42"	"We Don't Cut Corners"	Millwork	GC	
2041	1	Waterfall Table (56")		Millwork	GC	
2054	1	Waterfall Table (84")		Millwork	GC	
2109	6	Fixed Table Base: 2-Top / 4-Top		Millwork	GC	
2111	2	Fixed Table Base: 4-Top (Accessible)		Millwork	GC	
2112	1	Table Base: Freestanding - X Base		Millwork	GC	
2113	5	Table Base: Freestanding - 4 Top (Accessible)		Millwork	GC	
2133	2	Canntiever Bracket (4-Top)		Millwork	GC	
2310	2	42" Single Booth - Standard (Wood)		Millwork	GC	
2313	1	42" Double Booth - Standard (Wood)		Millwork	GC	
3103	1	Corian Wall Cap - Booth Wall, Concrete		Millwork	GC	
2436	0	Straight Booth Wall	N/A	Millwork	GC	
2440	1	C-Wall		Millwork	GC	
2701	1	Banquette Seating - Custom Length 330"		Millwork	GC	
3300	1	2 Kiosk Station Counter		Millwork	GC	
3311	1	2 Kiosk Ledge (No Backer) - 44"	Optional	Millwork	GC	
3404	1	Seat Back Cushion - 24" long		Millwork	GC	
3405	9	Seat Back Cushion - 42" long		Millwork	GC	
3523	2	Trash Receptacles (3-bin Enclosure)		Millwork	GC	
WC3308 - POS SYSTEM AND KIOSK - SINGLE-LINE						
0101	6	POS Monitor		IT Panasonic	IT Panasonic	
0200	3	POS Terminal		IT Panasonic	IT Panasonic	
0300	3	POS Printer		IT Panasonic	IT Panasonic	
0600	1	Headset		HME	HME	
3010	3	Interior Digital Menu Board + Wall Mounts		Acrelec	Acrelec	
3002	2	Self Order Station Kiosk		IT Panasonic	IT Panasonic	
0202	0	Cash Drop Safe		FR	FR	
WC5006 - SMALLWARES (PARTIAL)						
1705	2	Booster Seat		Millwork	GC	
1603	2	High Chair		Millwork	GC	
WC2101 - SAFETY - U.S. (PARTIAL)						
0703	1	6' Step Ladder		Smallwares	FR	
WC6004 - FABRICATED ACCESSORIES - U.S. (PARTIAL)						
0204	2	Soap Dispenser - Touchfree		EcoLab	EcoLab	
PATIO EXTERIOR FURNITURE						
3507	6	Warren Outdoor Dining Chair		Smallwares	GC	
8508	1	Patio Table 26"x36"		Recycle Design	GC	
8509	1	Patio Table 36"x36"		Recycle Design	GC	
8533	1	Patio Trash Receptacle		Recycle Design	GC	
BREASE						
1510	1	Grease Waste Tank	Frontline	Vendor	Vendor	
1516	1	Grill Grease Caddy	Frontline	Vendor	Vendor	

3. SEALANTS:

- .1 CONCEALED: TAPE OR COMPOUND, NON-SKINNING, NON-DRYING, BUTYL RUBBER.
- 2. EXPOSED: (ACRYLIC CO-POLYMER TO CGSB 19GP-5M) (ONE PART SILICONE TO CGSB CANZ-19.13)

2.5 FABRICATION

- .1 FABRICATE ROOF COMPONENTS TO COMPLY WITH DIMENSIONS, PROFILES, GAUGES AND DETAILS AS SHOWN ON THE SHOP DRAWINGS, INCLUDING FASCIA AND SOFFIT PANELS AND ALL COMPANION FLASHING.
- 2. FABRICATE ALL COMPONENTS OF THE SYSTEM IN THE FACTORY, READY FOR FIELD INSTALLATION.
- 3. PROVIDE METAL LINER AND CLADDING AND ALL ACCESSORIES IN LONGEST PRACTICABLE LENGTH TO MINIMIZE FIELD LAPPING OF JOINTS.

PART 3 -- EXECUTION

3.1 EXAMINATION

- .1 EXAMINE WORK OF OTHER SECTIONS UPON WHICH WORK OF THIS SECTION DEPENDS.
- 2. REPORT ALL DISCREPANCIES TO CONSULTANT BEFORE BEGINNING WORK ON THE ROOF SYSTEM.

3.2 INSTALLATION

- 1. SUB-GIRT FRAMING SYSTEM:
 - .1 INSTALL SUB-GIRTS, FRAME ALL OPENINGS IN THE CLADDING.
- 2. FLASHING:
 - .1 INSTALL STARTER FLASHING, DRIP AND OTHER FLASHING, AND CORNERS, EDGINGS, WINDOW AND DOOR FLASHING AS SHOWN ON THE DRAWINGS.
- 3. EXTERIOR CLADDING:
 - .1 INSTALL EXTERIOR CLADDING (AND SOFFIT) IN ACCORDANCE WITH MANUFACTURER'S STANDARD INSTALLATION PROCEDURES, PROVIDING PROPER LAPS AND DETAILING TO ENSURE A WEATHERTIGHT FACE.
 - 2. INSTALL FINISHING FLASHING AND CAP FLASHING.
- 4. SEALANTS:
 - .1 INSTALL SEALANTS AT JUNCTIONS WITH ADJOINING WORK, AND WHERE SHOWN ON THE DRAWINGS, IN ACCORDANCE WITH SECTION [07 92 00].

3.3 CLEAN-UP

- .1 CLEAN EXPOSED PANEL SURFACES IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
- 2. REPAIR AND TOUCH UP WITH COLOUR MATCHING HIGH GRADE ENAMEL, MINOR SURFACE DAMAGE, ONLY WHERE PERMITTED BY THE ARCHITECT AND ONLY WHERE APPEARANCE AFTER TOUCH-UP IS ACCEPTABLE TO ARCHITECT.
- 3. REPLACE DAMAGED PANELS AND COMPONENTS THAT, IN OPINION OF THE ARCHITECT, CANNOT BE SATISFACTORILY REPAIRED.

E.I.F.S.

"REFER TO WENDY'S "STO CORP. CUSTOM DETAIL" INSTRUCTIONS FOR WENDY'S RED AREAS"

F. PROVIDE ADMINISTRATION, FACILITIES, EQUIPMENT, LABOR AND MATERIALS REQUIRED TO FURNISH AND INSTALL EXTERIOR INSULATION AND FINISH SYSTEM (EIFS) AND DIRECT EXTERIOR FINISH SYSTEM (DEFS) PRODUCTS AS SHOWN ON THE DRAWINGS AND SPECIFIED BELOW.

G. RELATED WORK: MASONRY (DIVISION 4), SHEATHING AND WEATHER BARRIER (DIVISION 6), SHEET METAL & DUKLING (DIVISION 7), PAINTING (DIVISION 9).

H. DELIVERY, STORAGE AND HANDLING: DELIVERED MANUFACTURED PLASTERING PRODUCTS TO JOB SITE IN ORIGINAL, UNOPENED PACKAGES, CONTAINERS OR BUNDLES BEARING MANUFACTURER'S NAME BRAND, TYPE AND GRADE. KEEP MATERIALS DRY UNTIL USED. STORE UNDER COVER AND OFF THE GROUND. PROTECT METAL FROM RUSTING AND DAMAGE.

I. WARRANTY: EIFS MANUFACTURER IS PROVIDING OWNER WITH WARRANTY OF MATERIAL AND COLOR FADE. TOP COATING THE FINE SAND FINISH, WITH STOCOLOC ACRYL PLUS IS REQUIRED FOR FADE RESISTANT WARRANTY. TO ENSURE WARRANTY IS ENFORCEABLE, GENERAL CONTRACTOR SHALL EMPLOY EXPERIENCED EIFS AND COATING CONTRACTORS, AS FOLLOWS:

1. CONTRACTOR REQUIREMENTS FOR EIFS (STOTHERM CI ESSENCE):
 - a. ENGAGED IN APPLICATION OF EIFS FOR A MINIMUM OF THREE (3) YEARS.
 - b. KNOWLEDGEABLE IN THE PROPER USE AND HANDLING OF STO MATERIALS.
 - c. EMPLOY SKILLED MECHANICS WHO ARE EXPERIENCED AND KNOWLEDGEABLE IN FLUID-APPLIED AIR / MOISTURE BARRIERS AND EIFS APPLICATION, AND FAMILIAR WITH THE REQUIREMENTS OF THE SPECIFIED WORK.
 - d. SUCCESSFUL COMPLETION OF MINIMUM OF THREE (3) PROJECTS OF SIMILAR SIZE AND COMPLEXITY TO THE SPECIFIED PROJECT.
 - e. PROVIDE THE PROPER EQUIPMENT, MANPOWER AND SUPERVISION ON THE JOB SITE TO INSTALL THE SYSTEM IN COMPLIANCE WITH STO'S PUBLISHED SPECIFICATIONS AND DETAILS AND THE PROJECT PLANS AND SPECIFICATIONS.
2. CONTRACTOR REQUIREMENTS FOR ACRYLIC COATING (STOCOLOR ACRYL PLUS):
 - a. THE CONTRACTOR SHALL BE QUALIFIED TO PERFORM THE WORK SPECIFIED BY REASON OF EXPERIENCE.
3. EIFS CONTRACTOR MUST OBTAIN STOTHERM ESSENCE NEXT SYSTEM WARRANTY BY REQUESTING THE WARRANTY FROM THE STO DISTRIBUTOR WHERE MATERIAL WAS PURCHASED.
4. COATING / PAINTING CONTRACTOR MUST OBTAIN STOCOLOR ACRYL PLUS WARRANTY BY REQUESTING THE WARRANTY FROM THE STO DISTRIBUTOR WHERE MATERIAL WAS PURCHASED.

"IF EIFS CONTRACTOR ALSO APPLIES THE STO COATING, THEY CAN OBTAIN ONE WARRANTY THAT WILL INCLUDE BOTH; THE STOTHERM ESSENCE NEXT & STOCOAT ACRYL PLUS COATING WARRANTY.

5. CONTRACTORS SHALL FOLLOW STO SPECIFICATIONS FOR THE INSTALLATION OF THE EIFS AND COATINGS. ANY DEVIATIONS FROM STO SPECIFICATIONS AND THE CONTRACT DOCUMENTS SHALL BE BROUGHT TO THE ATTENTION OF THE GENERAL CONTRACTOR FOR FURTHER DIRECTION. THE EIFS / COATINGS CONTRACTORS SHALL BE RESPONSIBLE FOR ANY WORKMANSHIP WARRANTIES.
6. STO SHALL NOT HAVE ANY OBLIGATION UNDER THIS WARRANTY UNLESS THE OWNER NOTIFIES STO IN WRITING AT 3800 CAMP CREEK PKWY, BUILDING 1400, SUITE 120, ATLANTA, GEORGIA 30331, ATTN: WARRANTY SERVICES, WITHIN 30 DAYS OF THE DISCOVERY OF ALLEGED DEFECTS. STO CORP. SHALL BE ALLOWED A REASONABLE PERIOD OF TIME TO INVESTIGATE THE ALLEGED DEFECT, INCLUDING REMOVAL OF SAMPLES, AND TO PERFORM ANY TESTING DEEMED NECESSARY TO DETERMINE THE CAUSES OF THE ALLEGED DEFECT. THE OWNER SHALL PROVIDE AND CAUSE ANY TEMPORARY REPAIRS TO BE ACCOMPLISHED IN A TIMELY MANNER TO PREVENT FURTHER DAMAGE TO THE STRUCTURE OR CONTENTS OF THE BUILDING UNTIL THE CAUSE OF THE DEFECT IS DETERMINED AND A REPAIR IS IMPLEMENTED.
7. CONTACTS FOR STO:
 - a. STO TECHNICAL SERVICES: 1-800-221-2397
 - b. STO STRATEGIC ACCOUNTS: 1-888-786-3437

E. BASIS OF DESIGN AND SPECIFICATION: STO CORP. - "STOTHERM CI ESSENCE".

ACCEPTABLE ALTERNATE: DRYVIT SYSTEMS, INC. - "OUTSULATION PLUS MD". PROVIDE MATERIALS, COMPONENTS AND INSTALLATION BY DRYVIT COMPARABLE TO THOSE LISTED IN THIS SECTION.

1. TEXTURE: TROWEL APPLY STO FINE SAND FINISH TOP-COATED WITH STOCOAT ACRYL PLUS PER FINISH SCHEDULE. OVER HIGH-IMPACT ARMOR MAT REINFORCING MESH WITH STO 4.5 OZ. MESH TO 6'-9" ABOVE GRADE, STO 4.5 OZ. MESH ABOVE 6'-9".
ALTERNATE: DRYVIT INTEGRAL COLORED "WEND051022", "SANDPEBBLE FINE" FINISH, "DEMANDIT" TOP COAT PER FINISH SCHEDULE, OVER "PANZER 15 OZ." HIGH-IMPACT MESH TO 6'-9" MIN., AND, "STANDARD 4.3 OZ." REINFORCING MESH ABOVE 6'-9".

F. MATERIALS:

1. GENERAL: PROVIDE STANDARD PRODUCTS RECOMMENDED BY THE MANUFACTURER FOR THE APPLICATION INDICATED.
2. WATER: POTABLE AND FREE FROM IMPURITIES THAT AFFECT STUCCO.
3. PORTLAND CEMENT: ASTM C150, TYPE I; GRAY FOR BASE COAT.
4. AIR/WATER-RESISTIVE BARRIER COMPONENTS:
 - a. STOGUARD WITH GOLD COAT.
ALTERNATE: DRYVIT "BACKSTOP NT" SERIES.
 - b. STO RAPID GUARD FOR JOINT TREATMENT AND STO GOLD COAT WATERPROOF COATING. (NOTE: STOGUARD FABRIC OR STORAPID FILL MAY BE USED IN LIEU OF RAPID GUARD FOR JOINT TREATMENT.
ALTERNATE: DRYVIT "BACKSTOP NT - TEXTURE"; AND, GRID TAPE.

DIVISION 8 - OPENINGS

ALUMINUM ENTRANCE DOORS, STOREFRONT & CURTAINWALL

- A. DOORS AND WINDOWS SHALL HAVE PRODUCT LABELS INDICATING U-VALUE, SHGC AND AIR LEAKAGE RATE IN COMPLIANCE WITH LATEST ENERGY CODES. ALLOWED AIR LEAKAGE SHALL NOT EXCEED 1.0 CFM/FT² FOR GLAZED DOORS AND 0.3 CFM/FT² FOR WINDOWS.
- B. SYSTEMS: REFER TO EXTERIOR MATERIALS AND FINISHES SCHEDULE ON DRAWINGS.
- C. DOORS SHALL BE "350 MEDIUM STYLE" DOOR, MANUFACTURED BY US ALUMINUM.
- D. HARDWARE FOR ENTRANCE DOORS: SEE HARDWARE SCHEDULE ON DRAWINGS.
- E. EXPOSED ALUMINUM MATERIAL SHALL BE DARK BRONZE ANODIZED ALUMINUM. HARDWARE SHALL MATCH.
- F. MISCELLANEOUS TRIMS, SHAPES, SPACERS, AND ADAPTERS AS REQUIRED.

GLAZING

- A. EXTERIOR GLASS SHALL BE 1" INSULATED (UNLESS NOTED OTHERWISE). SEE THE FINISH SCHEDULE. GLASS MUST MEET SAFETY CODES AS REQUIRED. GLASS MUST HAVE 5-YEAR WARRANTY AGAINST SALT FAILURE.
 - 1. GLASS THICKNESSES: SELECT MIN. GLASS THICKNESSES PER ASTM E 1300, PER FOLLOWING REQUIREMENTS:
 - a. SPECIFIED DESIGN WIND LOADS: DESIGN WIND LOADS APPLICABLE TO PROJECT FROM BASIC WIND SPEED - IN MILES PER HOUR (METERS PER SECOND) AT 33 FEET (10 M) ABOVE GRADE, ACCORDING TO ASCE 7, "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES". SECTION 6.4.2, "ANALYTIC PROCEDURE," BASED ON MEAN ROOF HEIGHTS ABOVE GRADE INDICATED ON DRAWINGS.
 - b. PROBABILITY OF BREAKAGE FOR VERTICAL GLAZING: 8 LITES PER 1000 FOR LITES SET VERTICALLY OR NOT MORE THAN 15 DEGREES OFF VERTICAL AND UNDER WIND ACTION.
 - 1) LOAD DURATION: 60 SECONDS OR LESS.
 - c. MIN. GLASS THICKNESS FOR EXTERIOR LITES: NOT LESS THAN 6 MM.
 - d. THICKNESS OF TINTED AND HEAT-ABSORBING GLASS:
 - 1) PROVIDE THE SAME THICKNESS FOR EACH TINT COLOR INDICATED THROUGHOUT PROJECT.
- B. PRODUCTS AND MANUFACTURERS
 - 1. AVAILABLE PRODUCTS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PRODUCTS THAT MAY BE INCORPORATED INTO THE WORK INCLUDE, BUT ARE NOT LIMITED TO, THE PRODUCTS INDICATED IN SCHEDULES ON THE DRAWINGS.
- C. PRIMARY FLOAT GLASS
 - 1. ASTM C 1036, TYPE I (TRANSPARENT GLASS, FLAT), QUALITY Q3 (GLAZING SELECT), CLASS 1 (CLEAR).
- D. HEAT-TREATED FLOAT GLASS
 - 1. ASTM C 1048, TYPE I (TRANSPARENT GLASS, FLAT); QUALITY Q3 (GLAZING SELECT); CLASS, KIND, AND CONDITION AS INDICATED.
- E. INSULATING GLASS
 - 1. PREASSEMBLED UNITS CONSISTING OF SEALED LITES OF GLASS SEPARATED BY A DEHYDRATED INTERSPACE, AND COMPLYING WITH ASTM E 774 FOR CLASS CBA UNITS AND WITH REQUIREMENTS SPECIFIED IN THIS ARTICLE.
 - a. PROVIDE KIND HS (HEAT-STRENGTHENED) FLOAT GLASS IN PLACE OF ANNEALED GLASS WHERE NEEDED TO RESIST THERMAL STRESSES INDUCED BY DIFFERENTIAL SHADING OF INDIVIDUAL GLASS LITES AND TO COMPLY WITH GLASS DESIGN REQUIREMENTS SPECIFIED IN "PERFORMANCE REQUIREMENTS" ARTICLE. PROVIDE KIND FT (FULLY TEMPERED) WHERE SAFETY GLASS IS INDICATED.
 - 2. OVERALL UNIT THICKNESS AND THICKNESS OF EACH LITE: DIMENSIONS INDICATED IN THE GLASS SCHEDULE ARE NOMINAL AND THE OVERALL THICKNESSES OF UNITS MEASURED PERPENDICULARLY FROM OUTER SURFACES OF GLASS LITES AT UNITS' EDGE.
 - 3. SEALING SYSTEM: DUAL SEAL, WITH PRIMARY AND SECONDARY SEALANTS AS FOLLOWS:
 - a. RETAIN ONE SEALANT SYSTEM BELOW OR REVISE TO INSERT OTHER COMBINATIONS; CORRELATE WITH PRODUCTS/MANUFACTURERS SELECTED.
 - 1) MANUFACTURER'S STANDARD SEALANTS.
 - 4. SPACER SPECIFICATIONS: MANUFACTURER'S STANDARD SPACER MATERIAL AND CONSTRUCTION COMPLYING WITH THE FOLLOWING REQUIREMENTS:
 - a. ALUMINUM WITH CLEAR ANODIZED ALUMINUM FINISH.
 - b. DESICCANT: MOLECULAR SIEVE OR SILICA GEL OR BLEND OF BOTH.
 - c. CORNER CONSTRUCTION: MANUFACTURER'S STANDARD CORNER CONSTRUCTION.
 - 5. LOW E - SPUTTER-COATED FLOAT GLASS; ASTM C1376 APPLIED TO SURFACE #2
- F. SPANDREL GLASS: REFER TO EXTERIOR MATERIALS AND FINISHES SCHEDULE ON DRAWINGS.
- G. MISCELLANEOUS GLAZING MATERIALS
 - 1. GENERAL: PROVIDE PRODUCTS OF MATERIAL, SIZE, AND SHAPE COMPLYING WITH REFERENCED GLAZING STANDARD, REQUIREMENTS OF MANUFACTURERS OF GLASS AND OTHER GLAZING MATERIALS FOR APPLICATION INDICATED, AND WITH A PROVEN RECORD OF COMPATIBILITY WITH SURFACES CONTACTED IN INSTALLATION.
 - 2. CLEANERS, PRIMERS, AND SEALERS: TYPES RECOMMENDED BY SEALANT OR GASKET MANUFACTURER
 - 3. SETTING BLOCKS: ELASTOMERIC MATERIAL WITH A SHORE TYPE A DUROMETER HARDNESS OF 85, +/- 5.
 - 4. SPACERS: ELASTOMERIC BLOCKS OR CONTINUOUS EXTRUSIONS WITH A SHORE TYPE A DUROMETER HARDNESS REQUIRED BY GLASS MANUFACTURER TO MAINTAIN GLASS LITES IN PLACE FOR INSTALLATION INDICATED.
 - 5. EDGE BLOCKS: ELASTOMERIC MATERIAL OF HARDNESS NEEDED TO LIMIT GLASS LATERAL MOVEMENT (SIDE WALKING).
- H. FABRICATION OF GLASS AND OTHER GLAZING PRODUCTS
 - 1. FABRICATE GLASS AND OTHER GLAZING PRODUCTS IN SIZES REQUIRED TO GLAZE OPENINGS INDICATED FOR PROJECT, WITH EDGE AND FACE CLEARANCES, EDGE AND SURFACE CONDITIONS, AND BITE COMPLYING WITH WRITTEN INSTRUCTIONS OF PRODUCT MANUFACTURER AND REFERENCED GLAZING STANDARD, TO COMPLY WITH SYSTEM PERFORMANCE REQUIREMENTS.
 - 2. GRIND SMOOTH AND POLISH EXPOSED GLASS EDGES.
- I. EXAMINATION
 - 1. EXAMINE FRAMING GLAZING, WITH INSTALLER PRESENT, FOR COMPLIANCE WITH THE FOLLOWING.
 - a. MANUFACTURING AND INSTALLATION TOLERANCES, INCLUDING THOSE FOR SIZE, SQUARENESS, AND OFFSETS AT CORNERS.
 - b. PRESENCE AND FUNCTIONING OF WEEP SYSTEM.
 - c. MINIMUM REQUIRED FACE OR EDGE CLEARANCES.
 - d. EFFECTIVE SEALING BETWEEN JOINTS OF GLASS-FRAMING MEMBERS.
 - 2. PROCEED WITH INSTALLATION ONLY AFTER UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

- J. PREPARATION
 1. CLEAN GLAZING CHANNELS AND OTHER FRAMING MEMBERS RECEIVING GLASS IMMEDIATELY BEFORE GLAZING. REMOVE COATINGS NOT FIRMLY BONDED TO SUBSTRATES.
- K. GLAZING, GENERAL
 1. COMPLY WITH COMBINED WRITTEN INSTRUCTIONS OF MANUFACTURERS OF GLASS, SEALANTS, GASKETS, AND OTHER GLAZING MATERIALS, UNLESS MORE STRINGENT REQUIREMENTS ARE INDICATED, INCLUDING THOSE IN REFERENCED GLAZING PUBLICATIONS.
 2. GLAZING CHANNEL DIMENSIONS, AS INDICATED ON DRAWINGS, PROVIDE NECESSARY BITE ON GLASS, MINIMUM EDGE AND FACE CLEARANCES, AND ADEQUATE SEALANT THICKNESSES, WITH REASONABLE TOLERANCES. ADJUST AS REQUIRED BY PROJECT CONDITIONS DURING INSTALLATION.
 3. PROTECT GLASS EDGES FROM DAMAGE DURING HANDLING AND INSTALLATION. REMOVE DAMAGED GLASS FROM PROJECT SITE AND LEGALLY DISPOSE OF OFF PROJECT SITE. DAMAGED GLASS IS GLASS WITH EDGE DAMAGE OR OTHER IMPERFECTIONS THAT, WHEN INSTALLED, COULD WEAKEN GLASS AND IMPAIR PERFORMANCE AND APPEARANCE.
 4. APPLY PRIMERS TO JOINT SURFACES WHERE REQUIRED FOR ADHESION OF SEALANTS, AS DETERMINED BY PRECONSTRUCTION SEALANT-SUBSTRATE TESTING.
 5. INSTALL SETTING BLOCKS IN SILL RABBETS, SIZED AND LOCATED TO COMPLY WITH REFERENCED GLAZING PUBLICATIONS, UNLESS OTHERWISE REQUIRED BY GLASS MANUFACTURER. SET BLOCKS IN THIN COURSE OF COMPATIBLE SEALANT SUITABLE FOR HEEL BEAD.
 6. DO NOT EXCEED EDGE PRESSURES PER GLASS MANUFACTURERS FOR INSTALLING GLASS LITES.
 - a. PROVIDE SPACERS FOR GLASS LITES WHERE THE LENGTH PLUS WIDTH IS LARGER THAN 50 INCHES. LOCATE SPACERS DIRECTLY OPPOSITE EACH OTHER ON BOTH INSIDE AND OUTSIDE FACES OF GLASS. INSTALL CORRECT SIZE AND SPACING TO PRESERVE REQUIRED FACE CLEARANCES, UNLESS OTHERWISE SPECIFIED. TAPE ARE USED THAT HAVE DEMONSTRATED ABILITY TO MAINTAIN REQUIRED FACE CLEARANCES AND TO COMPLY WITH SYSTEM PERFORMANCE REQUIREMENTS.
 - b. PROVIDE 1/8-IN (3-MM) MINIMUM BITE OF SPACERS ON GLASS AND USE THICKNESS EQUAL TO SEALANT WIDTH, WITH GLAZING TAPE, USE THICKNESS LESS THAN FINAL THICKNESS OF TAPE.
 7. PROVIDE EDGE BLOCKING WHERE INDICATED OR NEEDED TO PREVENT GLASS LITES FROM MOVING SIDEWAYS IN GLAZING CHANNEL. AS RECOMMENDED IN WRITING BY GLASS MANUFACTURER AND ACCORDING TO REQUIREMENTS IN REFERENCED GLAZING PUBLICATIONS.
 8. SET GLASS LITES IN EACH SERIES WITH UNIFORM PATTERN, DRAW, BOW, AND SIMILAR CHARACTERISTICS.
 9. GLASS STOPS ARE EXTRUDED ALUMINUM SNAP-IN TYPE FOR INTERIOR GLAZING OF GLASS OF PANELS 5/8" THICK (CUSTOM STOPS FOR THICKNESS LESS UP TO AN 1" ARE AVAILABLE) AND HAVE A FIXED HIGH QUALITY ELASTOMERIC MATERIAL PERIMETER WOOL PILE AND ELASTOMERIC WEATHER-STRIP IS FACTORY APPLIED.
 10. GLASS MUST HAVE (5) FIVE YEAR WARRANTY AGAINST SEAL FAILURE.
- L. GLASS FINISHES: REFER TO EXTERIOR MATERIALS AND FINISHES SCHEDULE ON DRAWINGS.

STEEL SERVICE DOOR AND FRAME

- A. STEEL DOOR FRAMES: SHALL BE 18 GAUGE STEEL WELDED VERTICAL EDGE, MECHANICAL LOCK NOT ACCEPTED, AS NOTED IN THE DOOR SCHEDULE ON THE DRAWINGS AND AS MANUFACTURED BY BLU MOUNTAIN.
- B. DOOR, SERIES 400, OR EQUAL IF APPROVED BY ARCHITECT.
 1. SEE THE FINISH SCHEDULE, EXTERIOR SCHEDULE AND THIS SHEET FOR APPLICABLE PAINT.
- C. STEEL SILL/LOW MILE DOOR, SHALL BE 1 3/4" THICK, FLUSH TYPE, MINIMUM 18 GAUGE STEEL, FACE DOOR WITH POLYSTYRENE CORE, INSULATION, ETC., AND MANUFACTURED AS FRAMES ABOVE, REFER TO DRAWINGS.
 1. SEE THE FINISH SCHEDULE, EXTERIOR SCHEDULE AND THIS SHEET FOR APPLICABLE PAINT.
- D. FINISH HARDWARE: DOORS SHALL BE PREPARED TO RECEIVE HEAVY-DUTY HARDWARE. SEE HARDWARE SCHEDULE ON DRAWINGS FOR HARDWARE SPECIFICATIONS.

PREFINISHED DOORS

- A. LAMINATE DOORS: TO BE 1 3/4" SOLID CORE PRE-HUNG DOORS AS MANUFACTURED BY MARLITE PRODUCTS. DOORS OF THIS TYPE TO BE FINISHED IN HIGH PRESSURE LAMINATE FURNISHED COMPLETE WITH ADJUSTABLE ALUMINUM FRAME AND HARDWARE.
 1. SEE DOOR SCHEDULE FOR HARDWARE SPECIFICATIONS.

PICK-UP WINDOW

- A. ANODIZED ALUMINUM, DARK BRONZE ANODIZED ALUMINUM FINISH.
- B. VERIFY CONSTRUCTION IS READY TO RECEIVE PICK UP WINDOW. VERIFY ROUGH OPENINGS ARE CORRECT SIZE AND IN CORRECT LOCATION. ORIENT PICK UP WINDOW SO THAT THE OPENING MATCHES THE BUILDING ELEVATION.

BASIS OF DESIGN: QUICK-SERV

EXAMINE ROUGH-IN FOR EMBEDDED AND BUILT-IN ANCHORS TO VERIFY ACTUAL LOCATIONS OF SECURITY WINDOW CONNECTIONS BEFORE SECURITY WINDOW INSTALLATION. CONTRACTOR TO PROVIDE ANCHOR SCREWS.

INSPECT BUILT-IN AND CAST-IN ANCHOR INSTALLATIONS, BEFORE INSTALLING SECURITY WINDOWS, TO VERIFY THAT ANCHOR INSTALLATIONS COMPLY WITH REQUIREMENTS. REMOVE AND REPLACE ANCHORS WHERE INSPECTIONS INDICATE THAT THEY DO NOT COMPLY WITH SPECIFIED REQUIREMENTS. REINSPECT AFTER REPAIRS OR REPLACEMENTS ARE MADE.

FOR GLAZING MATERIALS WHOSE ORIENTATION IS CRITICAL FOR PERFORMANCE, VERIFY INSTALLATION ORIENTATION. PROCEED WITH INSTALLATION ONLY AFTER UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED.

FURNISH FRAMES AND ANCHORS TO OTHER SECTIONS AS REQUIRED FOR INSTALLATION IN SURROUNDING PARTITION AND CASEWORK CONSTRUCTION.

INSTALL PICK UP WINDOW IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.

ALIGN PICK UP WINDOW PLUMB, LEVEL AND SQUARE.

RIGIDLY SECURE PICK UP WINDOW TO ADJACENT SUPPORTING CONSTRUCTION.

GLAZE WINDOWS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS

SEAL PERIMETER JOINTS

CONNECT ELECTRICAL COMPONENTS TO POWER SOURCE.

PROTECTION: WHERE DISSIMILAR METALS WILL CONTACT EACH OTHER, PROTECT AGAINST GALVANIC ACTION BY PAINTING CONTACT SURFACES WITH PRIMER OR BY APPLYING SEALANT OR TAPE RECOMMENDED IN WRITING BY MANUFACTURER FOR THIS PURPOSE. WHERE ALUMINUM WILL CONTACT CONCRETE OR MASONRY, PROTECT AGAINST CORROSION BY PAINTING CONTACT SURFACES WITH BITUMINOUS PAINT.

ACCESS DOOR

- A. GALVANIZED STEEL, 16 GA., 1/4"x24" GREY ENAMEL PRIMED DOOR AND FRAME, INSULATED DOOR, 1/2" WALL, 1/4" BRGS. WOOD, EXT 1-3000 WITH CONTINUOUS HINGE, GASKET AND KEYED CYLINDER LOCK WITH TEE HANDLE.

WALL LOUVER

- A. STATIONARY WIND-DRIVEN RESISTANT LOUVER: RUSKIN (816-761-7476), MODEL EM222-D, 6"x24" MILD-FINISH ALUMINUM, OR APPROVED EQUAL. FIELD PAINTED AS NOTED ON DRAWINGS.

DIVISION 9 - FINISHES

FLOOR AND WALL TILE INSTALLATION

- A. PROVIDE TILE WORK COMPLETE IN PLACE AS INDICATED ON DRAWINGS, SPECIFIED HEREIN.
- B. TILE WORK SHALL BE SUBJECT TO PERFORMANCE STANDARDS AS SET BY THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) SPECIFICATION A-137-J-80 FOR TERRAZZO, TILE, MOSAIC ASSOC OF CANADA (TTMAC) FOR CURRENT HANDBOOK FOR CERAMIC TILE INSTALLATION.
- C. DELIVER MATERIAL TO THE JOB SITE AND STORE IN ORIGINAL UNOPENED CARTONS WITH LABELS INTACT AND LEGIBLE.
- D. TILE SHOULD BE STORED IN A DRY COVERED AREA.
- E. TILE SHALL BE STANDARD GRADE IN ACCORDANCE WITH SPECIFICATIONS PUBLISHED BY ANSI A-137-J-80 FOR CERAMIC TILE OR CTI-69-5 FOR SPECIAL PURPOSE TILE.
 1. EXTERIOR DECORATIVE WALL TILE: SEE FINISH SCHEDULE.
 2. INTERIOR FLOOR TILE: SEE FINISH SCHEDULE.

F. FILE SETTING, GROUTING MATERIALS, AND WATERPROOFING MEMBRANE:

- 1. BASIS-OF-DESIGN: LATICRETE INTERNATIONAL, INC.
- 2. APPROVED EQUAL: MAPEI CORPORATION.

G. [MR-1] MODIFIED-PORTLAND CEMENT THIN SET MORTAR: ISO 13007: C2PE1 / C2TES1PA AND ANSI A118.15.

- 1. PRODUCTS: LATICRETE: 254 PLATINUM THINSET OR MAPEI: ULTRA FLEX 2.

H. [MR-2] MEDIUM BED, MODIFIED-PORTLAND CEMENT THIN SET MORTAR: ISO 13007: C2PE1 / C2TES1PA AND ANSI A118.15 AND CAPABLE OF BEING INSTALLED UP TO 1/4 INCH THICK.

- 1. PRODUCTS: LATICRETE: 4XLT OR MAPEI: ULTRA FLEX LT.

I. [GR-1] POLYMER-MODIFIED HIGH PERFORMANCE CEMENT TILE GROUT: ISO 13007: CG-2WAF AND ANSI A118.7.

- 1. PRODUCTS: FOR JOINTS 1/8-INCH OR WIDER (SANDED GROUT): LATICRETE: PERMACOLOR; ULTRACOLOR PLUS.
- 2. COLORS: SEE INTERIOR AND EXTERIOR FINISH SCHEDULES.

J. [WM-1] INTERIOR WATERPROOFING MEMBRANE: COMPLY WITH ANSI A118.10, ADJOINING FLOOR AND WALL AREAS AT MOP SINK LOCATIONS OR WHERE INDICATED ON DRAWINGS, AND ELSEWHERE AS REQUIRED FOR WATERPROOFING TILE ASSEMBLY AS SPECIFIED IN ANSI A108.13.

- 1. PRODUCTS: LATICRETE: HYDROBAN OR MAPEI: AQUA DEFENSE.

K. THRESHOLDS: PROVIDE THRESHOLDS TO ADJUST BETWEEN TILE AND OTHER FLOOR FINISHES.

L. ACCEPTABILITY OF SURFACES: SURFACES TO BE TILED SHALL BE SMOOTH AND LEVEL FOR MORTAR BED AT THE REQUIRED FINISH ELEVATION, AND A STEEL TROWEL FINISH WITH A SUGGESTED 1/8" MAXIMUM TEXTURED FINISH WITHOUT MORE THAN THE FOLLOWING MAXIMUM VARIATIONS:

- 1. PORTLAND CEMENT MORTAR: WALLS AND CEILINGS - 1/4" IN 8"; FLOORS - 1/8" IN 10'-0".
- 2. DRY SET, LATEX AND CEMENT MORTARS: WALLS AND CEILINGS - 1/8" IN 8"; FLOORS - 1/8" IN 10'-0".

M. PREPARATION: PRIOR TO THE START OF LAYING TILE, SWEEP OR VACUUM AND WASH SURFACES TO BE COVERED. SURFACE SHOULD BE FREE FROM COATING, CURING COMPOUNDS, OIL, GREASE, WAX AND DUST.

N. JOB CONDITIONS: A MINIMUM TEMPERATURE OF 50 DEGREES F (10 DEGREES C) SHOULD BE MAINTAINED DURING TILE WORK AND FOR SEVEN (7) DAYS THEREAFTER. PROVIDE ADEQUATE LIGHTING FOR GOOD GROUTING AND CLEAN-UP.

O. LAYOUT OF WORK: INTERIOR WALL AND FLOOR FINISH LAYOUTS AND PATTERNS FOR KITCHEN, RESTROOMS AND DINING ROOM SHALL BE AS SHOWN ON INTERIOR ELEVATIONS AND FLOOR PLANS. REFER TO THE FINISH SCHEDULE TO DETERMINE LOCATIONS OF MOVEMENT (EXPANSION) JOINTS BEFORE STARTING TILE WORK. LAYOUT TILE WORK SO AS TO MINIMIZE CUTS LESS THAN ONE HALF TILE IN SIZE. LOCATE CUTS IN BOTH WALLS AND FLOORS SO AS TO BE AT LEAST CONSPICUOUS.

P. SETTING METHODS: SET TO TILE COUNCIL OF AMERICA SPECIFICATIONS WALLS W242-96 AND FLOORS F113-98.

Q. GROUTING: FOLLOW MANUFACTURER'S RECOMMENDATIONS AS TO GROUTING PROCEDURES AND PRECAUTIONS. REMOVE GROUT HAZE, OBSERVING GROUT MANUFACTURER'S INSTRUCTIONS. REMOVE GROUT AS TO THE USE OF VARIOUS CLEANERS. FLOOR TILE GROUT TO BE 1/4" WIDE; WALL TILE GROUT TO BE 1/16" WIDE.

R. FINISHING: THOROUGHLY RINSE TILE WORK. USE NEUTRAL CLEANER WITH ABRASIVE ADDITIVE (WALTER G. LEGG'S "TEXSPAR" OR EQUAL) FOR FINAL CLEANING. ACID CLEANERS ARE NOT RECOMMENDED EXCEPT AS NOTED.

- 1. USE MIXTURE OF 75% WATER AND 25% MAPEI CARACLEAN TO CLEAN TILE SURFACE (EQUAL LATICRETE TILE CLEANER 1:3 DILUTION RATIO). APPLY AND BUFF.
- 2. USE PHOSPHORIC ACID OR SULFAMIC ACID ONLY FOR REMOVAL OF GROUT RESIDUE. DO NOT USE MURIATIC ACID.

GYPSUM DRYWALL

- A. FURNISH MATERIAL AND LABOR NECESSARY TO PROVIDE FINISHED DRYWALL SURFACES IN AREAS SCHEDULED TO RECEIVE THIS FINISH ON THE DRAWINGS. TAPE, SPACKLE AND SAND SURFACES TO RECEIVE PAINT. REPEAT AS REQUIRED.
- B. DRYWALL AND FINISH MATERIALS SHALL BE STANDARD PRODUCTS MANUFACTURED BY US GYPSUM. NATIONAL GYPSUM OR GOLD BOND GYPSUM COMPANY.

SUSPENDED CEILING SYSTEM

- A. FURNISH MATERIALS AND LABOR TO PROVIDE A COMPLETE SUSPENDED CEILING INCLUDING CEILING TILE, HANGERS, GRID TIES, AND MOLDINGS.
- B. ACOUSTICAL CEILING MATERIALS IN CORRIDOR AT RESTROOMS, RE: CT-2 ON FINISH SCHEDULE.
- C. CEILING IN THE KITCHEN, RE: CT-1 ON FINISH SCHEDULE.
- D. THE CEILING IN THE RESTROOM SHALL BE SMOOTH, PAINTED GYPSUM DRYWALL.
- 1. COLOR: SEE THE FINISH SCHEDULE.

NON-TILE FIBERGLASS REINFORCED POLYESTER (FRP) PANELS

- A. NON TILE WALL FINISH FRP (FOOD PREP AREA): SEE FINISH SCHEDULE.
- B. TEXTURED FIBERGLASS REINFORCED POLYESTER (FRP) PANELS IN BATHARY WALL SYSTEMS TO BE FRP PANEL. INSTALL 4'X9'X1/8" PANEL WITH HARMONIZING PVC MOLDINGS, ADHESIVE AND SEALANTS IN STRICT ACCORDANCE WITH MANUFACTURERS WRITTEN INSTALLATION INSTRUCTIONS.
- C. NON-TILE WALL FINISH (DINING ROOM AREA): SEE FINISH SCHEDULE.

PAINTING

- A. PROVIDE MATERIALS, LABOR, TOOLS AND EQUIPMENT REQUIRED TO COMPLETE THE PAINTING OF BUILDING AS SPECIFIED.
- B. WORKMANSHIP:
 - 1. MATERIALS SHALL BE APPLIED FREE FROM RUNS, SAGS, WRINKLES, STREAKS, SHINERS AND BRUSH MARKS.
 - 2. MATERIALS SHALL BE APPLIED UNIFORMLY. IF REDUCTION OF THE COATINGS VISCOSITY IS NECESSARY, IT SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S LABEL DIRECTIONS.
 - 3. PUTTY, PLASTER AND OTHER MASONRY SURFACES SHALL NOT BE PRIMED UNTIL IT HAS BEEN DETERMINED THESE SUBSTRATES HAVE DRIED SUFFICIENTLY TO SAFELY ACCEPT PAINT. A RELIABLE ELECTRONIC MOISTURE METER SHOULD BE USED TO MAKE THIS DETERMINATION. UNACCEPTABLE MOISTURE CONTENT SHOULD BE REPORTED TO THE ARCHITECT OR HIS REPRESENTATIVE.
 - 4. A MINIMUM INTERIOR TEMPERATURE OF 65 DEGREES F SHALL BE MAINTAINED DURING THE ACTUAL APPLICATION AND DRYING OF THE PAINT, AND UNTIL OCCUPANCY OF THE BUILDING OCCURS. ADEQUATE VENTILATION SHALL BE MAINTAINED TO CONTROL EXCESSIVE HUMIDITY WHICH WILL ADVERSELY AFFECT THE CURING OF COATINGS. THE GENERAL CONTRACTOR IS SOLELY RESPONSIBLE FOR MAINTAINING SUITABLE TEMPERATURES AND VENTILATION.
 - 5. BEFORE PAINTING BEGINS, VERIFY WORK THAT CREATES DUST OR DEBRIS HAS BEEN COMPLETED. THE ROOMS OR AREAS ARE TO BE LEFT IN BROOM CLEAN CONDITION.
 - 6. ENAMEL AND VARNISH UNDERCOATS ARE TO BE SANDED PRIOR TO THE RECOATING. TOP AND BOTTOMS OF DOORS ARE TO BE FINISHED IN THE SAME MANNER AS DOOR FACING.
 - 7. NO EXTERIOR PAINTING SHALL BE UNDERTAKEN IF AIR OR SURFACE TEMPERATURE IS BELOW 50 DEGREES F, NOR IMMEDIATELY FOLLOWING RAIN OR UNTIL FROST, DEW OR CONDENSATION HAS EVAPORATED. SURFACES SHOULD ALWAYS BE TESTED WITH MOISTURE METER BEFORE PROCEEDING.
- C. PREPARATION OF SURFACES:
 - 1. DO NOT COMMENCE WORK UNTIL SURFACE IS IN PROPER CONDITION.
 - 2. SURFACES ARE TO BE CLEAN. IF FOR ANY REASON THE SURFACE CANNOT BE CLEANED, THIS CONDITION SHALL BE PROMPTLY REPORTED TO THE GENERAL CONTRACTOR AND OWNER.
 - 3. PRIME COAT SHOULD BE APPLIED SOON AFTER SURFACE PREPARATION HAS BEEN COMPLETED, TO PREVENT CONTAMINATION OF THE SUBSTRATE.
- D. INSPECTION: WORK NOT CONFORMING TO THE SPECIFICATIONS OR NOT MEETING WITH THE APPROVAL OF THE OWNER, SHALL BE REMOVED OR CORRECTED AND/OR REPAINTED AS APPROVED BY THE OWNER.

PAINT SCHEDULE

- A. EXTERIOR ITEMS: REFER TO EXTERIOR FINISH SCHEDULE.
- B. INTERIOR WOOD TRIM: REFER TO FINISH SCHEDULE.

PATIO CONCRETE SLAB

- A. CONCRETE SLAB TO BE A MINIMUM OF 5" THICK - VERIFY SLAB REQUIREMENTS WITH GEOTECHNICAL REPORT.
- B. BROOM FINISHED CONCRETE WITH TROWELED EDGES.
- C. CONCRETE SEALER: "SCOFIELD" CEMENTONE CLEAR SEALER. APPLY PER MANUFACTURER'S RECOMMENDATIONS.
- D. CONCRETE COLOR HARDENER: "SCOFIELD" LITHOCHROME, A33 "CLASSIC GREY" APPLY PER MANUFACTURER'S RECOMMENDATIONS.

[illegible]

