

EVERNORTH HEALTH SERVICES
EVERNORTH - ELGIN PHARMACY
ISSUE FOR PERMIT



CORGAN
401 North Houston Street, Dallas TX
7520
T: 972-852-1270

SHEET LIST

SHEET INDEX			ISSUE FOR PERMIT
SHEET NO.	SHEET NAME		
01 - GENERAL			
COVER	COVER SHEET		■
G01-01	LIFE SAFETY PLAN		■
08 - ARCHITECTURE			
A00-00	STANDARDS AND SYMBOLS		■
A00-01	DEMO FLOOR PLAN		■
A00-09	DEMO REFLECTED CEILING PLAN		■
A00-R	DEMO ROOF PLAN		■
A01-01	SITE PLAN		■
A01-02	ENLARGED SITE PLAN & DETAILS		■
A02-00A	PARTITION TYPES & SCHEDULES		■
A02-01	FLOOR PLAN		■
A02-01A	FLOOR PLAN - SEGMENT A		■
A02-01B	FLOOR PLAN - SEGMENT B		■
A02-R	ROOF PLAN		■
A03-01	REFLECTED CEILING PLAN		■
A03-01A	REFLECTED CEILING PLAN - SEGMENT A		■
A03-01B	REFLECTED CEILING PLAN - SEGMENT B		■
A04-00	RESTROOM TYPES AND RESTROOM ACCESSORIES		■
A07-01	INTERIOR ELEVATIONS		■
A07-21	INTERIOR DETAILS		■
A07-42	MILLWORK SECTIONS		■
A08-01	DOOR SCHEDULE		■
A09-01	FINISH FLOOR PLAN		■
A10-01	FF&E FLOOR PLAN		■
11 - MECHANICAL			
M00-01	MECHANICAL SYMBOLS AND ABBREVIATIONS		■
M00-02	MECHANICAL CODE COMPLIANCE		■
MD02-01	HVAC DEMOLITION PLAN - LEVEL ONE		■
MD02-01A	HVAC DEMOLITION PLAN - LEVEL ONE - SEGMENT A		■
MD02-01B	HVAC DEMOLITION PLAN - LEVEL ONE - SEGMENT B		■
MD02-02	HVAC DEMOLITION PLAN - ROOF		■
MD02-02A	HVAC DEMOLITION PLAN - ROOF - SEGMENT A		■
MD02-02B	HVAC DEMOLITION PLAN - ROOF - SEGMENT B		■
M02-01	HVAC PLAN - LEVEL ONE		■
M02-01A	HVAC PLAN - LEVEL ONE - SEGMENT A		■
M02-01B	HVAC PLAN - LEVEL ONE - SEGMENT B		■
M02-02	HVAC PLAN - ROOF		■
M02-02A	HVAC PLAN - ROOF - SEGMENT A		■
M02-02B	HVAC PLAN - ROOF - SEGMENT B		■
M03-01	PIPING PLAN - LEVEL ONE		■
M03-01A	PIPING PLAN - LEVEL ONE - SEGMENT A		■
M03-01B	PIPING PLAN - LEVEL ONE - SEGMENT B		■
M07-01	MECHANICAL RISER DIAGRAM		■
M08-01	MECHANICAL DETAILS		■
M09-01	MECHANICAL SCHEDULES		■
12 - PLUMBING			
P00-01	PLUMBING SYMBOLS AND ABBREVIATIONS		■
PD02-01	PLUMBING DEMOLITION PLAN - LEVEL ONE		■
PD02-02	PLUMBING DEMOLITION PLAN - ROOF		■
P02-01	PLUMBING PLAN - LEVEL ONE		■
P02-01A	PLUMBING PLAN - LEVEL ONE - SEGMENT A		■
P02-01B	PLUMBING PLAN - LEVEL ONE - SEGMENT B		■
P02-02	PLUMBING PLAN - ROOF		■
P07-01	PLUMBING RISER DIAGRAM		■
P09-01	PLUMBING SCHEDULES		■
13 - ELECTRICAL			
E00-01	ELECTRICAL SYMBOLS AND ABBREVIATIONS		■
ED02-01	LIGHTING DEMOLITION PLAN - LEVEL ONE		■
ED02-01A	LIGHTING DEMOLITION PLAN - LEVEL ONE - SEGMENT A		■
ED02-01B	LIGHTING DEMOLITION PLAN - LEVEL ONE - SEGMENT B		■
ED03-01	POWER DEMOLITION PLAN - LEVEL ONE		■
ED03-01A	POWER DEMOLITION PLAN - LEVEL ONE - SEGMENT A		■
ED03-01B	POWER DEMOLITION PLAN - LEVEL ONE - SEGMENT B		■
ED03-02	POWER DEMOLITION PLAN - ROOF		■
E02-01	LIGHTING PLAN - LEVEL ONE		■
E02-01A	LIGHTING PLAN - LEVEL ONE - SEGMENT A		■
E02-01B	LIGHTING PLAN - LEVEL ONE - SEGMENT B		■
E03-01	POWER PLAN - LEVEL ONE		■
E03-01A	POWER PLAN - LEVEL ONE - SEGMENT A		■
E03-01B	POWER PLAN - LEVEL ONE - SEGMENT B		■
E03-02	POWER PLAN - ROOF		■
E03-02A	POWER PLAN - ROOF - SEGMENT A		■
E03-02B	POWER PLAN - ROOF - SEGMENT B		■
E07-01	ELECTRICAL ONE-LINE DIAGRAMS		■
E08-01	ELECTRICAL DETAILS AND SCHEDULES		■
E010-00	PANELBOARD SCHEDULES - 480V		■
E010-01	PANELBOARD SCHEDULES - 208V		■

CODE INFORMATION

PROJECT DATA AND CODE INFORMATION

PROJECT DATA

PROJECT NAME:	EVERNORTH - ELGIN PHARMACY
PROJECT ADDRESS:	300 AIRPORT RD. SUITE 4 ELGIN, IL 60123
OWNER:	EVERNORTH HEALTH SERVICES

APPLICABLE CODES

BUILDING CODE:	2021 INTERNATIONAL BUILDING CODE WITH AMENDMENTS
ACCESSIBILITY CODE:	2018 STATE OF ILLINOIS ACCESSIBILITY CODE
ELECTRICAL CODE:	2020 NATIONAL ELECTRICAL CODE WITH AMENDMENTS
ENERGY CODE:	2021 STATE OF ILLINOIS ENERGY CONSERVATION CODE WITH AMENDMENTS
FIRE CODE:	2021 INTERNATIONAL FIRE CODE WITH AMENDMENTS
MECHANICAL CODE:	2023 INTERNATIONAL MECHANICAL CODE WITH AMENDMENTS
PLUMBING CODE:	2014 STATE OF ILLINOIS PLUMBING CODE WITH AMENDMENTS
REGIONAL OR MUNICIPAL CODE:	ELGIN MUNICIPAL CODE

LIFE SAFETY INFORMATION

REFERENCE

USE OR OCCUPANCY CLASSIFICATION

SECTION 304 & 311

OCCUPANCY:	B BUSINESS AND F-1 FACTORY INDUSTRIAL GROUP
	S-1 FUTURE SHELL SPACE

TYPE OF CONSTRUCTION

SECTION 602.2

CONSTRUCTION TYPE:	II-B
	SPRINKLERED

FIRE PROTECTION REQUIREMENTS

SECTION 601

BEARING WALLS: INT./EXT.	0
NONBEARING WALLS: INT./EXT.	0
ROOF / CEILING:	0
FLOOR / CEILING:	0
STRUCTURAL FRAME / COLUMNS:	0

RATED SEPARATIONS:	1 HR BETWEEN TENANTS	SECTION 508.4
	0 HR BETWEEN B, S-1, AND F-1	

DESIGN LIMITATIONS

	MAX. ALLOWED	MAX. PROVIDED	
HEIGHT:	75' - 0"	38' - 0"	SECTION 504.3
AREA:	70000 SF	40072 SF	SECTION 506.2

MEANS OF EGRESS

	MAX. ALLOWED	MAX. PROVIDED	
TRAVEL DISTANCE TO EXIT - (B):	300' - 0"	110' - 4"	
TRAVEL DISTANCE TO EXIT - (F-1):	250' - 0"	113' - 8"	
TRAVEL DISTANCE TO EXIT - (S-1):	250' - 0"	199' - 5"	
TOTAL OCCUPANT LOAD:	OLF (B) 150	46 OCCUPANTS	SECTION 1004.5
	OLF (F-1) 100	167 OCCUPANTS	
	OLF (S-1) 300	57 OCCUPANTS	
		270	

EGRESS WIDTH PER OCCUPANT

	MIN. ALLOWED	PROVIDED	
DOORS:	4' - 6"	5' - 0"	SECTION 1005
	270 OCCS * 0.2"		

DEFERRED SUBMITTALS

THE FOLLOWING ITEMS SHALL BE SUBMITTED FOR DEFERRED REVIEW:

1. FIRE ALARM
2. FIRE SPRINKLER
3. ACCESS CONTROL
4. WALK-IN COOLER / FREEZER
5. STRUCTURAL DRAWINGS

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

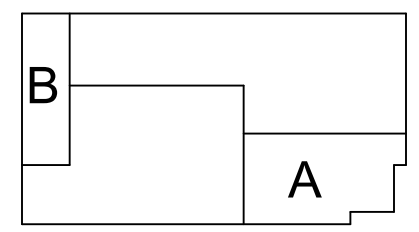

PROJECT TEAM

ARCHITECT

CORGAN
401 North Houston Street, Dallas TX 7520
T: 972-852-1270
CONTACT: Beth Wilson
EMAIL: beth.wilson@corgan.com

STRUCTURAL


MBJ
116 East University Drive, Suite 500 Tempe, AZ 85281
T: 480-747-6721
CONTACT: Kurt Kindermann
EMAIL: k.kindermann@mbjeng.com

M E P

AFFILIATED ENGINEERS,
INC
4742 North 24th, Suite 100 Phoenix, AZ 85016
T: 602-429-5800
CONTACT: James Derrickson, PE
EMAIL: jderrickson@aeieng.com


COVER SHEET

COVER

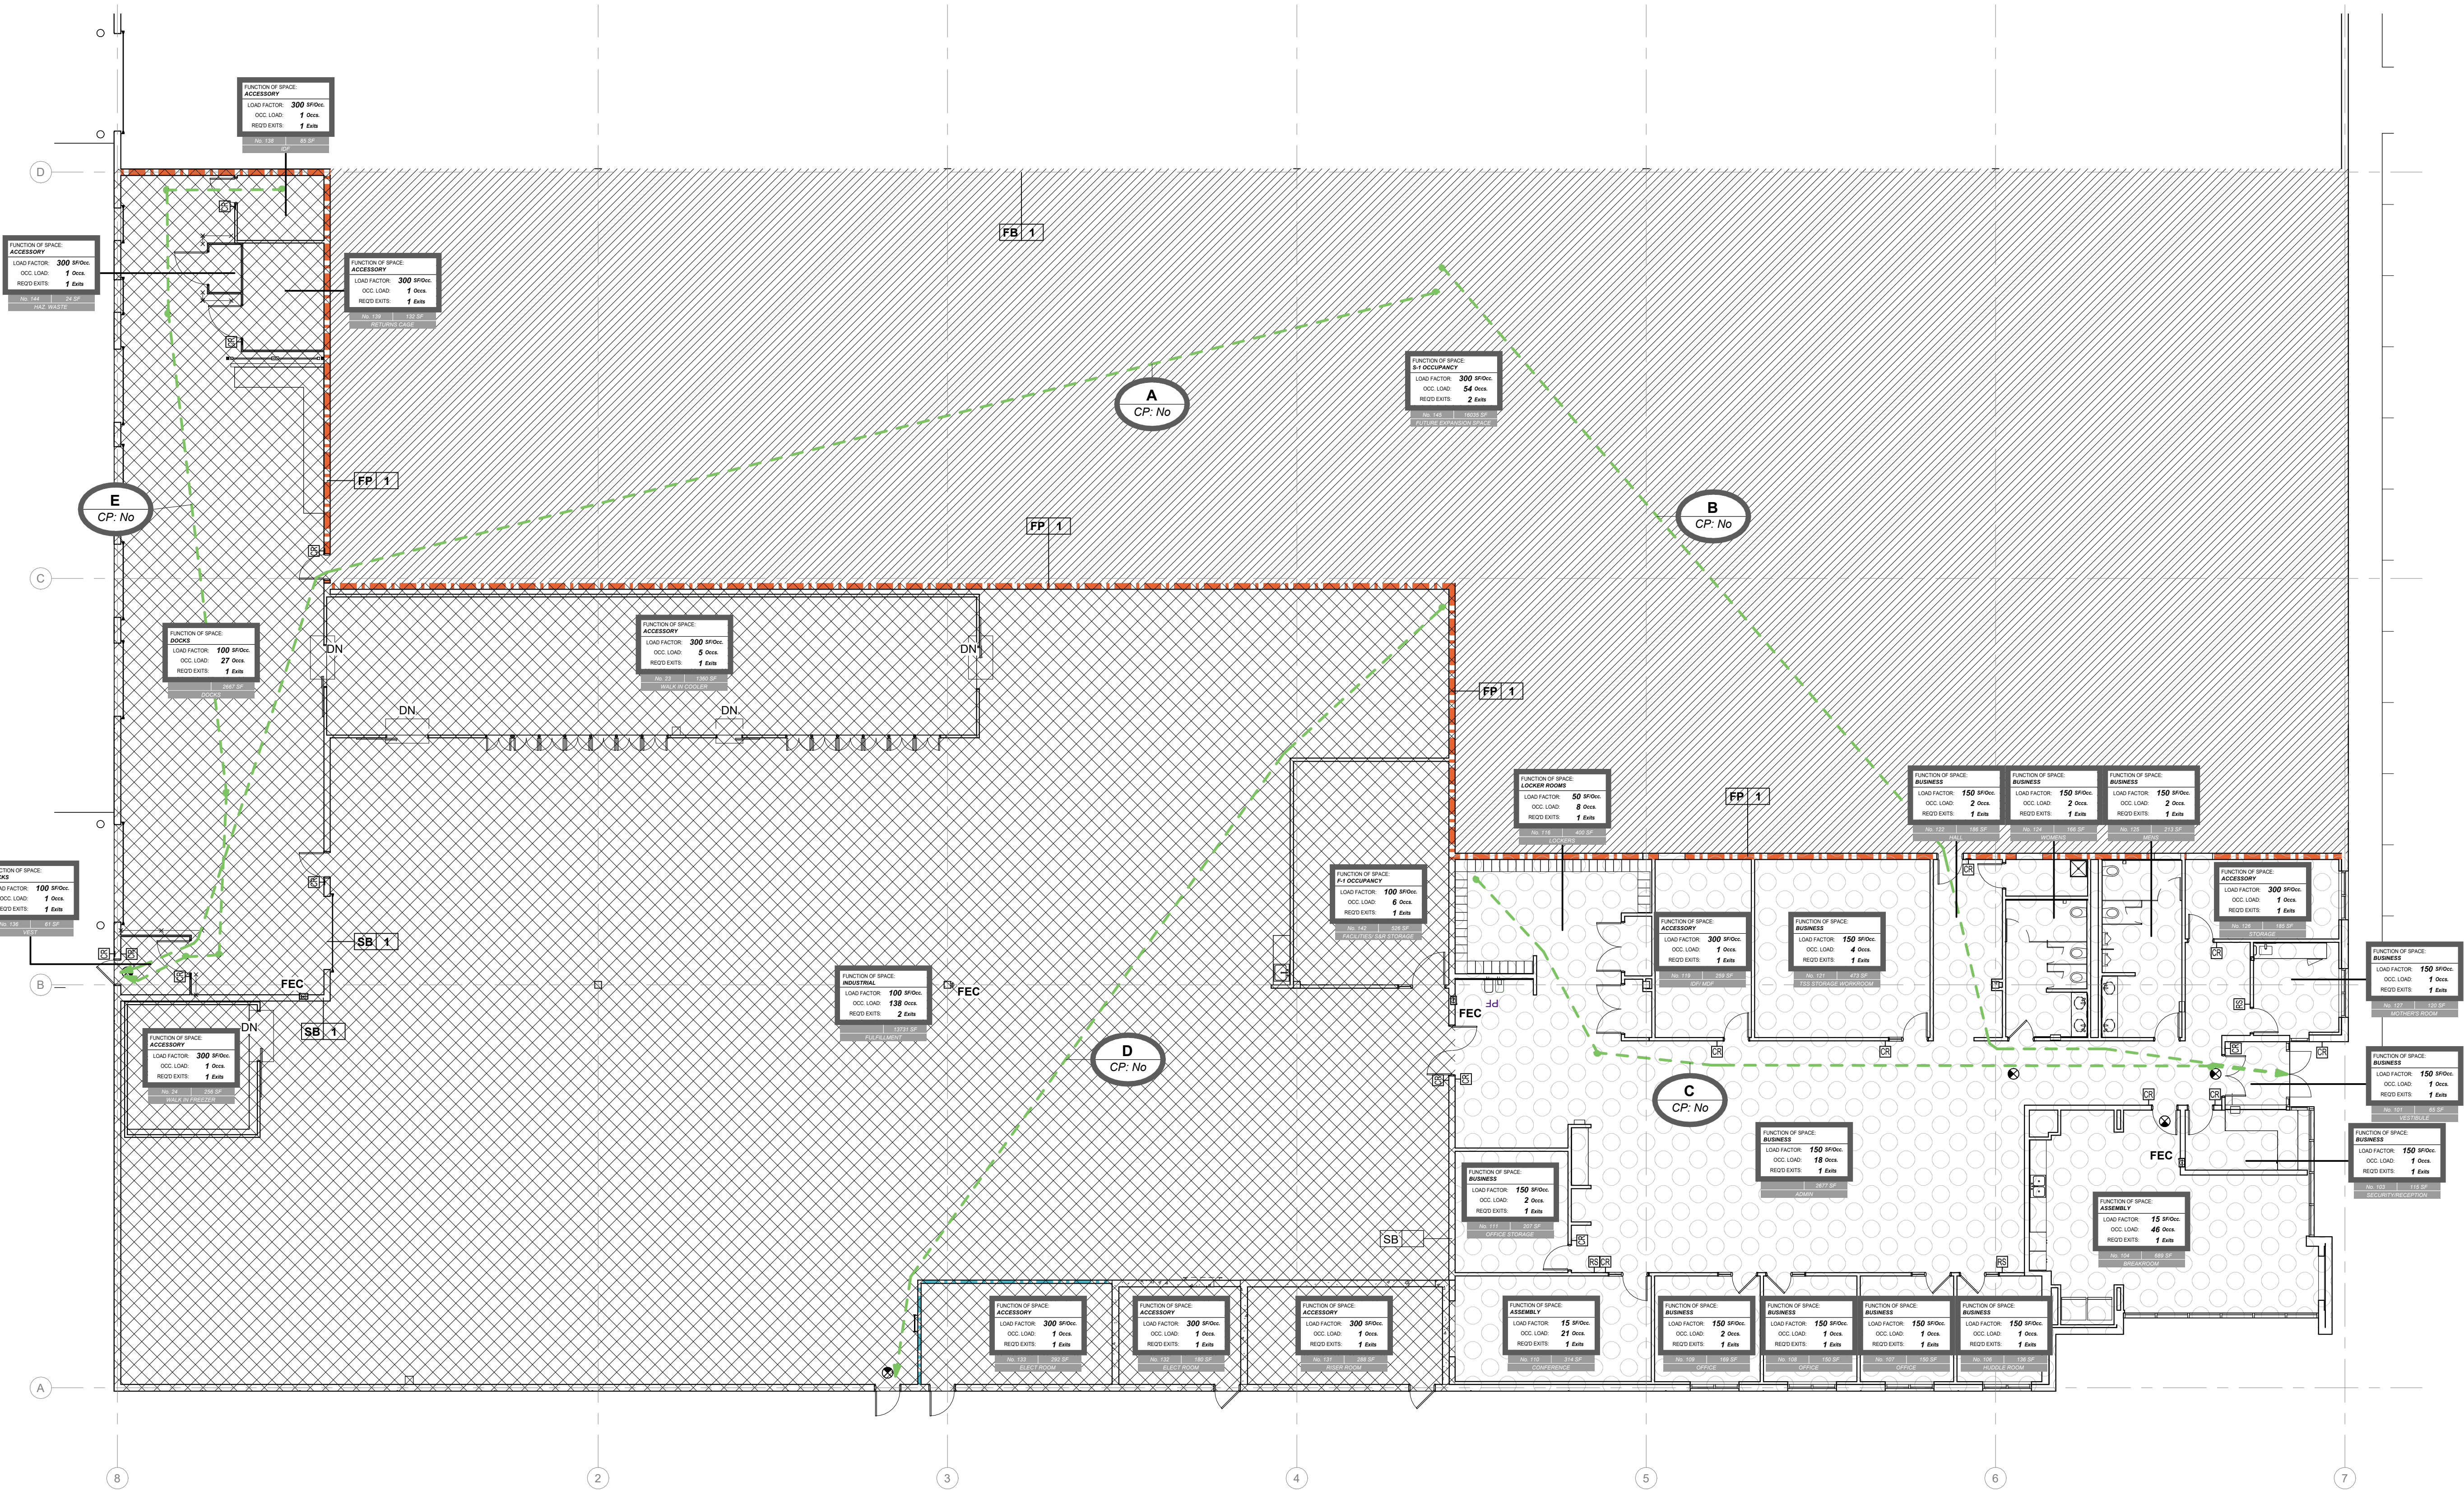

1 FLOOR PLAN - LIFE SAFETY
3/32" = 1'-0"


LIFE SAFETY LEGEND

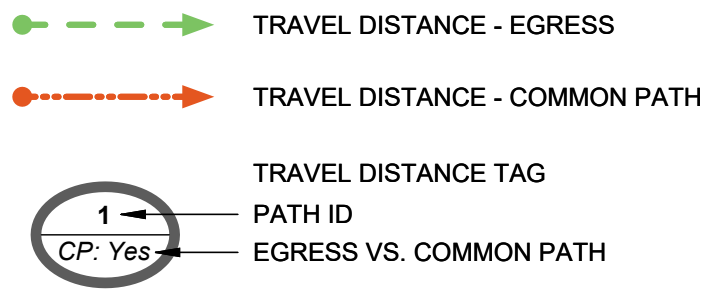

PATH OF TRAVEL DISTANCES

PATH ID	DISTANCE	EGRESS VS. COMMON PATH
A	199' - 5"	EGRESS
B	156' - 2"	EGRESS
C	111' - 3"	EGRESS
D	118' - 0"	EGRESS
E	121' - 1"	EGRESS


SEMI RECESSED FEC DETAIL

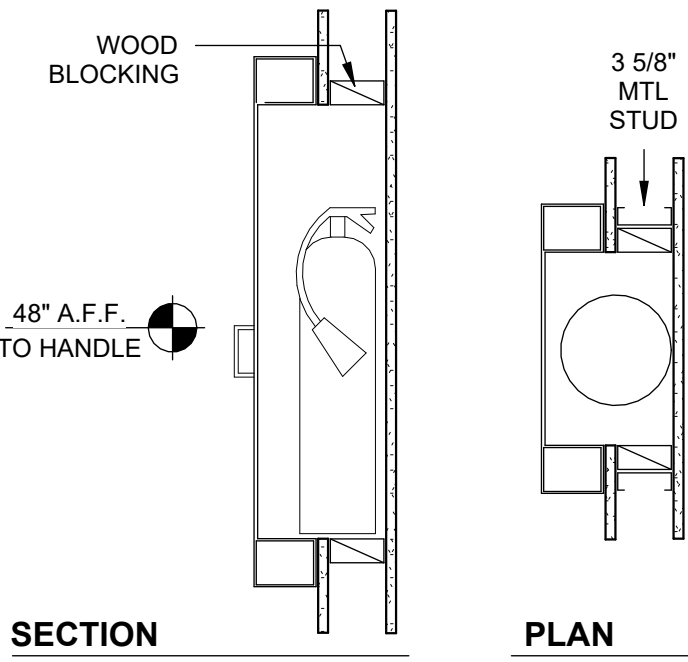


GENERAL LIFE SAFETY NOTES

- WHERE THERE IS AN ACCESSIBLE CONCEALED FLOOR, FLOOR-CEILING OR ATTIC SPACE, FIRE WALLS, FIRE BARRIERS, FIRE PARTITIONS, SMOKE BARRIERS AND SMOKE PARTITIONS OR ANY OTHER WALL REQUIRED TO HAVE PROTECTED OPENINGS OR PENETRATIONS SHALL BE EFFECTIVELY AND PERMANENTLY IDENTIFIED WITH SIGNS OR IDENTIFICATION SHALL:
 - 1) BE LOCATED WITHIN 15 FEET (4572 MM) OF THE END OF EACH WALL AND AT INTERVALS NOT EXCEEDING 30 FEET (9144 MM) MEASURED HORIZONTALLY ALONG THE WALL OR PARTITION.
 - 2) INCLUDE LETTERING NOT LESS THAN 3 INCHES (76MM) IN HEIGHT WITH A MINIMUM 3/8" (9.5MM) STROKE IN A CONTRASTING COLOR INCORPORATING THE SUGGESTED WORDING, "FIRE AND/OR SMOKE BARRIER - PROTECT ALL OPENINGS," OR OTHER WORDING.

OCCUPANCY CLASSIFICATION LEGEND

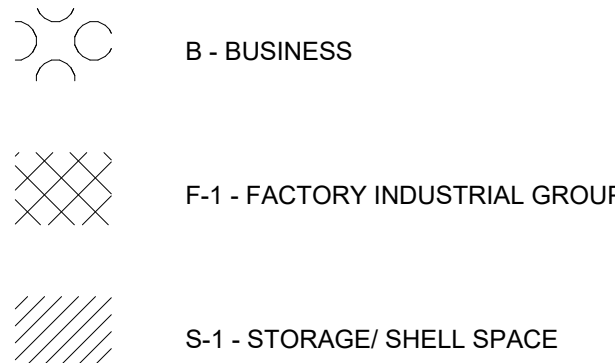

FIRE & SMOKE WALL LEGEND

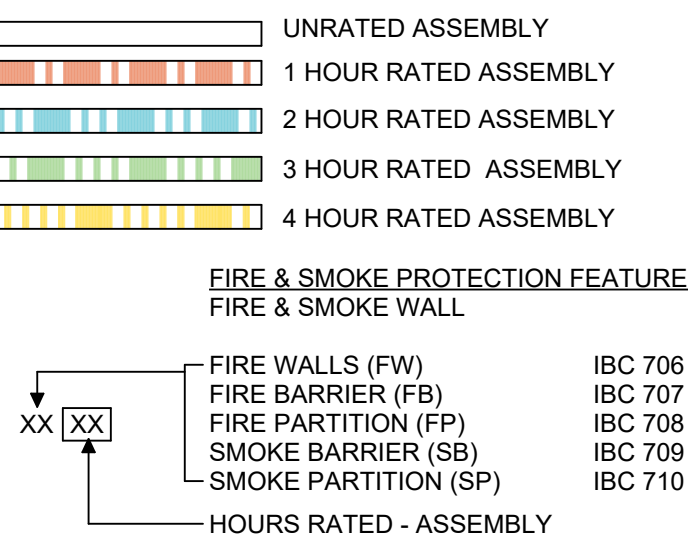

ISSUANCES



Date of Issue:

04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

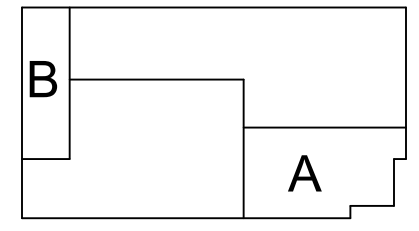

LIFE SAFETY PLAN

STANDARD ABBREVIATIONS							
A.D.	AREA DRAIN	DWR.	DRAWER	INFO.	INFORMATION	REF.	REFERENCE
A.F.F. OR AFF	ABOVE FINISH FLOOR			INSUL.	INSULATION	REFG.	REFRIGERATOR
A.P.	ACCESS PANEL	E.	EAST	INT.	INTERIOR	REINF.	REINFORCED
A.C.	AIR CONDITIONING	E.J.	EXPANSION JOINT	INV.	INVERT	REQD.	REQUIRED
ABV.	ABOVE	E.S.	EXPOSED STRUCTURE			RESIL.	RESILIENT
ACOUS.	ACOUSTICAL	E.W.	EACH WAY	JAN CLO.	JANITOR CLOSET	REV.	REVISION
ACP	ACOUSTICAL CEILING PANEL	E.W.C.	ELECTRIC WATER COOLER	JAN.	JANITOR	RFL.	REFLECTED
ACT	ACOUSTICAL CEILING TILE	EA.	EACH	JST.	JOIST	RM.	ROOM
ADDL.	ADDITIONAL	EL OR ELEV.	ELEVATION	JT.	JOINT		
ADJ.	ADJUSTABLE OR ADJACENT	ELEC. OR ELECT.	ELECTRICAL	L	LEG	S.	SOUTH
AL.	ALUMINUM	EMERG. OR EMER.	EMERGENCY	LAB	LABORATORY	S.C.	SOLID CORE
ANCH.	ANCHOR	ENCL.	ENCLOSURE	LAM.	LAMINATE	S.H.	SPRINKLER HEAD
APPROX.	APPROXIMATE	EQ	EQUAL	LAV.	LAVATORY	S.S.	STAINLESS STEEL
ARCH.	ARCHITECTURAL	EQUIP.	EQUIPMENT	LKR.	LOOKER	SAN.	SANITARY
ASPH.	ASPHALT	EXIST.	EXISTING	LT.	LIGHT	SCHED. OR SCHED.	SCHEDULE
ASSY.	ASSEMBLY	EXP. OR EXPAN.	EXPANSION			SEC.	SECURITY
AUTO.	AUTOMATIC	EXT.	EXTERIOR	M.	METER	SECT.	SECTION
AWC	ACOUSTICAL WALL PANELS			M.H.	MANHOLE	SEW.	SEWER
		F.A.	FIRE ALARM	M.O.	MASONRY OPENING	SGI.	SINGLE
B.L.	BUILDING LINE	F.D.	FLOOR DRAIN	MAS.	MASONRY	SHT.	SHEET
B.O.	BOTTOM OF	F.E.C.	FIRE EXTINGUISHER	MATL.	MATERIAL	SHWR.	SHOWER
BO.	BOARD	F.H.C.	FIRE EXTINGUISHER CABINET	MEQ.	MECHANICAL, ELECTRICAL, PLUMBING	SM.	SIMILAR
BLDG.	BUILDING	F.H.R.	FIRE HOSE CABINET	MAX	MAXIMUM	SPEC. OR SPECS.	SPECIFICATION(S)
BLK.	BLOCK	F.H.R.	FIRE HOSE REEL	MBL.	MARBLE	SPKR.	SPEAKER
BM.	BEAM	F.H.T.	FULL HEIGHT	MECH.	MECHANICAL	SQ.	SQUARE
BOT.	BOTTOM	F.O.C.	FACE OF CONCRETE	MEMB.	MEMBRANE	SQ. FT. OR S.F.	SQUARE FOOT (FEET)
BRK.	BREAK	F.O.F.	FACE OF FINISH	MEP.	MECHANICAL, ELECTRICAL, PLUMBING	SQ. YD. OR S.Y.	SQUARE YARD(S)
BRKT.	BRACKET	F.O.S.	FACE OF STUD	MFG.	MANUFACTURER	STA.	STATION
BSMT.	BASEMENT	F.S.	FULL SIZE	MIN.	MINIMUM	STD.	STANDARD
BTWN.	BETWEEN	F.V.C.	FIRE VALVE CABINET	MIR.	MIRROR	STL.	STEEL
		FDN.	FOUNDATION	MISC.	MISCELLANEOUS	STOR.	STORAGE
C.B.	CATCH BASIN	FIN.	FINISH	MTD.	MOUNTED	STRUCT.	STRUCTURE OR STRUCTURAL
C.G.	CORNER GUARD	FL OR FLR.	FLOOR	MTL.	METAL	SUSP.	SUSPENDED
C.I.	CAST IRON	FLASH	FLASHING	MUL.	MULLION	SYM.	SYMMETRICAL
C.I.P.	CAST IN PLACE	FLUOR.	FLUORESCENT				
C.J.	CONTROL JOINT	FRPF.	FIREPROOF(ING)	N	NORTH	T&G	TONGUE & GROOVE
C.O.	CLEAR OPENING	FR	FRAME	N.C.	NOT IN CONTRACT	T	TREAD
C.T.	CERAMIC TILE	FRP	FIBERGLASS REINFORCED PLASTIC	N.T.S.	NO TO SCALE	T. OR TEMP.	TEMPERED
CAB.	CABINET	FSTNR.	FASTENER	NO.	NUMBER	T.O.C.	TOP OF CONCRETE
CAT.	CATEGORY	FT.	FOOT OR FEET	NOM.	NOMINAL	T.O. CMU	TOP OF CMU
CER.	CERAMIC	FTG.	FOOTING			T.O.D.	TOP OF DECK
CFMF	COLD FORMED METAL FRAMING	FLUR.	FLOOR FURRING	O.C.	ON CENTER	T.O.O.	TOP OF
CLG.	CEILING	FUT.	FUTURE	O.D.	OUTSIDE DIAMETER/DIMENSION	T.O.P.	TOP OF PARAPET
CLO.	CLOSET			OFF.	OFFICE	T.O.S.	TOP OF STEEL
CLR.	CLEAR	G.B.	GRAB BAR	OPNG.	OPENING	T.O.S.S.	TOP OF STRUCTURAL SLAB
CMU	CONCRETE MASONRY UNIT	G.C.	GENERAL CONTRACTOR	OPP.	OPPOSITE	T.V.	TELEVISION
COL.	COLUMN	GA.	GAUGE	OPP. HD.	OPPOSITE HAND	TEL.	TELEPHONE
CONC.	CONCRETE	GALV.	GALVANIZED	OVHD.	OVERHEAD	THK.	THICK
CONN.	CONNECTION	GFRG.	GLASS FIBER REINFORCED GYPSUM	OZ.	OUNCE	TLT.	TOILET
CONST.	CONSTRUCTION	GL.	GLASS			TYP.	TYPICAL
CONT.	CONTINUOUS	GND.	GROUND	P.C.	PRECAST CONCRETE		
CONTR.	CONTRACTOR	GRD.	GRADE	P.LAM.	PLASTIC LAMINATE	UN O	UNLESS NOTED OTHERWISE
CORR.	CORRIDOR	GRN.	GRANITE	PAV.	PAVING	UNF.	UNFINISHED
CPT	CARPET	GSW.	GYPSUM SHAFT WALL	PC.	PIECE	UR.	URINAL
CPTT	CARPET TILE	GYP. BD.	GYPSUM BOARD	PL.	PLATE		
CTR.	CENTER			PLAS.	PLASTIC	V.I.F.	VERIFY IN FIELD
CTRL.	CONTROL	H.B.	HOSE BIB	PLBG.	PLUMBING	VB.	VAPOR BARRIER
		H.C.	HOLLOW CORE	PLYWD.	PLYWOOD	VERT.	VERTICAL
D.F.	DRINKING FOUNTAIN	H.K.	HOUSEKEEPING	PMPM	PREMANUFACTURED METAL PANEL	VEST.	VESTIBULE
D.O.	DOOR OPENING	H.M.	HOLLOW METAL				
D.P.	DAMP PROOFING	HCP.	HANDICAPPED	PNT.	PAINT		
D.S.	DOWNSPOUT	HD.	HAND	POL.	POLISHED	W.	WEST OR WIDTH
DBL.	DOUBLE	HDW. OR HDWR.	HARDWARE	PR.	PAIR	W.B.	WEATHER BARRIER
DEMO.	DEMOLITION	HDWD.	HARDWOOD	PRCST.	PRECAST	W.C.	WATER CLOSET
DEPT.	DEPARTMENT	HDRL.	HANDRAIL	PREMANUF.	PREMANUFACTURED	W.P.	WATERPROOF
DET. OR DTL.	DETAIL	HORZ.	HORIZONTAL	PT.	POINT	W.	WITH
DIA. OR DIAM.	DIAMETER	HR.	HOUR	PTD.	PAINTED	W/O.	WITHOUT
DIM.	DIMENSION	HT.	HEIGHT	PTN.	PARTITION	WD.	WOOD
DISP.	DISPENSER	HVAC	HEATING, VENTILATION, AIR CONDITIONING			WDW.	WINDOW
DN.	DOWN	I.D.	INSIDE DIAMETER/DIMENSION	R.	RADIUS	WR/GB.	WATER RESISTANT GYP. BOARD
DN.	DOOR	IN.	INCH	R.O.	ROUGH OPENING	WSC.	WAINSCOT
DRN.	DRAIN	INCL.	INCLUDE(D)(ING)	RCP.	REFLECTED CEILING PLAN	WT.	WEIGHT
DWG.	DRAWING			REBAR	REINFORCING BAR		
DWGS.	DRAWINGS						

ACCESSIBILITY NOTES	
01	EXTERIOR ROUTE CONSTRUCTION
1.	AN ACCESSIBLE ROUTE, IN THE DIRECTION OF TRAVEL, SHALL NOT HAVE A SLOPE EXCEEDING 1:20 (5/8" PER FOOT)
2.	AN ACCESSIBLE ROUTE CROSS SLOPE SHALL NOT EXCEED 1:48 (1/4" PER FOOT).
3.	ALL NEW PAVING AND WALKS FOR AN ACCESSIBLE ROUTE, SHALL NOT HAVE AN ABRUPT CHANGE IN SURFACE LEVEL (VERTICALLY) GREATER THAN 1/4" WHEN ABUTTING EITHER EXISTING OR OTHER NEW SURFACES DESIGNATED FOR AN ACCESSIBLE ROUTE.
4.	AN ACCESSIBLE ROUTE CROSSING OR PARALLELING A HAZARDOUS AREA, SHALL BE CLEARLY MARKED IN A CONTRASTING COLOR, WITH THE ROUTE LOCATION, MARKING MATERIALS AND COLOR SHOWN ON THE DRAWING.
5.	ANY OPENINGS THAT ARE CONSTRUCTED IN THE SURFACE OF AN ACCESSIBLE ROUTE SHALL HAVE THE OPENINGS RUNNING PERPENDICULAR TO THE DIRECTION OF TRAVEL WITH THE OPENINGS DIMENSION NOT TO EXCEED 1/2" IN THE DIRECTION OF TRAVEL.
02	CURB RAMPS
1.	THE TOP AND BOTTOM OF THE RAMP, AT THE TRANSITION TO EITHER EXISTING OR NEW SURFACES, SHALL BE FLUSH AND FREE OF ANY ABRUPT VERTICAL CHANGES.
2.	THE SURFACE FINISH OF THE RAMP, EITHER RAISED OR RECESSED AS PERMITTED BY ACCESSIBILITY CODES AND GUIDELINES, SHALL BE INSTALLED TO PERMIT WATER DRAINAGE.
3.	THE RAMP CROSS SLOPE SHALL NOT EXCEED 1:48 (1/4" PER FOOT), SLOPE IN THE DIRECTION OF TRAVEL SHALL NOT EXCEED 1:12 (1" PER FOOT).
03	INTERIOR ROUTE CONSTRUCTION
1.	AN ACCESSIBLE ROUTE, IN THE DIRECTION OF TRAVEL, SHALL NOT HAVE A SLOPE EXCEEDING 1:20 (5/8" PER FOOT), EXCEPT AT A RAMP.
2.	AN ACCESSIBLE ROUTE CROSS SLOPE SHALL NOT EXCEED 1:48 (1/4" PER FOOT).
3.	ALL NEW FLOOR CONSTRUCTION AND FLOORING MATERIALS SHALL NOT HAVE AN ABRUPT VERTICAL CHANGE IN FINISH SURFACE LEVEL GREATER THAN 1/4" WHEN ABUTTING EITHER EXISTING OR NEW SURFACES DESIGNATED FOR AN ACCESSIBLE ROUTE.
04	DOORS
1.	ANY THRESHOLD SHALL NOT EXCEED 1/2" IN HEIGHT, NOR 1:2 SLOPE.
2.	ALL ACCESSIBLE HARDWARE OPERABLE BY THE DISABLED, SHALL NOT EXCEED A HEIGHT OF 4'-0" AFF AND SHALL BE EASILY OPERATED WITH ONE HAND WITHOUT GRASPING, PINCHING OR TWISTING OF THE WRIST.
3.	DOOR CLOSERS AND GATE CLOSERS SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO A POSITION OF 12 DEGREES FROM THE LATCH IS 5 SECONDS MINIMUM.
4.	THE OPENING FORCE OF THE ALL ACCESSIBLE DOORS, EXCEPT FIRE EXIT DOORS, SHALL NOT EXCEED 5 POUNDS IN THE DIRECTION OF TRAVEL FOR EXITING.
5.	THE OPERABLE HARDWARE ON A DOOR LEADING TO HAZARDOUS AREAS (E.G. BOILER ROOMS, MECHANICAL AND ELECTRICAL ROOMS, OTHER EQUIPMENT ROOMS, AND LOADING DOCK), SHALL HAVE A TEXTURED SURFACE ON THE TOUCHABLE AREA.
05	TOILET ROOMS
1.	THE FLUSH CONTROL FOR ALL ACCESSIBLE TOILET/URINALS SHALL NOT EXCEED 3'-8" AFF, AND SHALL BE ON THE WIDE (APPROACH) SIDE OF THE TOILET.
2.	ACCESSIBLE LAVATORIES SHALL HAVE ALL EXPOSED HOT WATER PIPING AND DRAIN PIPES EITHER INSULATED OR CONFIGURED TO PROTECT AGAINST SKIN CONTACT. THE UNDERSIDE OF THE LAVATORY SHALL NOT HAVE ANY SHARP OR ABRASIVE SURFACES.
3.	ANY GRAB BAR INSTALLATION SHALL BE ABLE TO SUPPORT 250 POUNDS APPLIED IN ANY DIRECTION.
06	SIGNAGE
1.	ALL ACCESSIBLE PERMANENT ROOMS AND SPACES, EXIT WAYS AND EXIT STAIRWAYS, SHALL HAVE SIGNAGE THAT MEETS ACCESSIBLE SIGNAGE REQUIREMENTS FOR LETTER SIZE, LETTER AND NUMBER TYPESTYLE, RAISED LETTERS, GRADE 2 BRAILLE, COLOR/CONTRAST, AND LOCATION.
2.	ALL ACCESSIBLE TOILET ROOMS SHALL BE DESIGNATED WITH THE INTERNATIONAL SYMBOL OF ACCESSIBILITY AND ACCESSIBLE TEXT SIGNAGE FOR A PERMANENT ROOM, PLACED DIRECTLY BELOW THE PICTOGRAM SYMBOL. THE SIGNAGE SHALL MEET THE ACCESSIBLE SIGNAGE REQUIREMENTS FOR LETTER SIZE, LETTER AND NUMBER TYPESTYLE, RAISED LETTERS, GRADE 2 BRAILLE, COLOR/CONTRAST, AND LOCATION.
3.	ALL ACCESSIBLE PARKING SPACES AND PUBLIC ENTRANCES SHALL BE DESIGNATED WITH THE INTERNATIONAL SYMBOL OF ACCESSIBILITY SIGNAGE IN ADDITION TO ANY OTHER SIGNAGE REQUIRED FOR ACCESSIBILITY. THIS SIGNAGE SHALL MEET ACCESSIBILITY REQUIREMENTS FOR COLOR/CONTRAST AND LOCATION.

SHEET SYMBOLS			
	NEW PARTITION		ELEVATION IDENTIFICATION TAG
	EXISTING PARTITION		CEILING TAG
	DEMOLISHED PARTITION		BREAK LINE
	TEMPORARY PARTITION		CENTER LINE
	PARTIAL HEIGHT PARTITION		PROPERTY LINE
	DEMOLITION KEYNOTE		MATCHLINE
	WINDOW TYPE IDENTIFICATION TAG		EXTERIOR ELEVATION IDENTIFICATION TAG
	DOOR IDENTIFICATION TAG		INTERIOR ELEVATION IDENTIFICATION TAG
	ROOM NAME IDENTIFICATION TAG		BUILDING SECTION IDENTIFICATION TAG
	BATHROOM ACCESSORIES TAG		WALL SECTION IDENTIFICATION TAG
	FINISH TYPE IDENTIFICATION TAG		DETAIL REFERENCE TAG
	PARTITION TYPE IDENTIFICATION TAG		FIRE EXTINGUISHER CABINET
	LOUVER TAG		
	GRID LINE IDENTIFICATION TAG		
	REVISION CLOUD AND IDENTIFICATION TAG		

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

JOB 26136.0000
DATE 04/24/2026

STANDARDS AND
SYMBOLS

ACCESSIBLE MOUNTING HEIGHTS				
	ADULT			SECTION
WATER CLOSET				
TOP OF SEAT	17"-19"			604.4
FLUSH CONTROLS	15" MIN-48" MAX			604.6/309.3/308
URINAL				
RIM OF BASIN	17" MAX.			605.2
FLUSH CONTROLS	15" MIN-48" MAX			604.6/309.3/308
LAVATORY/SINKS				
RIM OR COUNTER SURFACE	34" MAX.			606.3
APRON CLEARANCE	27" MIN.			306
KNEE CLEARANCE	27" MIN.			306.3
TOE CLEARANCE	9" MIN.			306.2
DRINKING FOUNTAIN				
SPOUT HEIGHT	36" MAX.			602.4
KNEE CLEARANCE	27" MIN.			306.3
TOE CLEARANCE	9" MIN.			306.2
DRINKING FOUNTAIN (BENDING DISABLED)				
SPOUT HEIGHT	38"-43"			602.7
GRAB BARS				
TOP OF BAR	33" MIN-36" MAX			609.4
MIRROR				
BOTTOM OF REFLECTIVE SURFACE (above counters & lavs.)	40" MAX.			603.3
TOP OF REFLECTIVE SURFACE	74" MIN.			603.3
SHOWER STALL				
TOP OF SEAT	17" MIN-19" MAX			610.2
SHOWER SPRAY UNIT HEIGHT (FIXED)	48" MAX			608.6
SHOWER SPRAY UNIT HEIGHT (HAND HELD)	48" MAX			608.6
CONTROLS AND OPERATING MECHANISMS				
TOWEL DISPENSER	48" MAX.			308
SOAP DISPENSER	48" MAX.			308
HAND DRYER	48" MAX.			308
TOILET TISSUE DISPENSER	15"-48" MAX.			604.7
SANITARY NAPKIN DISPENSER/RECEPTACLE	48" MAX.			308
TOILET SEAT COVER DISPENSER	48" MAX.			308
ELECTRICAL DEVICES				
ELECTRICAL, PHONE AND DATA OUTLETS (TO CENTER)	17" MIN-46" MAX			308.2.1
ABOVE COUNTER OUTLETS (TO CENTER)	44" MAX.			308.2.2
LIGHT SWITCHES (HIGHEST OPERABLE PART)	48" MAX.			308
FIRE ALARM PULL (HIGHEST OPERABLE PART)	48" MAX.			308
THERMOSTATS (HIGHEST OPERABLE PART)	48" MAX.			308
FIRE EXTINGUISHER CAB. (T.O.HANDLE/OPER. DEVICE)	48" MAX.			308.3.1
PUBLIC TELEPHONE (TO HIGHEST OPERABLE PART)	48" MAX.			308
RAMPS AND STAIRS				
TOP OF HANDRAILS	34"-38"			505.4
ELEVATORS				
HALL CALL BUTTON	48" MAX			407.2.1/308
HALL LANTERNS	72" MIN			407.2.2.2
DRESSING AND FITTING ROOMS				
TOP OF BENCH	17" MIN-19" MAX			903.5
FOOD SERVICE LINES				
TOP OF TRAY SLIDE	28" MIN-34" MAX			904.5.2

4/24/2026 2:14:32 PM A00-01 DEMO FLOOR PLAN

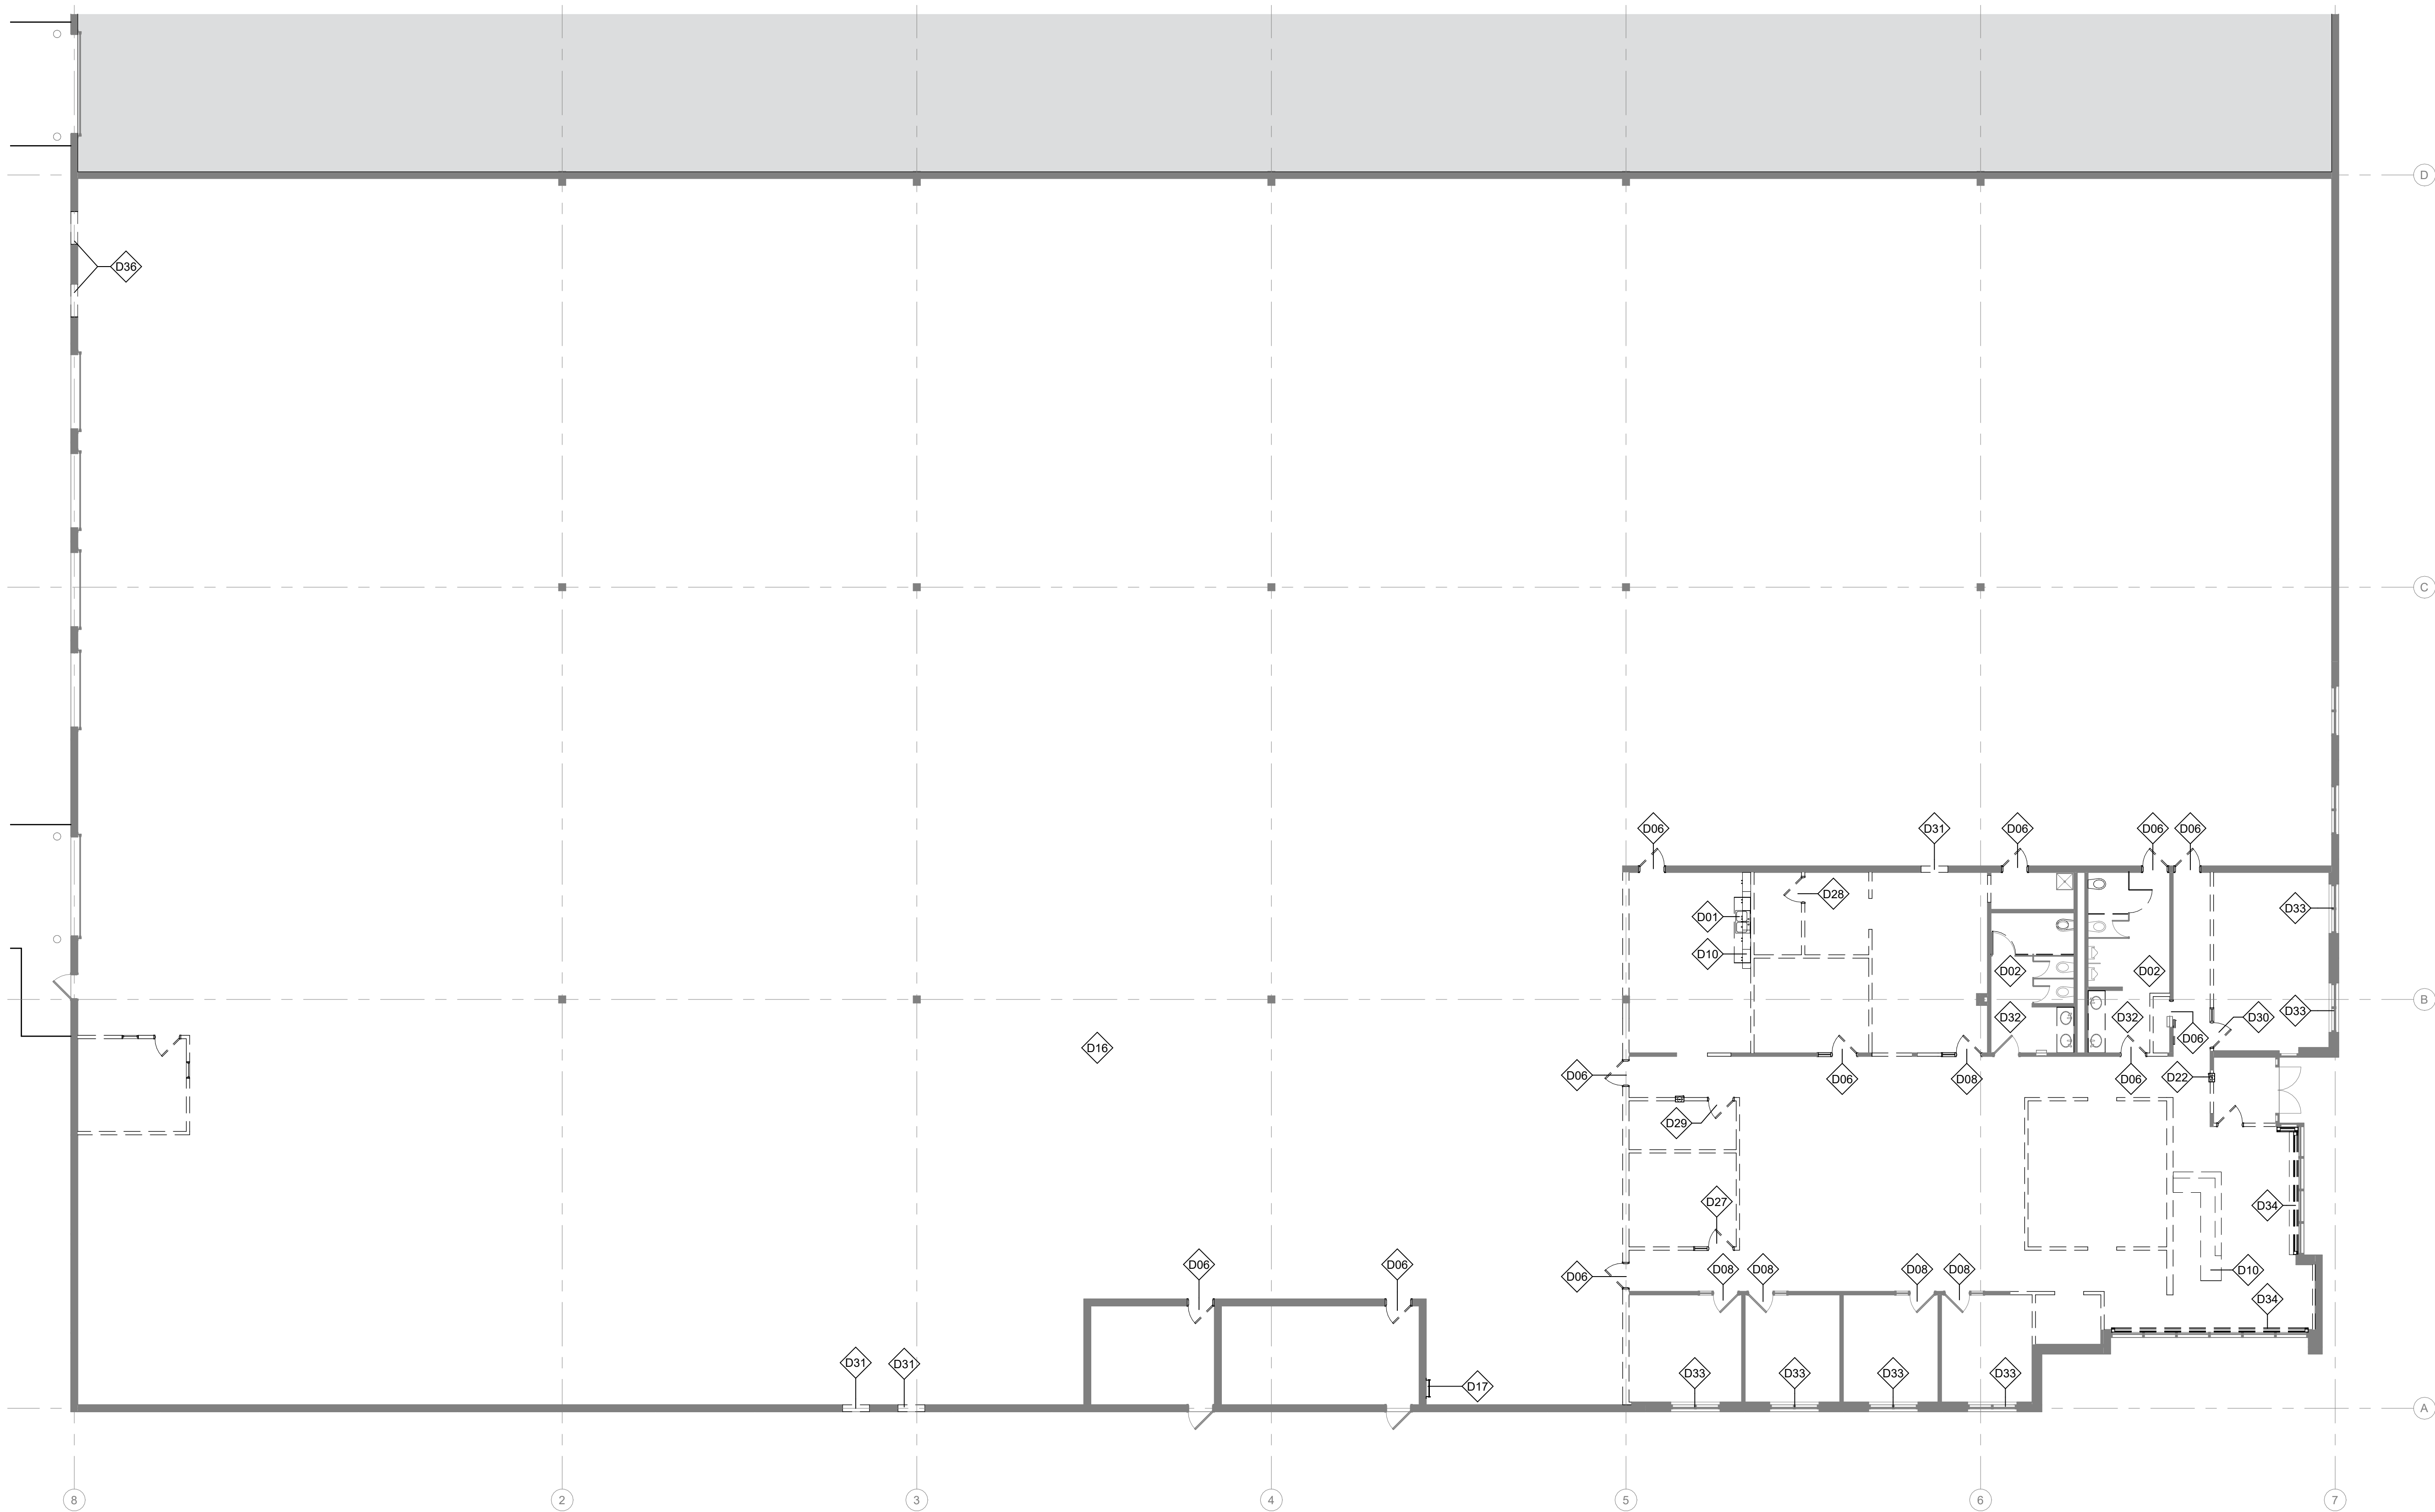

1 DEMO FLOOR PLAN - OVERALL
3/32" = 1'-0"

GENERAL DEMO NOTES

- REFERENCE COVER AND A00-00 FOR STANDARDS, CODE INFORMATION AND ADDITIONAL LEGENDS.
- REFER CONSULTANT DRAWINGS FOR FURTHER DETAIL REGARDING THE REMOVAL OF THOSE SCOPES.
- CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONED CONDITIONS AND FINISHES BEFORE PRICING FABRICATION AND/OR INSTALLATION. ALL DISCREPANCIES SHALL BE BROUGHT TO THE ARCHITECT'S ATTENTION IMMEDIATELY.
- IF SUSPECTED HAZARDOUS MATERIALS ARE ENCOUNTERED, DO NOT DISTURB. IMMEDIATELY NOTIFY ARCHITECT AND OWNER. HAZARDOUS MATERIALS WILL BE REMOVED BY OWNER UNDER A SEPARATE CONTRACT.
- CONTRACTOR TO FURNISH LABOR AND MATERIAL TO COMPLETE DEMOLITION AND REMOVAL OF ITEMS AS INDICATED ON ARCHITECT'S DRAWINGS. DEMOLITION DOCUMENTATION IS FOR GUIDANCE ONLY. ANY ADDITIONAL DEMOLITION WORK REQUIRED TO FULLY COMPLETE NEW OR REMODEL/RENOVATION WORK BUT NOT OTHERWISE SHOWN OR DESCRIBED IN THE DEMOLITION DRAWINGS SHALL BE CONSIDERED PART OF THE CONTRACT.
- CONTRACTOR TO EXECUTE WORK WITHIN THE OWNER RULES AND REGULATIONS FOR DEMOLITION AND REMOVAL OF DEBRIS, INCLUDING OVERTIME WORK.
- ALL DEMOLITION THAT MAY CAUSE NOISE AND/OR ODOR TO OCCUR PER OWNER'S AND TENANT'S REQUIREMENTS.
- DURING THE ENTIRE PERIOD OF DEMOLITION AND CONSTRUCTION, EXISTING EXITS, EXIT LIGHTING, FIRE PROTECTIVE DEVICES AND ALARMS SHALL BE CONTINUOUSLY MAINTAINED AND COMPLY WITH ADAAG.
- CONTRACTOR IS RESPONSIBLE FOR A PRE-PUNCH LIST. (IE. BEFORE DEMOLITION BEGINS.) THE PURPOSE OF THIS PUNCH LIST IS TO DOCUMENT THE CONDITION OF ALL EXISTING TO REMAIN ITEMS.
- CONTRACTOR TO BE RESPONSIBLE FOR THE PROPER MAINTENANCE OF ALL ITEMS SCHEDULED TO BE SALVAGED AND RETURNED TO THE OWNER AND/OR ITEMS SCHEDULED TO BE REMOVED AND STORED FOR REINSTALLATION. ALL SUCH ITEMS SHALL BE REMOVED AND HANDLED IN SUCH A MANNER AS TO MAINTAIN PROPER WORKING ORDER. PROTECT SALVAGED ITEMS TO ENSURE REUSE IN SAME CONDITION AS AT TIME OF SALVAGE.
- REFINISH OR REPLACE EXISTING CONSTRUCTION TO BE LEFT IN PLACE WHICH IS DAMAGED BY DEMOLITION OPERATIONS. G.C. SHALL RETURN ITEM TO EQUIVALENT CONDITION AS BEFORE DAMAGE.
- GENERAL CONTRACTOR TO SALVAGE ALL SPRINKLER HEADS AND ESCUTCHEONS FOR POSSIBLE REUSE.
- EXISTING BUILDING FIRE ALARM AND SPRINKLER SYSTEM TO REMAIN IN OPERATION DURING DEMOLITION AND CONSTRUCTION.
- SALVAGE ALL FIRE EXTINGUISHERS, FIRE EXTINGUISHER CABINETS, AND FIRE EXTINGUISHER BRACKETS FOR RE-USE U.N.O.. VERIFY ALL FIRE EXTINGUISHERS MEET CODE AND ARE IN WORKING ORDER. ANY EXTRA FIRE EXTINGUISHERS AND FIRE EXTINGUISHER BRACKETS TO BE RETURNED TO OWNER.
- FINISH FLOORS TO BE REMOVED THROUGH-OUT UNO.
- SLAB SHALL BE SCRAPED, SMOOTHED AND CLEANED IN PREPARATION FOR INSTALLATION OF NEW FLOORING MATERIAL. AT ALL AREAS WITH FINAL FINISH FLOOR SURFACE SCHEDULED TO BE SEALED OR STAINED CONCRETE, EXISTING SLAB TO BE GROUND TO SMOOTH AND CONSISTENT FINISH. ALL EXISTING POCK MARKS TO BE FILLED TO SIMILAR COLOR TO REDUCE VISIBILITY.

DEMO KEYNOTE LEGEND

- | | |
|-----|---|
| D01 | DEMO PLUMBING AND PLUMBING FIXTURES. |
| D02 | EXISTING PLUMBING AND PLUMBING FIXTURES TO REMAIN. |
| D06 | REMOVE DOOR AND FRAME; INFILL WALL, PATCH AND REPAIR. MAINTAIN FIRE RATING AS APPLICABLE. |
| D08 | EXISTING DOOR TO REMAIN. REFER TO DOOR SCHEDULE FOR UPDATED FINISH. |
| D10 | REMOVE MILLWORK. |
| D16 | EXISTING SEALED CONCRETE FLOOR TO REMAIN. WHERE EXISTING ELEMENTS ARE REMOVED (PARTITIONS, FINISH FLOORING, ETC.), SLAB SHALL BE SCRAPED, SMOOTHED AND CLEANED, AND FINISHED TO MATCH EXISTING. REF FLOOR PLAN. |
| D17 | SALVAGE LADDER FOR RELOCATION. FINAL LOCATION OF ROOF ACCESS LADDER TO BE COORDINATED IN THE FIELD SO THAT ACCESS TO THE EXISTING TO REMAIN PORTION OF THE LADDER REMAINS. |
| D22 | SALVAGE EXISTING FIRE EXTINGUISHER FOR REUSE. |
| D27 | SALVAGE DOOR FOR RELOCATION AT STORAGE WORKROOM. |
| D28 | SALVAGE DOOR FOR RELOCATION AT IDF/MDF ROOM. |
| D29 | SALVAGE DOOR FOR RELOCATION AT STORAGE (39) ROOM. |
| D30 | SALVAGE DOOR FOR RELOCATION AT FACILITIES / S&R STORAGE (142). |
| D31 | REFERENCE FLOOR PLAN FOR NEW FRAME AND DOOR. |
| D32 | FLOOR TILE AND COUNTERTOP TO BE DEMOED. |
| D33 | REMOVE AND SALVAGE ALL WINDOW SHADES FOR RE-INSTALLATION. |
| D34 | FLOOR MOUNTED HEATERS ALONG STOREFRONT WINDOWS EXISTING TO REMAIN. |
| D36 | DEMO OPENING FOR ACCESS TO NEW COMPACTORS. |

DEMO PLAN SYMBOLS

- | | |
|--|------------------------------------|
| | EXISTING PARTITION TO REMAIN |
| | DEMOLISHED PARTITION |
| | DEMOLISHED DOOR, FRAME, & HARDWARE |
| | EXISTING DOOR TO REMAIN |
| | DEMOLISHED MILLWORK |
| | KEYNOTE; SEE LEGEND |

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
7520
T: 972-852-1270

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

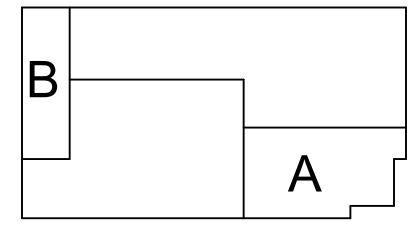

DEMO FLOOR
PLAN

A00-01

4/24/2026 2:14:33 PM A00-09 DEMO REFLECTED CEILING PLAN



1 DEMO REFLECTED CEILING PLAN
3/32" = 1'-0"

GENERAL RCP DEMO NOTES

1. REFER CONSULTANT DRAWINGS FOR FURTHER DETAIL REGARDING THE REMOVAL OF THOSE SCOPES.
2. COORDINATE THE REMOVAL OF ALL MECHANICAL GEAR AND ALL RELATED PIPING/ELECTRICAL ITEMS WITH G.C. AND BUILDING MANAGEMENT.
3. CONTRACTOR TO NOTIFY ARCHITECT OF ANY DISCREPANCIES OR CONFLICTS IN INTENT TO ACCOMPLISHING ALL WORK ON PLAN AND THE COORDINATION OF THIS PLAN WITH ENGINEERING DRAWINGS OR IT WILL BE DEEMED THAT ALL NECESSARY WORK AND COST ARE INCLUDED.
4. REMOVE EXISTING CEILING TILES, CEILING GRID SYSTEM, GYP. BD. CEILING AND CEILING FIXTURES THROUGHOUT UNLESS OTHERWISE NOTED. UPON REMOVAL OF CEILING TILE AND GRID, ALL SPRINKLER HEADS ARE TO BE IDENTIFIED BY SAFETY TAPE OR MARKING AND ALL HEADS ARE TO BE TURNED UP AND MADE UPRIGHT INSTEAD OF PENDANT TO ENSURE HEADS WILL ACTIVATE. NO AREA IS TO BE RENDERED AS UNPROTECTED DURING THE ENTIRE DURATION OF DEMOLITION AND CONSTRUCTION OF THIS PROJECT (UNLESS A FIRE WATCH IS RETAINED).
5. EXISTING LIGHT FIXTURES TO BE REMOVED AS INDICATED. PROVIDE TEMPORARY POWER AND LIGHTING THROUGHOUT COURSE OF JOB.

DEMO KEYNOTE LEGEND

- | | |
|-----|--|
| D13 | EXISTING GYPSUM CEILING AND LIGHTS TO REMAIN. NEW DIFFUSERS. REF TO MECHANICAL DRAWINGS. |
| D14 | CEILING TO BE REMOVED. SALVAGE FIXTURES AND REUSE AS APPROPRIATE. REF ELECTRICAL DRAWINGS. |

RCP DEMO LEGEND

- | | | | |
|--|--------------------------------------|--|--------------------------------|
| | 2X2 LAY-IN CEILING | | GYP. BD. CEILING NEW |
| | GYP. BD. CEILING EXISTING | | GYP. BD. CEILING DEMO |
| | EXPOSED STRUCTURE | | RECESSED LIGHT FIXTURE |
| | 2X2 LAY-IN LENS FIXTURE | | 2X4 LAY-IN LENS FIXTURE |
| | 1X4 HUNG PARABOLIC STRIP | | WALL SCONCE TOP @ 7'-2" A.F.F. |
| | RETURN AIR DIFFUSER | | SUPPLY AIR DIFFUSER |
| | 1'-0" FINISHED CEILING HEIGHT A.F.F. | | EMERGENCY EXIT FIXTURE |

FIRE & SMOKE WALL LEGEND

- | | |
|--|-----------------------|
| | UNRATED ASSEMBLY |
| | 1 HOUR RATED ASSEMBLY |
| | 2 HOUR RATED ASSEMBLY |
| | 3 HOUR RATED ASSEMBLY |
| | 4 HOUR RATED ASSEMBLY |
- FIRE & SMOKE PROTECTION FEATURES
FIRE & SMOKE WALL
- | | | |
|--|------------------------|---------|
| | FIRE WALLS (FW) | IBC 706 |
| | FIRE BARRIER (FB) | IBC 707 |
| | FIRE PARTITION (FP) | IBC 708 |
| | SMOKE BARRIER (SB) | IBC 709 |
| | SMOKE PARTITION (SP) | IBC 710 |
| | HOURS RATED - ASSEMBLY | |



CORGAN
401 North Houston Street, Dallas TX
7520
T: 972-852-1270

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

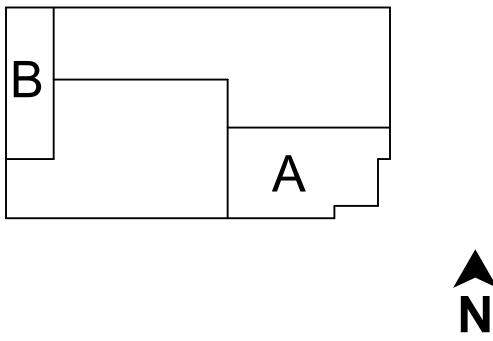

DEMO
REFLECTED
CEILING PLAN

4/24/2026 2:14:33 PM A00-R DEMO ROOF PLAN

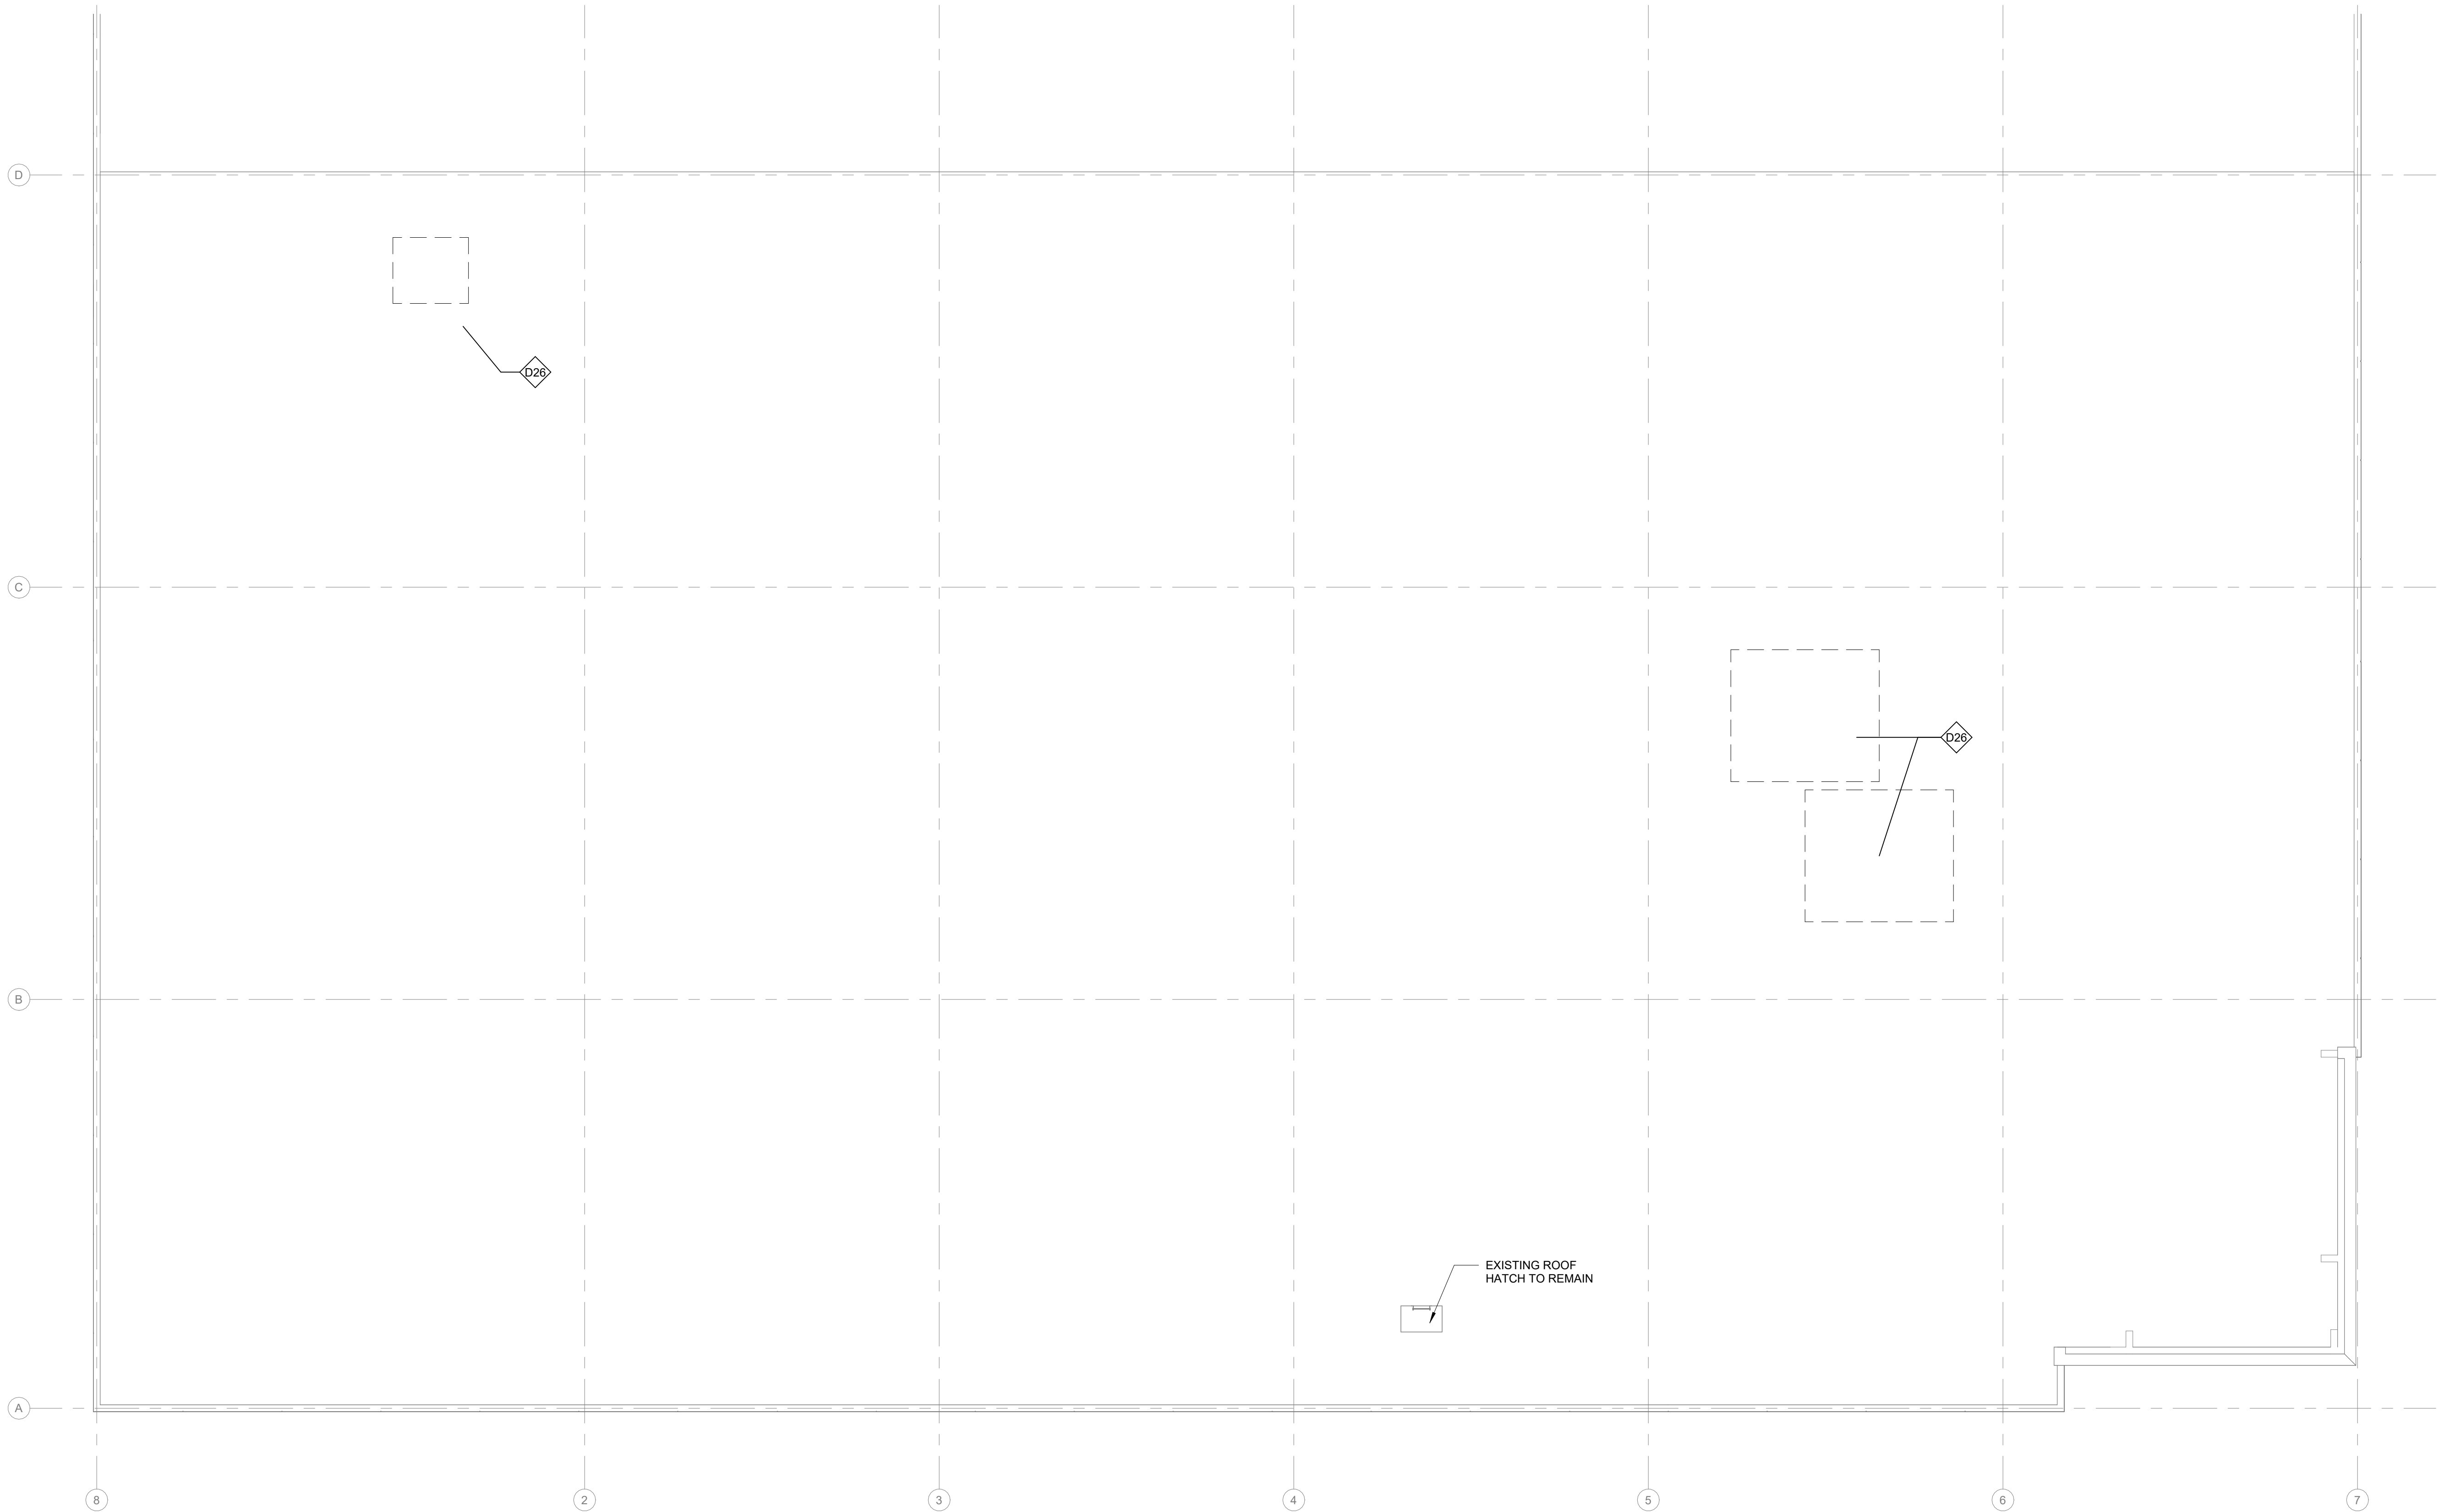

1 DEMO ROOF PLAN
3/32" = 1'-0"

GENERAL DEMO NOTES

1. REFER CONSULTANT DRAWINGS FOR FURTHER DETAIL REGARDING THE REMOVAL OF THOSE SCOPES.
2. CONTRACTOR TO NOTIFY ARCHITECT OF ANY DISCREPANCIES OR CONFLICTS IN INTENT TO ACCOMPLISHING ALL WORK AND COORDINATIONON PLAN AND COORDINATION OF THIS PLAN WITH ENGINEERING DRAWINGS OR IT WILL BE DEEMED THAT ALL NECESSARY WORK COST ARE INCLUDED.

DEMO KEYNOTE LEGEND

D26 DEMO RTU, REF, MECHANICAL DRAWINGS.



CORGAN
401 North Houston Street, Dallas TX
7520
T: 972-852-1270

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

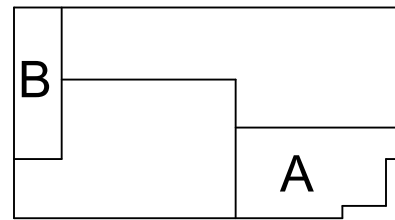

DEMO ROOF PLAN

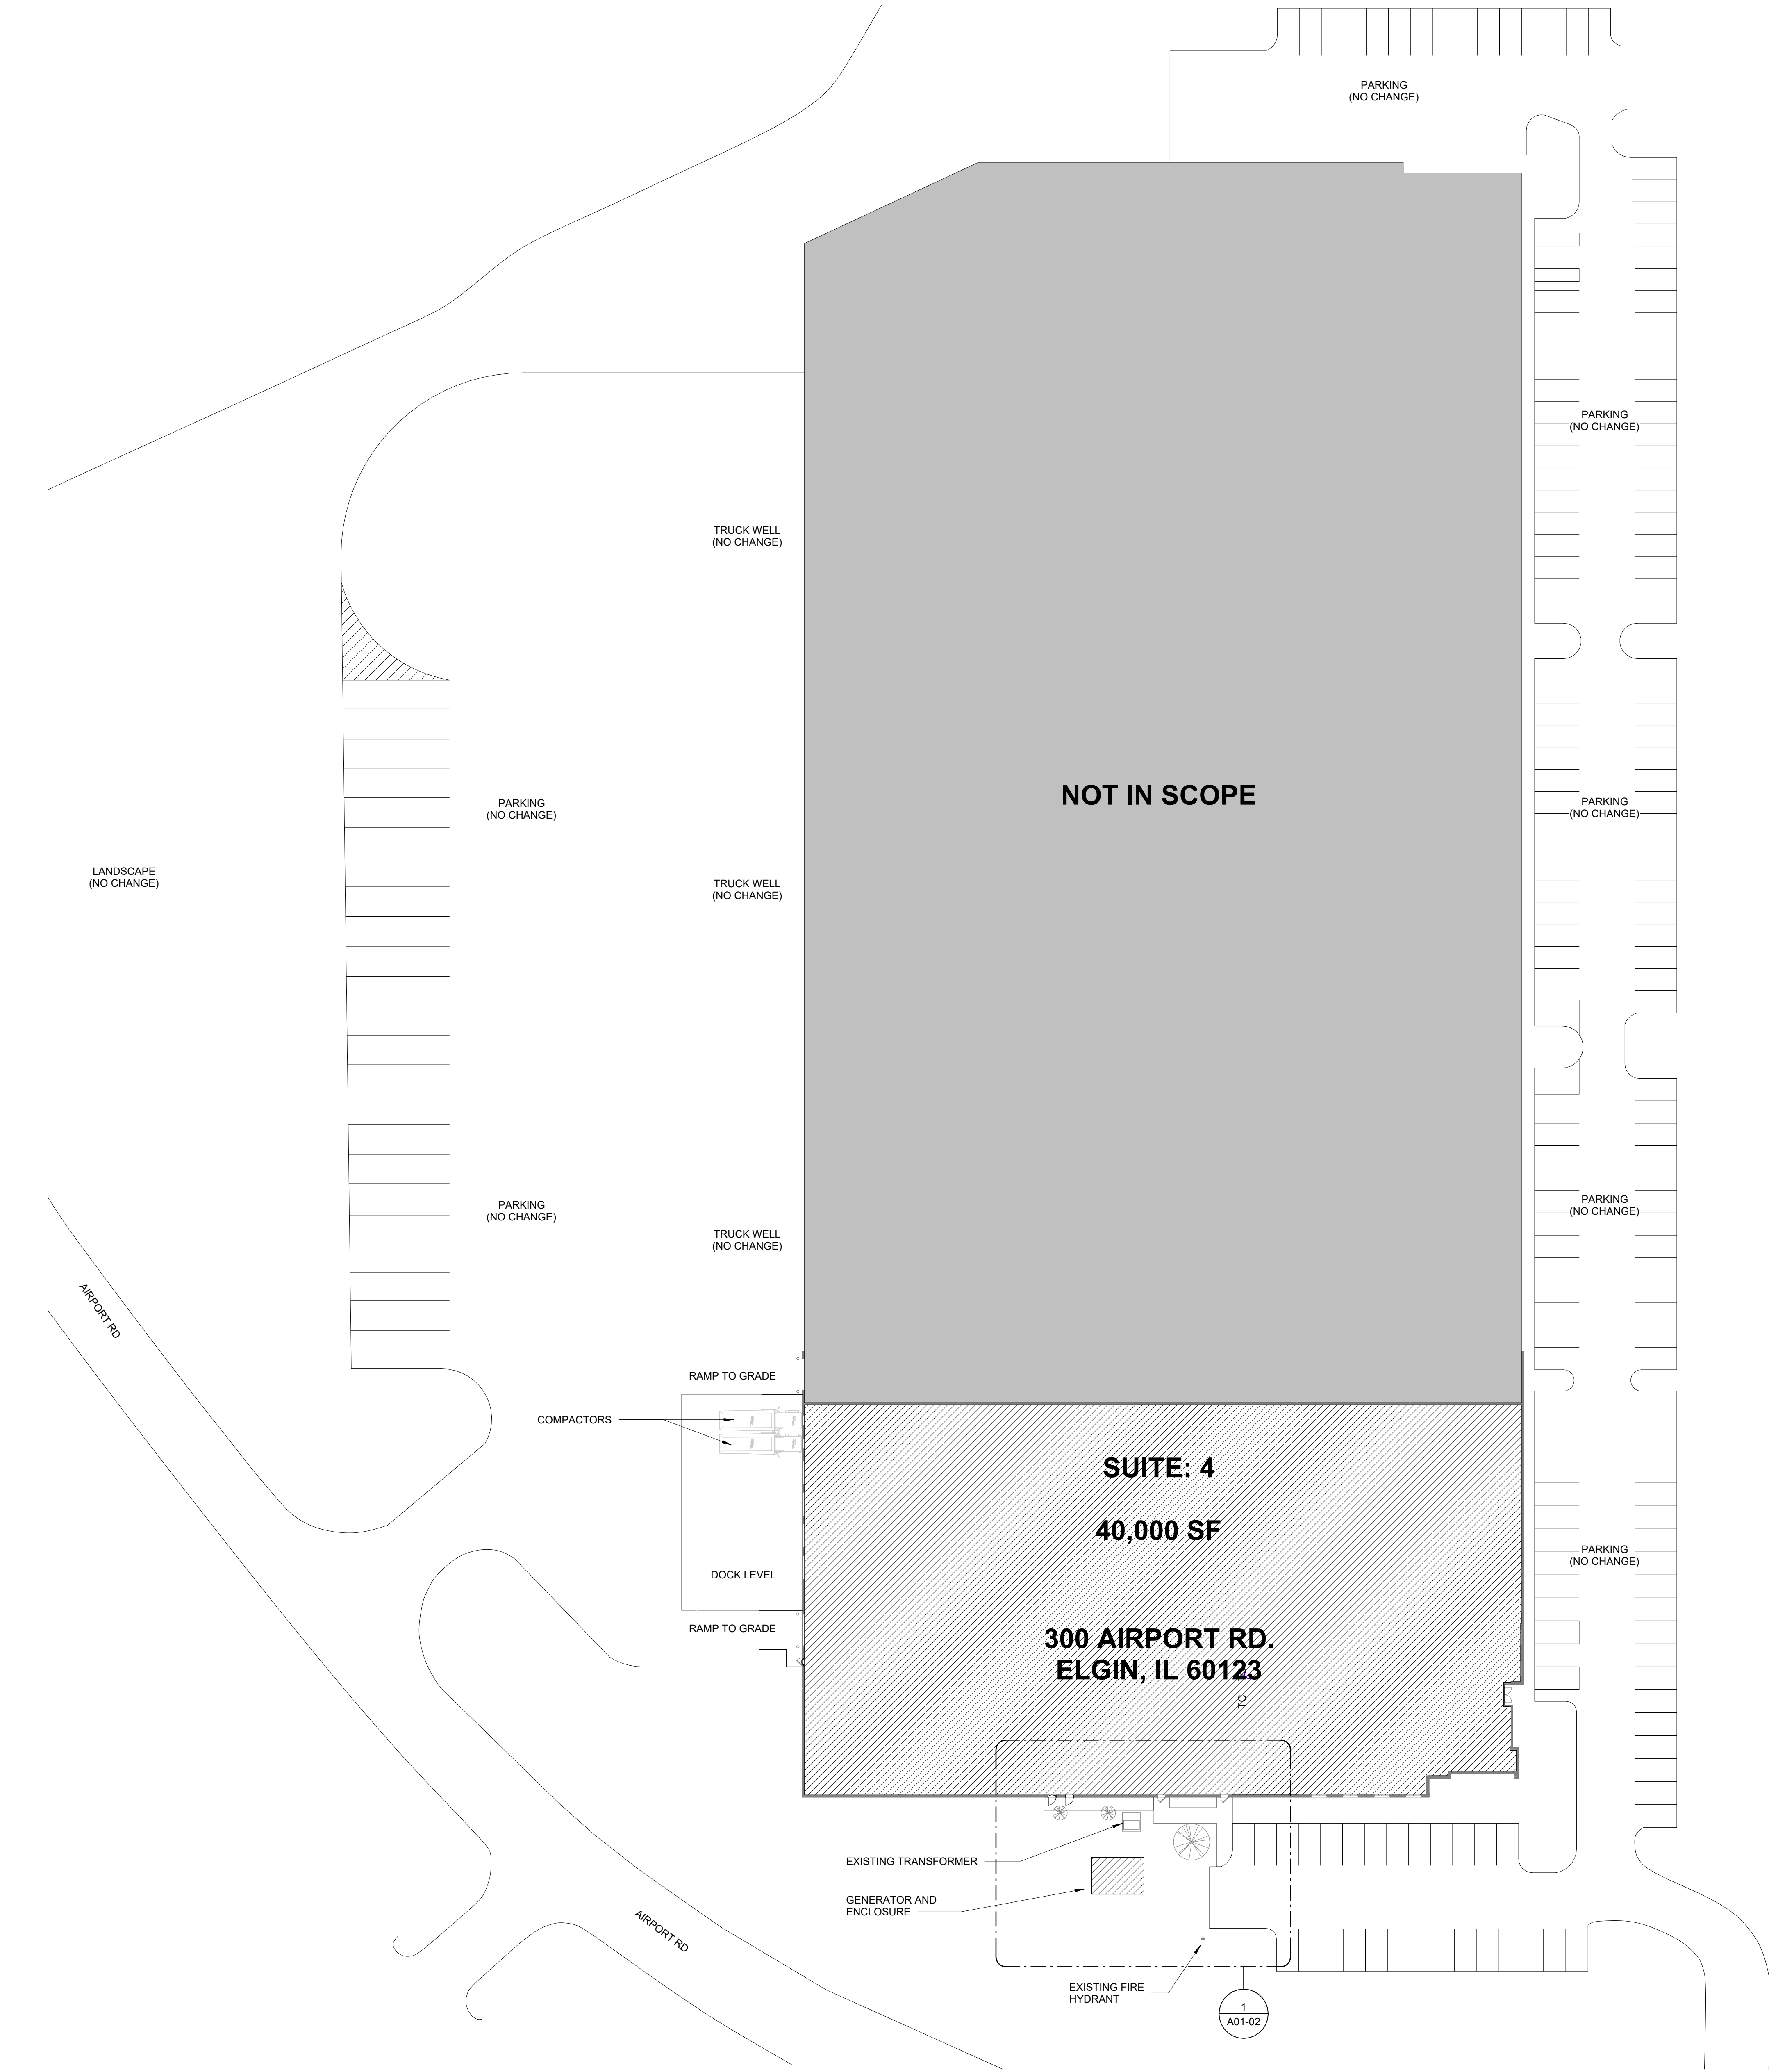

1 SITE PLAN
1" = 30'-0"

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123



JOB 26136.0000
DATE 04/24/2026

KEYPLAN

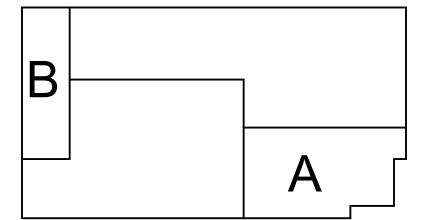

SITE PLAN

4/24/2026 2:14:35 PM AD1-02 ENLARGED SITE PLAN & DETAILS

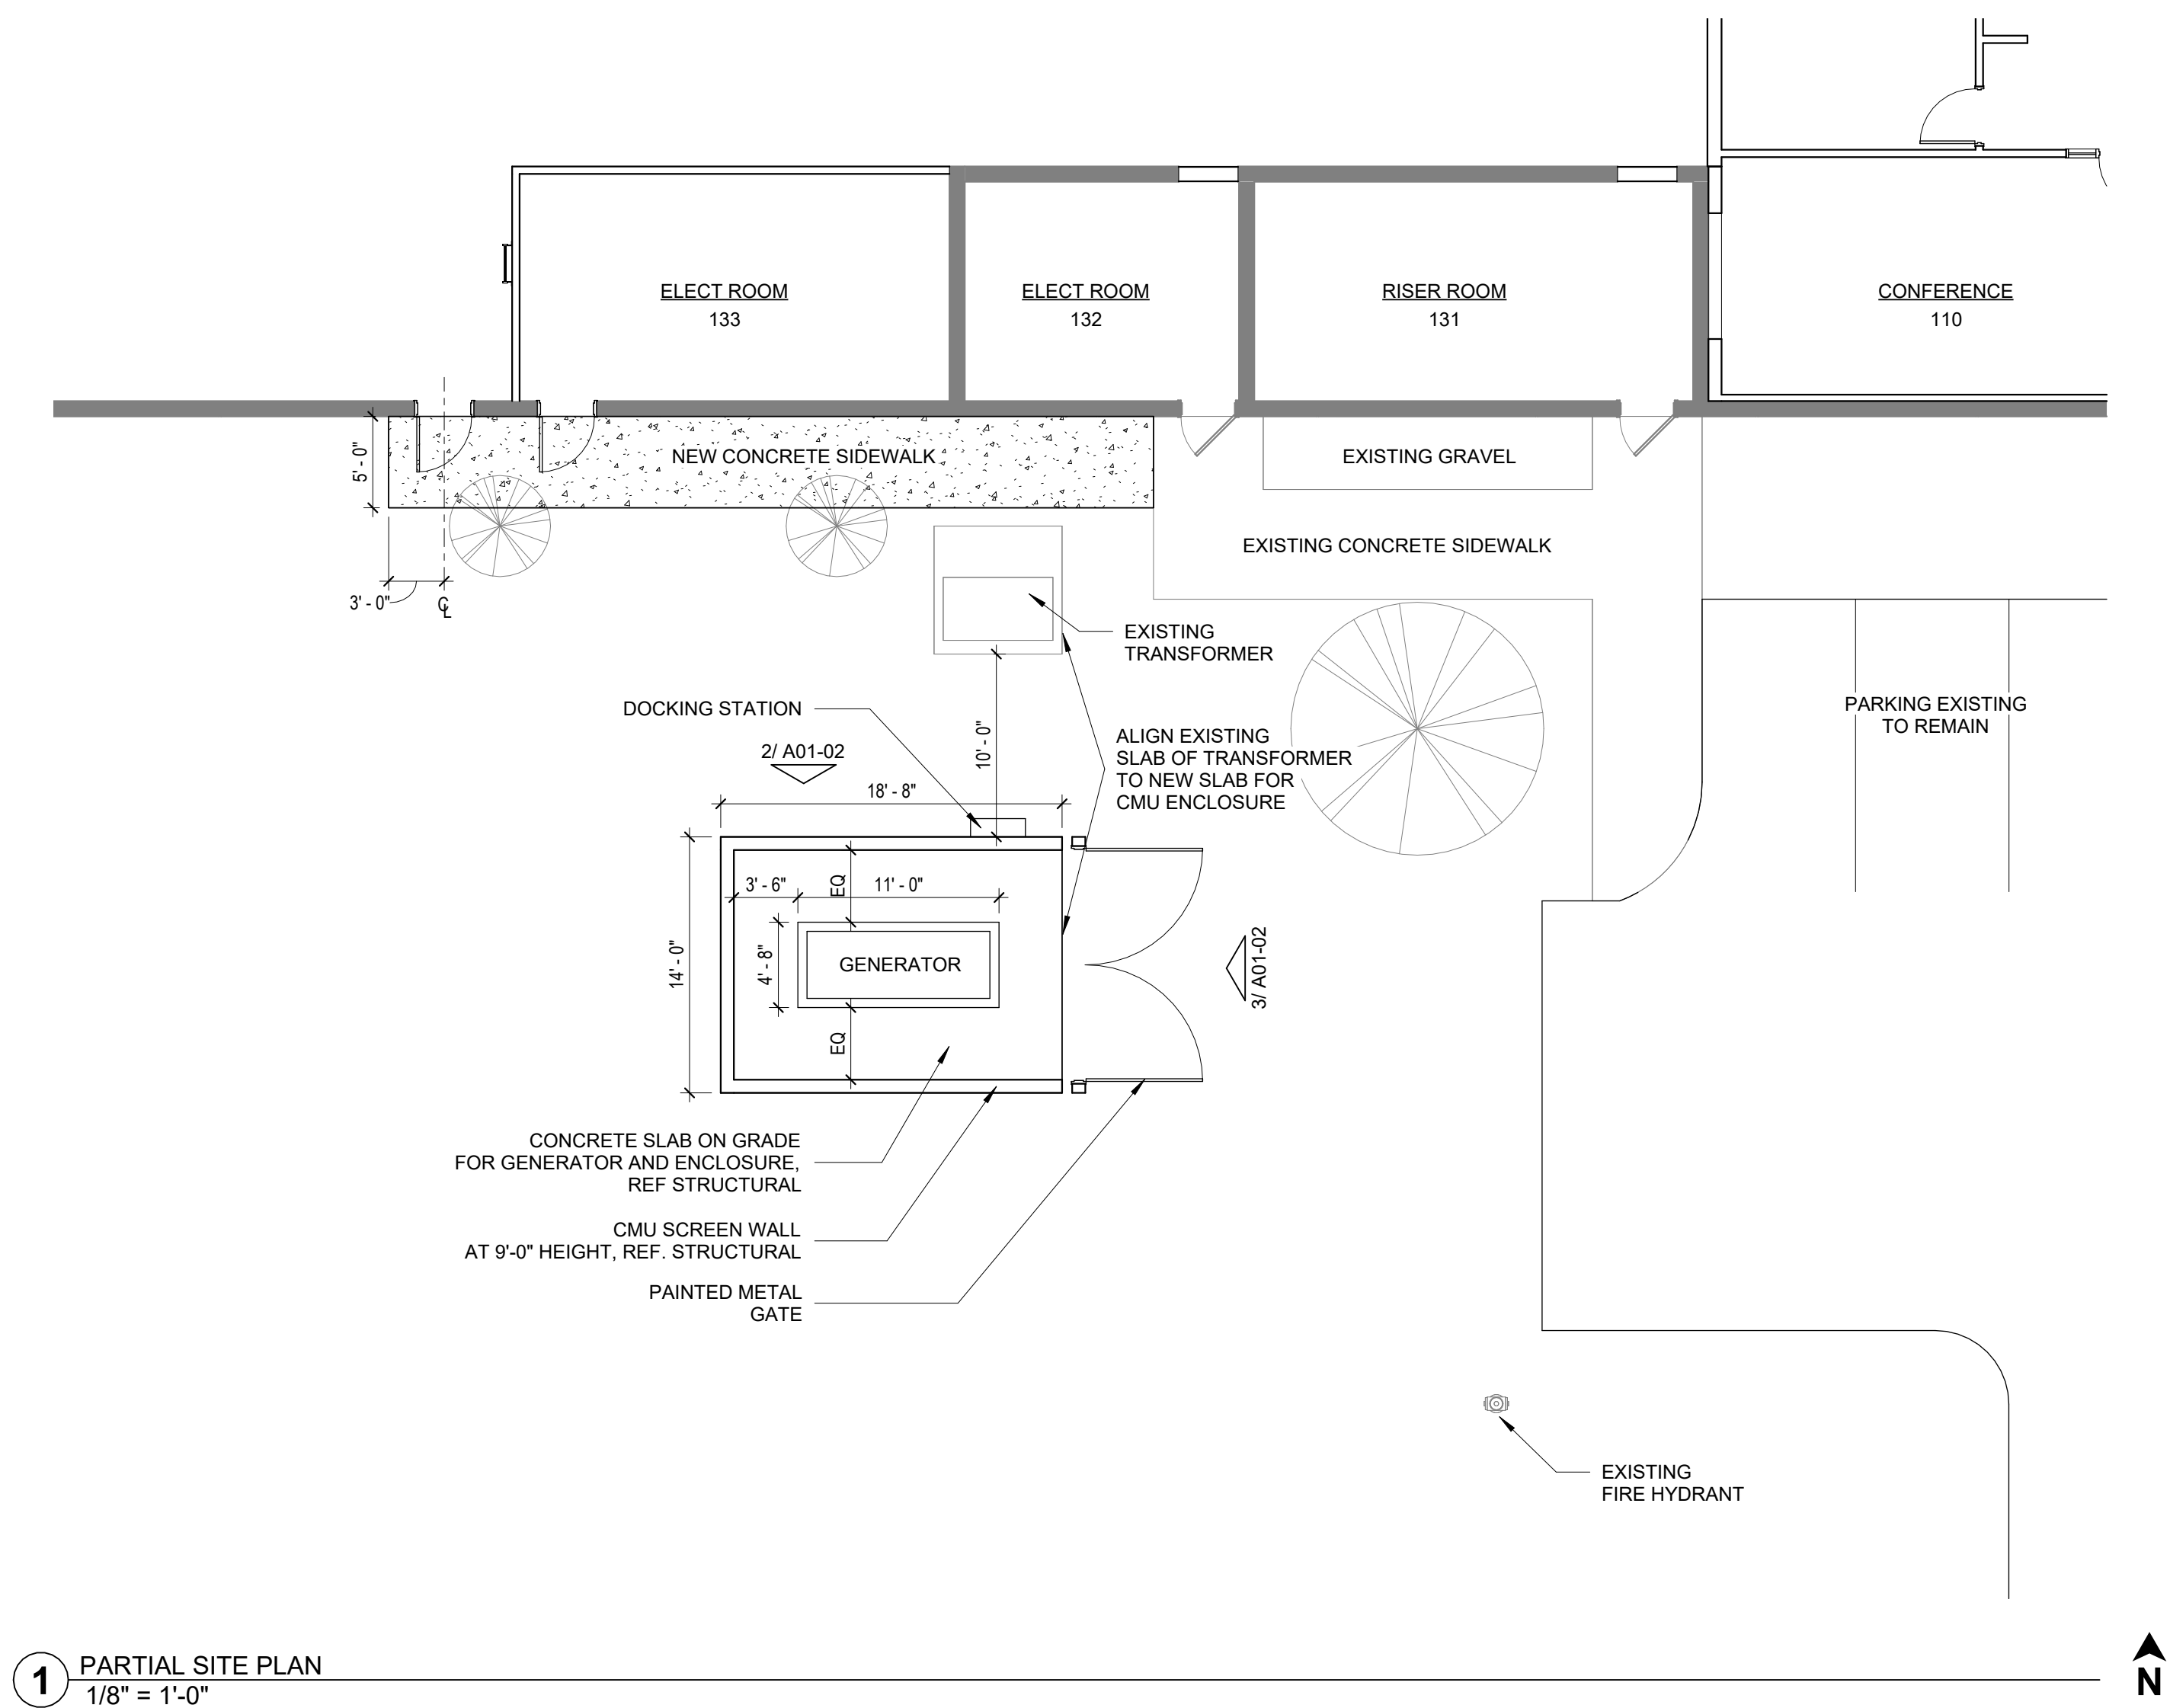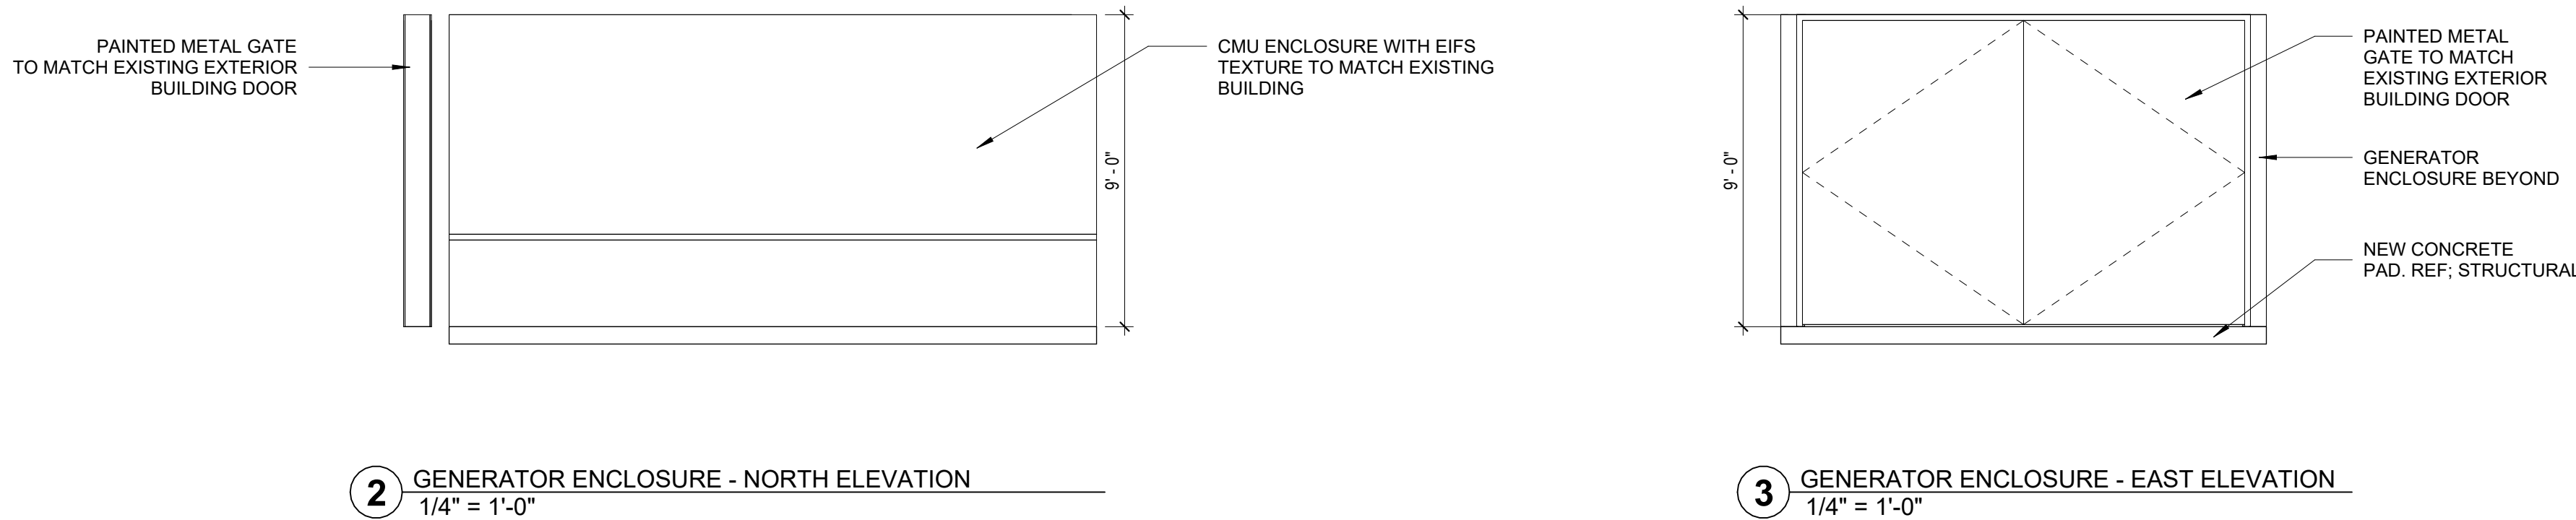

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


ENLARGED SITE
PLAN & DETAILS

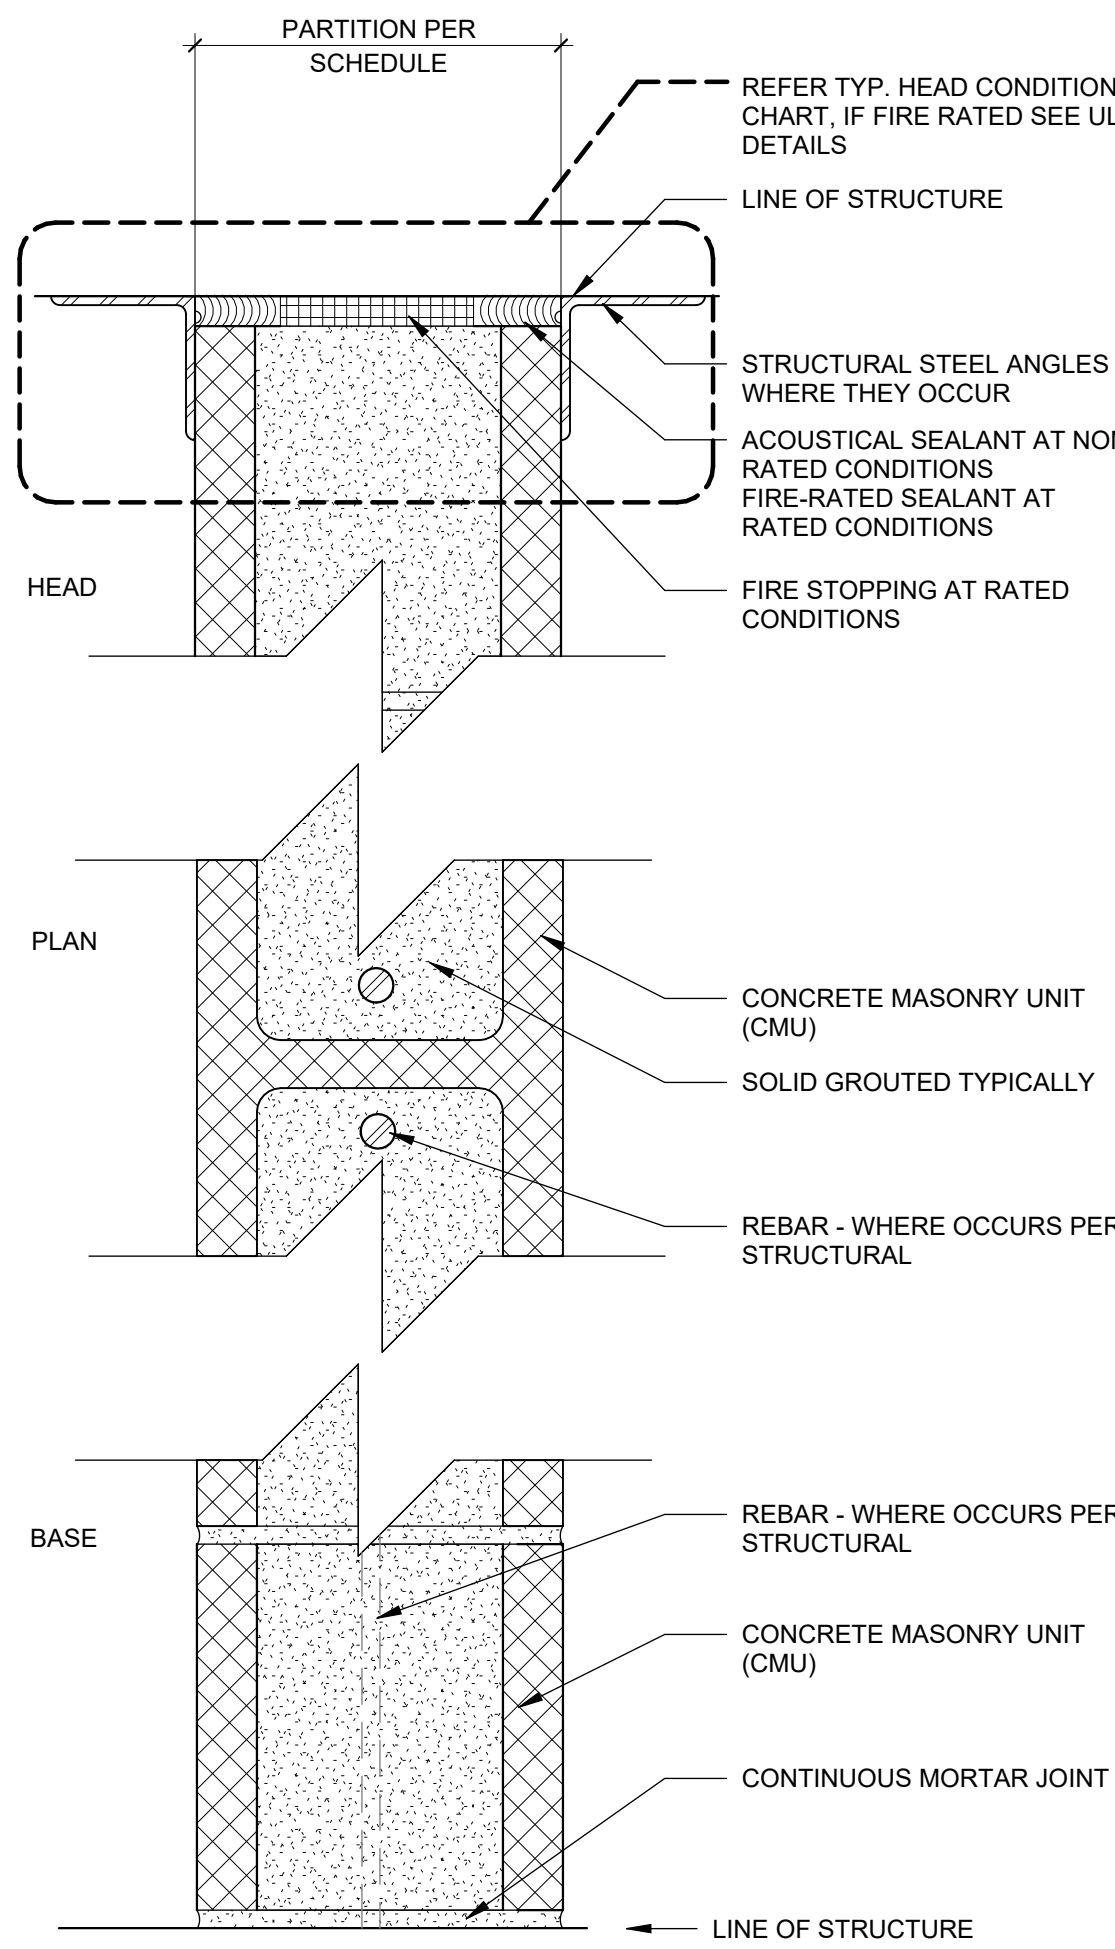

4 M TYPE PARTITION
N.T.S.

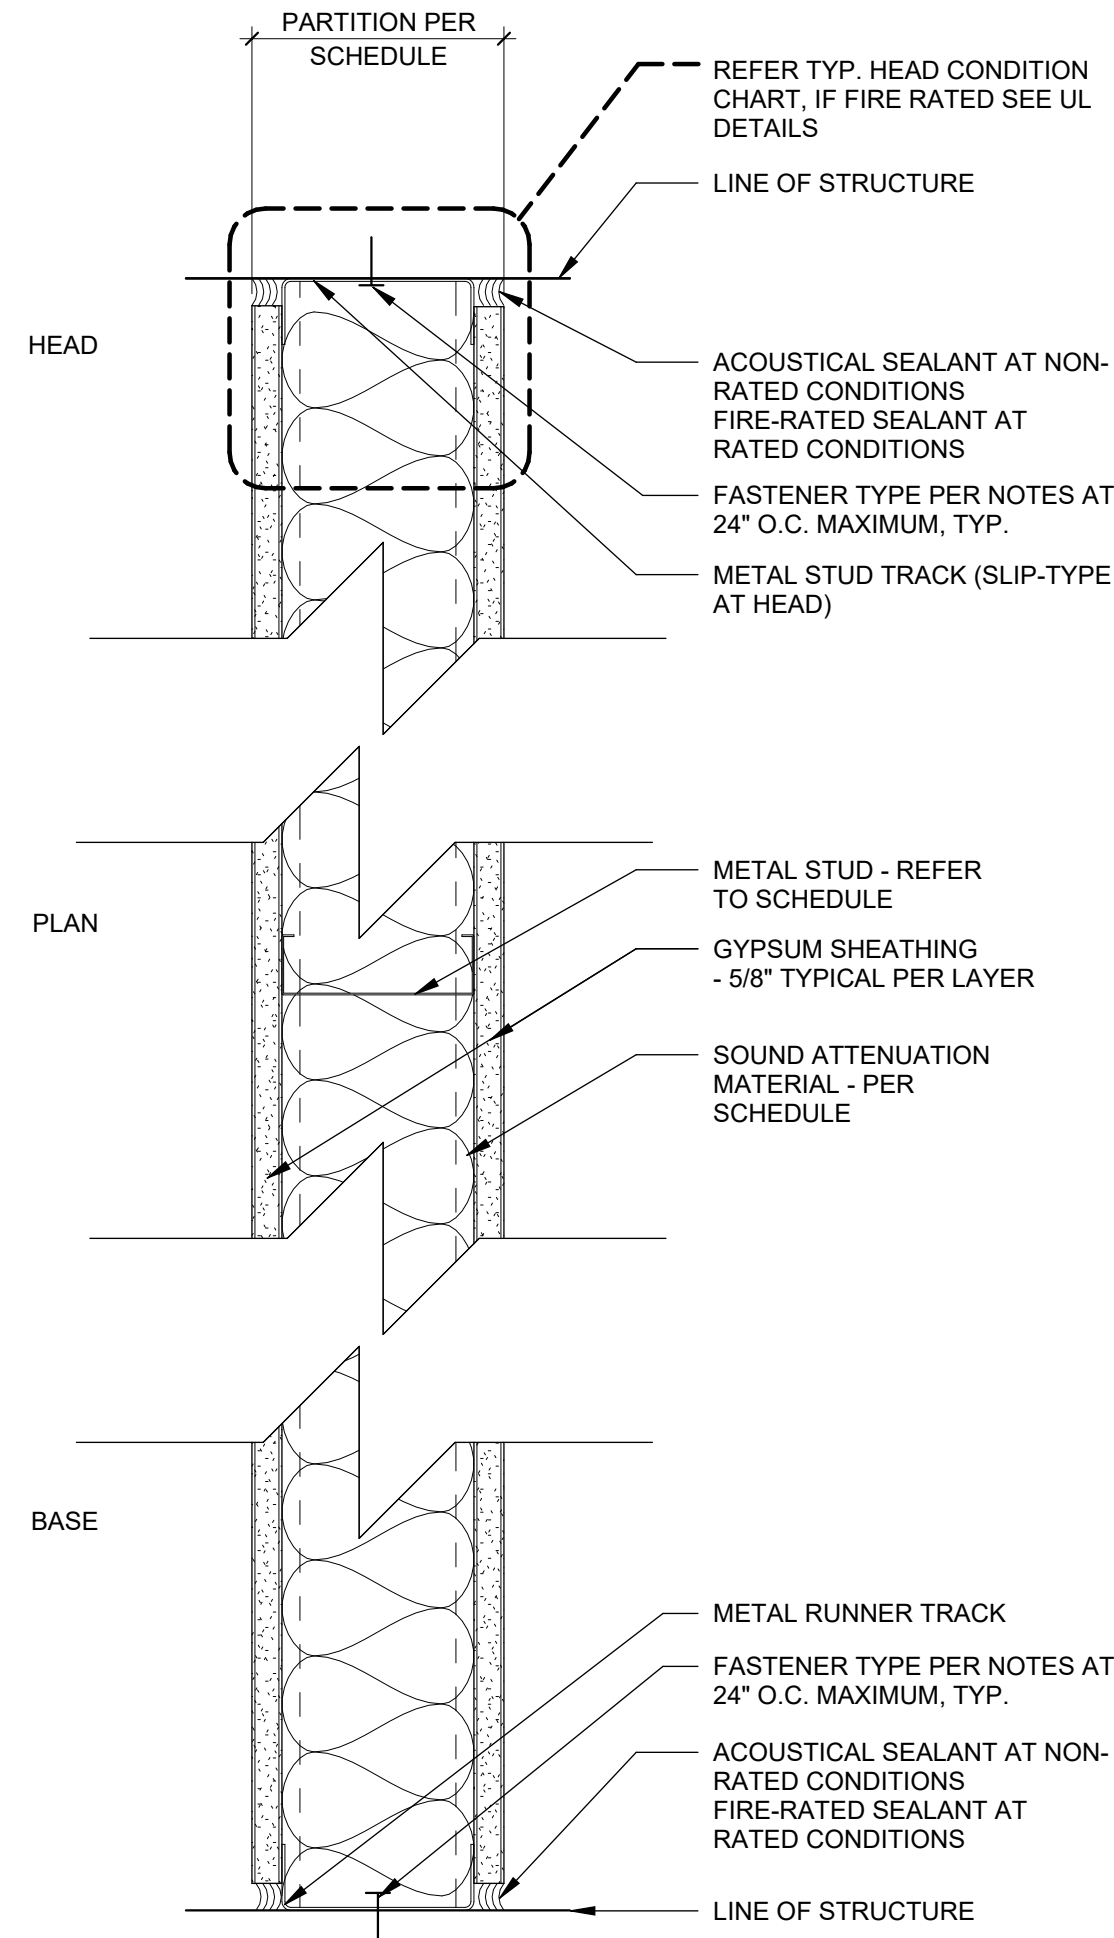

1 A TYPE PARTITION
N.T.S.

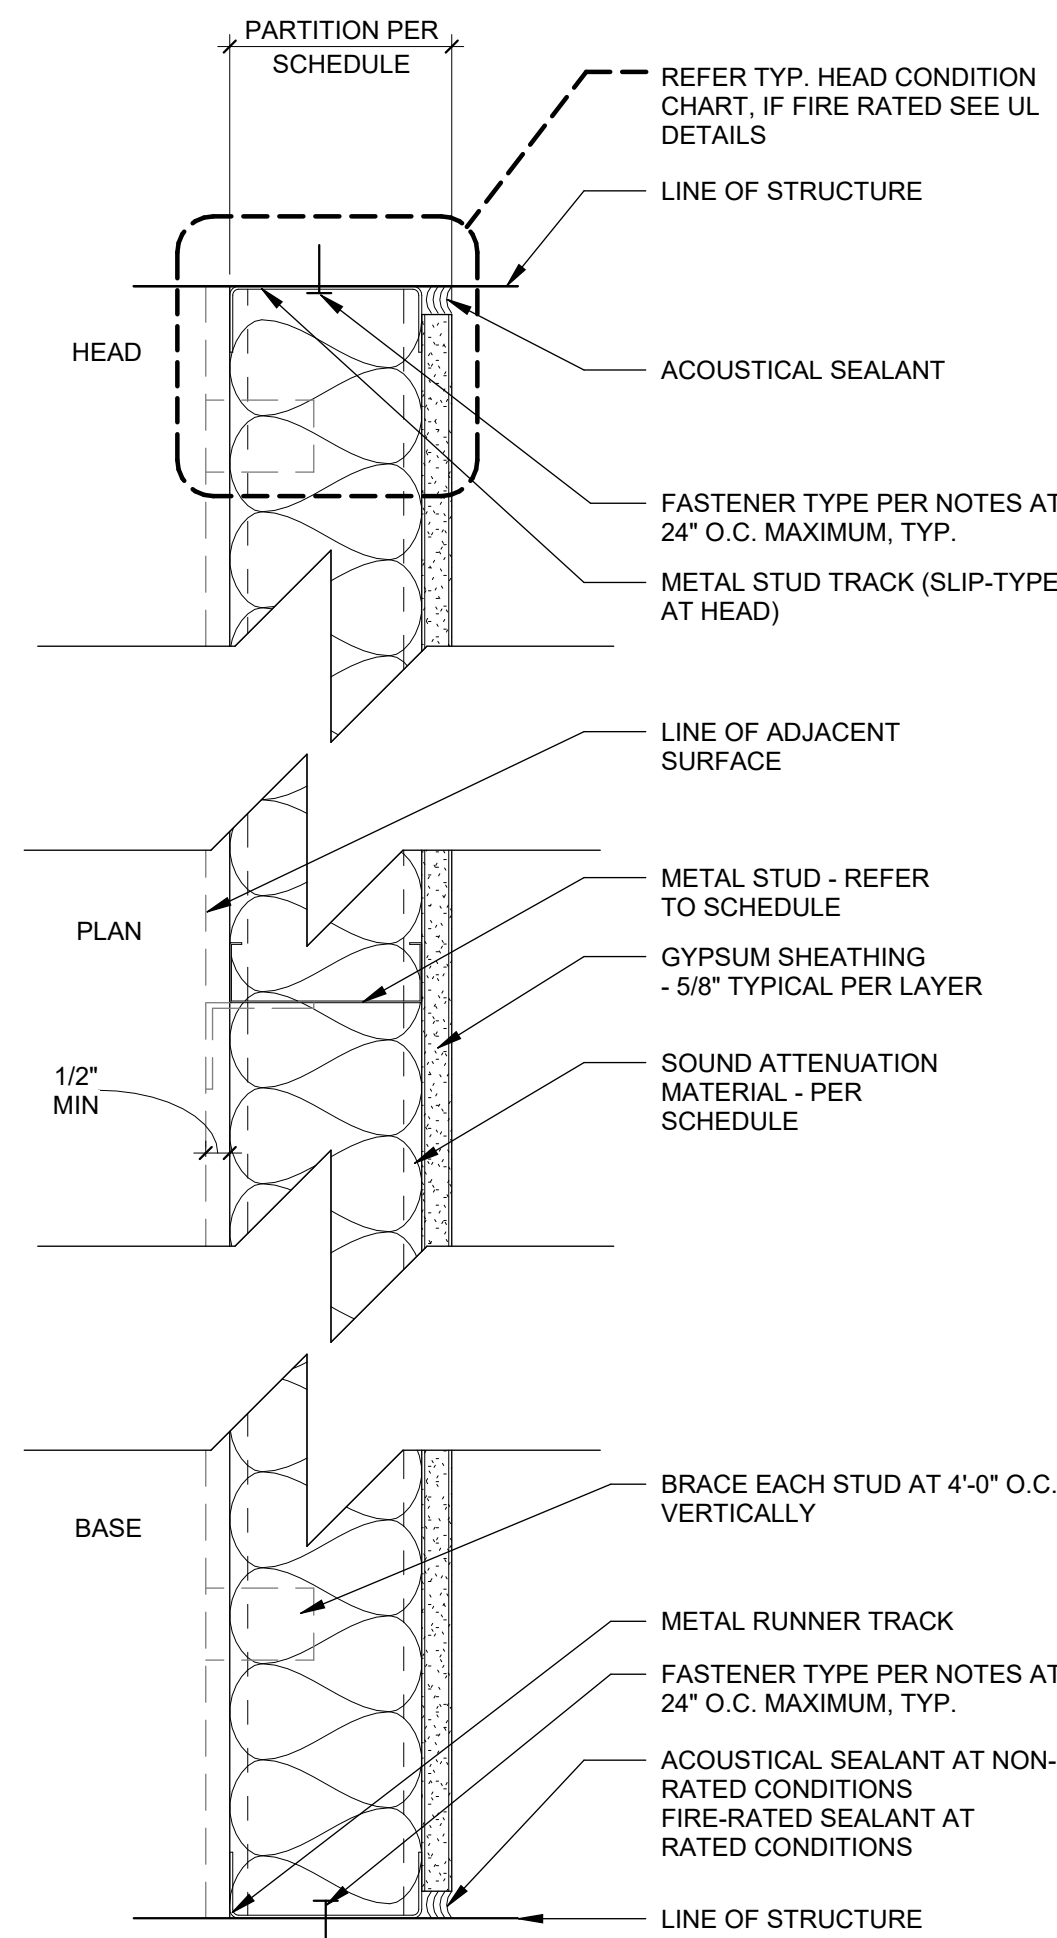


2 H TYPE PARTITION
N.T.S.

PARTITION ASSEMBLY NOTES

TAG	PARTITION SPECIAL ASSEMBLY NOTES
A	ACOUSTICAL INSULATION
S	SECURITY MESH & THERMAL INSULATION
T	THERMAL INSULATION
V	VAPOR BARRIER & THERMAL INSULATION
-	EMPTY WALL CAVITY

DOOR & WINDOW JAMB INTERIOR METAL STUD FRAMING SCHEDULE

STUDS AT 16" OC		
CLEAR OPENING WIDTH	MIN. NUMBER OF STUDS AT EACH JAMB	NOTES
5'-4" OR LESS	2	1. MULTIPLE STUDS SHALL BE FASTENED TOGETHER AT EACH JAMB.
5'-5" TO 8'-0"	3	2. STUD FRAMING IS TO ESTABLISH DESIGN BASIS.
8'-1" TO 10'-8"	4	3. CMF SUPPLIER SHALL ENGINEER ALL OPENINGS IN WALLS.
10'-9" OR MORE	SEE NOTE 5	4. AT FIRE-RATED PARTITIONS, USE SPECIFIED FIRE-RATED CONTROL JOINT ACCESSORY OR BLOCK STUD CAVITY BEHIND C.J. WITH TWO LAYERS OF 5/8" GYPSUM BOARD.
		5. FOR OPENING GREATER THAN 16" W/IN WITH THE GENERAL CONTRACTOR OR SUBCONTRACTOR IS TO PROVIDE ENGINEERING FOR THE WALL CONSTRUCTION VIA DEFERRED SUBMITTAL.

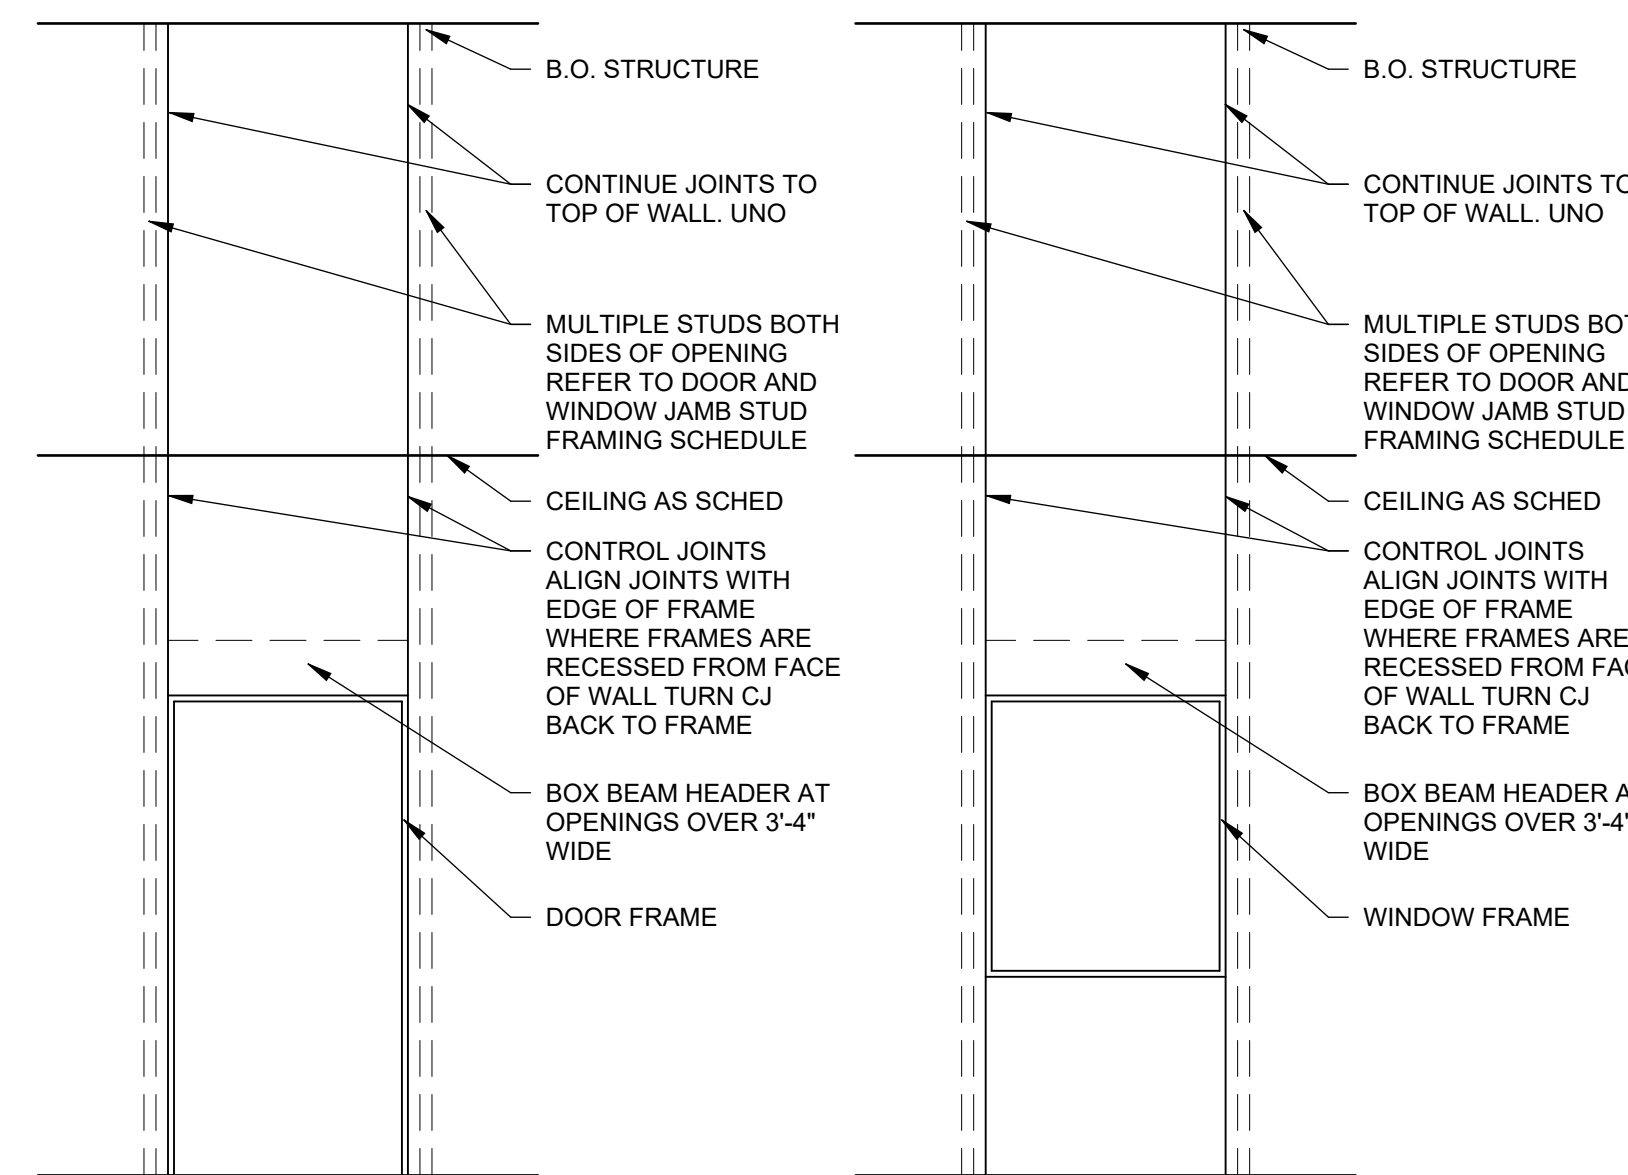


DOOR
(VIEW FROM INTERIOR)

WINDOW
(VIEW FROM INTERIOR)

INTERIOR PARTITION METAL STUD SPAN CHART FOR BRACING

INTERIOR PARTITION METAL STUD SPAN CHART
THIS DATA IS BASED ON ASTM C-754-20 STANDARD SPECIFICATION FOR INSTALLATION OF STEEL FRAMING MEMBERS TO RECEIVE SCREW ATTACHED GYPSUM PRODUCTS FOR THE PURPOSE OF LIMITING THE HEIGHTS OF UNBRACED PARTITIONS. THE USE OF THIS DATA IS SET TO MAXIMUM HEIGHT STANDARD FOR SUCH PARTITIONS. (CALCULATED AT 5 PSF LATERAL LOAD AND LATERAL DEFLECTION AND ONE (2) LAYER OF 5/8" GYPSUM BOARD EACH SIDE OF STUD.) FOR UNBRACED SPANS GREATER THAN 28'-1" CONSULT ARCHITECT

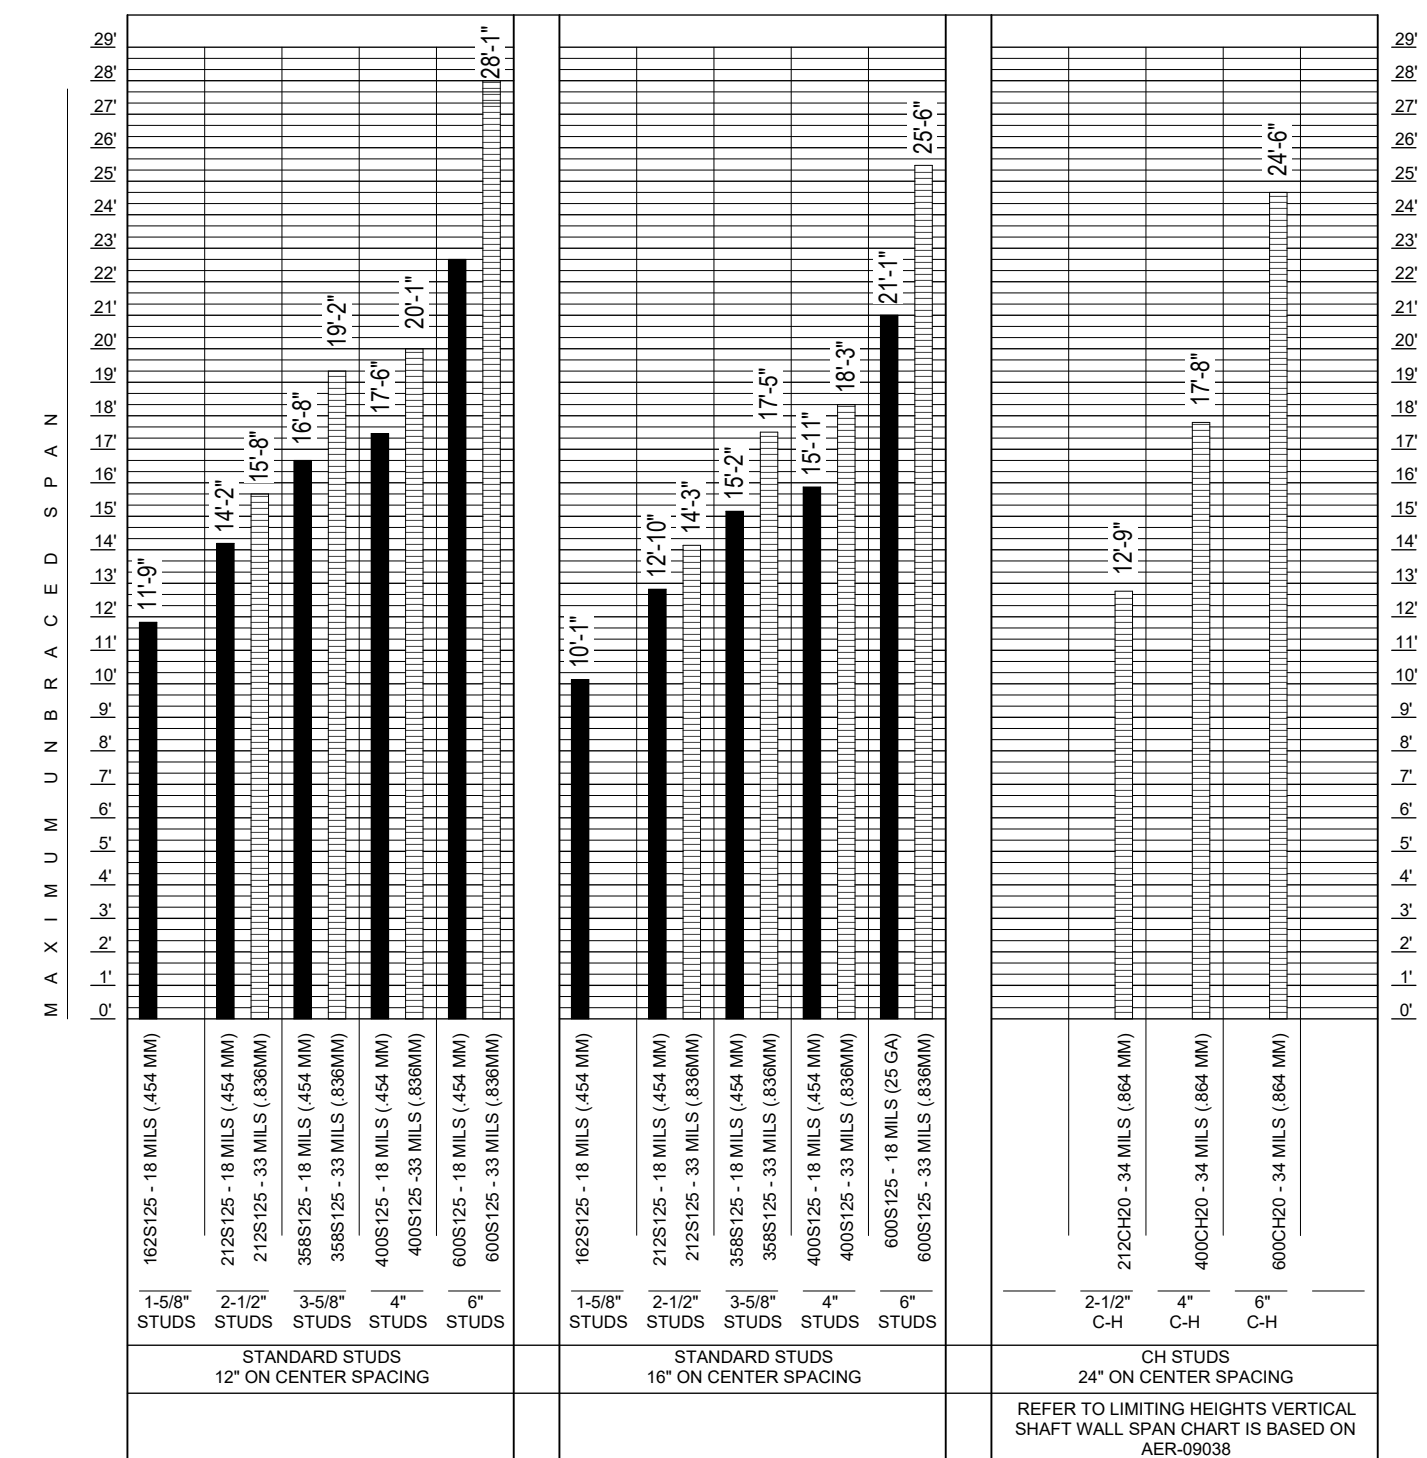

- NOTES:
1. MAXIMUM UNBRACED SPAN IS DEFINED AS THE TOTAL DISTANCE BETWEEN THE TOP OF FINISHED FLOOR AND THE UNDERSIDE OF STRUCTURAL DECK.
 2. SUSPENDED CEILING OF ANY KIND ARE NOT TO BE CONSIDERED APPROPRIATE LATERAL BRACING FOR ANY PARTITION CONSTRUCTION AND SHALL REDUCE THE MEASUREMENT OF UNBRACED SPAN.
 3. IN NO CASE SHALL THE MAXIMUM UNBRACED SPANS EXCEED THE REQUIREMENTS OF ASTM C-754.
 4. THE GYPSUM BOARD (ONE OR TWO LAYERS) MUST BE INSTALLED VERTICALLY FULL HEIGHT TO EACH STUD FLANGE USING MINIMUM TYPE S DRYWALL SCREWS SPACED A MAXIMUM OF 12" O.C. FOR STUDS AT 24" SPACING, AND 16" O.C. FOR STUDS AT 16" AND 12" SPACING. GYPSUM BOARD ONE OR TWO LAYERS MUST BE ATTACHED TO EACH TOP AND BOTTOM TRACK FLANGE USING MINIMUM TYPE S DRYWALL SCREWS AT A MAXIMUM OF 16" O.C.
 5. 1" ADJACENT TO THE HEIGHT VALUE INDICATES THAT FLEXURAL STRESS CONTROLS THE ALLOWABLE WALL HEIGHT.

CEILING JOIST SCHEDULE


SPAN (MAX)	CEILING JOIST
5'-0"	1 5/8" X 33 MILS (.836 MM) @16" O.C.
8'-0"	2 1/2" X 33 MILS (.836 MM) @16" O.C.
11'-0"	3 5/8" X 33 MILS (.836 MM) @16" O.C.
12'-0"	4" X 33 MILS (.836 MM) @16" O.C.
16'-0"	6" X 33 MILS (.836 MM) @16" O.C.

1. ALL STUDS & JOISTS ARE "S" TYPE.
2. WHERE CLG. JOISTS ARE SUPPORTED FROM SOFFIT HANGERS, CLG. JOIST SPANS SHALL NOT EXCEED 8'-0". WHERE CLG. JOISTS OCCUR @ BOTH SIDES OF HANGERS, JOIST SPANS SHALL NOT EXCEED 8'-0". PROVIDE ADDITIONAL LINES OF HANGERS AS REQ'D.

PARTITION TYPE NOTES

1. PARTITION TYPES APPLY TO INTERIOR PARTITIONS ONLY.
2. REFERENCE PLANS TO DETERMINE FIRE RATING REQUIREMENTS. FIRE RATING NOTATIONS SUPERSEDE HEAD CONDITION INDICATION.
3. SLIP TRACK HEAD CONDITIONS ARE REQUIRED AT ALL PARTITIONS TO DECK OR STRUCTURE. REFERENCE STRUCTURAL FOR DEFLECTION CRITERIA FOR THE PRIMARY STRUCTURE WHEN PROVIDED.
4. GENERAL CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTING THE COMPLETE ASSEMBLY OF ALL FIRE RATED PARTITIONS IN FULL ACCORDANCE WITH THE UL LISTING.
5. ALL INTERIOR PARTITION STUDS TO BE 18 MILS MINIMUM. SHAFT WALLS STUDS TO BE 33 MILS MINIMUM. REFER TO STUD SPAN FOR SPACING AND BRACING. REFERENCE SPECIFICATIONS FOR FRAMED OPENING CONDITIONS.
6. REFERENCE CHART BELOW FOR MINIMUM PARTITION BRACING REQUIREMENT.
7. PROVIDE BLOCKING WITHIN PARTITIONS FOR ALL PARTITION MOUNTED EQUIPMENT AND MILLWORK.
8. REFERENCE STRUCTURAL DRAWINGS AND SPECIFICATIONS FOR ANY ADDITIONAL REQUIREMENTS FOR CONCRETE MASONRY UNIT PARTITIONS.
9. STC VALUES REFLECT A FULLY SEALED PARTITION WITH SOUND ATTENUATION BATTS. FRAMING IS ASSUMED TO BE 18MILS @16" O.C.
10. ALL STC VALUES ARE BASED ON INSUL V10.0.4 SOUND ISOLATION MODELING. FOR "TYPICAL" PARTITIONS SUCH AS THESE, MODELING RESULTS HAVE BEEN SHOWN TO BE WITHIN 3 STC POINTS OF LABORATORY-TESTED ASSEMBLIES.
11. GYPSUM SHEATHING TO BE 5/8" MINIMUM THICKNESS, UNLESS NOTED OTHERWISE. REFER TO SPECIFICATIONS FOR TYPE PER LOCATIONS.
12. FASTENERS TYPES - CONCRETE STUD NAILS, EXPANSION ANCHORS, SHIELDED SCREWS, OR POWER-DRIVEN FASTENERS PER STRUCTURAL SYSTEM FASTENING TO PRIMARY STRUCTURE. CONFIRM TYPE WITH SPECIFICATIONS.
13. PROVIDE CONTROL JOINTS AT GYPSUM WALLS PARTITIONS - SEE PLANS, ELEVATIONS AND SPECIFICATIONS FOR CONTROLLED LOCATIONS REQUIREMENTS.

PARTITION TAG LEGEND

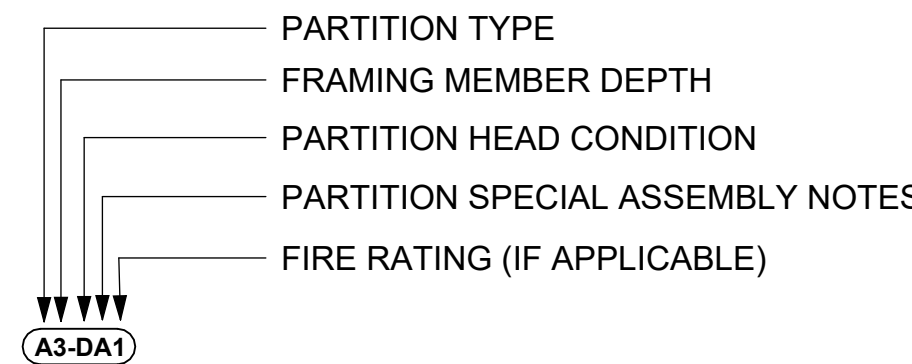

PARTITION TYPE CHART


TAG	SHEATHING	FRAMING MEMBER TYPE	SHEATHING
A	1 LAYER	METAL C-STUD	1 LAYER
B	1 LAYER	METAL C-STUD	2 LAYER
C	2 LAYER	METAL C-STUD	2 LAYER
D	1 LAYER	METAL C-STUD	1 LAYER
E	1 LAYER	METAL C-STUD	2 LAYER
F	2 LAYER	METAL C-STUD	2 LAYER
G	1 LAYER	METAL - HAT CHANNEL	NONE
H	1 LAYER	METAL C-STUD	NONE
J	2 LAYER	METAL C-STUD	NONE
M	NONE	CMU BLOCK	NONE
S	1 LAYER	METAL C/H-STUD	1 LAYER
T	2 LAYER	METAL C/H-STUD	1 LAYER

FRAMING MEMBER DEPTH CHART


TAG	METAL FRAMING DEPTH (IN)	METAL FRAMING DEPTH (MM)	METAL SHAFT (CH-STUD)	MASONRY UNIT	WOOD FRAMING
0	7/8" CHANNEL	-	-	-	-
1	1 5/8"	41.3	-	-	-
2	2 1/2"	63.5	2 1/2"	-	-
3	3 5/8"	88.9	-	-	-
4	4"	92.1	4"	3 5/8"	3 1/2"
6	6"	-	6"	5 5/8"	5 1/2"
8	8"	-	-	7 5/8"	7 1/4"
10	10"	-	-	-	9 1/4"
12	12"	-	-	11 5/8"	11 1/4"

TYPICAL PARTITION HEAD CONDITIONS AND BRACING

- B = BRACED PARTITION TO BOTTOM OF CEILING
WALL EXTENDS TO UNDERSIDE OF CEILING.
- C = BRACED PARTITION TO ABOVE HIGHEST CEILING
WALLS WILL TERMINATE AT A MINIMUM OF 6" ABOVE HIGHEST ADJOINING CEILING UNLESS NOTED OTHERWISE ON PLAN. TERMINATE 1 FULL COURSE ABOVE AT MASONRY WALLS.
- D = BRACED PARTITION TO UNDERSIDE OF DECK
WALLS WILL TERMINATE TO BOTTOM OF STRUCTURAL DECK.
- E = PARTIAL HEIGHT PARTITION
REF. ELEVATIONS FOR HEIGHT.
- F = UNBRACED PARTITION TO UNDERSIDE OF DECK
WALLS WILL TERMINATE TO BOTTOM OF STRUCTURAL DECK.
- G = BRACED PARTITION TO UNDERSIDE OF DECK
WALLS WILL TERMINATE TO BOTTOM OF STRUCTURAL DECK.

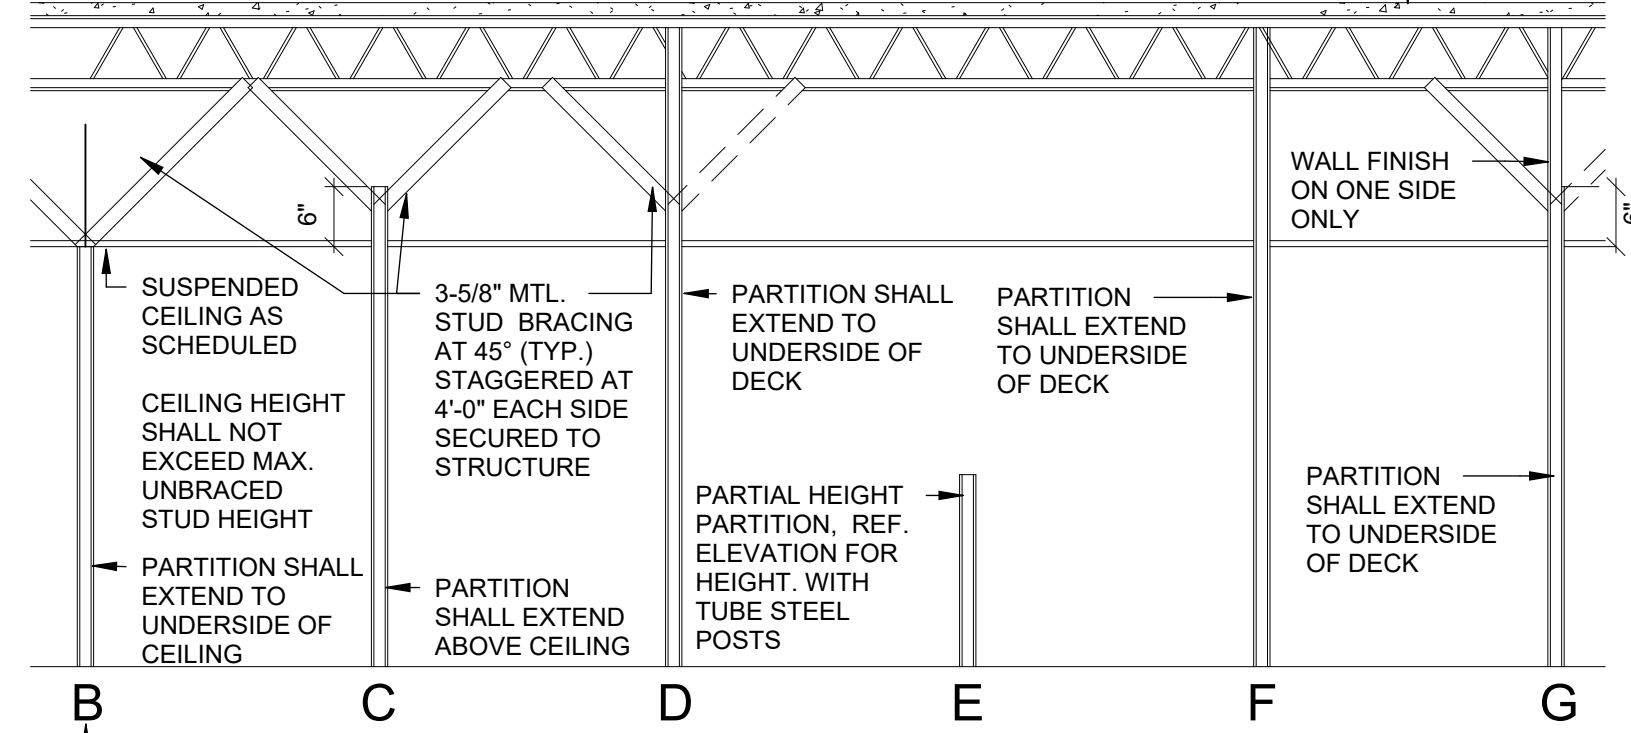

1. PARTITION STUD FRAMING AND GYP BOARD (BOTH SIDES) ON FULL HEIGHT WALLS SHALL EXTEND TO UNDERSIDE OF STRUCTURAL DECK.
2. PROVIDE PARTITION BRACING AT ALL ASSEMBLIES OVER 15'-0" IN HEIGHT, U.N.O.
3. REFER UL MANUAL FOR APPROPRIATE HEAD DETAILS.
4. STC RATINGS APPLY ONLY TO PARTITIONS WITH A "D" OR "F" HEAD CONDITION.
5. REFER TO STUD SPAN CHART FOR STUD MILS REQUIREMENTS BASED ON VERTICAL SPANS.
6. FOR TYPE E PARTITIONS, REFER TO PARTIAL HEIGHT WALL DETAIL FOR REQUIRED STEEL. ENSURE PLATES AND POSTS ARE CONCEALED WITHIN PARTITION.



△	ISSUANCES
---	-----------

Date of issue

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

KEYPLAN

FLOOR PLAN -
SEGMENT A

A02-01A

REFERENCE A00-00 SHEET FOR STANDARDS, CODE INFORMATION AND ADDITIONAL LEGENDS.

2. ALL PARTITIONS TYPES ARE A3-C4 U.N.O.

3. CONTRACTOR WITHOUT ADDITIONAL EXPENSE TO OWNER, TO OBTAIN NECESSARY LICENSES AND PERMITS, AND BE RESPONSIBLE FOR COMPLYING WITH ANY FEDERAL, STATE, COUNTY AND MUNICIPAL LAWS, CODES, AND REGULATIONS AND ANY PERMITS REQUIRED FOR THE WORK. CONTRACTOR SHALL BE LIMITED TO ANY LAWS OR REGULATIONS, AND USE OF LICENSED CONTRACTORS TO PERFORM PARTS OF WORK.

4. CONTRACTOR TO SEE THAT ALL SUBCONTRACTORS RECEIVE COMPLETE SETS OF DRAWINGS, ADDENDUMS, AND REVISED DRAWINGS OR ASSUME FULL RESPONSIBILITY FOR COORDINATION OF WORK WHEN COMPLETE SETS ARE NOT AVAILABLE TO THE SUBCONTRACTOR.

5. CONTRACTOR TO MAINTAIN A CURRENT AND COMPLETE SET OF CONSTRUCTION DRAWINGS ON SITE DURING ALL PHASES OF CONSTRUCTION.

6. CONTRACTOR IS RESPONSIBLE FOR REVIEWING EXISTING CONDITIONS IN THE BUILDING AND BECOMING FAMILIAR WITH BUILDING SYSTEMS, DETAILS, AND DIMENSIONS.

7. THE CONTRACTOR SHALL CONFIRM THAT THE WORK IS BUILDABLE AS SHOWN BEFORE PROCEEDING WITH CONSTRUCTION, AND ANY DISCREPANCIES SHALL BE COMMUNICATED TO THE ARCHITECT IN WRITING BEFORE PROCEEDING WITH THE WORK.

8. WORK WHICH CREATES LEVELS OF NOISE WHICH ARE DISRUPTIVE TO THE CONDUCT OF BUSINESS WITHIN THE BUILDING, OR ACTIVITIES WHICH CREATE HANDFUL OR OFFENSIVE ODORS WHICH TRAVEL PAST THE WORK AREA MUST BE ADJUSTED OUTSIDE OF NORMAL BUSINESS HOURS AND COORDINATED WITH THE TENANT.

9. CONSTRUCTION NOTES AND/OR DRAWINGS SUPPLIED ARE TO ILLUSTRATE THE DESIGN AND GENERAL TYPE OF CONSTRUCTION DESIRED AND ARE INTENDED TO APPLY TO THE FINEST QUALITY OF CONSTRUCTION MATERIAL AND WORKMANSHIP TECHNIQUE.

10. IN THE EVENT A CONTRADICTION OCCURS WITHIN THESE CONSTRUCTION DOCUMENTS OR EXISTING CONDITIONS, NOTIFY ARCHITECT IMMEDIATELY FOR INTERPRETATION. WORK UNDERTAKEN PRIOR TO NOTIFICATION WILL BE AT THE CONTRACTOR'S SOLE EXPENSE AND RESPONSIBILITY.

11. CONTRACTOR TO PROVIDE FIRE PROTECTION AS REQUIRED BY ALL APPLICABLE CODES. CONTRACTOR TO REVIEW LOCATION OF ALL FIRE EXTINGUISHERS, HOSE CARRIERS, EXTINGUISHERS, ETC. WITH ARCHITECT PRIOR TO ROUGH-IN.

12. FIRE EXTINGUISHER CABINETS TO BE PROVIDED IN LOCATIONS AND IN QUANTITY AS INDICATED ON INTERIOR ARCHITECTURAL FLOOR PLANS G01-01 SHEET. ALL FINAL LOCATIONS TO BE APPROVED BY LOCAL CODE OFFICIALS. GENERAL CONTRACTOR IS RESPONSIBLE FOR VERIFYING THAT ALL FIRE EXTINGUISHERS ARE IN COMPLIANCE AND ANY FIRE EXTINGUISHERS NOT IN COMPLIANCE ARE TO BE REPLACED BY CONTRACTOR.

13. FIRE PROOFING REMOVED FROM COLUMNS AND BEAMS DURING THE COURSE OF CONSTRUCTION SHALL BE REPLACED WITH THE SAME MATERIAL AND RATINGS AS THAT WHICH WAS REMOVED.

14. PARTITIONS SHOWN ALIGNED WITH BASE BUILDING STRUCTURE SHALL BE FLUSH WITH BASE BUILDING STRUCTURE, U.O.

15. CONFLICTS WITH SCHEDULED PARTITION AND CEILING FINISHES, FURNITURE, ETC. TO BE IDENTIFIED AND REPORTED TO ARCHITECT IN WRITING BEFORE PROCEEDING WITH THE WORK.

16. CONTRACTOR TO THOROUGHLY CLEAN THE ENTIRE SPACE TO THE SATISFACTION OF TENANT PRIOR TO BEING TURNED OVER TO THE TENANT.

17. INSPECT ALL MATERIALS SUPPLIED BY TENANT UPON RECEIPT OF SUCH ITEMS. THE CONTRACTOR SHALL NOT INSTALL ANY DEFECTIVE OR DAMAGED MATERIALS, BUT SHALL NOTIFY THE TENANT IMMEDIATELY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COST OF ANY ASSOCIATED DAMAGE, INCLUDING A DAMAGED OR DEFECTIVE ITEM IF SUCH DAMAGE OR DEFECT SHOULD HAVE REASONABLY BEEN NOTICED DURING CONTRACTOR'S INSPECTION OF MATERIAL UPON RECEIPT.

18. PARTITIONS WHICH TERMINATE AT EXTERIOR WINDOW MULLIONS ARE TO BE LOCATED CENTERLINE PARTITION AT CENTERLINE OF MULLION U.N.O. PROVIDE TO THE TENANT A DURABLE PARTITION CAP AT WINDOW MULLION AS REQUIRED. REFERENCE DETAIL.

19. CONTRACTOR TO VERIFY ROUGH OPENING DIMENSION REQUIREMENTS OF ALL APPLIANCES AND COORDINATE WITH MILLWORK.

20. FIRE SEAL ALL PENETRATIONS AND JOINTS AT FIRE RATED PARTITIONS AND FLOOR ASSEMBLIES, TYP.

21. CONTRACTOR TO COORDINATE ALL STAGING AREA WITH OWNER AND ANY OTHER CONTRACTORS EMPLOYED BY THE OWNER PRIOR TO COMMENCEMENT OF WORK.

22. ALL BATT INSULATIONS TO BE STRAPPED IN PLACE WITH WIRE MESH ATTACHED TO STRUCTURE WHERE REQUIRED.

23. INSULATE EXPOSED HOT WATER LINES AND DRAIN PIPES AS REQUIRED WHERE ACCESSIBLE PROVISIONS HAVE BEEN MADE.

24. PROVIDE CONTROL JOINTS IN GYPSUM BOARD WALLS ABOVE THE CORNER OF ALL INTERIOR DOOR AND WINDOW FRAMES IN THE CENTER OF STRAIGHT WALLS 3'-0" IN LENGTH OR GREATER OR AS INDICATED ON INTERIOR ELEVATIONS. PROVIDE HORIZONTAL CONTROL JOINTS AT 10'-0" A.F.F. THROUGHOUT BUILDING, TYP.

25. PUTTY PAKS TO BE PROVIDED AT ALL ELECTRICAL OUTLETS AND PARTITION PENETRATIONS.

26. CONTRACTOR TO CONTACT OWNER TO OBTAIN BUILDING RULES AND REGULATION FOR CONSTRUCTION. BUILDING RULES (SEE BELOW), OPERATIONAL HOURS, AND IN GENERAL, ANY SPECIAL BUILDING REQUIREMENTS WHICH WILL AFFECT THEIR WORK, IF (OVERTIME WORK IS REQUIRED BY ANY TRADE, APPROVAL MUST BE OBTAINED FROM THE OWNER PRIOR TO ANY WORK, INCLUDING COST). IN GENERAL, ALL CONSTRUCTION WORK SHALL BE DONE ON REGULAR TIME EXCEPT NOISE GENERATING CONSTRUCTION. IT SHALL BE THE RESPONSIBILITY OF EACH CONTRACTOR TO BE AWARE OF AND COMPLY WITH ALL REGULATIONS GOVERNING WORK ON THE PREMISES INCLUDING THE FOLLOWING:

(A) DATE AND TIME OF DELIVERY TO BE ESTABLISHED WITH THE PERSON IN CHARGE OF JURISDICTION OVER PREMISES (OVERTIME CHARGES AND/OR ANY NECESSARY EXPENSE SHALL BE PAID BY THE CONTRACTOR REQUESTING SERVICE).

(B) DURING CONSTRUCTIONS, INCLUDING SIZE AND LOADING CAPACITY OF ELEVATORS, SET OF DOORWAYS, CORRIDORS, WINDOW OPENINGS, ETC. SHALL BE CHECKED FOR TIMES BEING CURTAILED BY CONTRACTOR REQUESTING DELIVERY.

27. ALL COLUMN FURRUTOS ARE E-3CA U.N.O.; HOLD TIGHT TO VERTICAL ELEMENTS.

28. MAINTAIN EXTERIOR AND INTERIOR DOOR CLEARANCES SHOWN ON A08-01.

C01 PROVIDE 4X8H3/4" PLYWOOD SHEET PLUNED TO WALL FOR EQUIPMENT, PAINT TO MATCH ADJACENT WALL COLOR. REEF. FOR EXTENTS

C02 PROVIDE IN-WALL PLYWOOD BLOCKING FOR WALL MOUNTED EQUIPMENT. VERIFY MOUNTING HEIGHT OF EQUIPMENT PRIOR TO ROUGH IN

C03 TERMINATE PARTITION INTO CENTER OF EXISTING WINDOW MULLION USING GORDON MULLION PLUS MATERIAL PER MANUFACTURER'S INSTRUCTION. FILL GAPS AS REQUIRED AT JOINTS

C11 INFILL WALL OPENING. PATCH AND PAINT TO MATCH EXISTING.


C16 FLOORBOX OUTLET, REEF ELECTRICAL. FINAL LOCATION TO BE COORDINATED WITH OWNER PROVIDED FURNITURE.

C18 EXISTING WINDOW SILL TO BE PAINTED TO MATCH NEW WALL PAINT, UNDERSIDE OF SILL TO BE CAULKED. PATCH WALL PAINT

C21 ONE TIME CLOCK TO BE ADA ACCESSIBLE.

CR	CARD READER
RS	ROOM SCHED
TC	TIME CLOCK



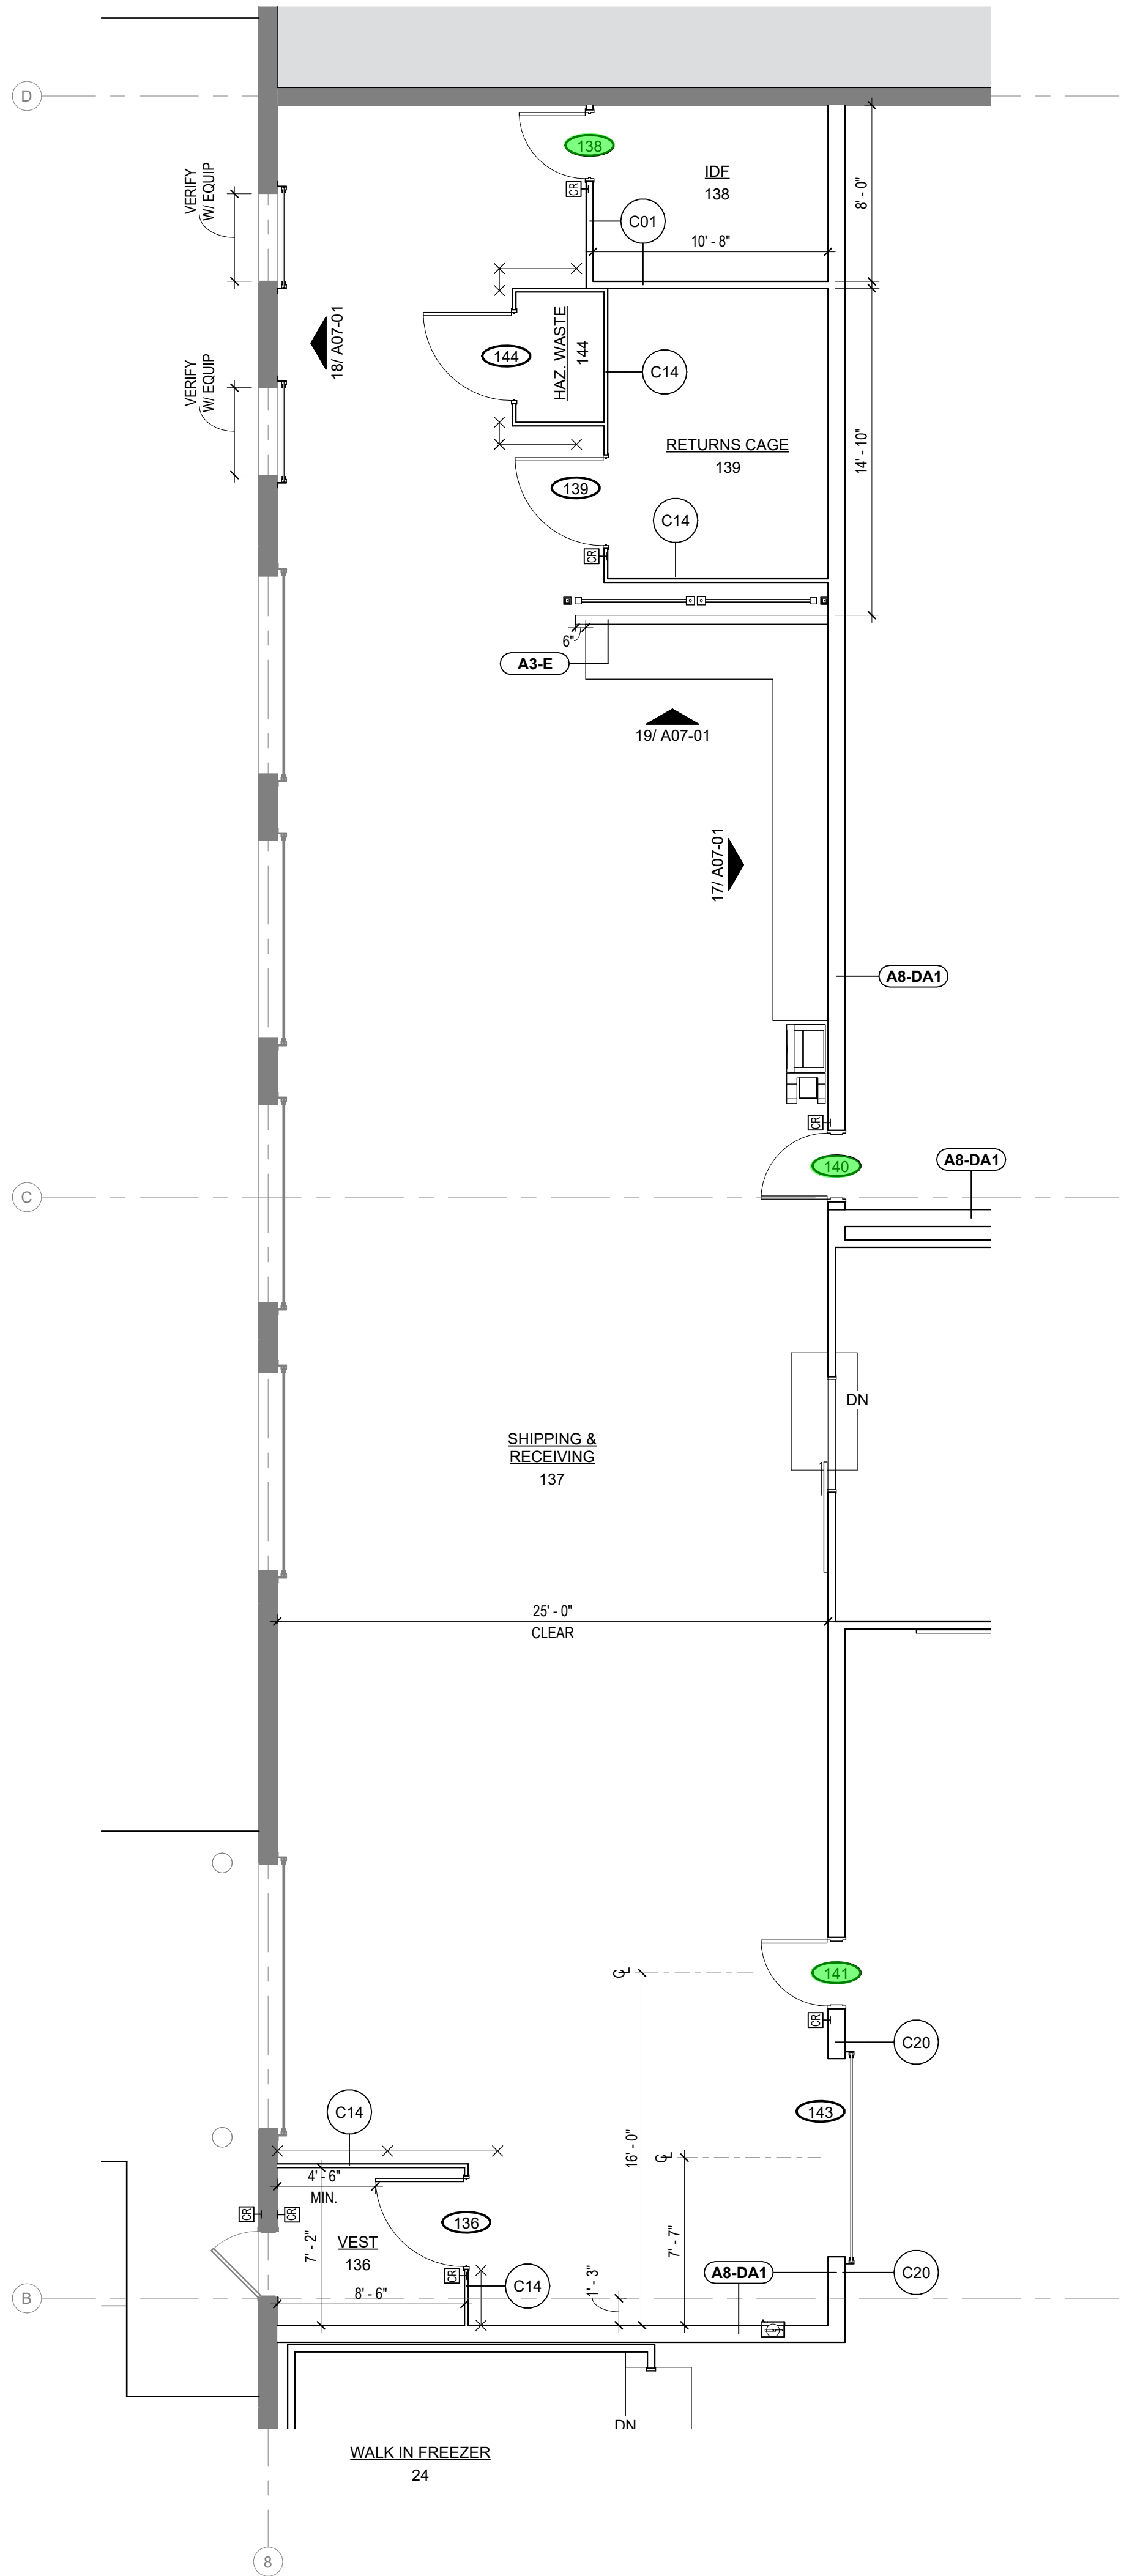

1 FLOOR PLAN - SEGMENT B
3/16" = 1'-0"

GENERAL CONSTRUCTION NOTES

1. REFERENCE A00-00 SHEET FOR STANDARDS, CODE INFORMATION AND ADDITIONAL LEGENDS.
2. ALL PARTITIONS TYPES ARE A3-CA, U.N.O.
3. CONTRACTOR, WITHOUT ADDITIONAL EXPENSE TO OWNER, TO OBTAIN NECESSARY LICENSES AND PERMITS, AND BE RESPONSIBLE FOR COMPLYING WITH ANY FEDERAL, STATE, COUNTY AND MUNICIPAL LAWS, CODES, AND REGULATIONS APPLICABLE TO PERFORMANCE OR WORK, INCLUDING BUT NOT LIMITED TO, ANY LAWS OR REGULATIONS, AND USE OF LICENSED CONTRACTORS TO PERFORM PARTS OF WORK.
4. CONTRACTOR TO SEE THAT ALL SUBCONTRACTORS RECEIVE COMPLETE SETS OF DRAWINGS, ADDENDUMS, AND REVISED DRAWINGS OR ASSUME FULL RESPONSIBILITY FOR COORDINATION OF WORK WHEN COMPLETE SETS ARE NOT AVAILABLE TO THE SUBCONTRACTOR.
5. CONTRACTOR TO MAINTAIN A CURRENT AND COMPLETE SET OF CONSTRUCTION DRAWINGS ON SITE DURING ALL PHASES OF CONSTRUCTION.
6. CONTRACTOR IS RESPONSIBLE FOR REVIEWING EXISTING CONDITIONS IN THE BUILDING AND BECOMING FAMILIAR WITH BUILDING SYSTEMS, DETAILS, AND DIMENSIONS.
7. THE CONTRACTOR SHALL CONFIRM THAT THE WORK IS BUILDABLE AS SHOWN BEFORE PROCEEDING WITH CONSTRUCTION, AND ANY DISCREPANCIES SHALL BE COMMUNICATED TO THE ARCHITECT IN WRITING BEFORE PROCEEDING WITH THE WORK.
8. WORK WHICH CREATES LEVELS OF NOISE WHICH ARE DISRUPTIVE TO THE CONDUCT OF BUSINESS WITHIN THE BUILDING, OR ACTIVITIES WHICH CREATE HARMFUL OR OFFENSIVE ODORS WHICH TRAVEL PAST THE WORK AREA MUST BE ACCOMPLISHED OUTSIDE OF NORMAL BUSINESS HOURS AND COORDINATED WITH THE TENANT.
9. CONSTRUCTION NOTES AND/OR DRAWINGS SUPPLIED ARE TO ILLUSTRATE THE DESIGN AND GENERAL TYPE OF CONSTRUCTION DESIRED AND ARE INTENDED TO APPLY TO THE FINEST QUALITY OF CONSTRUCTION MATERIAL AND WORKMANSHIP THROUGHOUT.
10. IN THE EVENT A CONTRADICTION OCCURS WITHIN THESE CONSTRUCTION DOCUMENTS OR EXISTING CONDITIONS, NOTIFY ARCHITECT IMMEDIATELY FOR INTERPRETATION. WORK UNDERTAKEN PRIOR TO NOTIFICATION WILL BE AT THE CONTRACTOR'S SOLE EXPENSE AND RESPONSIBILITY.
11. CONTRACTOR TO PROVIDE FIRE PROTECTION AS REQUIRED BY ALL APPLICABLE CODES. CONTRACTOR TO REVIEW LOCATION OF ALL FIRE EXTINGUISHERS, HOSE CABINETS, SPRINKLER HEADS, ETC. WITH ARCHITECT PRIOR TO ROUGH-IN.
12. FIRE EXTINGUISHER CABINETS TO BE PROVIDED IN LOCATIONS AND IN QUANTITY AS INDICATED ON INTERIOR ARCHITECTURAL FLOOR PLANS G01-01 SHEET. ALL FINAL LOCATIONS TO BE APPROVED BY LOCAL CODE OFFICIALS. GENERAL CONTRACTOR IS RESPONSIBLE FOR VERIFYING THAT ALL FIRE EXTINGUISHERS ARE IN COMPLIANCE. ANY FIRE EXTINGUISHERS NOT IN COMPLIANCE ARE TO BE REPLACED BY CONTRACTOR.
13. FIRE PROOFING REMOVED FROM COLUMNS AND BEAMS DURING THE COURSE OF CONSTRUCTION SHALL BE REPLACED WITH THE SAME MATERIAL AND RATING AS THAT WHICH WAS REMOVED.
14. PARTITIONS SHOWN ALIGNED WITH BASE BUILDING STRUCTURE SHALL BE FLUSH WITH BASE BUILDING STRUCTURE, U.N.O.
15. CONFLICTS WITH SCHEDULED PARTITION AND CEILING FINISHES, FURNITURE, LIGHTING, ETC. TO BE COMMUNICATED TO ARCHITECT IN WRITING BEFORE PROCEEDING WITH THE WORK.
16. CONTRACTOR TO THOROUGHLY CLEAN THE ENTIRE SPACE TO THE SATISFACTION OF TENANT PRIOR TO BEING TURNED OVER TO THE TENANT.
17. INSPECT ALL MATERIALS SUPPLIED BY TENANT UPON RECEIPT OF SUCH ITEMS. THE CONTRACTOR SHALL NOT INSTALL ANY DEFECTIVE OR DAMAGED MATERIALS, BUT SHALL NOTIFY THE TENANT IMMEDIATELY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COSTS ASSOCIATED WITH REPLACING A DAMAGED OR DEFECTIVE ITEM IF SUCH DAMAGE OR DEFECT SHOULD HAVE REASONABLY BEEN NOTICED DURING CONTRACTOR'S INSPECTION OF MATERIAL UPON RECEIPT.
18. PARTITIONS WHICH TERMINATE AT EXTERIOR WINDOW MULLIONS ARE TO BE LOCATED CENTERLINE OF PARTITION AT CENTERLINE OF MULLION U.N.O. PROVIDE BUILDING STANDARD PARTITION CAP AT WINDOW MULLION AS REQUIRED. REFERENCE DETAIL.
19. CONTRACTOR TO VERIFY ROUGH OPENING DIMENSION REQUIREMENTS OF ALL APPLIANCES AND COORDINATE WITH MILLWORK.
20. FIRE SEAL ALL PENETRATIONS AND JOINTS AT FIRE RATED PARTITIONS AND FLOOR ASSEMBLIES, TYP.
21. CONTRACTOR TO COORDINATE ALL STAGING AREAS WITH OWNER AND ANY OTHER CONTRACTORS EMPLOYED BY THE OWNER PRIOR TO COMMENCEMENT OF WORK.
22. ALL BATT INSULATIONS TO BE STRAPPED IN PLACE WITH WIRE MESH ATTACHED TO STRUCTURE WHERE REQUIRED.
23. INSULATE EXPOSED HOT WATER LINES AND DRAIN PIPES AS REQUIRED WHERE ACCESSIBLE PROVISIONS HAVE BEEN MADE.
24. PROVIDE CONTROL JOINTS IN GYPSUM BOARD WALLS ABOVE THE CORNER OF ALL INTERIOR DOOR AND WINDOW FRAMES IN THE CENTER OF STRAIGHT WALLS 30'-0" IN LENGTH OR GREATER OR AS INDICATED ON INTERIOR ELEVATIONS. PROVIDE HORIZONTAL CONTROL JOINTS AT 10'-0" A.F.F. THROUGHOUT BUILDING, TYP.
25. PUTTY PACKS TO BE PROVIDED AT ALL ELECTRICAL OUTLETS AND PARTITION PENETRATIONS.
26. CONTRACTOR TO CONTACT OWNER TO OBTAIN BUILDING RULES AND REGULATIONS FOR CONSTRUCTION, DELIVERIES (SEE BELOW), OPERATIONAL HOURS, AND IN GENERAL, ANY SPECIAL BUILDING REQUIREMENTS WHICH WILL AFFECT THEIR WORK. (IF OVERTIME WORK IS REQUIRED BY ANY TRADE, APPROVAL MUST BE OBTAINED PRIOR TO THE EXECUTION OF ANY WORK, INCLUDING COST). IN GENERAL, ALL CONSTRUCTION WORK SHALL BE DONE ON REGULAR TIME EXCEPT NOISE GENERATING CONSTRUCTION. IT SHALL BE THE RESPONSIBILITY OF EACH CONTRACTOR TO CHECK THE RULES AND REGULATIONS GOVERNING WORK ON THE PREMISES INCLUDING THE FOLLOWING:
(A) DATE AND TIME OF DELIVERY TO BE ESTABLISHED WITH THE PERSON HAVING JURISDICTION OVER PREMISES (OVERTIME CHARGES AND/OR ANY NECESSARY EXPENSE SHALL BE PAID BY THE CONTRACTOR REQUESTING SERVICE).
(B) BUILDING CONDITIONS, INCLUDING SIZE AND LOADING CAPACITY OF ELEVATORS, SIZE OF DOORWAYS, CORRIDORS, WINDOW OPENINGS, ETC. SHALL BE CHECKED FOR TIMES BEING DELIVERED BY CONTRACTOR REQUESTING DELIVERY.
27. ALL COLUMN FURROUTS ARE E3-CA U.N.O.; HOLD TIGHT TO VERTICAL ELEMENTS.
28. MAINTAIN EXTERIOR AND INTERIOR DOOR CLEARANCES SHOWN ON A08-01.

CONSTRUCTION KEYNOTE LEGEND

- | | |
|-----|--|
| C01 | PROVIDE 4Wx8Hx3/4" PLYWOOD SHEET MOUNTED TO WALL FOR EQUIPMENT, PAINT TO MATCH ADJACENT WALL COLOR, REF. PLAN FOR EXTENTS. |
| C14 | SECURITY GATE SYSTEM. REFERENCE DOOR SCHEDULE FOR DOOR FUNCTION AND ACCESS CONTROL REQUIREMENTS. |
| C20 | IN-WALL STEEL FOR OVERHEAD DOOR TO BE MOUNTED TO, TO BE COORDINATED WITH STRUCTURAL. |



CORGAN
401 North Houston Street, Dallas TX
7520
T: 972-852-1270

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

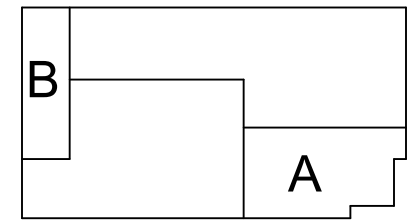

FLOOR PLAN -
SEGMENT B

A02-01B

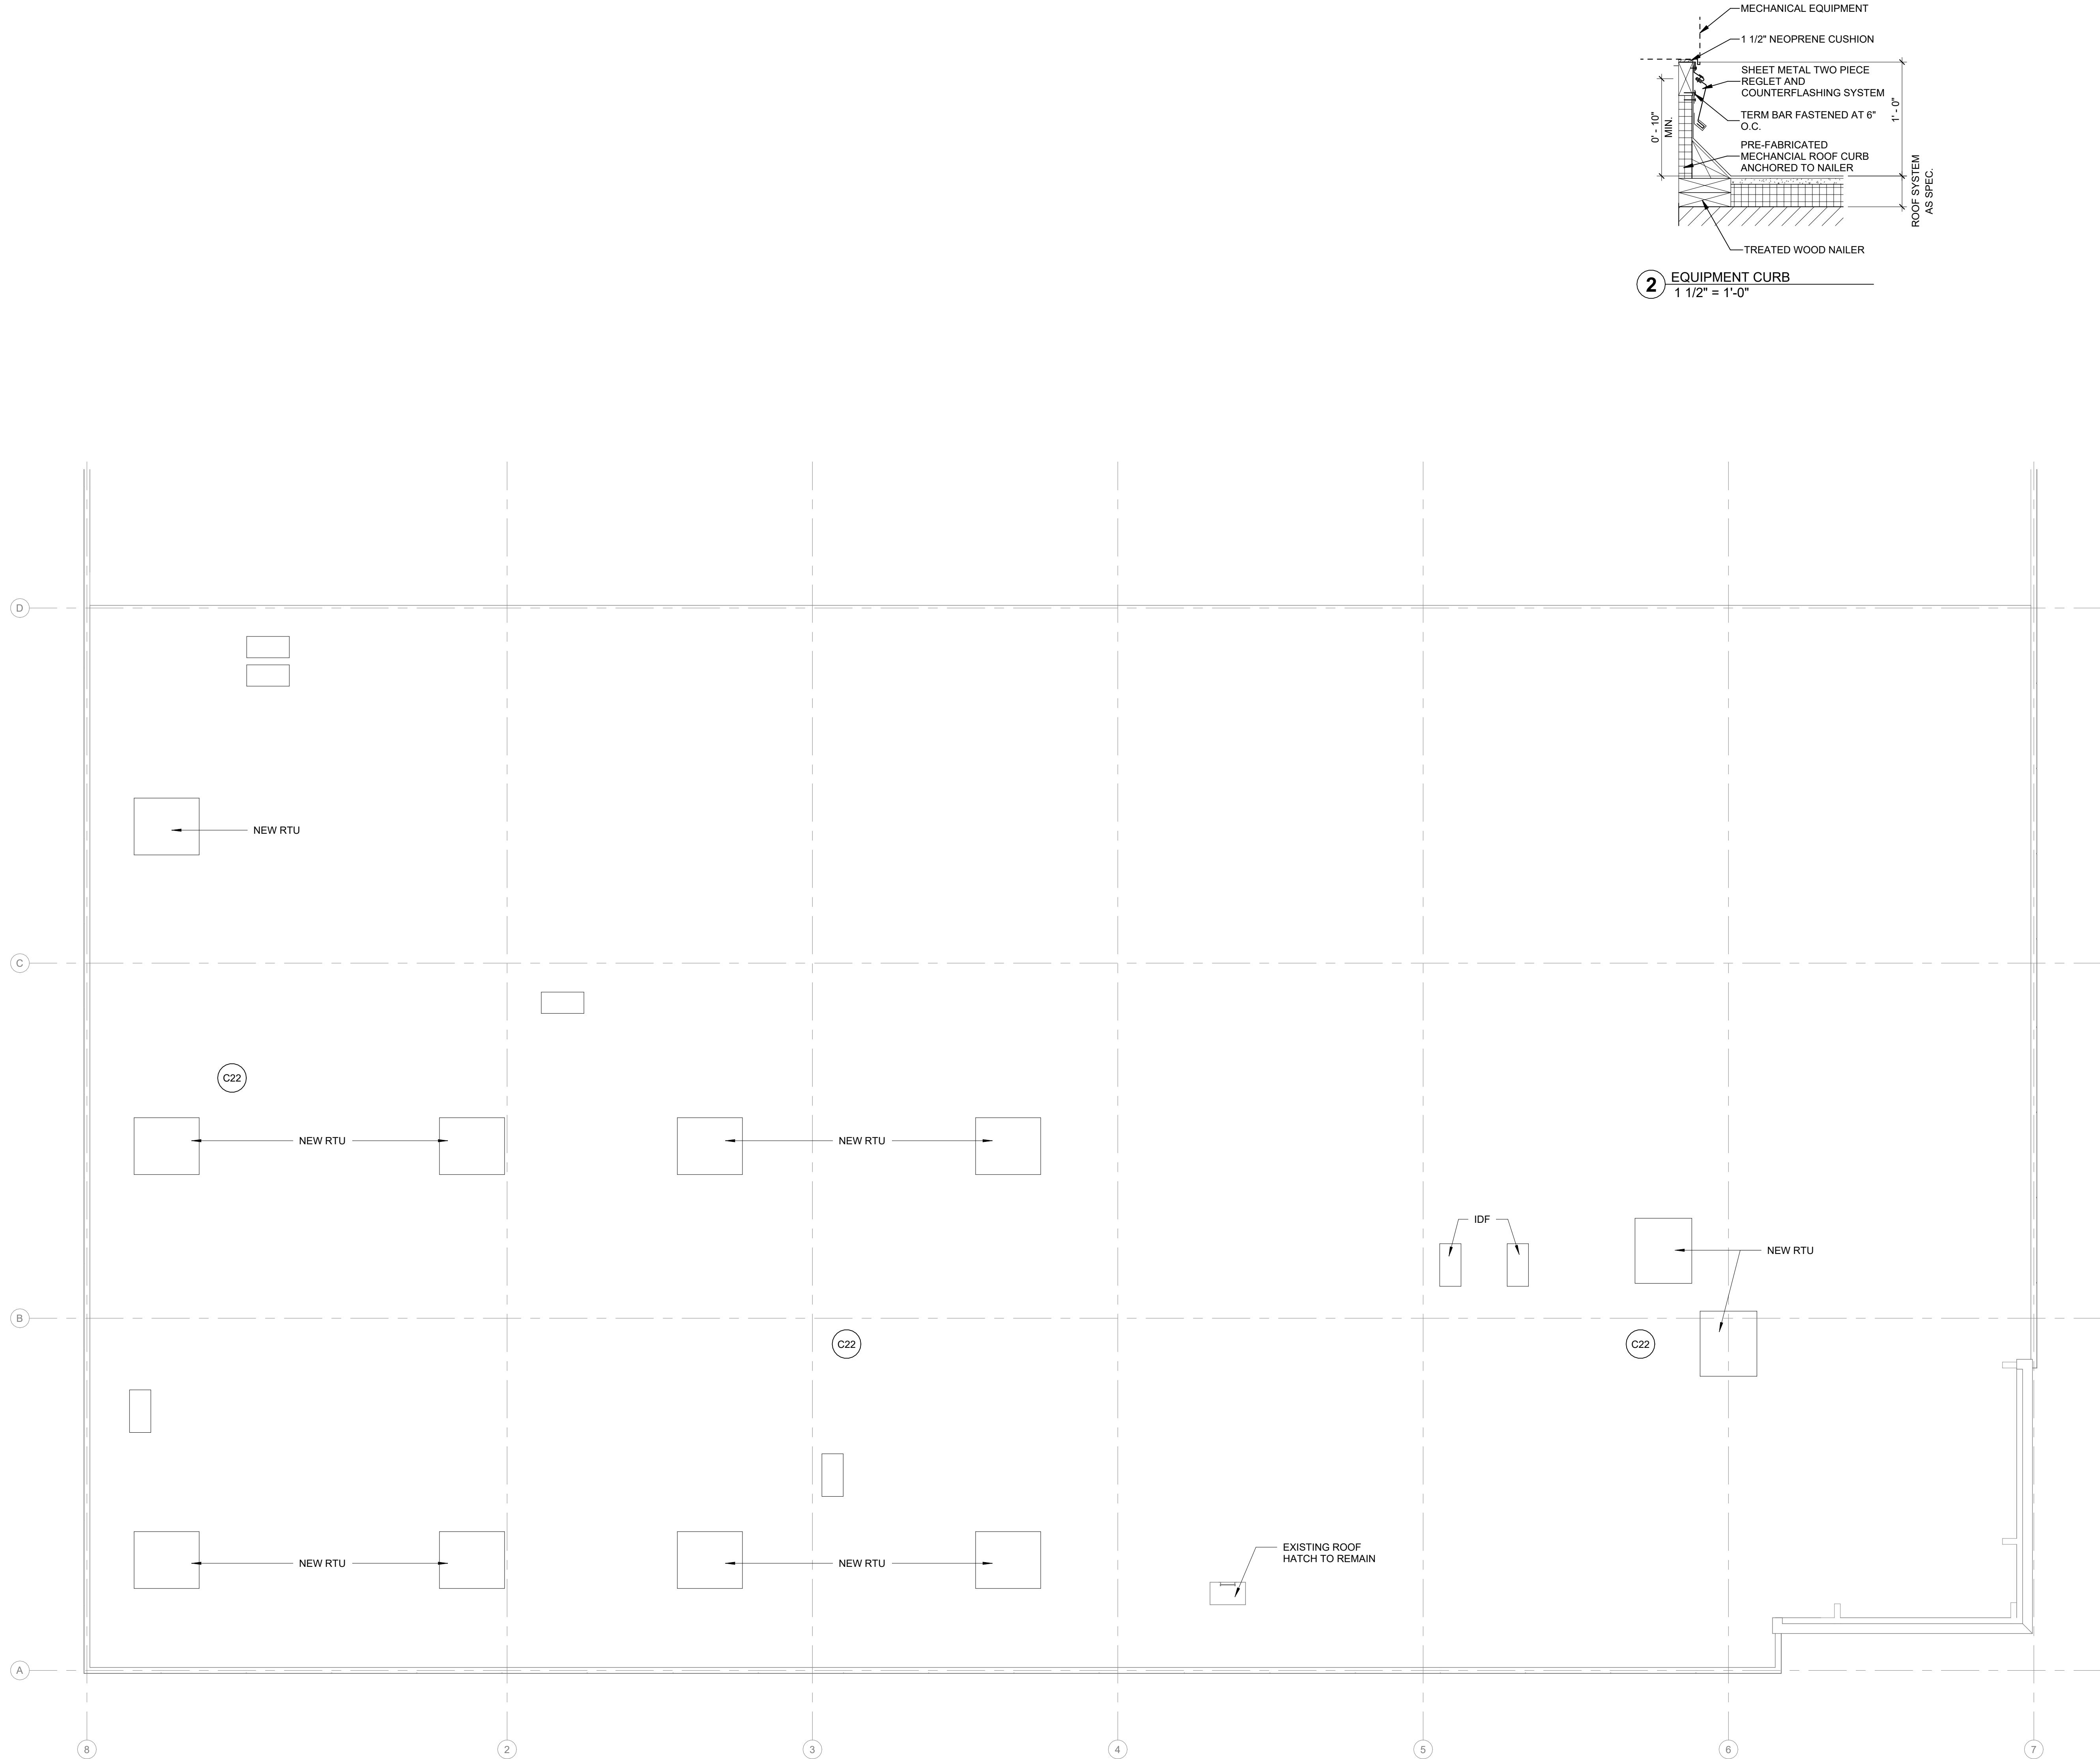

1 ROOF PLAN
3/32" = 1'-0"


GENERAL CONSTRUCTION NOTES

- REFERENCE A00-00 SHEET FOR STANDARDS, CODE INFORMATION AND ADDITIONAL LEGENDS.
- ALL PARTITIONS TYPES ARE A3-CA, U.N.O.
- CONTRACTOR, WITHOUT ADDITIONAL EXPENSE TO OWNER, TO OBTAIN NECESSARY LICENSES AND PERMITS, AND BE RESPONSIBLE FOR COMPLYING WITH ANY FEDERAL, STATE, COUNTY AND MUNICIPAL LAWS, CODES, AND REGULATIONS APPLICABLE TO PERFORMANCE OR WORK, INCLUDING BUT NOT LIMITED TO, ANY LAWS OR REGULATIONS, AND USE OF LICENSED CONTRACTORS TO PERFORM PARTS OF WORK.
- CONTRACTOR TO SEE THAT ALL SUBCONTRACTORS RECEIVE COMPLETE SETS OF DRAWINGS, ADDENDUMS, AND REVISED DRAWINGS OR ASSUME FULL RESPONSIBILITY FOR COORDINATION OF WORK WHEN COMPLETE SETS ARE NOT AVAILABLE TO THE SUBCONTRACTOR.
- CONTRACTOR TO MAINTAIN A CURRENT AND COMPLETE SET OF CONSTRUCTION DRAWINGS ON SITE DURING ALL PHASES OF CONSTRUCTION.
- CONTRACTOR IS RESPONSIBLE FOR REVIEWING EXISTING CONDITIONS IN THE BUILDING AND BECOMING FAMILIAR WITH BUILDING SYSTEMS, DETAILS, AND DIMENSIONS.
- THE CONTRACTOR SHALL CONFIRM THAT THE WORK IS BUILDABLE AS SHOWN BEFORE PROCEEDING WITH CONSTRUCTION, AND ANY DISCREPANCIES SHALL BE COMMUNICATED TO THE ARCHITECT IN WRITING BEFORE PROCEEDING WITH THE WORK.
- WORK WHICH CREATES LEVELS OF NOISE WHICH ARE DISRUPTIVE TO THE CONDUCT OF BUSINESS WITHIN THE BUILDING, OR ACTIVITIES WHICH CREATE HARMFUL OR OFFENSIVE ODORS WHICH TRAVEL PAST THE WORK AREA MUST BE ACCOMPLISHED OUTSIDE OF NORMAL BUSINESS HOURS AND COORDINATED WITH THE TENANT.
- CONSTRUCTION NOTES AND/OR DRAWINGS SUPPLIED ARE TO ILLUSTRATE THE DESIGN AND GENERAL TYPE OF CONSTRUCTION DESIRED AND ARE INTENDED TO APPLY TO THE FINEST QUALITY OF CONSTRUCTION MATERIAL AND WORKMANSHIP THROUGHOUT.
- IN THE EVENT A CONTRADICTION OCCURS WITHIN THESE CONSTRUCTION DOCUMENTS OR EXISTING CONDITIONS, NOTIFY ARCHITECT IMMEDIATELY FOR INTERPRETATION. WORK UNDERTAKEN PRIOR TO NOTIFICATION WILL BE AT THE CONTRACTOR'S SOLE EXPENSE AND RESPONSIBILITY.
- CONTRACTOR TO PROVIDE FIRE PROTECTION AS REQUIRED BY ALL APPLICABLE CODES. CONTRACTOR TO REVIEW LOCATION OF ALL FIRE EXTINGUISHERS, HOSE CABINETS, SPRINKLER HEADS, ETC. WITH ARCHITECT PRIOR TO ROUGH-IN.
- FIRE EXTINGUISHER CABINETS TO BE PROVIDED IN LOCATIONS AND IN QUANTITY AS INDICATED ON INTERIOR ARCHITECTURAL FLOOR PLANS G01-01 SHEET. ALL FINAL LOCATIONS TO BE APPROVED BY LOCAL CODE OFFICIALS. GENERAL CONTRACTOR IS RESPONSIBLE FOR VERIFYING THAT ALL FIRE EXTINGUISHERS ARE IN COMPLIANCE. ANY FIRE EXTINGUISHERS NOT IN COMPLIANCE ARE TO BE REPLACED BY CONTRACTOR.
- FIRE PROOFING REMOVED FROM COLUMNS AND BEAMS DURING THE COURSE OF CONSTRUCTION SHALL BE REPLACED WITH THE SAME MATERIAL AND RATING AS THAT WHICH WAS REMOVED.
- PARTITIONS SHOWN ALIGNED WITH BASE BUILDING STRUCTURE SHALL BE FLUSH WITH BASE BUILDING STRUCTURE, U.N.O.
- CONFLICTS WITH SCHEDULED PARTITION AND CEILING FINISHES, FURNITURE, LIGHTING, ETC. TO BE COMMUNICATED TO ARCHITECT IN WRITING BEFORE PROCEEDING WITH THE WORK.
- CONTRACTOR TO THOROUGHLY CLEAN THE ENTIRE SPACE TO THE SATISFACTION OF TENANT PRIOR TO BEING TURNED OVER TO THE TENANT.
- INSPECT ALL MATERIALS SUPPLIED BY TENANT UPON RECEIPT OF SUCH ITEMS. THE CONTRACTOR SHALL NOT INSTALL ANY DEFECTIVE OR DAMAGED MATERIALS, BUT SHALL NOTIFY THE TENANT IMMEDIATELY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COSTS ASSOCIATED WITH REPLACING A DAMAGED OR DEFECTIVE ITEM IF SUCH DAMAGE OR DEFECT SHOULD HAVE REASONABLY BEEN NOTICED DURING CONTRACTOR'S INSPECTION OF MATERIAL UPON RECEIPT.
- PARTITIONS WHICH TERMINATE AT EXTERIOR WINDOW MULLIONS ARE TO BE LOCATED CENTERLINE OF PARTITION AT CENTERLINE OF MULLION U.N.O. PROVIDE BUILDING STANDARD PARTITION CAP AT WINDOW MULLION AS REQUIRED. REFERENCE DETAIL.
- CONTRACTOR TO VERIFY ROUGH OPENING DIMENSION REQUIREMENTS OF ALL APPLIANCES AND COORDINATE WITH MILLWORK.
- FIRE SEAL ALL PENETRATIONS AND JOINTS AT FIRE RATED PARTITIONS AND FLOOR ASSEMBLIES, TYP.
- CONTRACTOR TO COORDINATE ALL STAGING AREAS WITH OWNER AND ANY OTHER CONTRACTORS EMPLOYED BY THE OWNER PRIOR TO COMMENCEMENT OF WORK.
- ALL BATT INSULATIONS TO BE STRAPPED IN PLACE WITH WIRE MESH ATTACHED TO STRUCTURE WHERE REQUIRED.
- INSULATE EXPOSED HOT WATER LINES AND DRAIN PIPES AS REQUIRED WHERE ACCESSIBLE PROVISIONS HAVE BEEN MADE.
- PROVIDE CONTROL JOINTS IN GYPSUM BOARD WALLS ABOVE THE CORNER OF ALL INTERIOR DOOR AND WINDOW FRAMES IN THE CENTER OF STRAIGHT WALLS 30'-0" IN LENGTH OR GREATER OR AS INDICATED ON INTERIOR ELEVATIONS. PROVIDE HORIZONTAL CONTROL JOINTS AT 10'-0" A.F.F. THROUGHOUT BUILDING, TYP.
- PUTTY PACKS TO BE PROVIDED AT ALL ELECTRICAL OUTLETS AND PARTITION PENETRATIONS.
- CONTRACTOR TO CONTACT OWNER TO OBTAIN BUILDING RULES AND REGULATIONS FOR CONSTRUCTION, DELIVERIES (SEE BELOW), OPERATIONAL HOURS, AND IN GENERAL, ANY SPECIAL BUILDING REQUIREMENTS WHICH WILL AFFECT THEIR WORK. (IF OVERTIME WORK IS REQUIRED BY ANY TRADE, APPROVAL MUST BE OBTAINED PRIOR TO THE EXECUTION OF ANY WORK, INCLUDING COST). IN GENERAL, ALL CONSTRUCTION WORK SHALL BE DONE ON REGULAR TIME EXCEPT NOISE GENERATING CONSTRUCTION. IT SHALL BE THE RESPONSIBILITY OF EACH CONTRACTOR TO CHECK THE RULES AND REGULATIONS GOVERNING WORK ON THE PREMISES INCLUDING THE FOLLOWING:
(A) DATE AND TIME OF DELIVERY TO BE ESTABLISHED WITH THE PERSON HAVING JURISDICTION OVER PREMISES (OVERTIME CHARGES AND/OR ANY NECESSARY EXPENSE SHALL BE PAID BY THE CONTRACTOR REQUIRING SERVICE).
(B) BUILDING CONDITIONS, INCLUDING SIZE AND LOADING CAPACITY OF ELEVATORS, SIZE OF DOORWAYS, CORRIDORS, WINDOW OPENINGS, ETC, SHALL BE CHECKED FOR TIMES BEING DELIVERED BY CONTRACTOR REQUESTING DELIVERY.
- ALL COLUMN FURROUTS ARE E3-CA U.N.O.; HOLD TIGHT TO VERTICAL ELEMENTS.
- MAINTAIN EXTERIOR AND INTERIOR DOOR CLEARANCES SHOWN ON A08-01.

CONSTRUCTION KEYNOTE LEGEND

- | | |
|--------|---|
| 05-006 | SHEET METAL TWO PIECE REGLET AND COUNTERFLASHING SYSTEM |
| 06-012 | TREATED WOOD NAILER |
| 07-022 | PRE-FABRICATED MECHANICAL ROOF CURB ANCHORED TO NAILER |
| 07-028 | 1 1/2" NEOPRENE CUSHION |
| 07-036 | TERM BAR FASTENED AT 6" O.C. |
| 23-002 | MECHANICAL EQUIPMENT |
| C22 | DELEGATED DESIGN ITEM. FINAL STRUCTURAL DESIGN, CALCULATIONS, AND DRAWINGS TO BE PROVIDED BY STRUCTURAL ENGINEER AS A DEFERRED SUBMITTAL. |

ISSUANCES

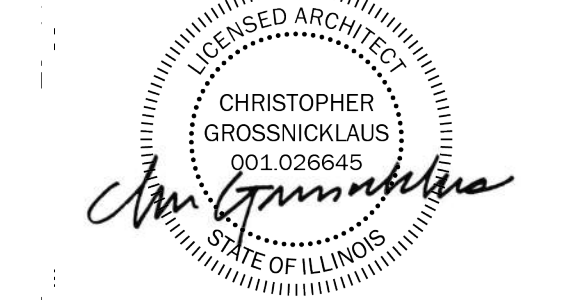

Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY


300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

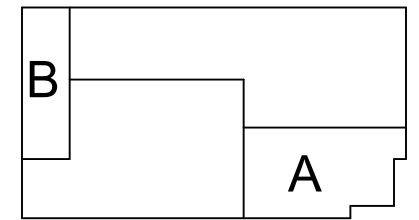

ROOF PLAN

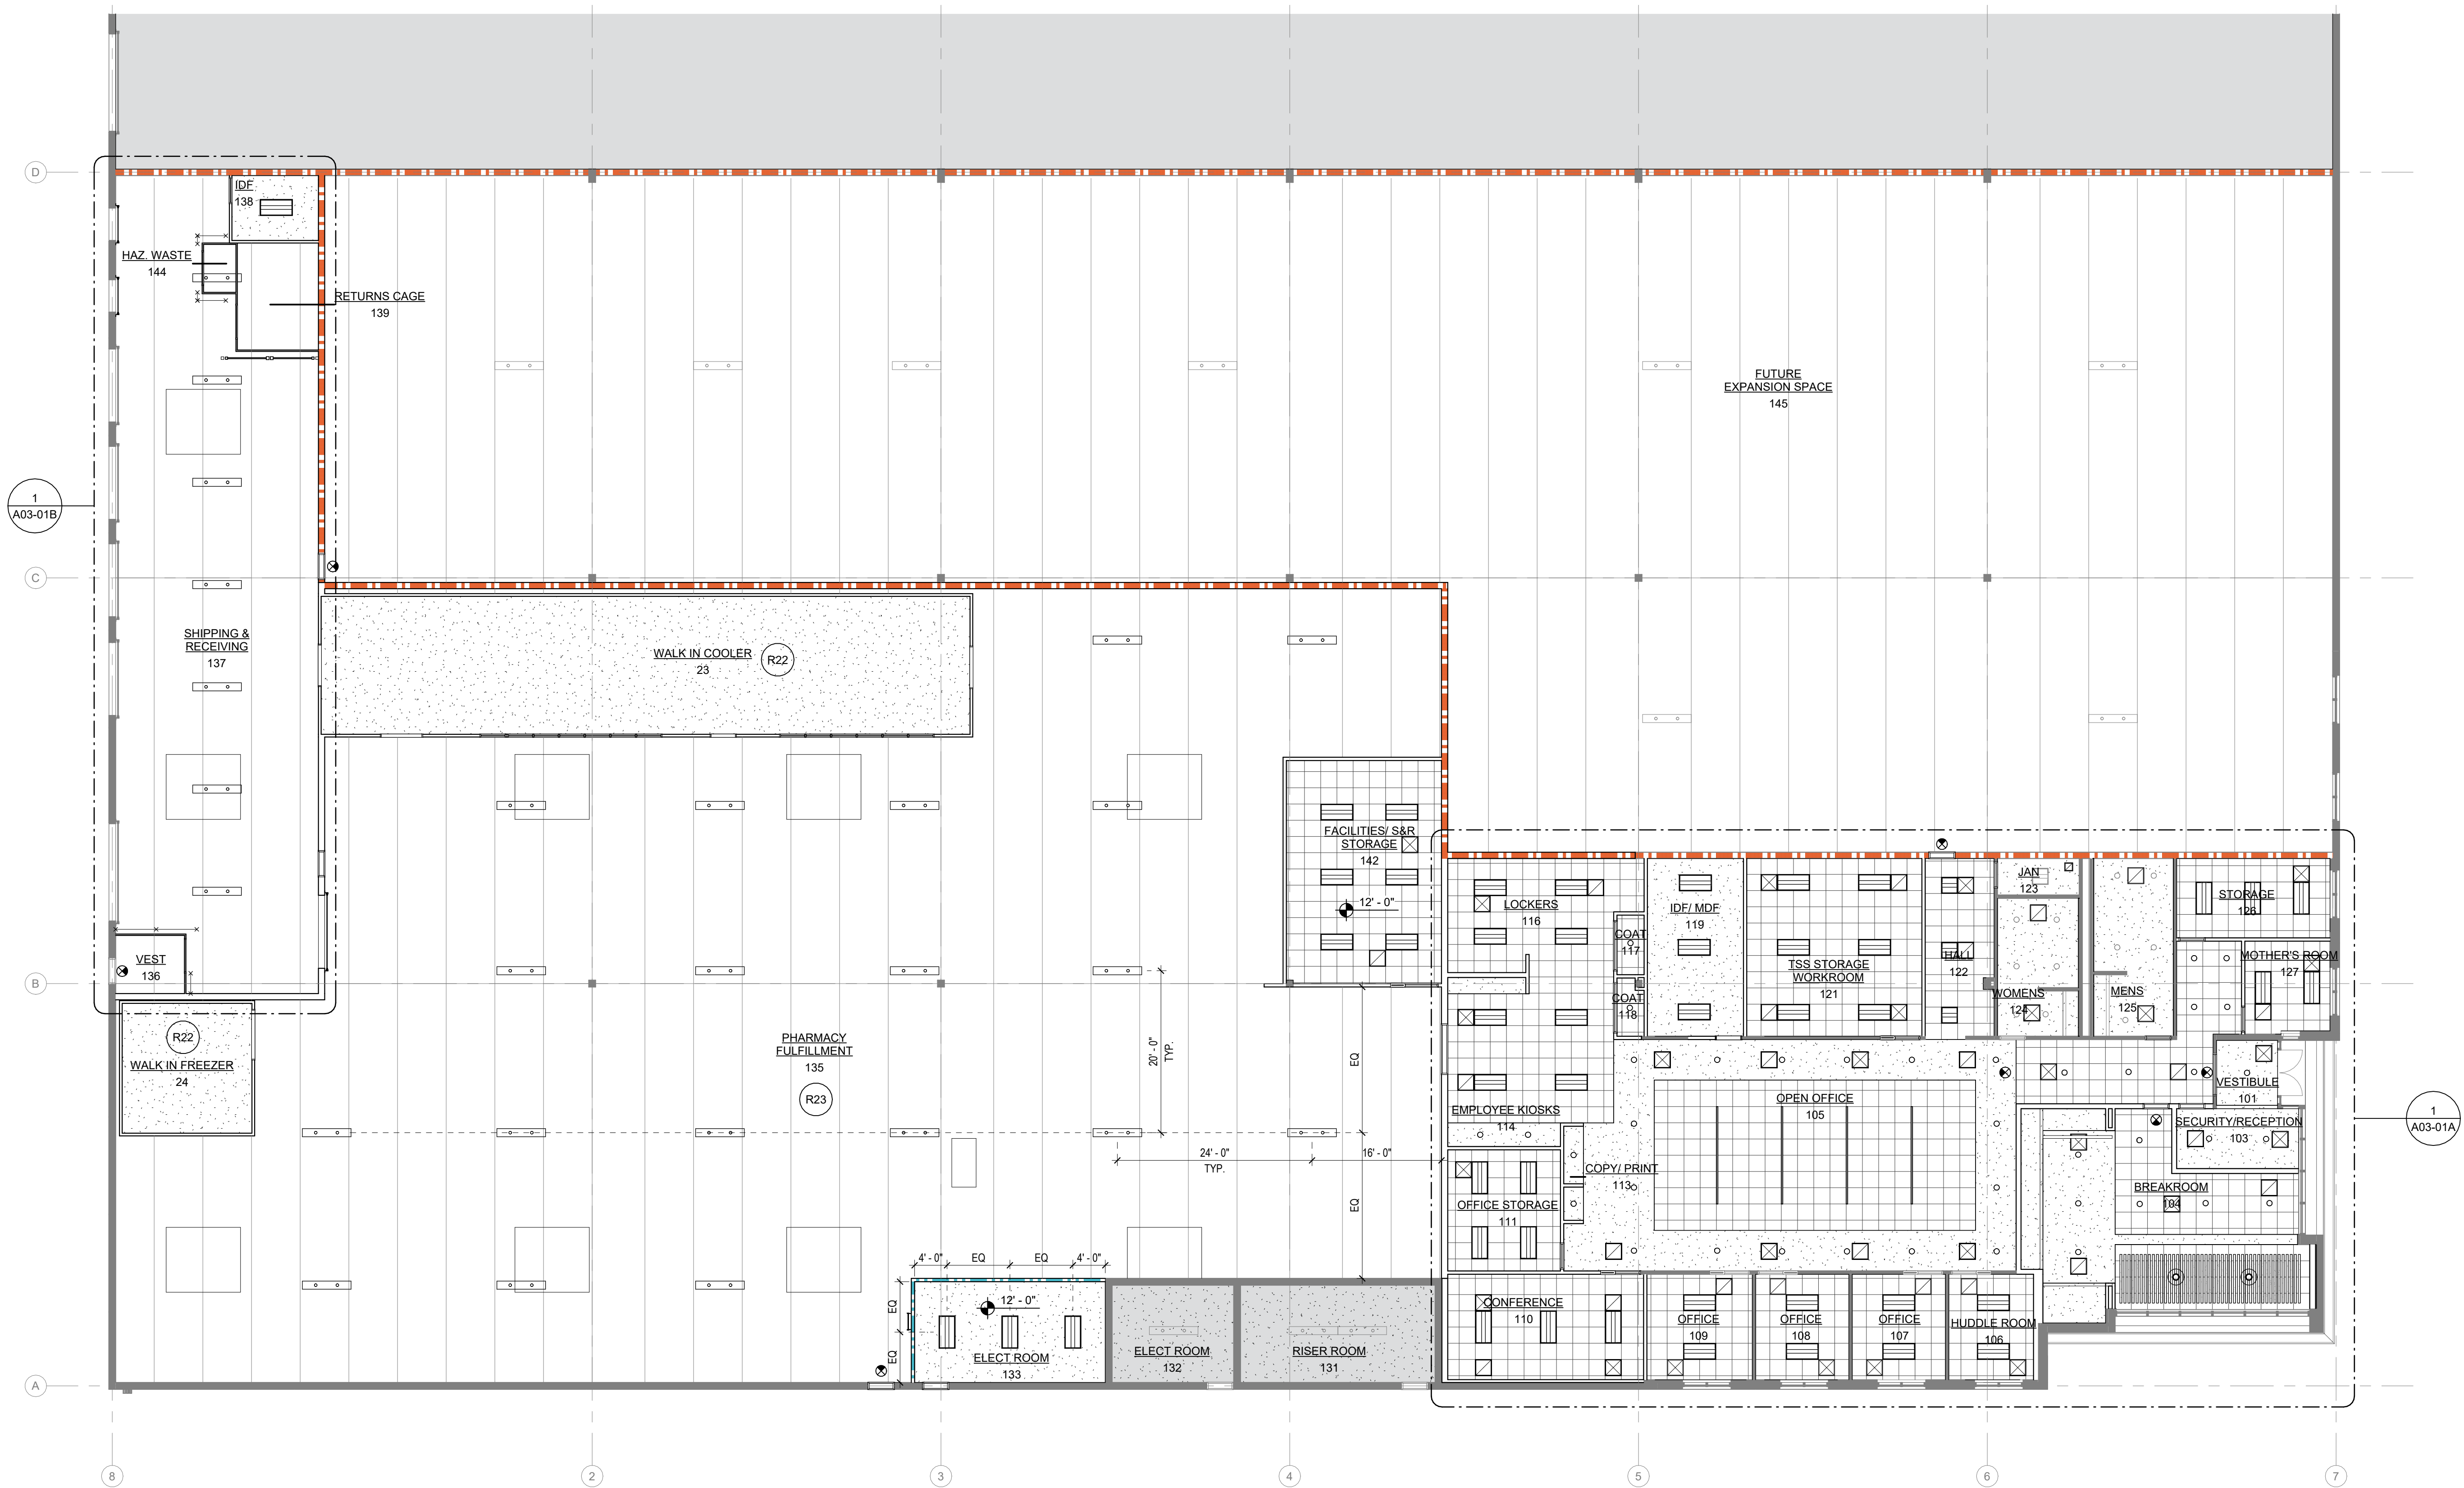

1 REFLECTED CEILING PLAN - OVERALL
3/32" = 1'-0"

GENERAL RCP NOTES

1. LOCATE CEILING MOUNTED FIXTURES / DEVICES IN THE CENTERS OF FULL CEILING PANELS/TILES U.N.O.
2. COORDINATE MEP / ETC. DRAWINGS FOR ALL FIXTURES / DEVICES MOUNTED IN, ABOVE, OR HUNG FROM CEILING. FINAL FIXTURE / DEVICE LOCATIONS ARE DETERMINED BY THE ARCHITECTURAL R.C.P. WHERE CONDITIONS DIFFER SIGNIFICANTLY BETWEEN THE PLANS, REQUEST CLARIFICATION FROM THE ARCHITECT BEFORE PROCEEDING. WHERE FIXTURES / DEVICES SHOWN OR SPECIFIED ON DRAWINGS OTHER THAN THE ARCHITECTURAL R.C.P.'S ARE VISIBLE AT THE CEILING PLANE, COORDINATE LOCATIONS WITH THE ARCHITECT.
3. FOR ACT CEILINGS, IF START POINT IS NOT PROVIDED ON PLANS, THEN IT IS INTENDED FOR THE ACT GRID TO BE CENTERED IN THE ROOM.
4. ALL CEILINGS TO BE 9'-0" U.N.O.
5. ALL CEILING SOFFITS FOR MILLWORK TO BE 7'-2" U.N.O.
6. WHERE DIMENSION IS NOT PROVIDED FOR A FIXTURE IN A GYPSUM CEILING IT IS INTENDED FOR THE FIXTURE TO BE CENTERED WITHIN THE EXTENT OF THE CEILING.
7. LIGHT FIXTURES IN SOFFITS OVER COUNTERS SHALL BE CENTERED OVER SINK, TYP.

CONSTRUCTION KEYNOTE LEGEND

- R22 COMPLETE PREFAB SYSTEM, LIGHT FIXTURES LOCATIONS AND QUANTITIES TO BE COORDINATED WITH WALK IN COOLER AND WALK IN FREEZER MANUFACTURER
- R23 INSULATION ROLLS WITH FACING TO BE PROVIDED ACROSS ALL EXPOSED CEILING, REF. SPECS FOR REQUIREMENTS.

RCP LEGEND

- | | |
|--------------------------------------|------------------------------|
| 2X2 LAY-IN CEILING | GYP. BD. CEILING |
| ES EXPOSED STRUCTURE | CLG MOUNTED CURTAIN TRACK |
| 2X2 LAY-IN INDIRECT FIXTURE | 2X4 LAY-IN INDIRECT FIXTURE |
| 1X4 HUNG PARABOLIC STRIP | RECESSED LIGHT FIXTURE |
| 1'-0" FINISHED CEILING HEIGHT A.F.F. | SUPPLY AIR DIFFUSER |
| RETURN AIR DIFFUSER | CEILING GRID FULL START TILE |
| | EMERGENCY EXIT FIXTURE |

FIRE & SMOKE WALL LEGEND

- UNRATED ASSEMBLY
- 1 HOUR RATED ASSEMBLY
- 2 HOUR RATED ASSEMBLY
- 3 HOUR RATED ASSEMBLY
- 4 HOUR RATED ASSEMBLY
- FIRE & SMOKE PROTECTION FEATURES
- FIRE WALLS (FW) IBC 706
- FIRE BARRIER (FB) IBC 707
- FIRE PARTITION (FP) IBC 708
- SMOKE BARRIER (SB) IBC 709
- SMOKE PARTITION (SP) IBC 710
- HOURS RATED - ASSEMBLY

ISSUANCES



Date of issue:

04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH - ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

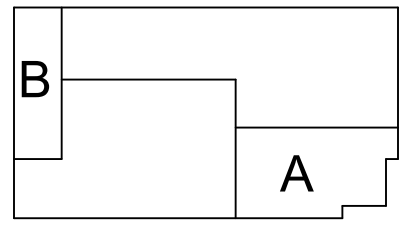

REFLECTED CEILING PLAN



1 REFLECTED CEILING PLAN - SEGMENT A
3/16" = 1'-0"

GENERAL RCP NOTES

1. LOCATE CEILING MOUNTED FIXTURES / DEVICES IN THE CENTERS OF FULL CEILING PANELS/TILES U.N.O.
2. COORDINATE MEP / ETC. DRAWINGS FOR ALL FIXTURES / DEVICES MOUNTED IN, ABOVE, OR HUNG FROM CEILINGS. FINAL FIXTURE / DEVICE LOCATIONS ARE DETERMINED BY THE ARCHITECTURAL R.C.P. WHERE CONDITIONS DIFFER SIGNIFICANTLY BETWEEN THE PLANS, REQUEST CLARIFICATION FROM THE ARCHITECT BEFORE PROCEEDING. WHERE FIXTURES / DEVICES SHOWN OR SPECIFIED ON DRAWINGS OTHER THAN THE ARCHITECTURAL R.C.P.'S ARE VISIBLE AT THE CEILING PLANE, COORDINATE LOCATIONS WITH THE ARCHITECT.
3. FOR ACT CEILINGS, IF START POINT IS NOT PROVIDED ON PLANS, THEN IT IS INTENDED FOR THE ACT GRID TO BE CENTERED IN THE ROOM.
4. ALL CEILINGS TO BE 9'-0" U.N.O.
5. ALL CEILING SOFFITS FOR MILLWORK TO BE 7'-2" U.N.O.
6. WHERE DIMENSION IS NOT PROVIDED FOR A FIXTURE IN A GYPSUM CEILING IT IS INTENDED FOR THE FIXTURE TO BE CENTERED WITHIN THE EXTENT OF THE CEILING.
7. LIGHT FIXTURES IN SOFFITS OVER COUNTERS SHALL BE CENTERED OVER SINK, TYP.

CONSTRUCTION KEYNOTE
LEGEND

- | | |
|-----|--|
| R19 | PROVIDE FIXED ROLLER SHADE AT WINDOWS THAT REMAIN ABOVE THE FINISHED CEILING HEIGHT. |
| R20 | LIGHTING FIXTURES ARE TO REMAIN, PROVIDE FRESH COAT OF PAINT, PT-1 ON THE CEILINGS. |


RCP LEGEND

- | | | | |
|--|--------------------------------------|--|------------------------------|
| | 2X2 LAY-IN CEILING | | GYP. BD. CEILING |
| | EXPOSED STRUCTURE | | CLG MOUNTED CURTAIN TRACK |
| | 2X2 LAY-IN INDIRECT FIXTURE | | 2X4 LAY-IN INDIRECT FIXTURE |
| | 1X4 HUNG PARABOLIC STRIP | | RECESSED LIGHT FIXTURE |
| | 1'-0" FINISHED CEILING HEIGHT A.F.F. | | SUPPLY AIR DIFFUSER |
| | RETURN AIR DIFFUSER | | CEILING GRID FULL START TILE |
| | EMERGENCY EXIT FIXTURE | | |

FIRE & SMOKE WALL LEGEND

- | | |
|--|-----------------------|
| | UNRATED ASSEMBLY |
| | 1 HOUR RATED ASSEMBLY |
| | 2 HOUR RATED ASSEMBLY |
| | 3 HOUR RATED ASSEMBLY |
| | 4 HOUR RATED ASSEMBLY |
- FIRE & SMOKE PROTECTION FEATURES
FIRE & SMOKE WALL
- | | | |
|--|------------------------|---------|
| | FIRE WALLS (FW) | IBC 706 |
| | FIRE BARRIER (FB) | IBC 707 |
| | FIRE PARTITION (FP) | IBC 708 |
| | SMOKE BARRIER (SB) | IBC 709 |
| | SMOKE PARTITION (SP) | IBC 710 |
| | HOURS RATED - ASSEMBLY | |

ISSUANCES

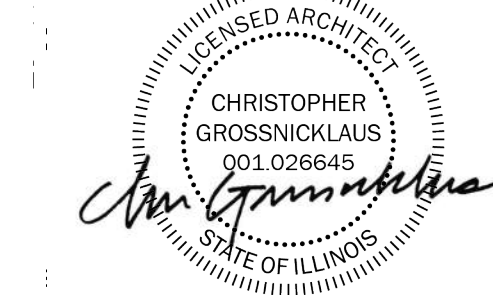

Date of issue:

04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

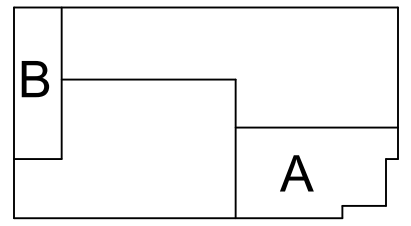

REFLECTED
CEILING PLAN -
SEGMENT A

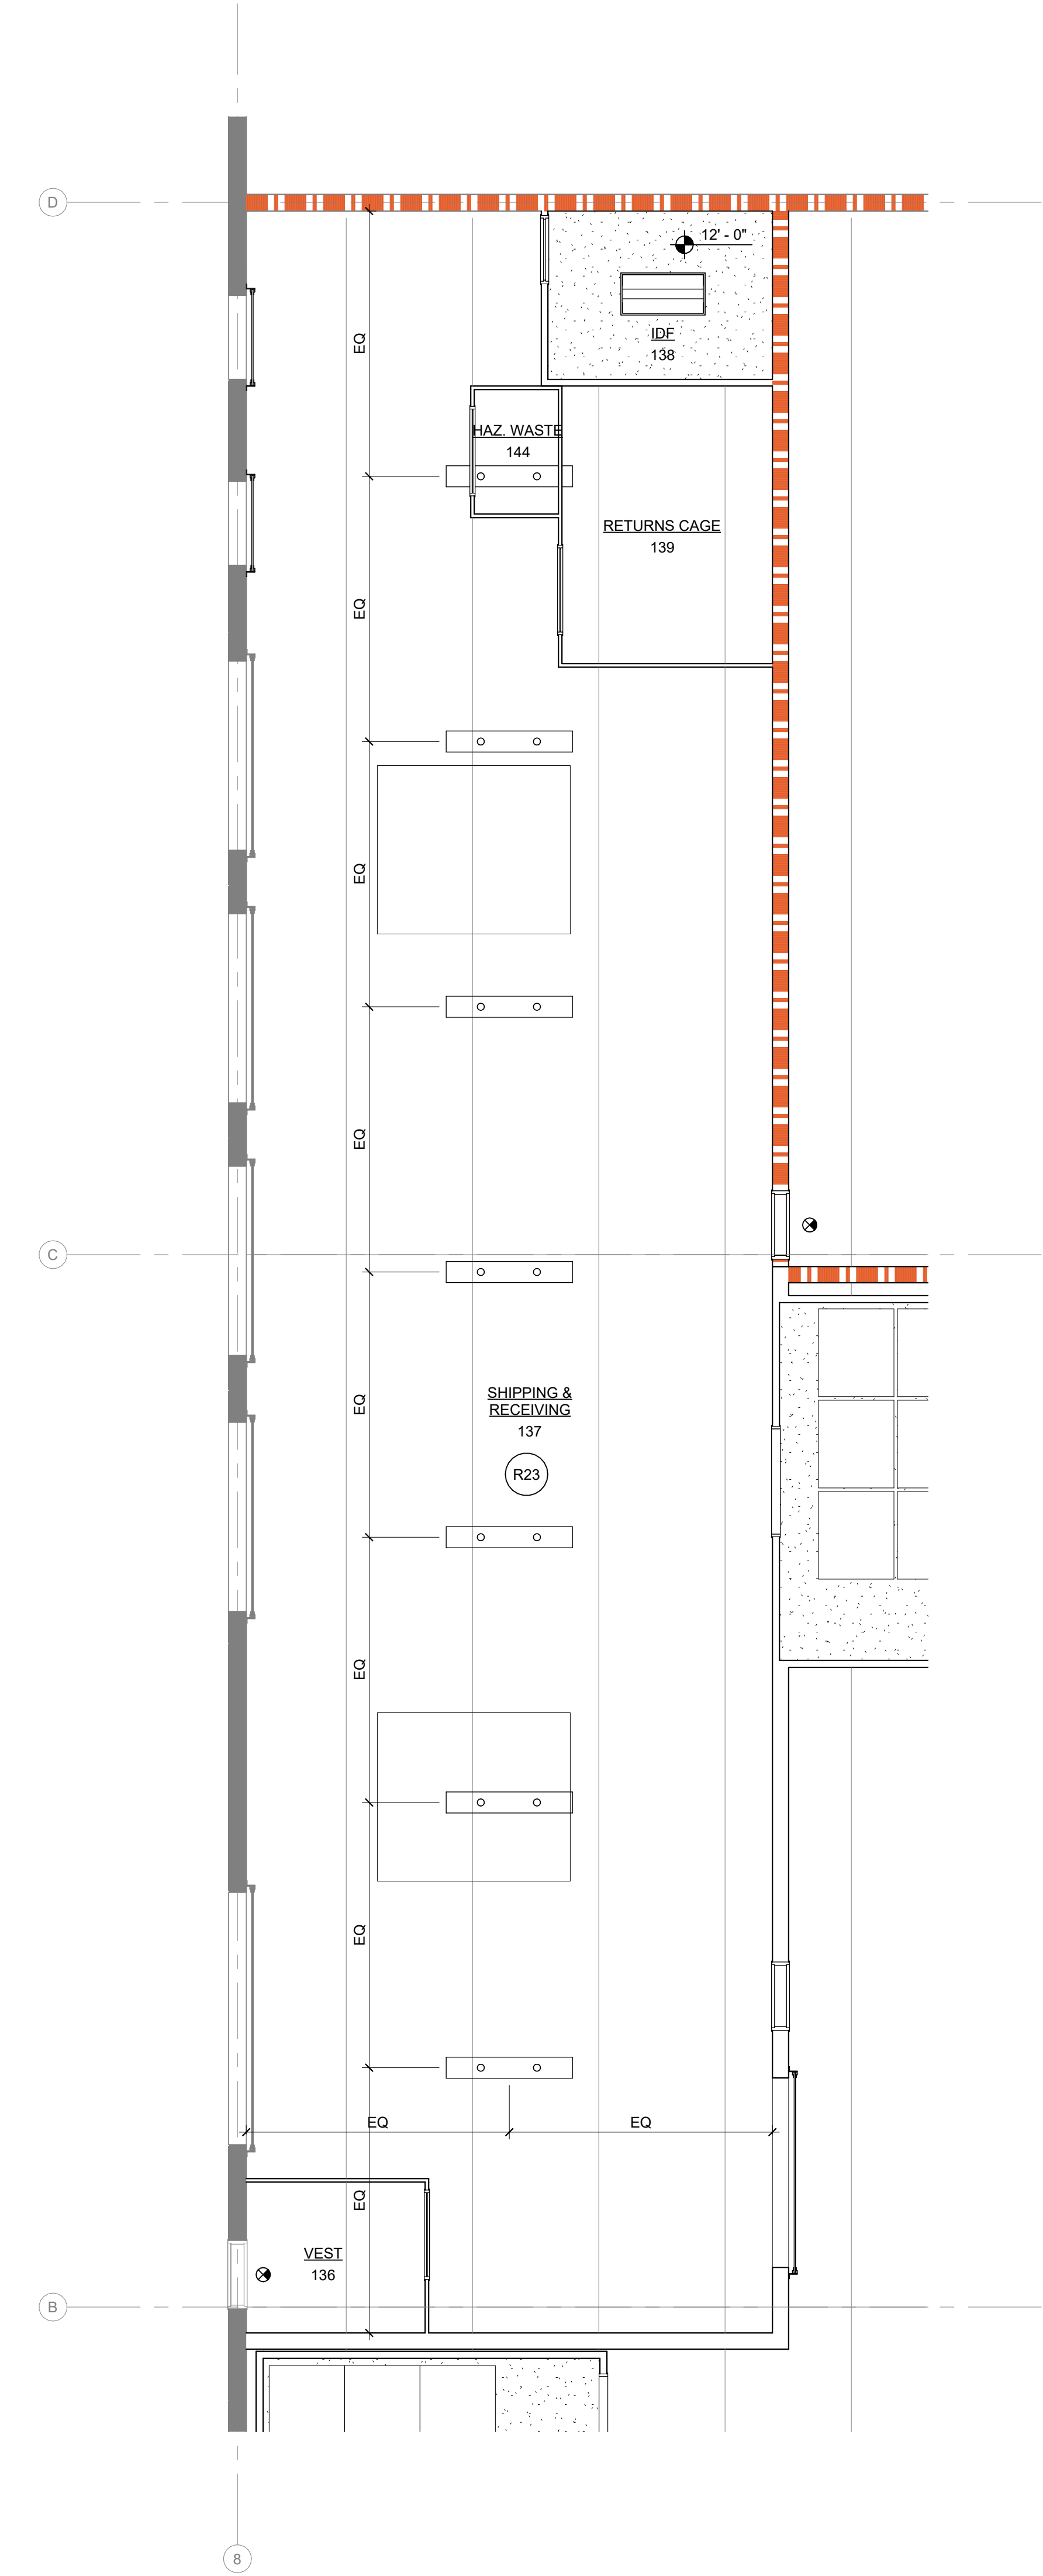

1 REFLECTED CEILING PLAN - SEGMENT B
3/16" = 1'-0"

GENERAL RCP NOTES

1. LOCATE CEILING MOUNTED FIXTURES / DEVICES IN THE CENTERS OF FULL CEILING PANELS/TILES U.N.O.
2. COORDINATE MEP / ETC. DRAWINGS FOR ALL FIXTURES / DEVICES MOUNTED IN, ABOVE, OR HUNG FROM CEILINGS. FINAL FIXTURE / DEVICE LOCATIONS ARE DETERMINED BY THE ARCHITECTURAL R.C.P. WHERE CONDITIONS DIFFER SIGNIFICANTLY BETWEEN THE PLANS, REQUEST CLARIFICATION FROM THE ARCHITECT BEFORE PROCEEDING. WHERE FIXTURES / DEVICES SHOWN OR SPECIFIED ON DRAWINGS OTHER THAN THE ARCHITECTURAL R.C.P.'S ARE VISIBLE AT THE CEILING PLANE, COORDINATE LOCATIONS WITH THE ARCHITECT.
3. FOR ACT CEILINGS, IF START POINT IS NOT PROVIDED ON PLANS, THEN IT IS INTENDED FOR THE ACT GRID TO BE CENTERED IN THE ROOM.
4. ALL CEILINGS TO BE 9'-0" U.N.O.
5. ALL CEILING SOFFITS FOR MILLWORK TO BE 7'-2" U.N.O.
6. WHERE DIMENSION IS NOT PROVIDED FOR A FIXTURE IN A GYPSUM CEILING IT IS INTENDED FOR THE FIXTURE TO BE CENTERED WITHIN THE EXTENT OF THE CEILING.
7. LIGHT FIXTURES IN SOFFITS OVER COUNTERS SHALL BE CENTERED OVER SINK, TYP.

CONSTRUCTION KEYNOTE
LEGEND

R23 INSULATION ROLLS WITH FACING TO BE PROVIDED ACROSS ALL EXPOSED CEILING. REF. SPECS FOR REQUIREMENTS.

RCP LEGEND

	2X2 LAY-IN CEILING		GYP. BD. CEILING
	EXPOSED STRUCTURE		CLG MOUNTED CURTAIN TRACK
	2X2 LAY-IN INDIRECT FIXTURE		2X4 LAY-IN INDIRECT FIXTURE
	1X4 HUNG PARABOLIC STRIP		RECESSED LIGHT FIXTURE
	1'-0" FINISHED CEILING HEIGHT A.F.F.		SUPPLY AIR DIFFUSER
	RETURN AIR DIFFUSER		CEILING GRID FULL START TILE
			EMERGENCY EXIT FIXTURE

FIRE & SMOKE WALL LEGEND

	UNRATED ASSEMBLY
	1 HOUR RATED ASSEMBLY
	2 HOUR RATED ASSEMBLY
	3 HOUR RATED ASSEMBLY
	4 HOUR RATED ASSEMBLY
FIRE & SMOKE PROTECTION FEATURES FIRE & SMOKE WALL	
	FIRE WALLS (FW)
	FIRE BARRIER (FB)
	FIRE PARTITION (FP)
	SMOKE BARRIER (SB)
	SMOKE PARTITION (SP)
	HOURS RATED - ASSEMBLY
	IBC 706
	IBC 707
	IBC 708
	IBC 709
	IBC 710

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

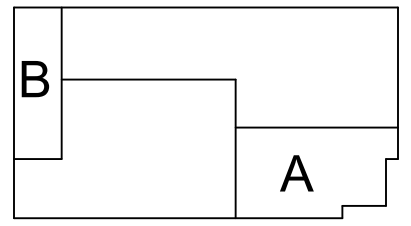

REFLECTED
CEILING PLAN -
SEGMENT B

TOILET ACCESSORY (TA) MOUNTING DIAGRAM																																		
SCALE: 1/4" = 1'-0"																																		
NOTE: 1. ACCESSORIES LISTED MAY HAVE GAPS IN ALPHA-NUMERIC LISTING 2. ACCESSORIES CAN APPEAR ON FLOOR PLANS OR INTERIOR ELEVATIONS 3. REFER SPECIFICATION SECTION 10.28.13 FOR TOILET AND BATH ACCESSORIES 4. PROVIDE BLOCKING @ ALL ACCESSORIES PER MFR INSTRUCTIONS 3'-4" AFF TO DISPENSE POINT OR OPTIC CONTROL IF EQUIPPED 3'-4" AFF TO DISPENSE POINT OR OPTIC CONTROL IF EQUIPPED NOTE: SURFACE MOUNTED TOILET ACCESSORIES SHALL NOT PROTRUDE MORE THAN 4" INTO CIRCULATION PATH LEADING EDGE OF TOILET 7'-0" FROM EDGE OF TOILET REFER TO PLAN FOR LENGTH AND CONFIGURATION DIMENSION TO SUPERSEDE MANUFACTURE SUGGESTION HANDLE AT 48" AFF OR LESS WHEN CLOSED INSULATE TO BOTTOM WHEN OPEN																																		
DRAWING DESIGNATION	TA-1	TA-2	TA-3	TA-4	TA-5	TA-6	TA-7	TA-8	TA-9	TA-9A	TA-10	TA-11	TA-12	TA-13	TA-14	TA-14.1	TA-15	TA-16	TA-17	TA-18	TA-19		TA-20	TA-26	TA-27	TA-28	TA-29	TA-30	TA-31	TA-32	TA-33	TA-34		
TOILET ACCESSORY TYPE	SOAP DISPENSER	SOAP DISPENSER	STAINLESS STEEL FRAMED MIRROR	STAINLESS STEEL FRAMED MIRROR	TOWEL BAR	SHOWER CURTAIN ROD, CURTAIN & HOOKS	TOILET SEAT COVER DISPENSER	MULTI-FOLD PAPER TOWEL DISPENSER	MULTI-FOLD PAPER TOWEL DISPENSER	MULTI-FOLD PAPER TOWEL DISPENSER	MULTI-FOLD PAPER TOWEL DISPENSER	ROLL PAPER TOWEL DISPENSER AND WASTE RECEPTACLE	ROLL PAPER TOWEL DISPENSER	ROLL PAPER TOWEL DISPENSER	ROLL PAPER TOWEL DISPENSER	MULTI-FOLD PAPER TOWEL DISPENSER	TOILET TISSUE DISPENSER	SANITARY NAPKIN-TAMPON VENDOR (PUBLIC WOMEN'S ONLY)	DOUBLE SANITARY NAPKIN-TAMPON DISPOSAL (WOMEN'S ONLY)	SINGLE SANITARY NAPKIN-TAMPON DISPOSAL (WOMEN'S ONLY)	GRAB BAR TA-19	ACCESSIBLE TOILET OR SHOWER L-SHAPED GRAB BAR	COAT HOOK WITH BUMPER	ROBE HOOK (DOUBLE)	MOP & BROOM HOLDER	SPECIMEN PASS-THRU	FOLDING SHOWER SEAT (L-SHAPED)	FOLDING SHOWER SEAT (15" X 18")	SOAP DISH	SOAP DISH	DIAPER CHANGING STATION			
MFG #1	BOBRICK B-822	BOBRICK B-2111	BOBRICK B-165	BOBRICK B-290	BOBRICK B-530	BOBRICK B-207	BOBRICK B-221	BOBRICK B-2621	BOBRICK B- 262	BOBRICK B-359	BOBRICK B-3942	BOBRICK B-3961	BOBRICK B-2860	BOBRICK B-526	BOBRICK B-3888	BOBRICK B-2706	BOBRICK B-354	BOBRICK B-353	BOBRICK B-8806	BOBRICK B-6861	BOBRICK B-671	BOBRICK B-6727	BOBRICK B-223	BOBRICK B-505	BOBRICK B-5181	BOBRICK B-5191	BOBRICK B-4380	BOBRICK B-4807	BOBRICK KB110- SSWM					
MFG #2	BRADLEY 6324-48		BRADLEY 781		BRADLEY 908	BRADLEY 9538	BRADLEY 5831	BRADLEY 252	BRADLEY 250-15		BRADLEY 237-10	BRADLEY 2277	BRADLEY 2277-10	BRADLEY 2484	BRADLEY 5412	BRADLEY 407-11	BRADLEY 5412		BRADLEY 9114		BRADLEY 9124	BRADLEY 9563, 9564, 9565	BRADLEY 9813		BRADLEY 9567, 9568	BRADLEY 9401, 9403	BRADLEY 9014	ASI 9013						
MFG #3			ASI 0620			ASI 1224	ASI 9477-SM	ASI 0215	ASI 0210			ASI 04692	ASI 64696-6	ASI 8522		ASI 0031	ASI 0864		ASI 0473	ASI 3800	ASI 3260		ASI 7340	ASI 7345	ASI 8215	ASI 8154		ASI 8206-L, 8206-R						
DESCRIPTION	COUNTER MOUNTED	SURFACE MOUNTED VERTICAL	24 X 36 SURFACE MOUNTED	24 X 72 FULL LENGTH SURFACE MOUNTED	SURFACE MOUNTED	TA-6 SHOWER CURTAIN ROD TA-6A SHOWER CURTAIN HOOKS BOBRICK 204-2 TA-6B BOBRICK 204-1	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	RECESSED	SURFACE MOUNTED	RECESSED	SEMI-RECESSED	SURFACE MOUNTED	RECESSED	COUNTER MOUNTED	RECESSED MULTI ROLL	SURFACE MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	G24 24" G42 42" G36 36" G48 48"	G16 18" G56 16 X 31 - NON-SLIP FINISH G58 30 X 42 - NON-SLIP FINISH G59 42 X 54 - NON-SLIP FINISH				SURFACE MOUNTED ADA	SINGLE SURFACE MOUNTED ADA	THROUGH WALL MOUNTED	SURFACE MOUNTED	SURFACE MOUNTED	RECESSED	SURFACE MOUNTED	SURFACE MOUNTED	
FURNISHED BY:	FURNISHED BY G.C.	FURNISHED BY OWNER	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.	FURNISHED BY G.C.		
INSTALLED BY:	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.	INSTALLED BY G.C.		
GENERAL COMMENTS	PROVIDE AS INDICATED	PROVIDE AT ALL SINGLE OCCUPANT RESTROOM. PROVIDE AS INDICATED IN ALL OTHER LOCATIONS.	PROVIDE AT ALL SINGLE OCCUPANT RESTROOM. PROVIDE AS INDICATED IN ALL OTHER LOCATIONS.	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AT ALL SINGLE OCCUPANT RESTROOM. PROVIDE AS INDICATED IN ALL OTHER LOCATIONS.	PROVIDE AS INDICATED	PROVIDE AS INDICATED	WOMEN'S TOILET ONLY AS INDICATED	WOMEN'S TOILET ONLY AS INDICATED	PROVIDE AT ALL SINGLE OCCUPANT TOILETS OR RESTROOM TOILET STALLS. LENGTH: (1) @ 42"; (1) @ 36"; (1) @ 18"	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE (1) FOR EVERY JANITOR'S MOP SINK	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED	PROVIDE AS INDICATED

EVERNORTH

HEALTH SERVICES


CORGAN

CORGAN


401 North Houston Street, Dallas TX 7520

T: 972-852-1270


ISSUANCES

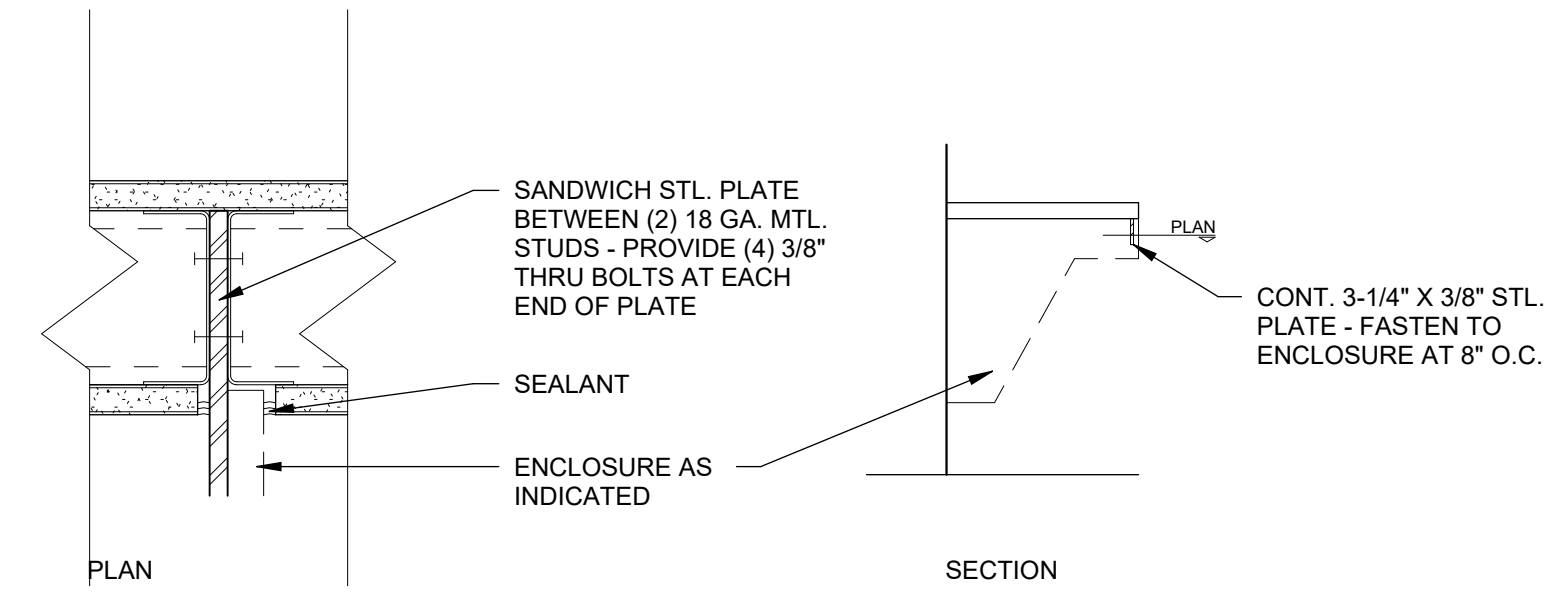


02 LAVATORY COUNTER SUPPORT - SPAN LESS THAN 10'-0" N.T.S.

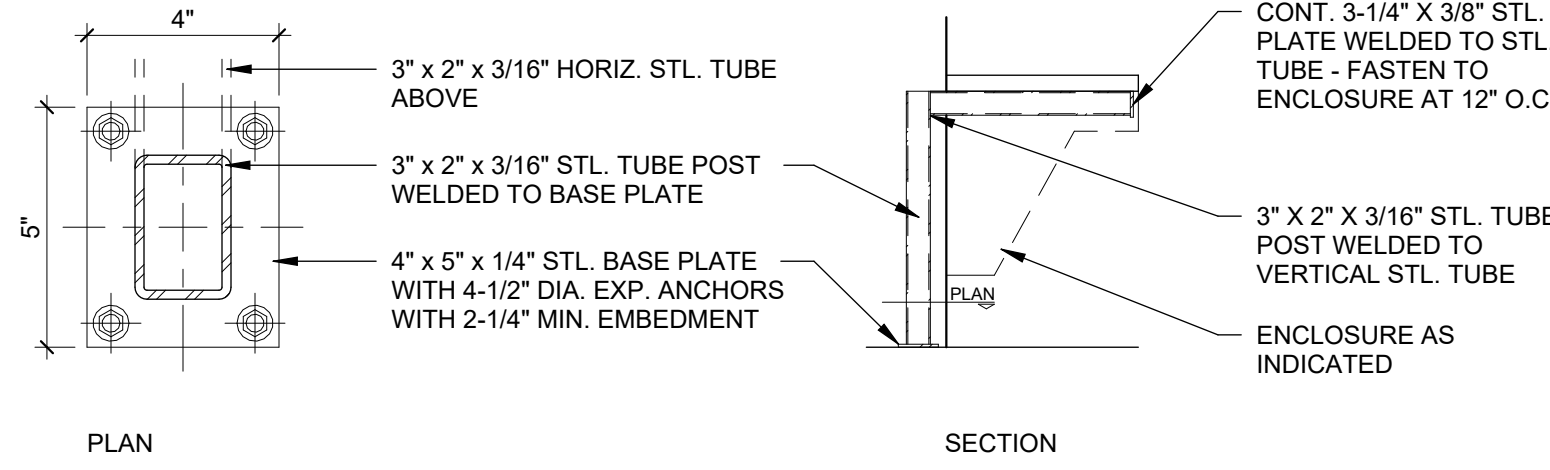



03 LAVATORY COUNTER SUPPORT - SPAN 10'-0" TO 16'-0" N.T.S.

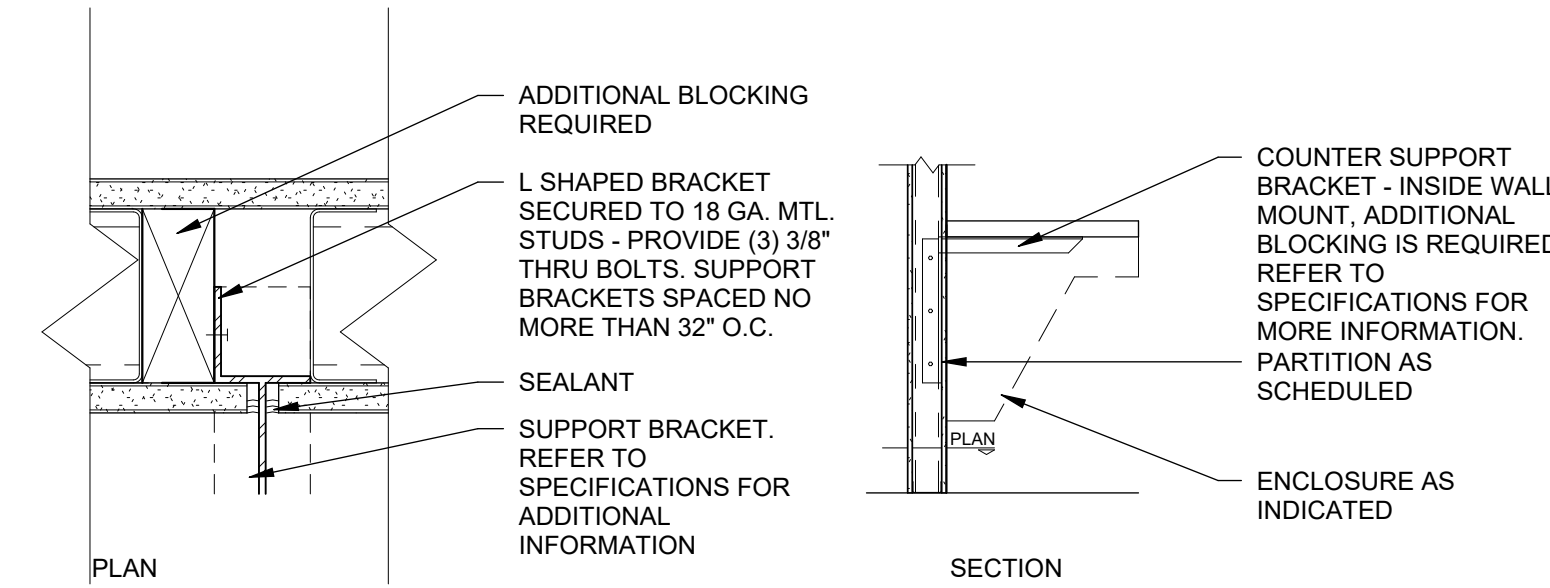


04 LAVATORY COUNTER SUPPORT BRACKETS - SPAN 10'-0" TO 16'-0" - SECTION N.T.S.

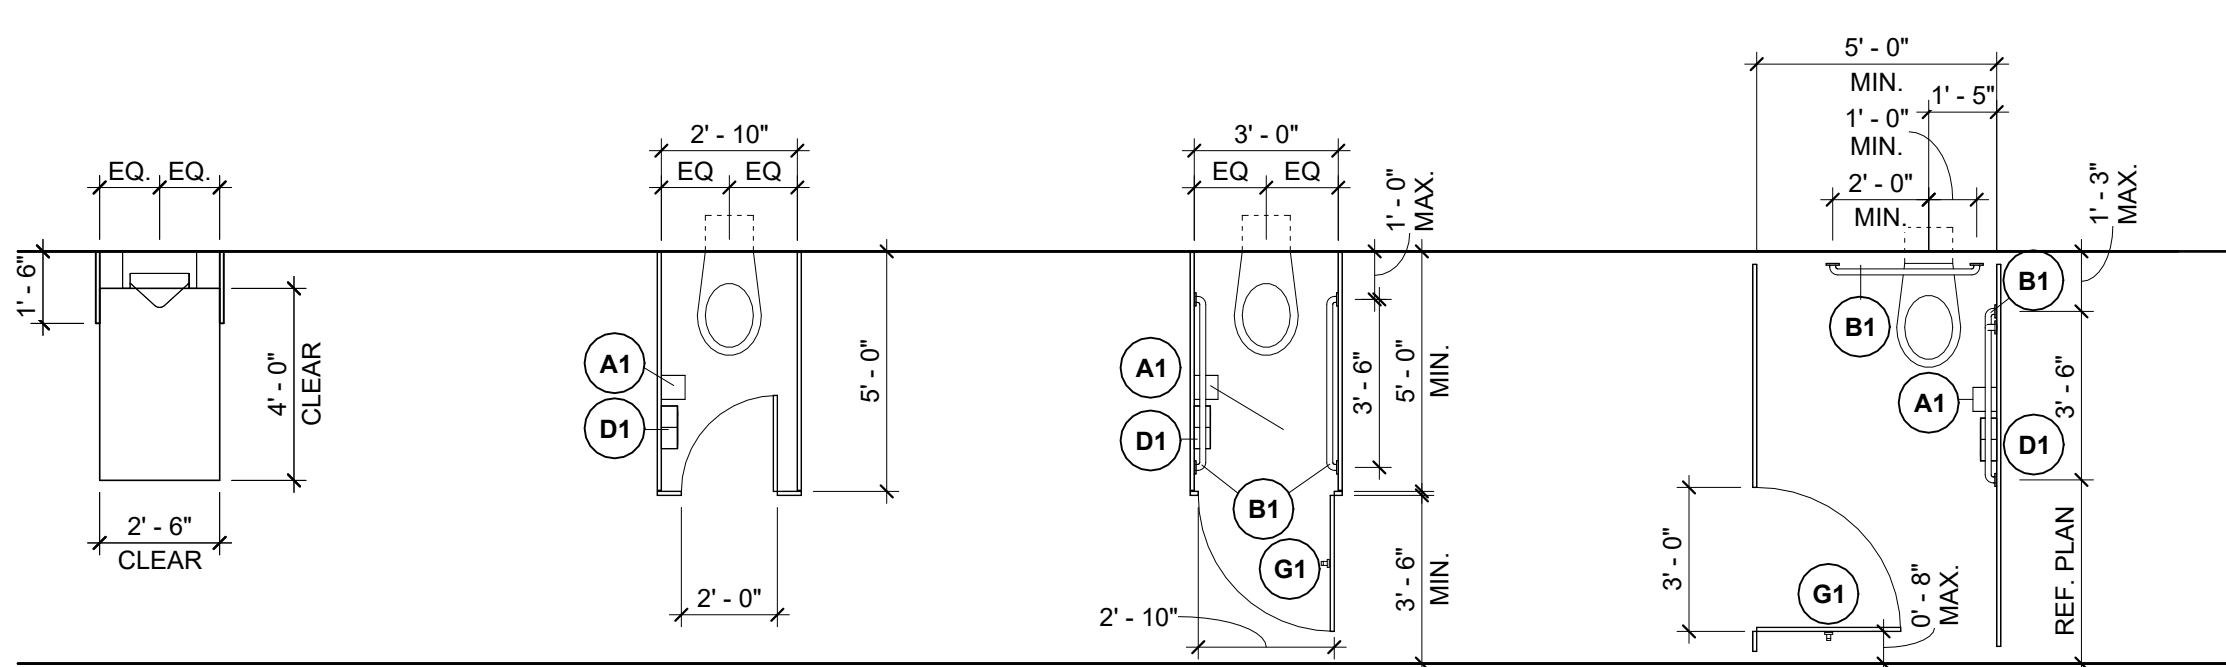


STALL TYPES DIAGRAMS

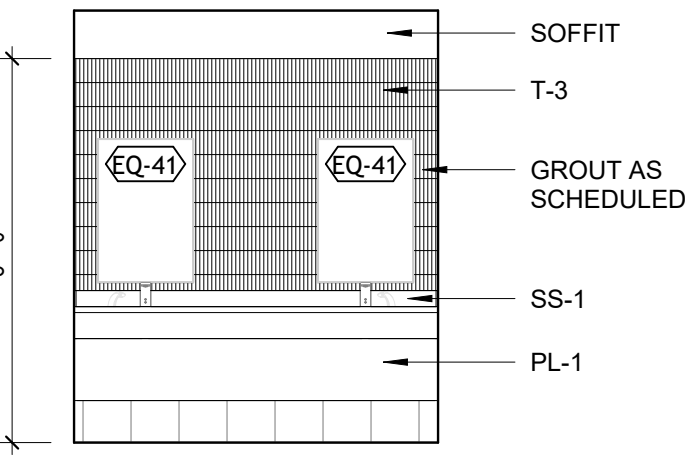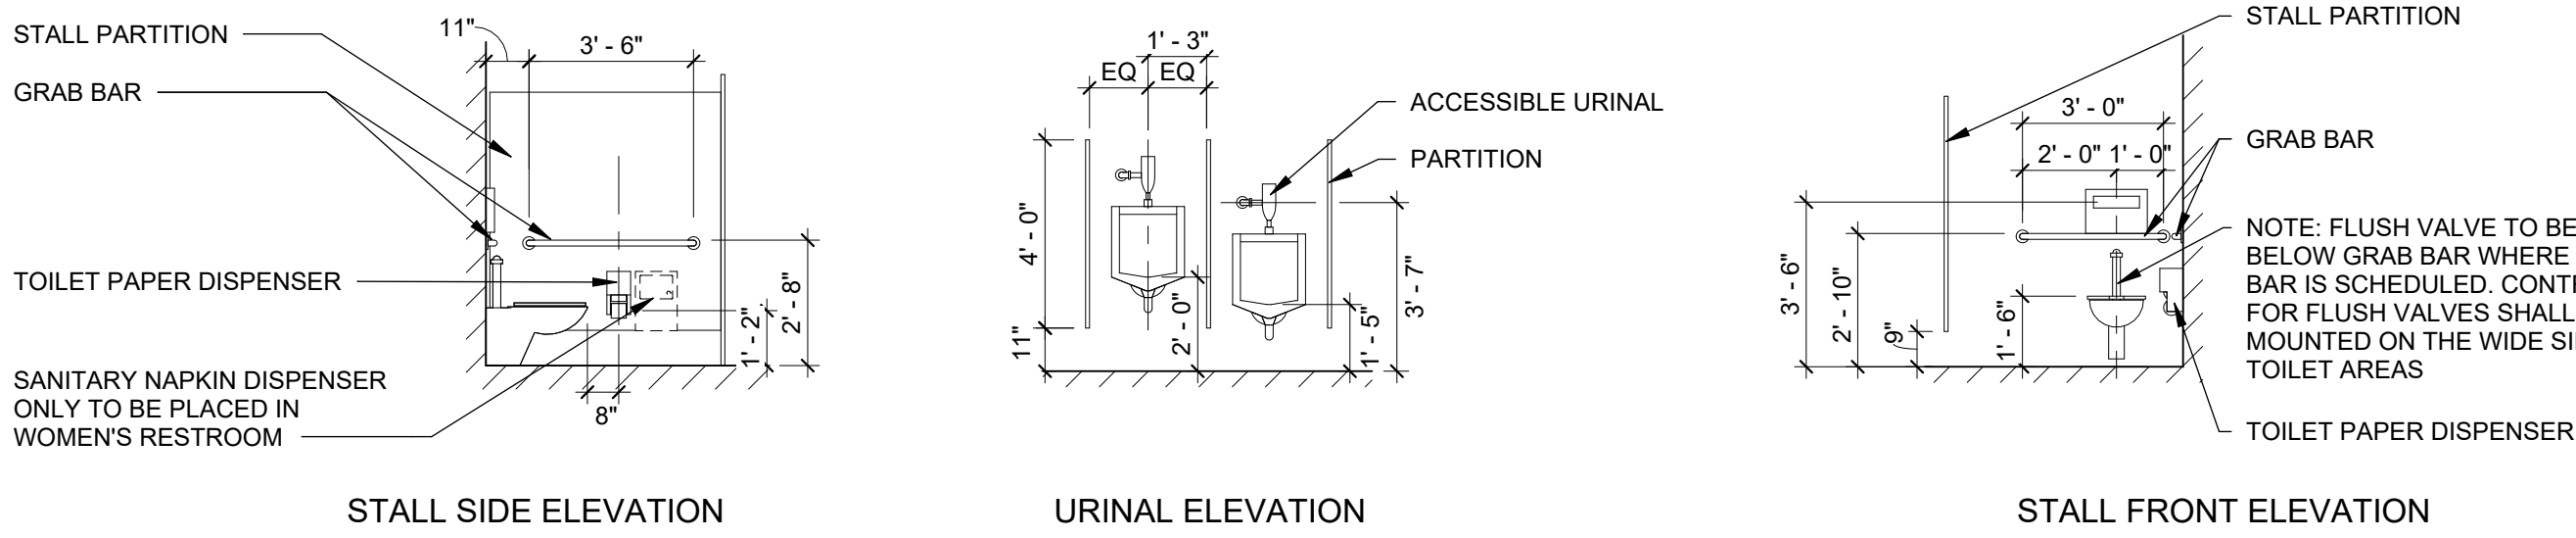


9 125 - MENS RR SINK W 1/4" = 1'-0"

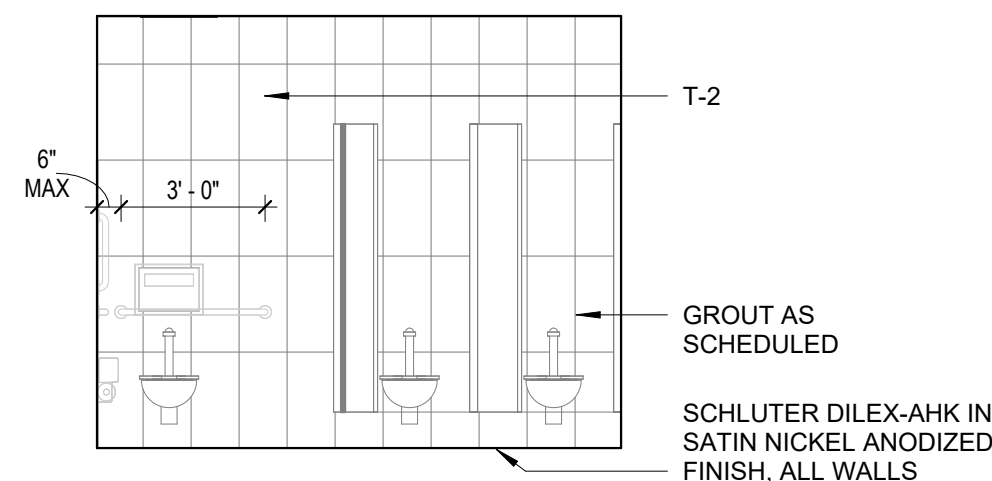


5 124 - WOMENS RR STALLS E 1/4" = 1'-0"

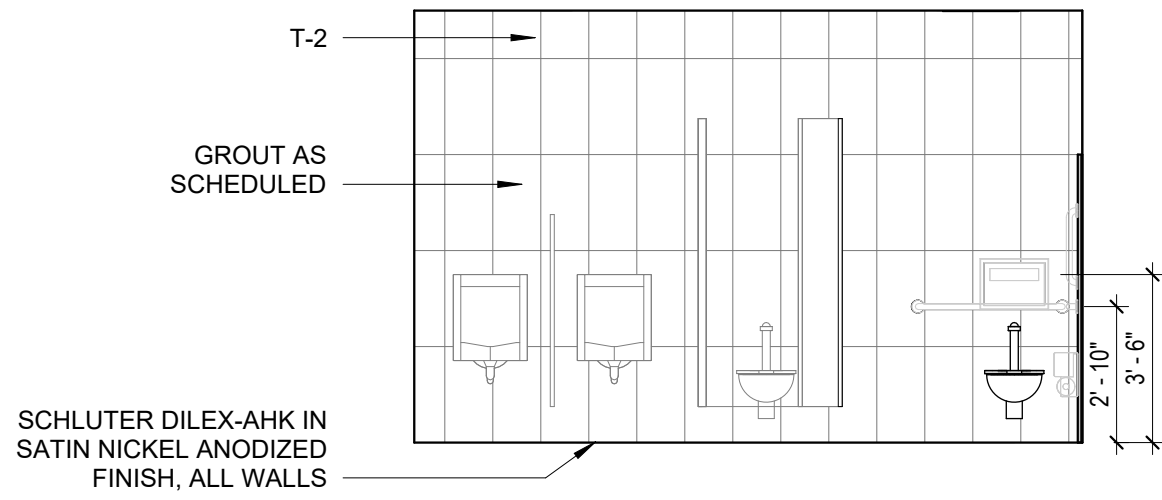


8 125 - MENS RR STALLS W 1/4" = 1'-0"

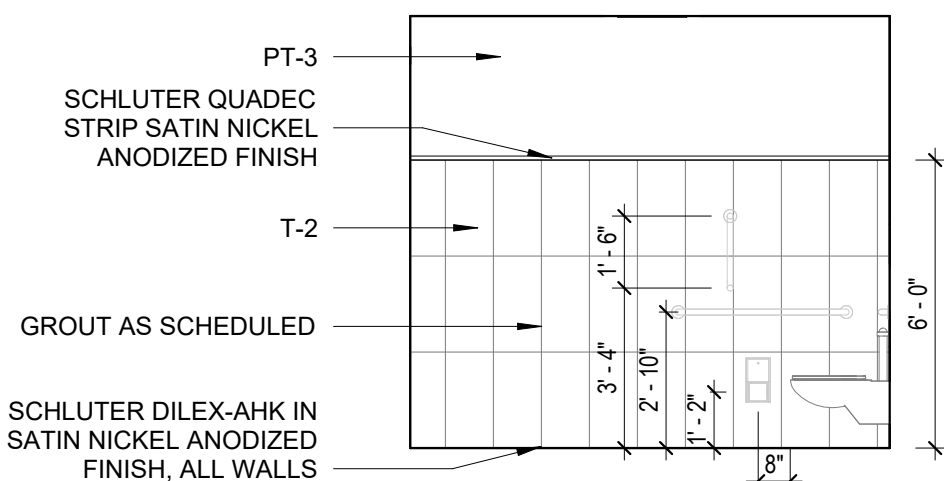


4 124 - WOMENS RR TLT N 1/4" = 1'-0"

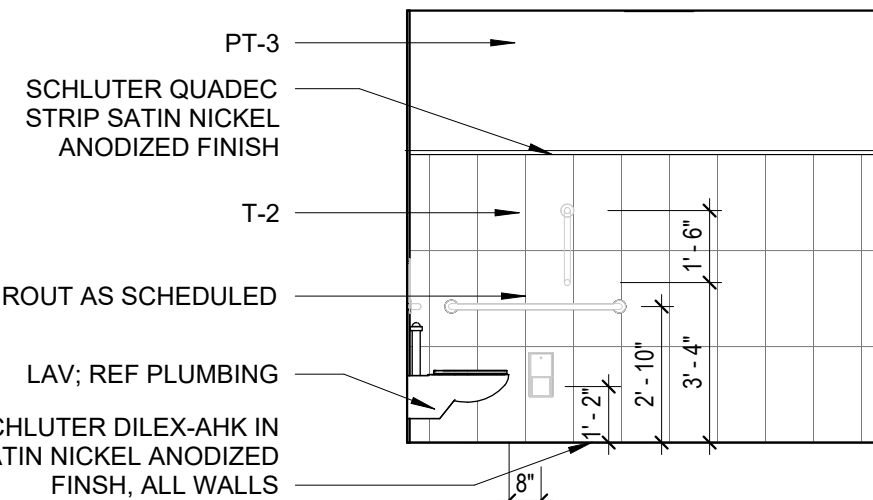

7 125 - MENS RR TLT N 1/4" = 1'-0"

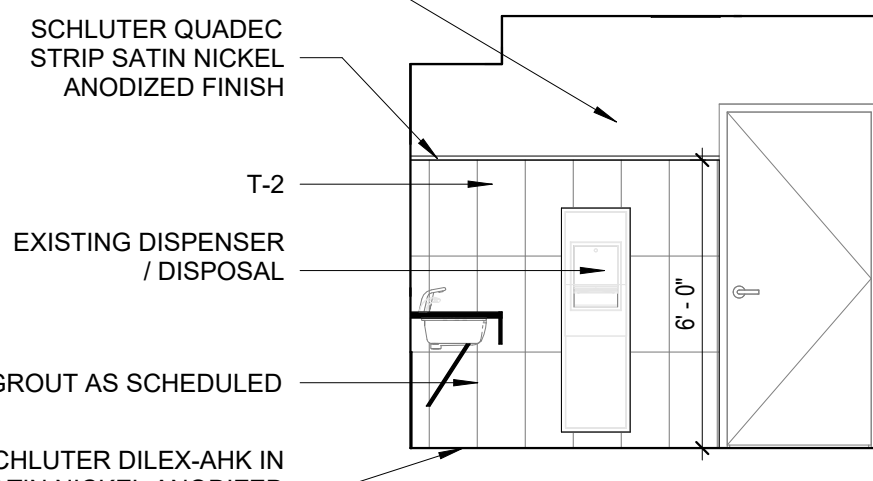

3 124 - WOMENS RR S 1/4" = 1'-0"

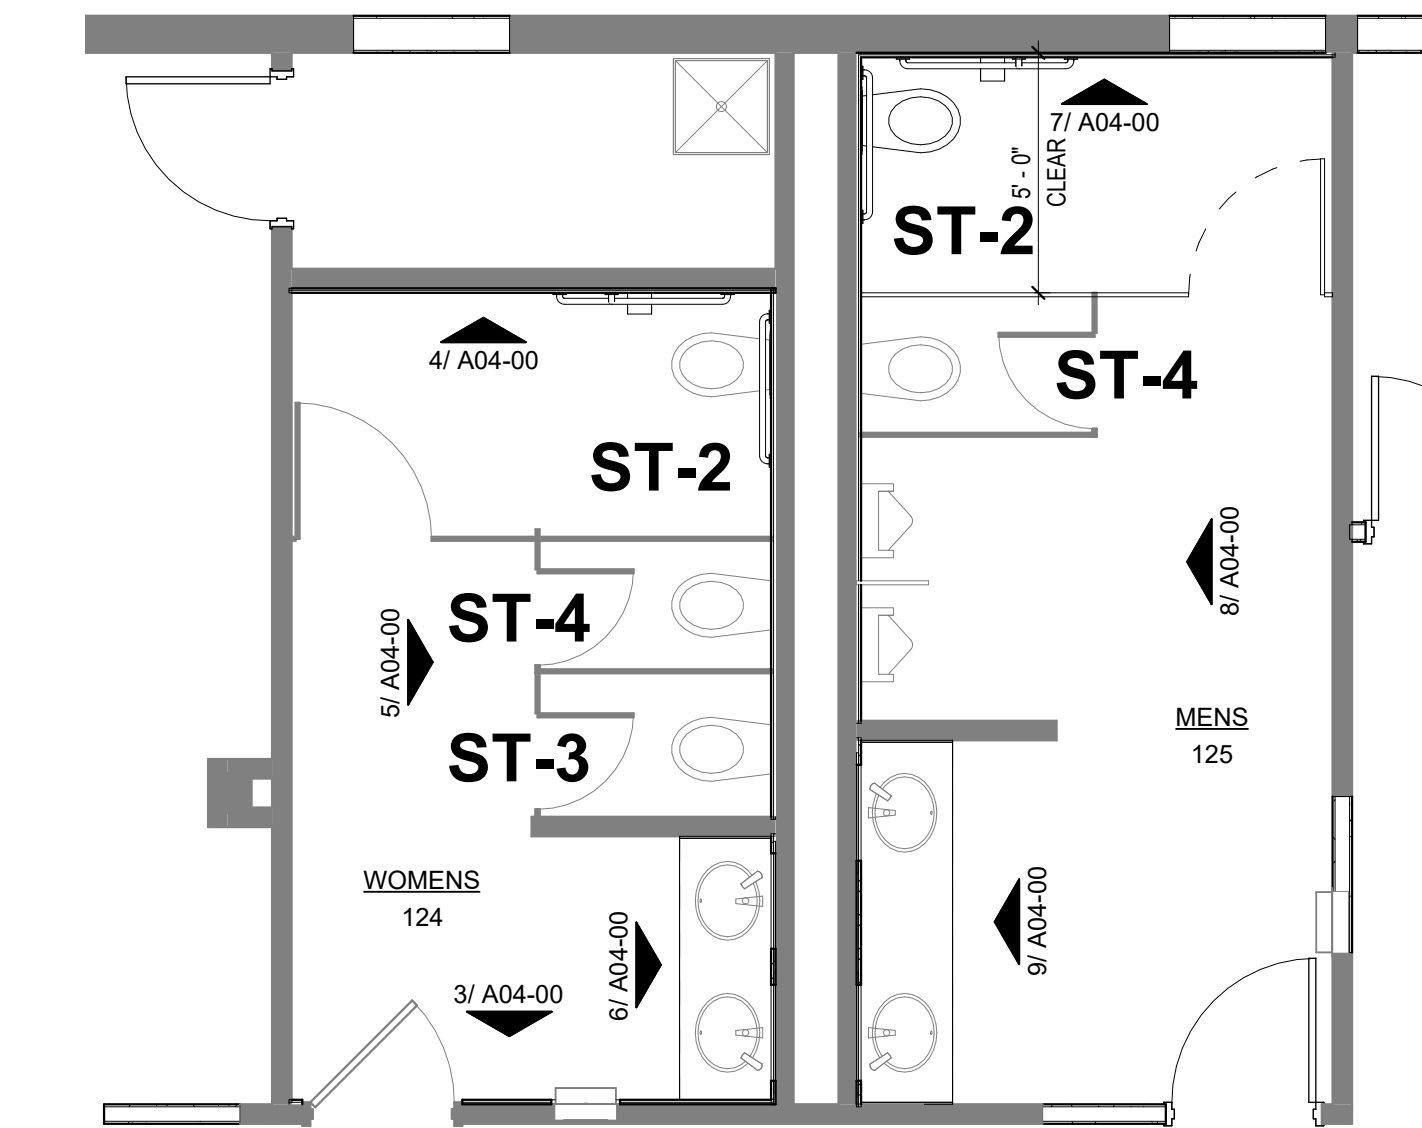

1 ENLARGED PLAN - RESTROOMS 1/4" = 1'-0"

1. REFER TO ENLARGED RESTROOM PLANS FOR TRASH GROMMET INCLUSION.

2. REFER TO ENLARGED RESTROOM PLANS FOR NUMBER OF SINKS.

WATER CLOSET TYPES

1. REFER TO ENLARGED RESTROOM PLANS FOR ACCESSORY ORIENTATION

2. REFER TO ENLARGED RESTROOM PLANS FOR DOOR SWING DIRECTION

3. SANITARY NAPKIN DISPOSALS AND DISPENSERS ARE TO BE INSTALLED ONLY IN WOMENS RESTROOMS AND GENDER-NEUTRAL RESTROOMS.

4. WHEN TOILET PARTITIONS NOT INDICATED DIMENSIONS ARE TO BE TAKEN FROM FINAL FINISH FACE. REFER TO FINISH PLANS FOR MORE INFORMATION.

CRISTOPHER GROSSNICKLAUS 001.026645

STATE OF ILLINOIS

Date of issue:

04/24/2026

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.

© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -

ELGIN PHARMACY

300 AIRPORT RD. SUITE 4

ELGIN, IL 60123

JOB

26136.0000

DATE

04/24/2026


RESTROOM

TYPES AND


RESTROOM

ACCESSORIES

A04-00

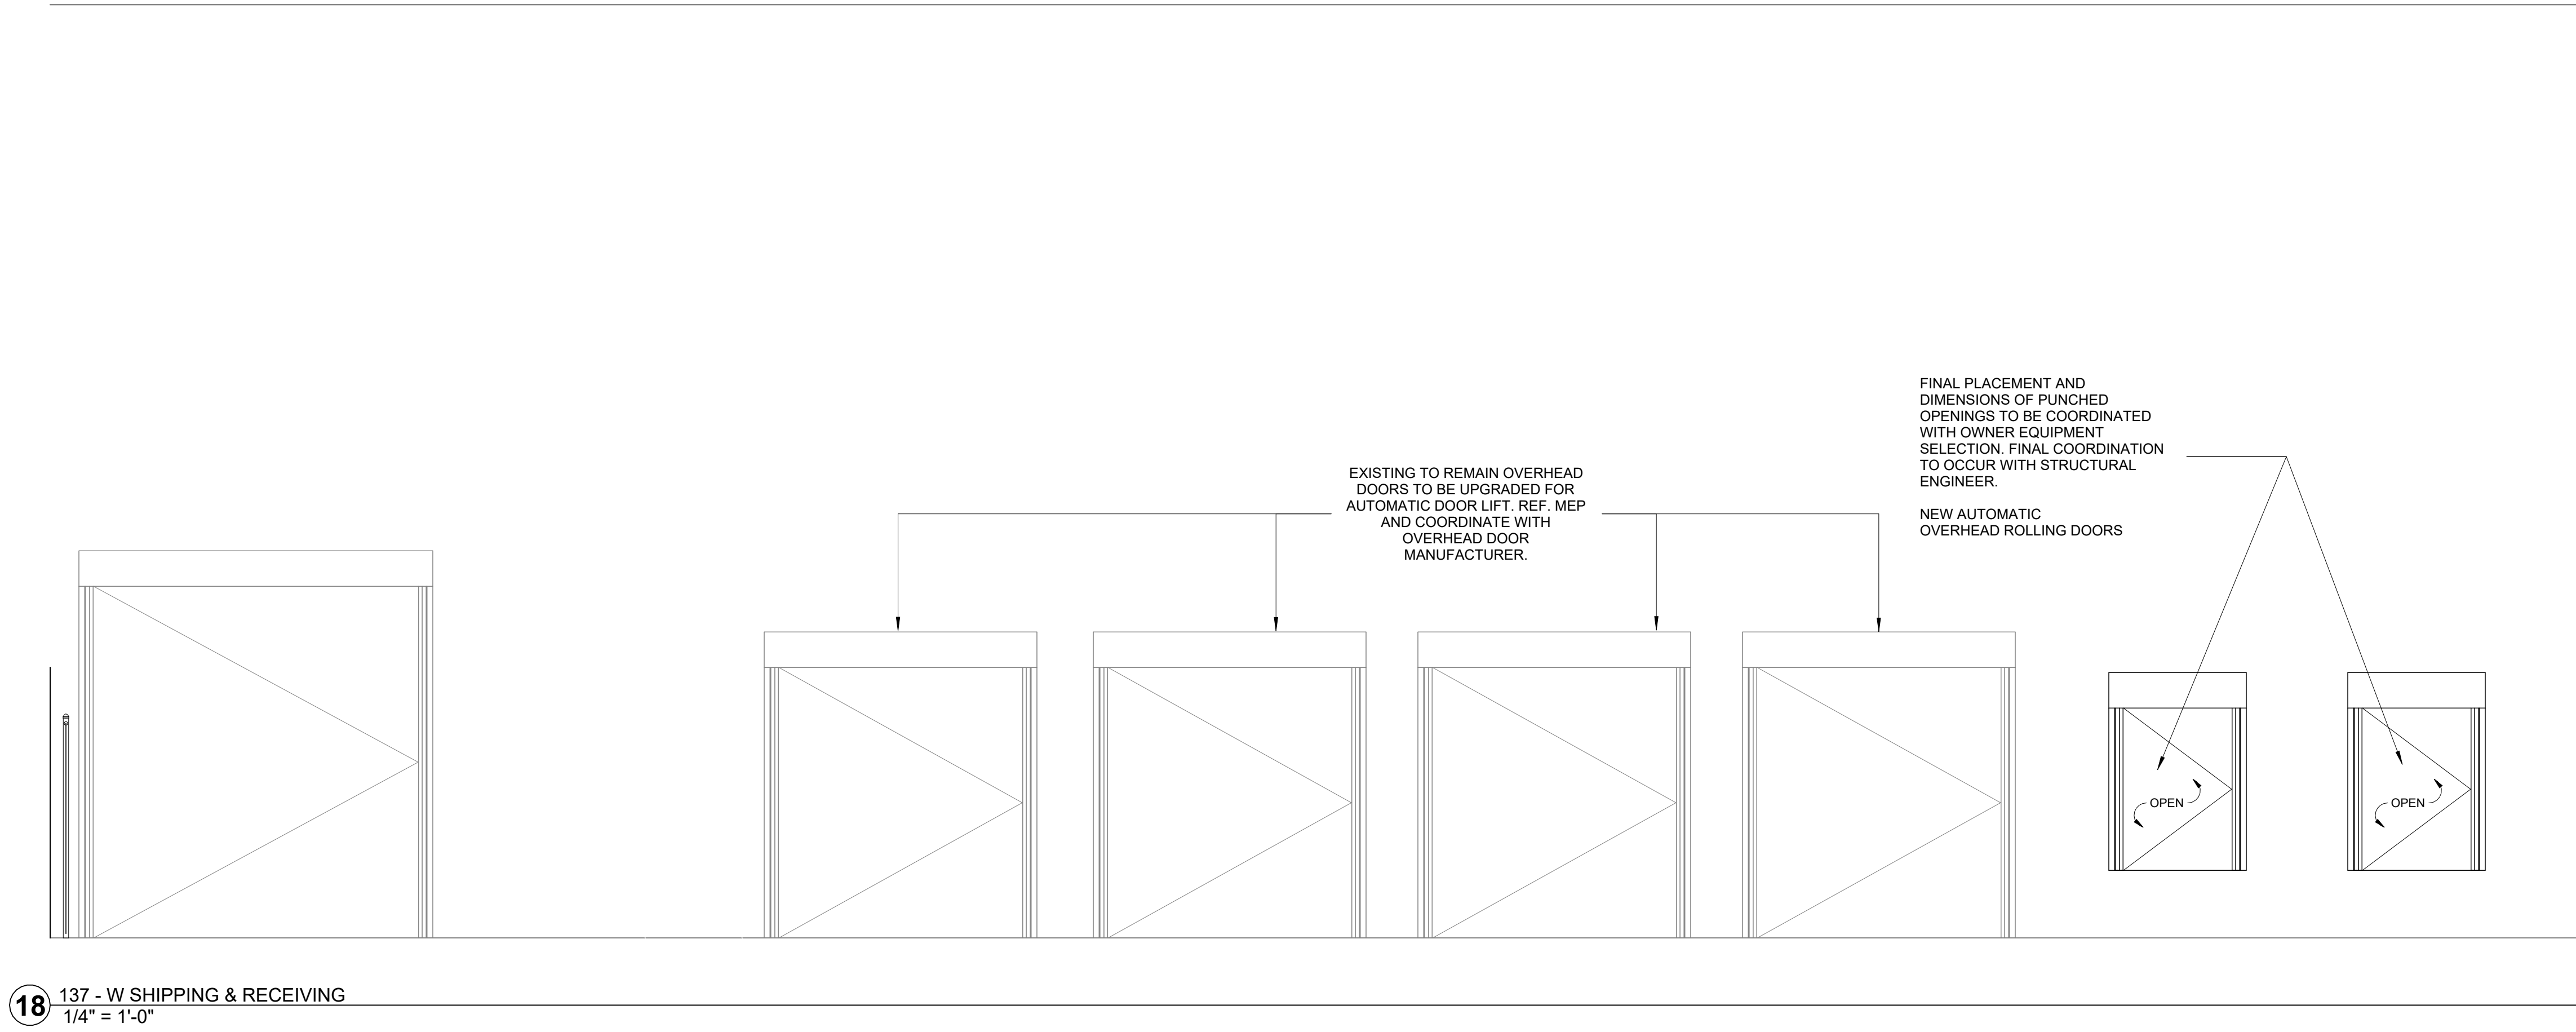

18 137 - W SHIPPING & RECEIVING
1/4" = 1'-0"

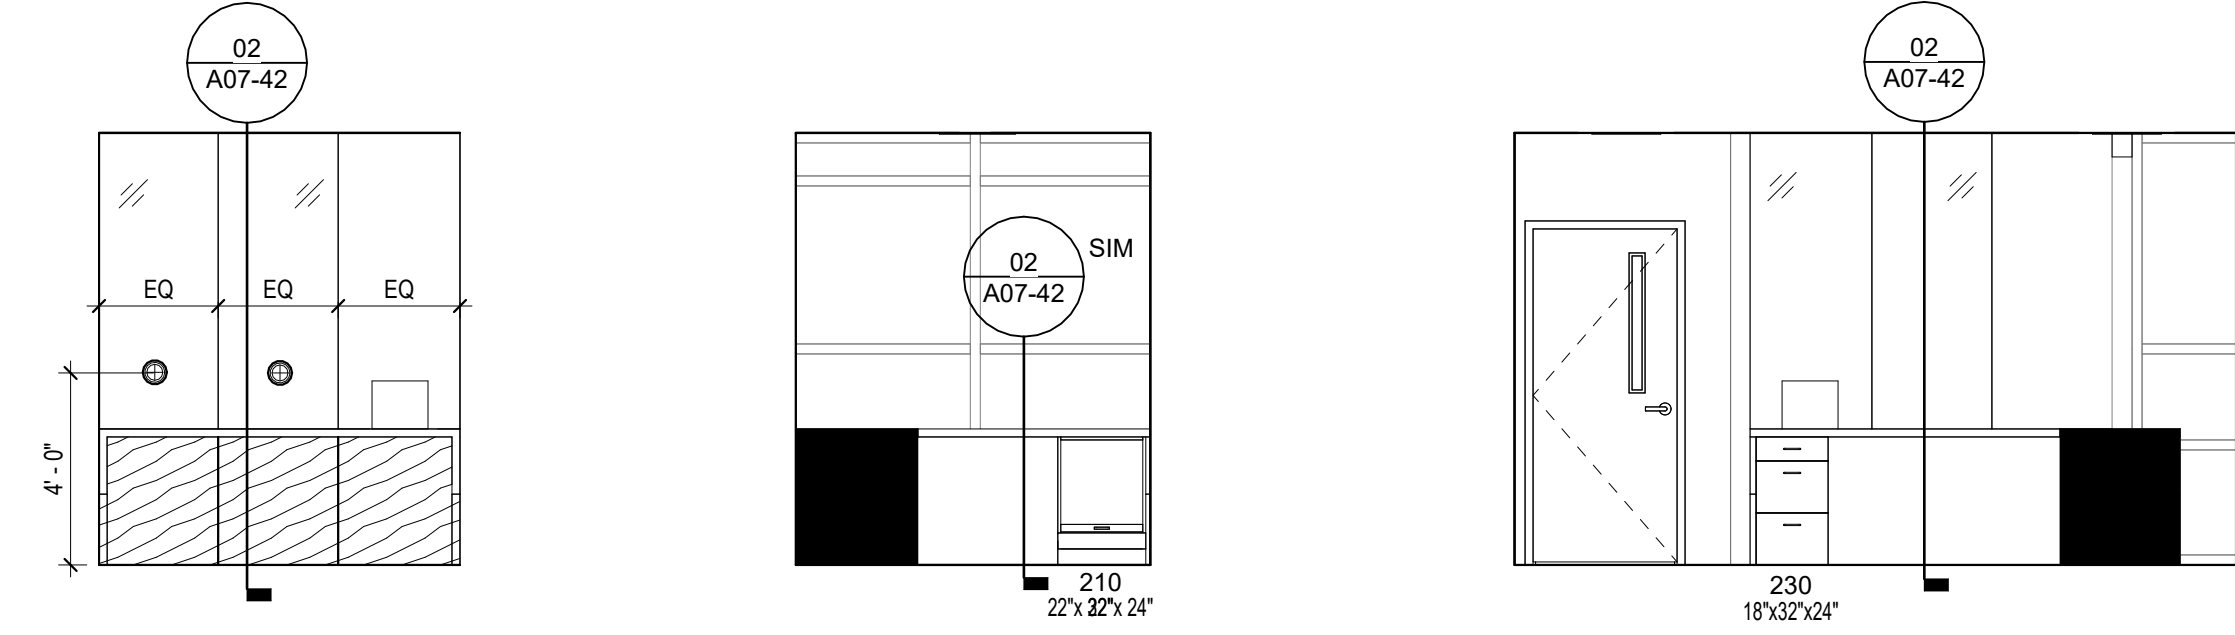


16 103 - S SECURITY/RECEPTION
1/4" = 1'-0"

15 103 - E SECURITY/RECEPTION
1/4" = 1'-0"


14 103 - N SECURITY/RECEPTION
1/4" = 1'-0"

13 127 - W MOTHER'S ROOM
1/4" = 1'-0"

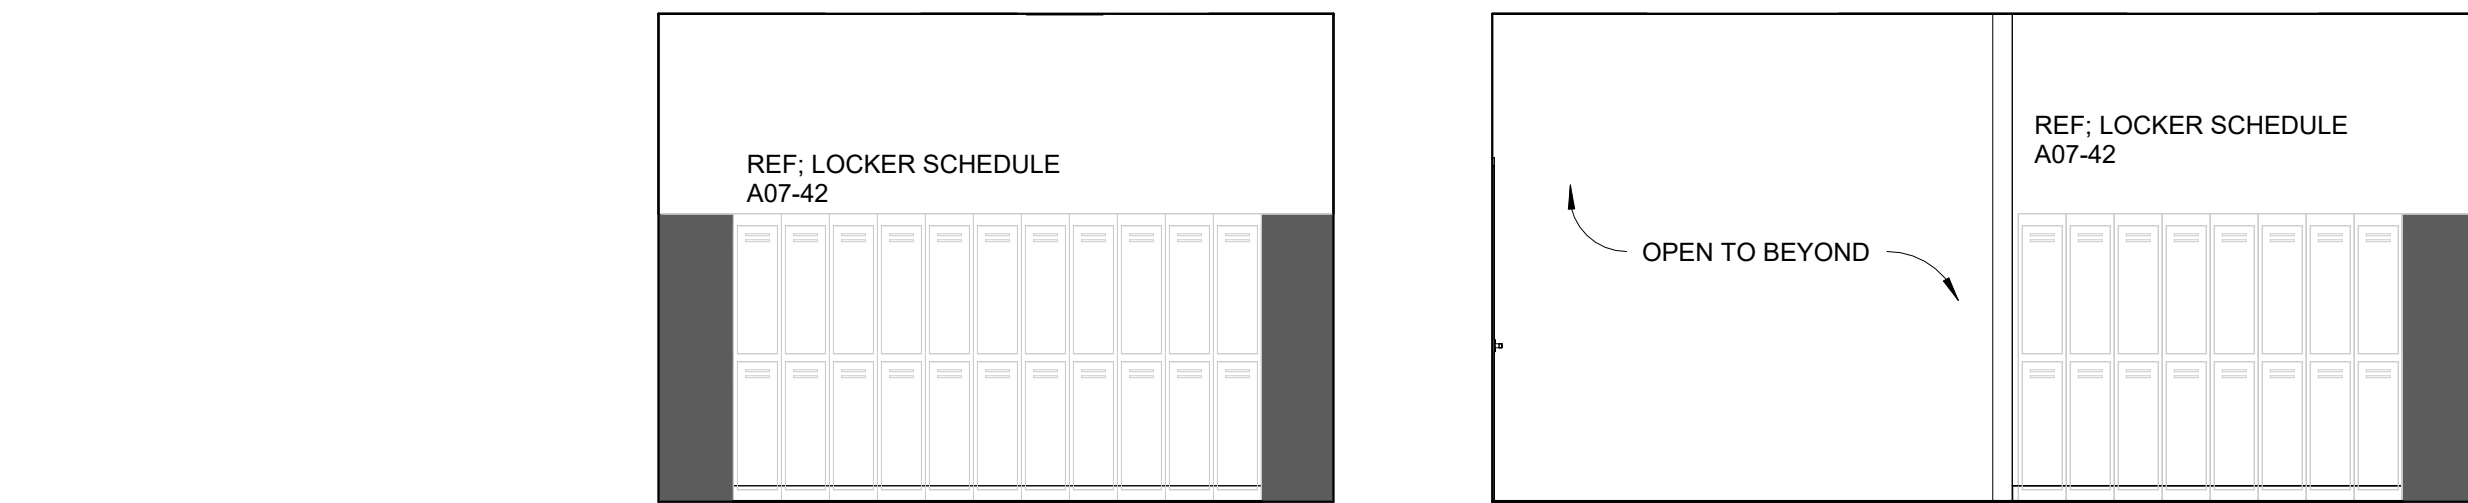


10 116 - W LOCKERS
1/4" = 1'-0"


9 116 - S LOCKERS
1/4" = 1'-0"

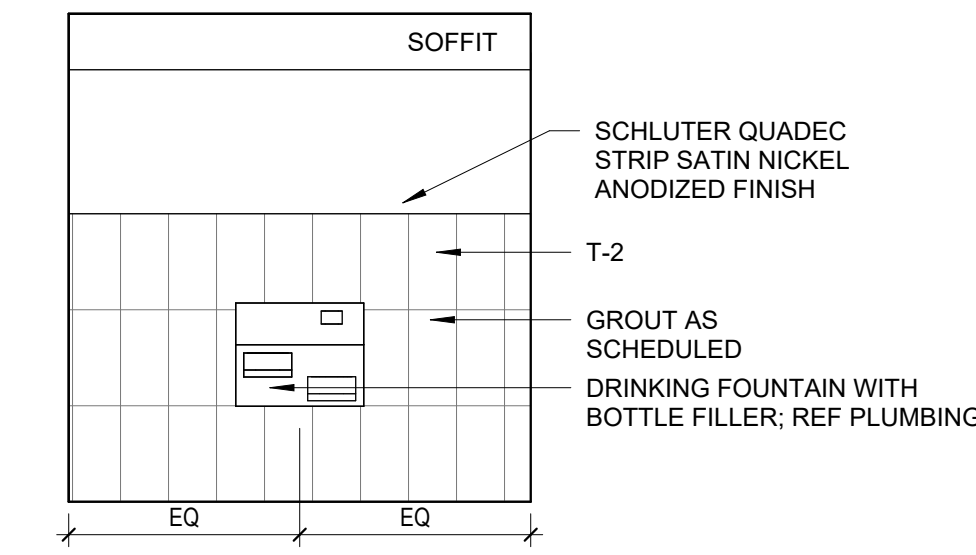


8 105 N DRINKING FOUNTAINS
1/4" = 1'-0"

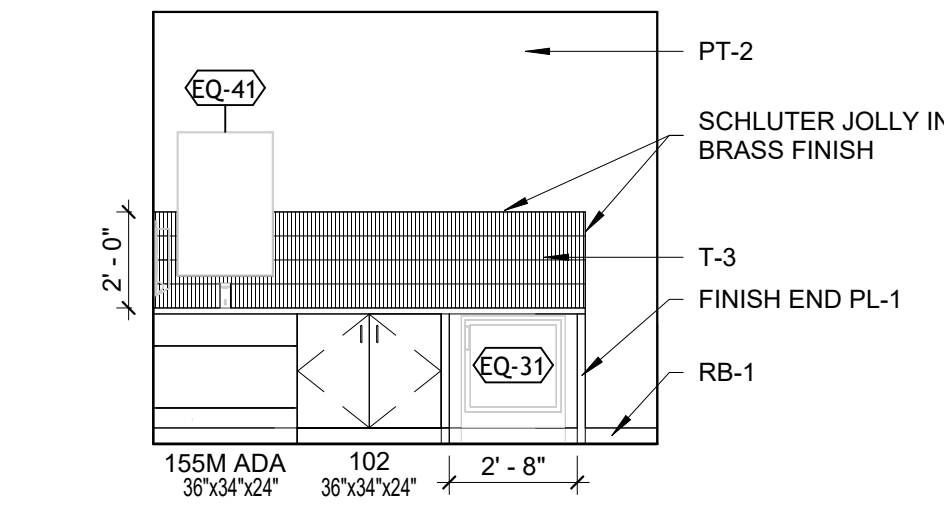


12 127 - N MOTHER'S ROOM
1/4" = 1'-0"

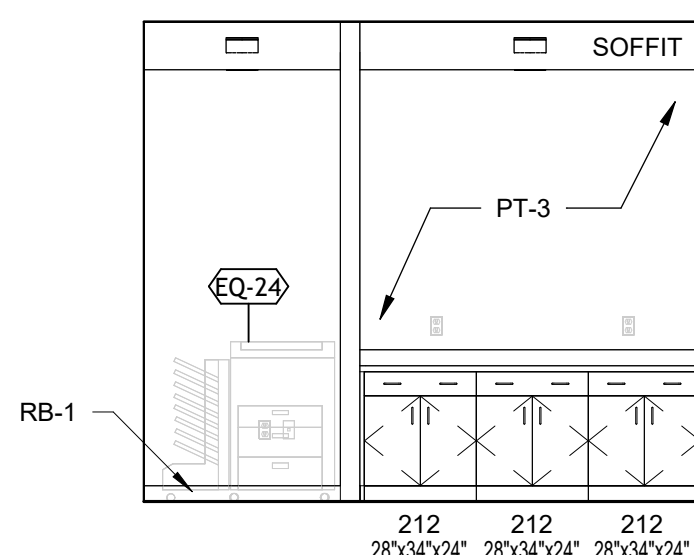


7 113 - W COPY
1/4" = 1'-0"

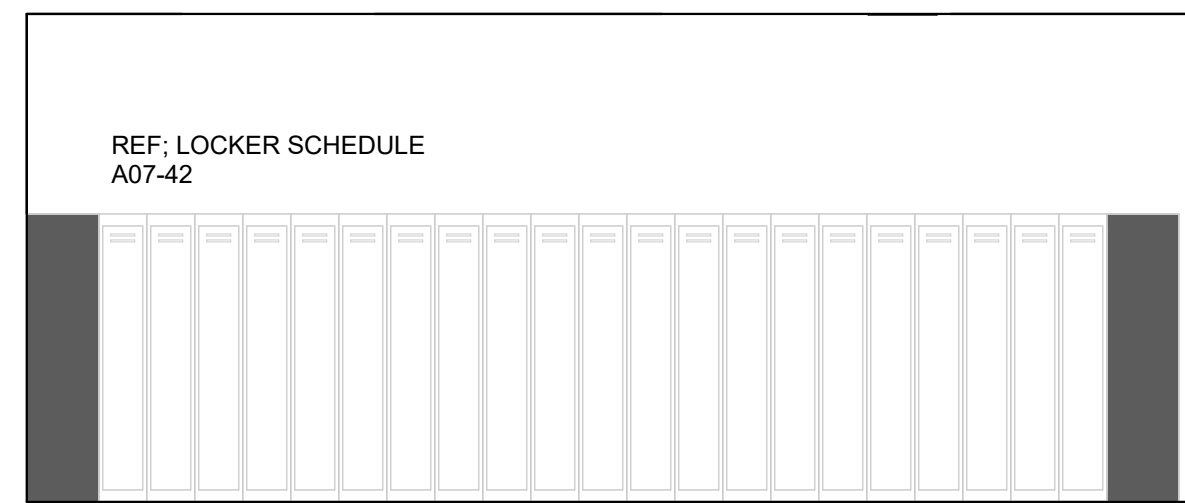


11 116 - N LOCKERS
1/4" = 1'-0"

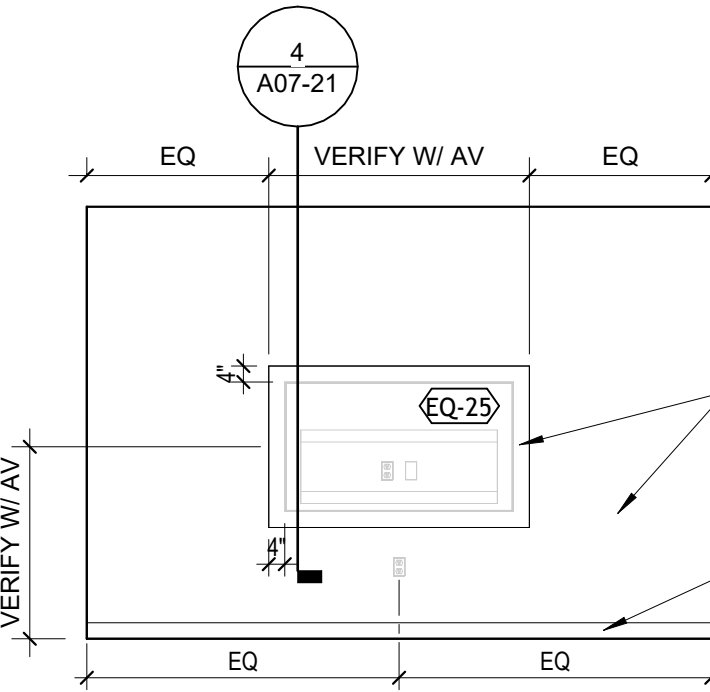


6 106 - E HUDDLE
1/4" = 1'-0"

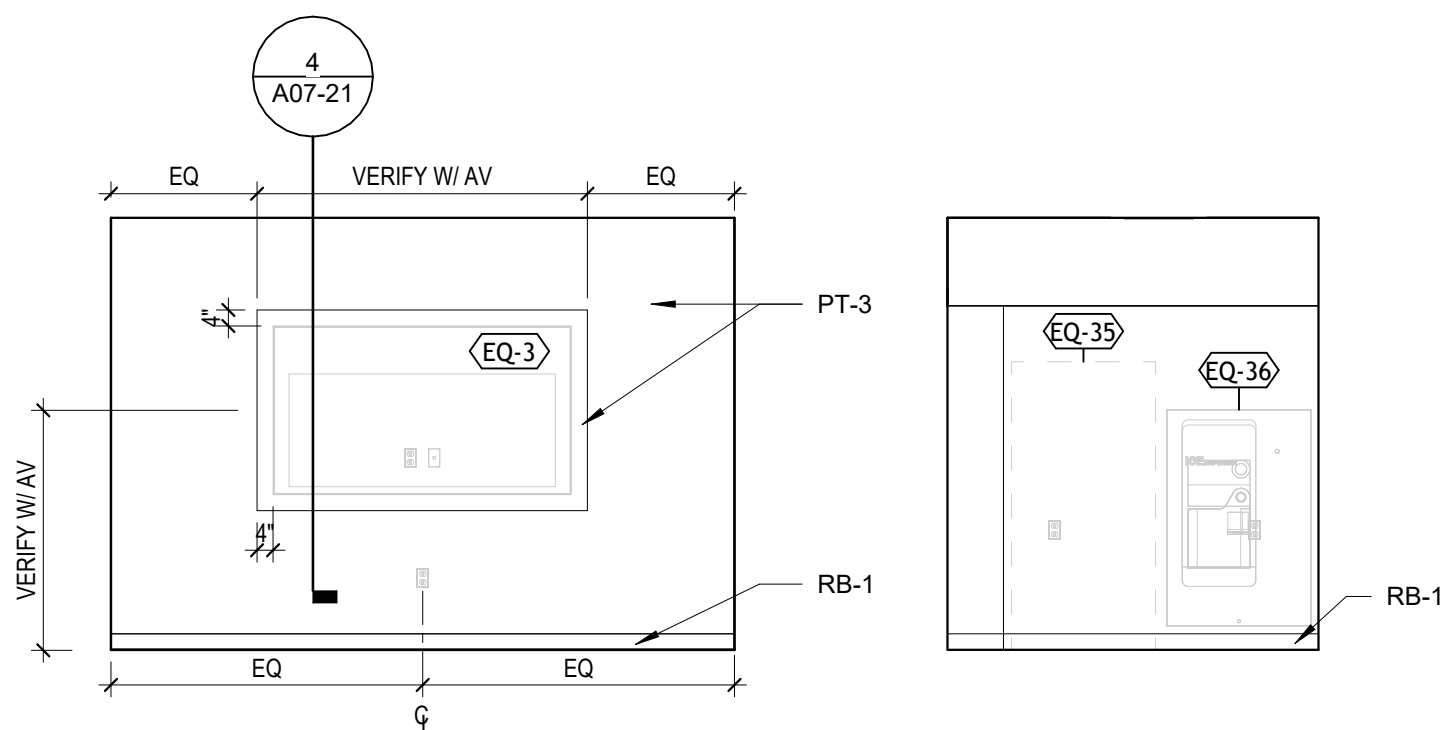


5 110 - W CONFERENCE
1/4" = 1'-0"

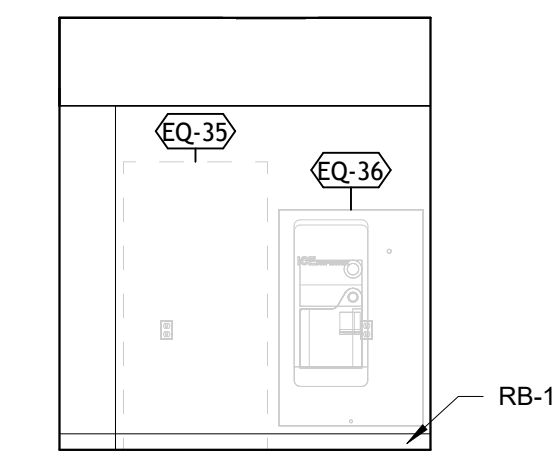


4 104 - N BREAKROOM
1/4" = 1'-0"

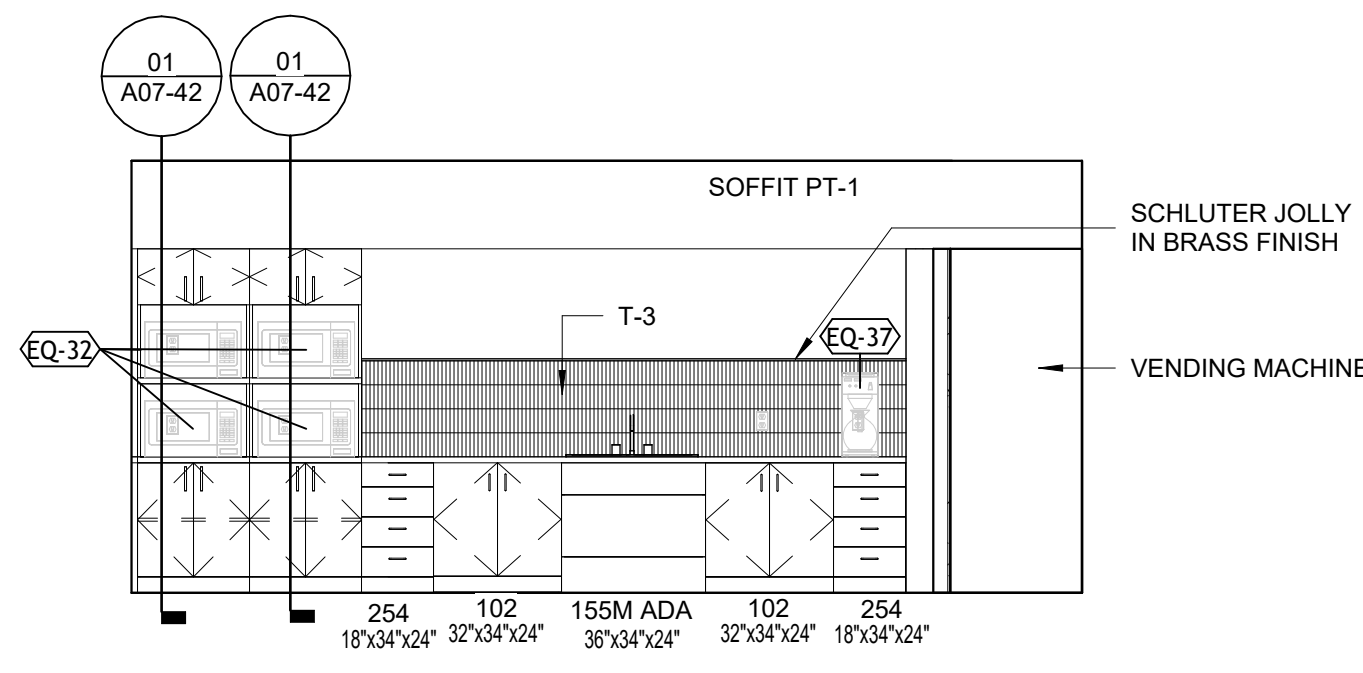


3 104 - W BREAKROOM
1/4" = 1'-0"

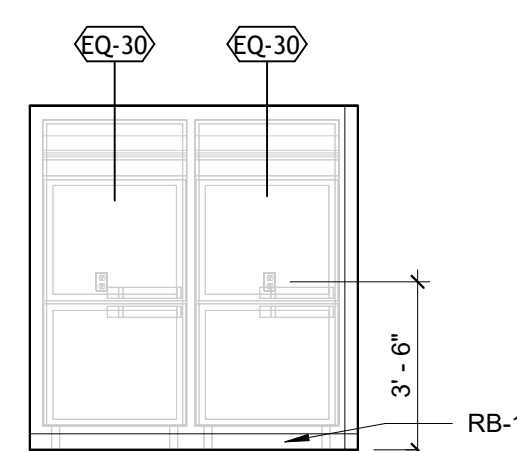


2 104 - S BREAKROOM
1/4" = 1'-0"

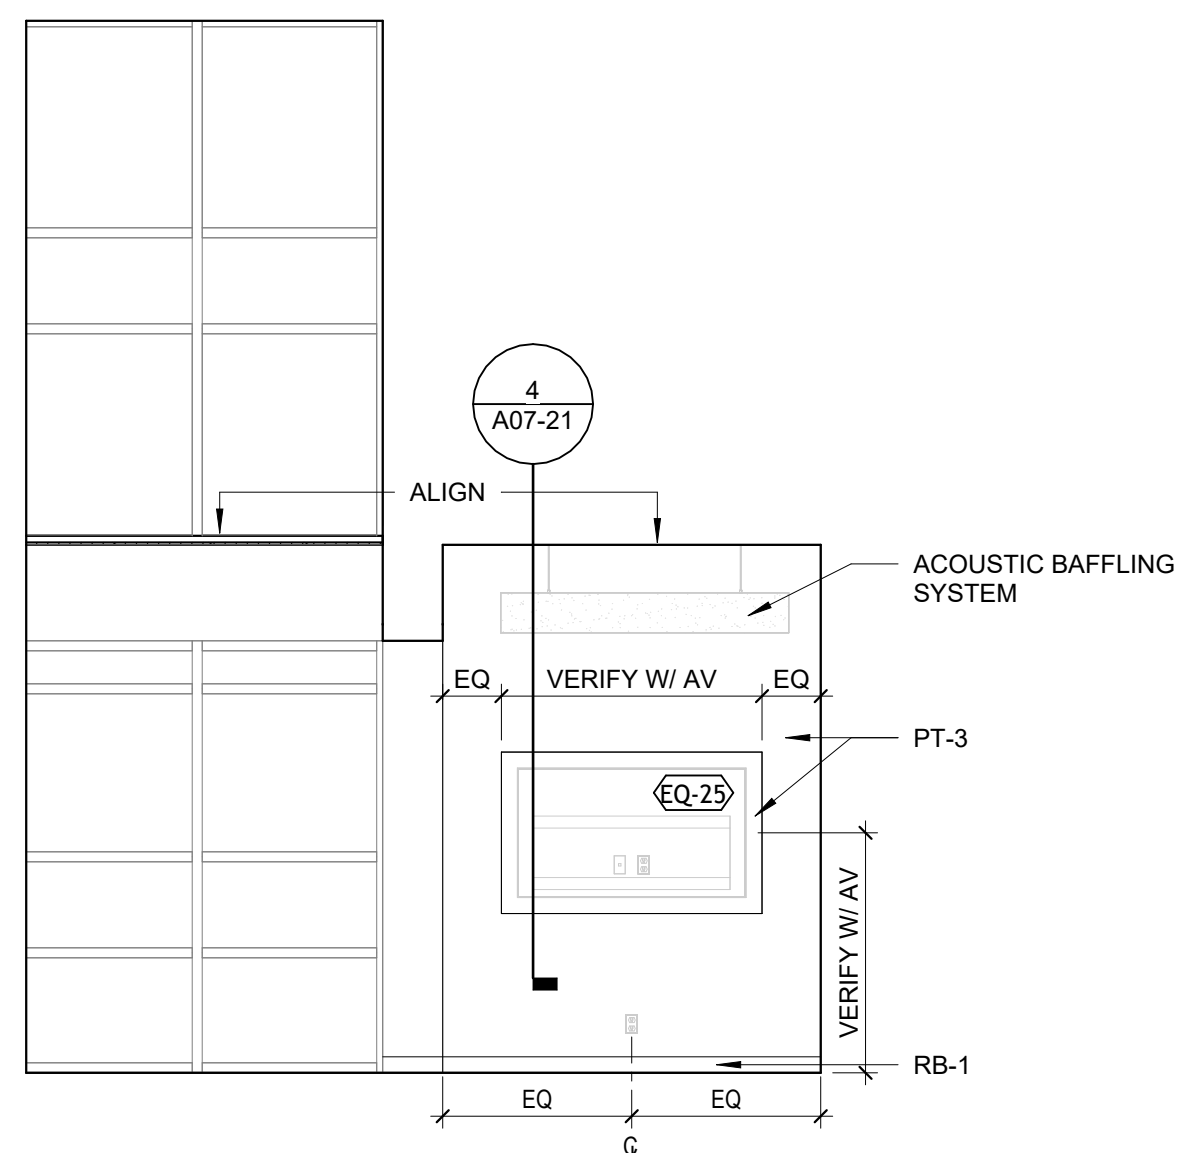


1 104 - E BREAKROOM
1/4" = 1'-0"

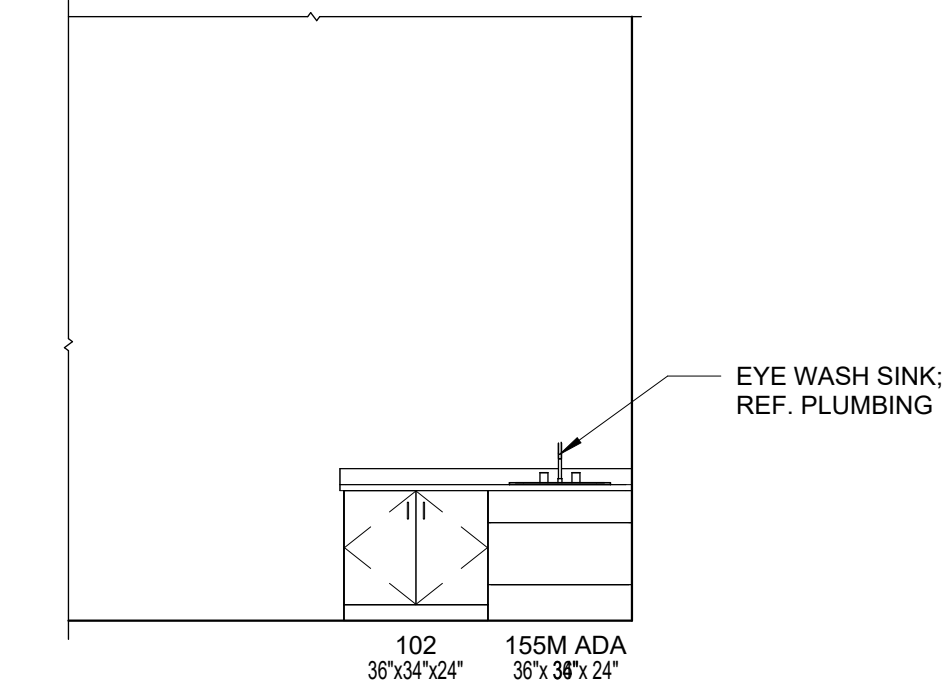

20 135 - S PHARMACY FULFILLMENT
1/4" = 1'-0"

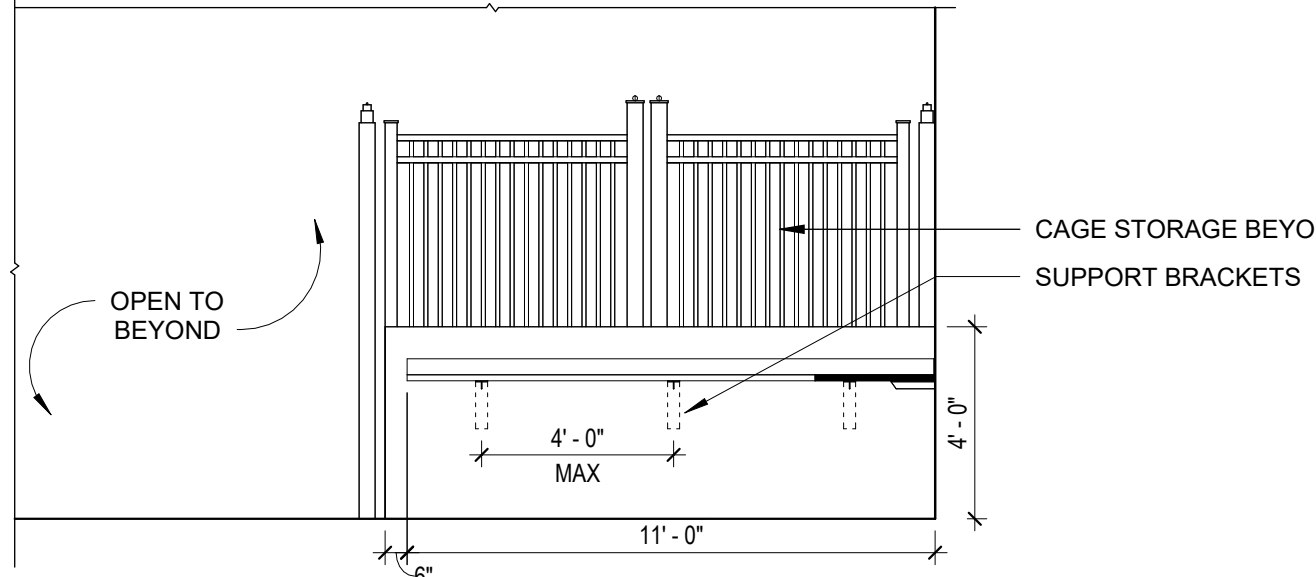

19 137 - N SHIPPING & RECEIVING
1/4" = 1'-0"

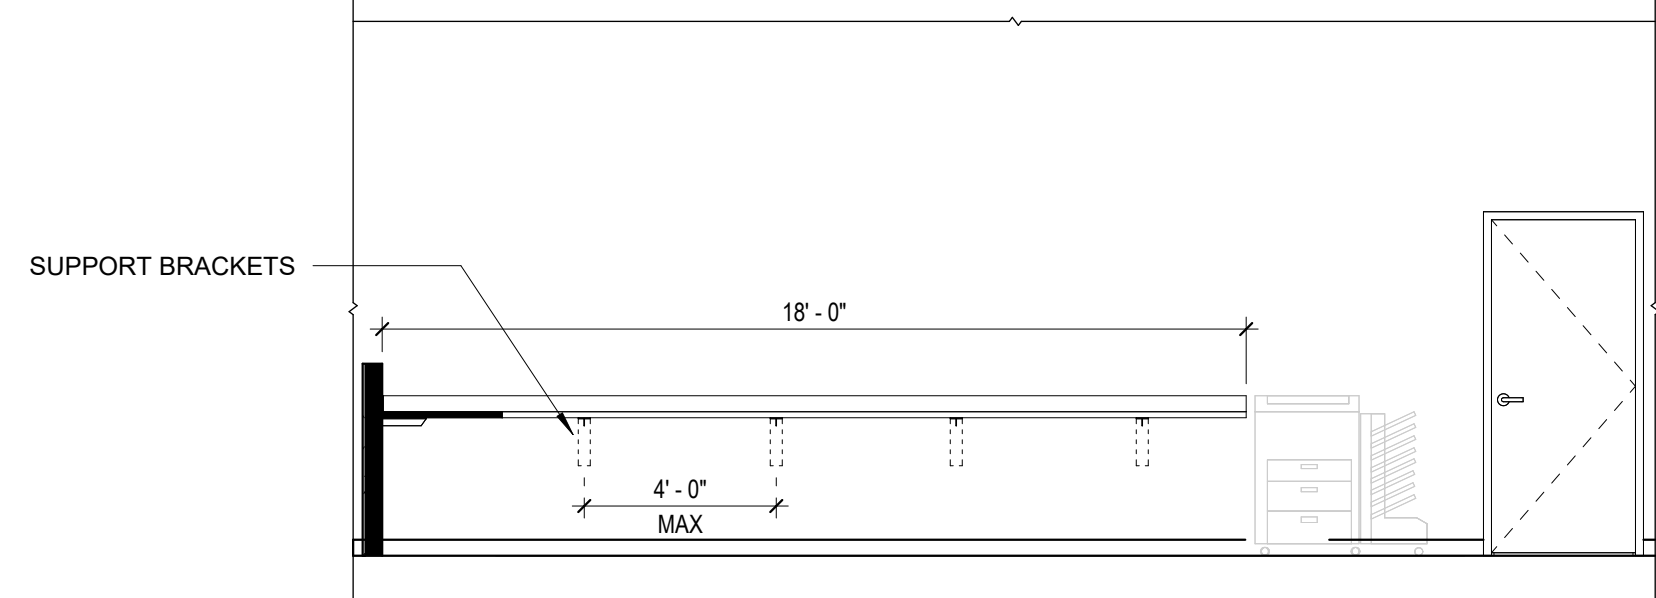


17 137 - E SHIPPING & RECEIVING
1/4" = 1'-0"

GENERAL MILLWORK NOTES

- MILLWORK SHALL TO CONFORM TO AWI STANDARD SUITES SUPPLEMENTED BY THE AWI ARCHITECTURAL WOODWORK STANDARDS 2ND EDITION, U.N.O.
- REFER TO ANSI/AWI 0641 ARCHITECTURAL CASEWORK STANDARD SUPPLEMENTED BY AWI ARCHITECTURAL WOODWORK STANDARDS 2ND EDITION FOR DESIGN DESIGNATIONS.
- SPECIALIZED MILLWORK SECTIONS ARE KEYED OR NOTED ON MILLWORK ELEVATIONS. REFER TO AWI ARCHITECTURAL WOODWORK STANDARDS 2ND EDITION FOR TYPICAL SECTIONS.
- CABINETRY SHALL BE PLASTIC LAMINATE CLAD WITH PL-1, U.N.O.
- ALL COUNTERTOPS TO BE SSM-1 U.N.O.
- PROVIDE PLASTIC LAMINATE CLAD TRIM AND FILLER PANELS WHERE EQUIPMENT IS LOCATED WITHIN CABINET UNITS.
- PROVIDE COUNTERTOP BRACE SUPPORTS AT 48" O.C. MAX AT KNEE SPACES AND LAVATORY COUNTERS, U.N.O.
- PROVIDE 2" DIAMETER GROMMETS AT WORKSTATIONS WITH KNEE SPACES AND ACCESS TO POWER AND LOW VOLTAGE IS NEEDED. CONFIRM LOCATIONS WITH OWNER
- PROVIDE BLOCKING WITHIN PARTITION FOR CABINETRY ATTACHED TO WALLS.
- PROVIDE BOTTOM CLOSURE FOR FILLER PANELS AT TOE SPACE AND BOTTOM OF UPPER WALL CABINETS TO SEAL TIGHT
- PROVIDE PLASTIC LAMINATE FACED BASE AT PLASTIC LAMINATE BASE CABINET MILLWORK.
- PROVIDE WOOD BASE AT ALL WOOD BASE CABINET MILLWORK.
- SEMI-EXPOSED SURFACES SUCH AS THE INTERIOR OF A CABINET SHALL BE WHITE MELAMINE.
- PLASTIC LAMINATE FACED DOORS, DRAWERS, AND COUNTERTOP EDGES SHALL RECEIVE 3MM PVC EDGE BANDING TO MATCH ADJACENT LAMINATE COLOR. SUBMIT EDGE BANDING SAMPLE TO ARCHITECT FOR APPROVAL.
- 4" TOE KICK IS STANDARD AT CASEWORK, U.N.O.
- WOOD GRAIN LAMINATES GRAIN DIRECTION RUN VERTICALLY, U.N.O.
- MANUFACTURERS NAMES AND IDENTIFICATION NUMBERS ARE LISTED AS A MEANS OF ESTABLISHING A STANDARD OF TYPE, FUNCTION, COLOR AND QUANTITY. REFER TO THE FINISH SCHEDULE AND THE SPECIFICATIONS FOR BASIS OF DESIGN AND ACCEPTABLE MANUFACTURERS.
- TERMINATE ACCENT PAINTS & TILE WAINSCOTS ON INSIDE CORNERS ONLY, U.N.O.
- PAINT CLG / WALL ACCESS PANELS AND HANDRAILS TO MATCH THE SURFACE THE SUBSTRATE
- WHERE REQUIRED FILLER STRIPS SHALL MATCH ADJACENT CABINETRY FINISH.

MILLWORK LEGEND

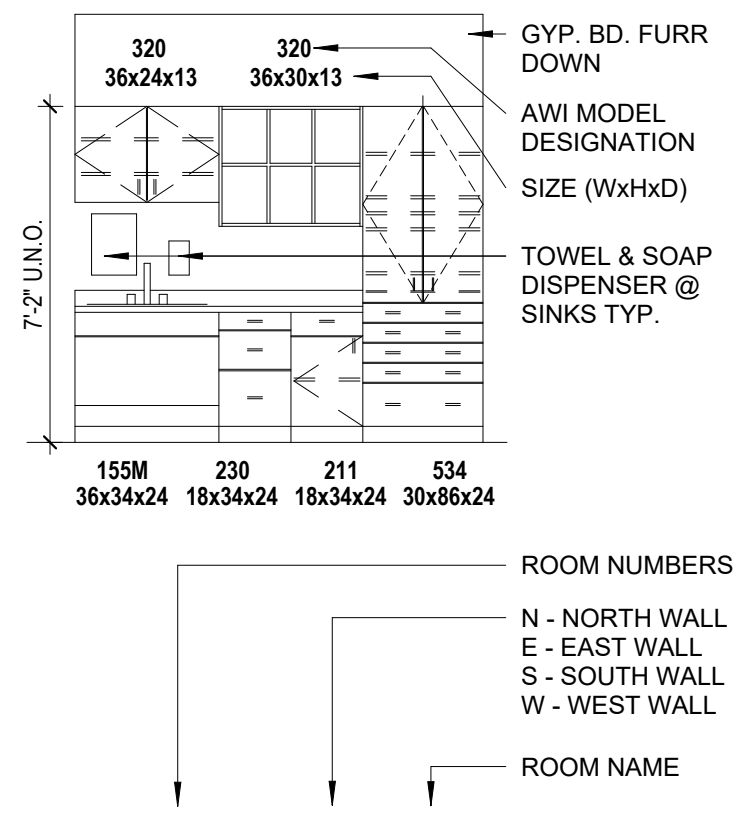

01 1120 - E BREAK
1/4" = 1'-0"

ELEVATION SYMBOLS

- # EQUIPMENT TAG; SEE EQUIPMENT SCHEDULE

ISSUANCES



Date of issue:
04/24/2026

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

INTERIOR
ELEVATIONS


ISSUANCES




Date of issue:

04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

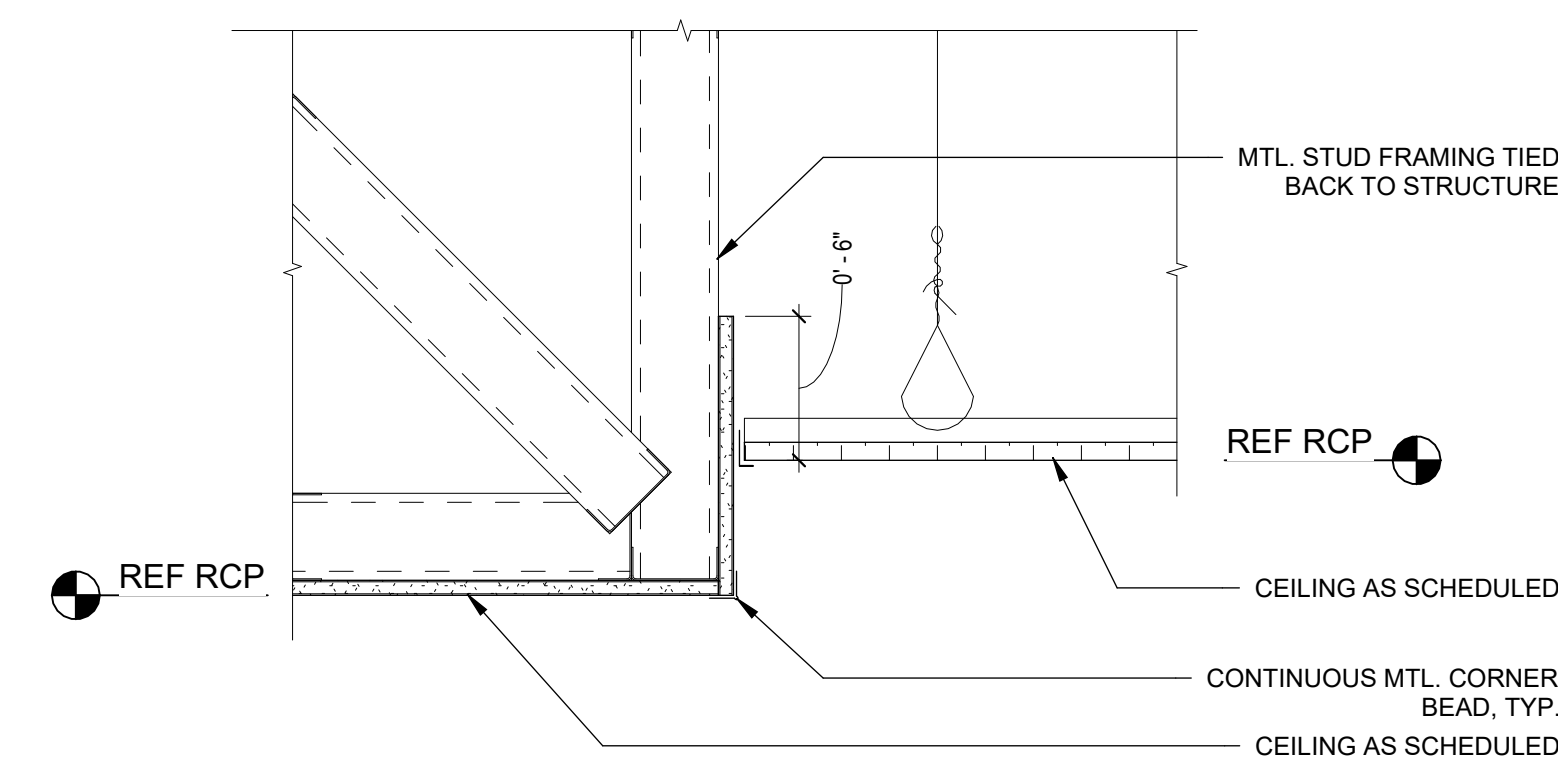EVERNORTH -
ELGIN PHARMACY
300 AIRPORT RD. SUITE 4
ELGIN, IL 60123JOB 26136.0000
DATE 04/24/2026INTERIOR
DETAILS


6 RCP DETAIL - GYP TO HIGHER LAY IN
1 1/2" = 1'-0"

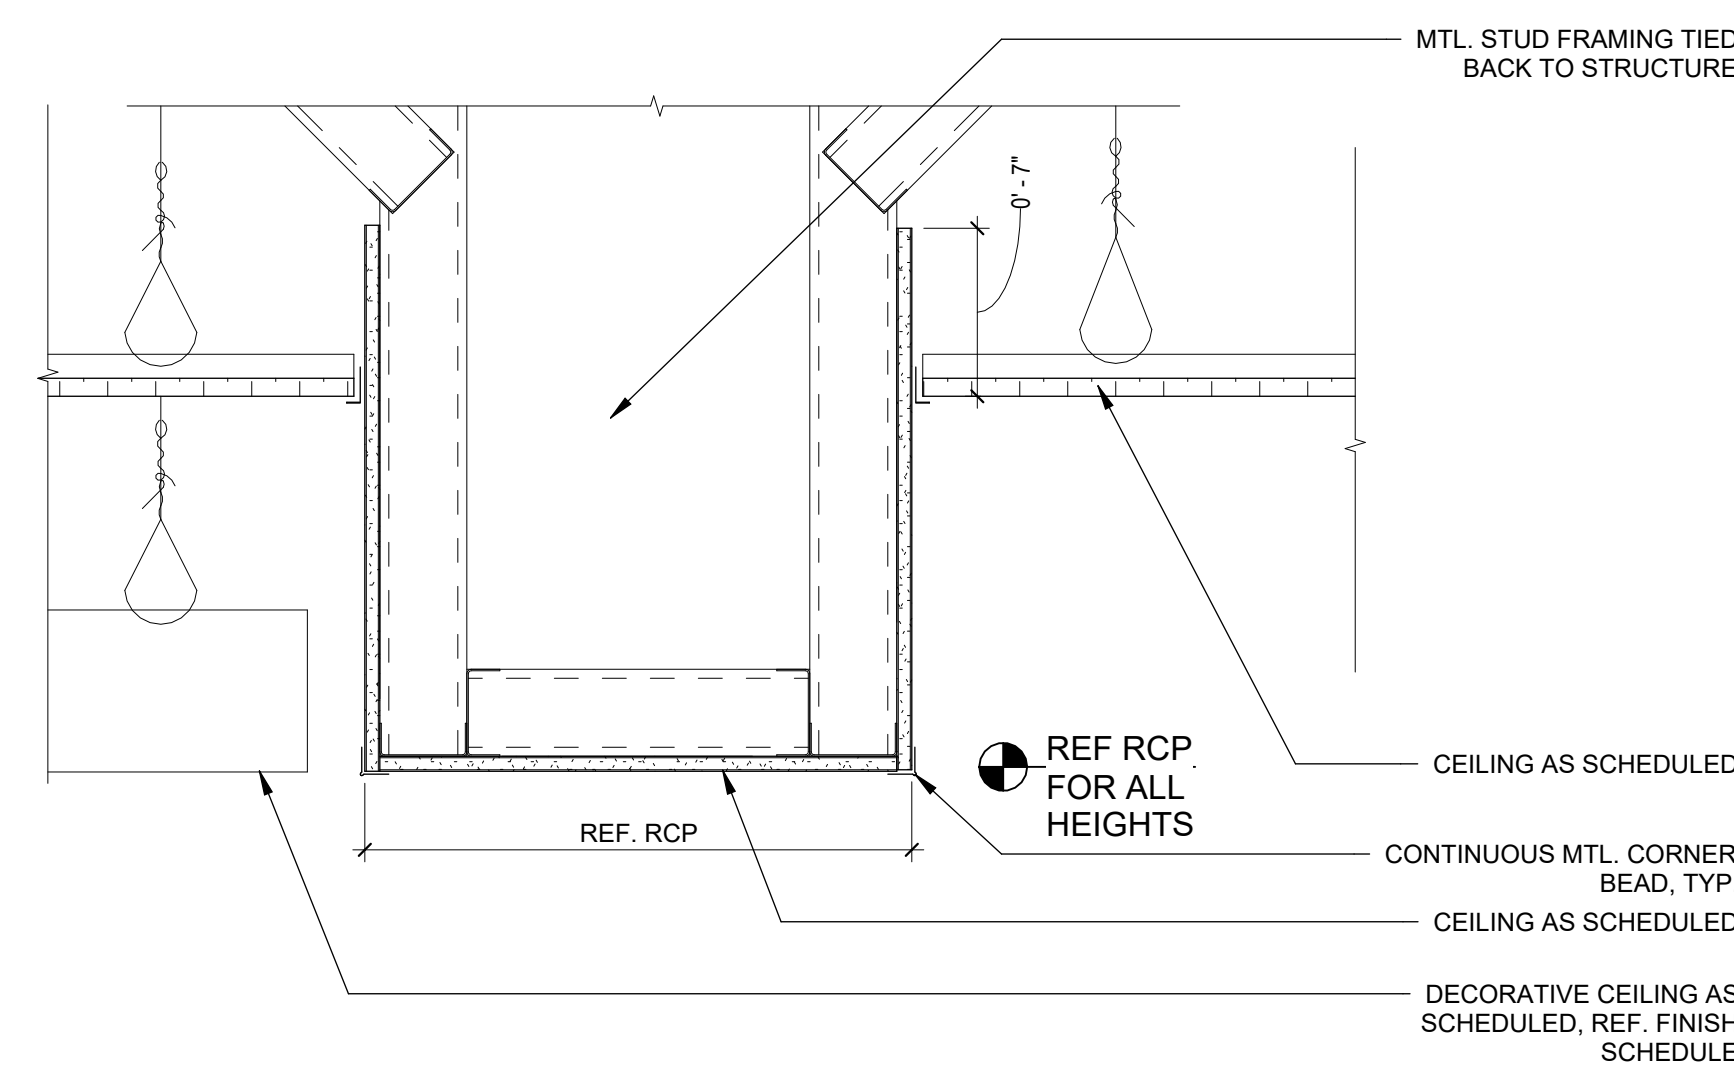


5 RCP DETAIL - GYP HEADER DECORATIVE CEILING
1 1/2" = 1'-0"

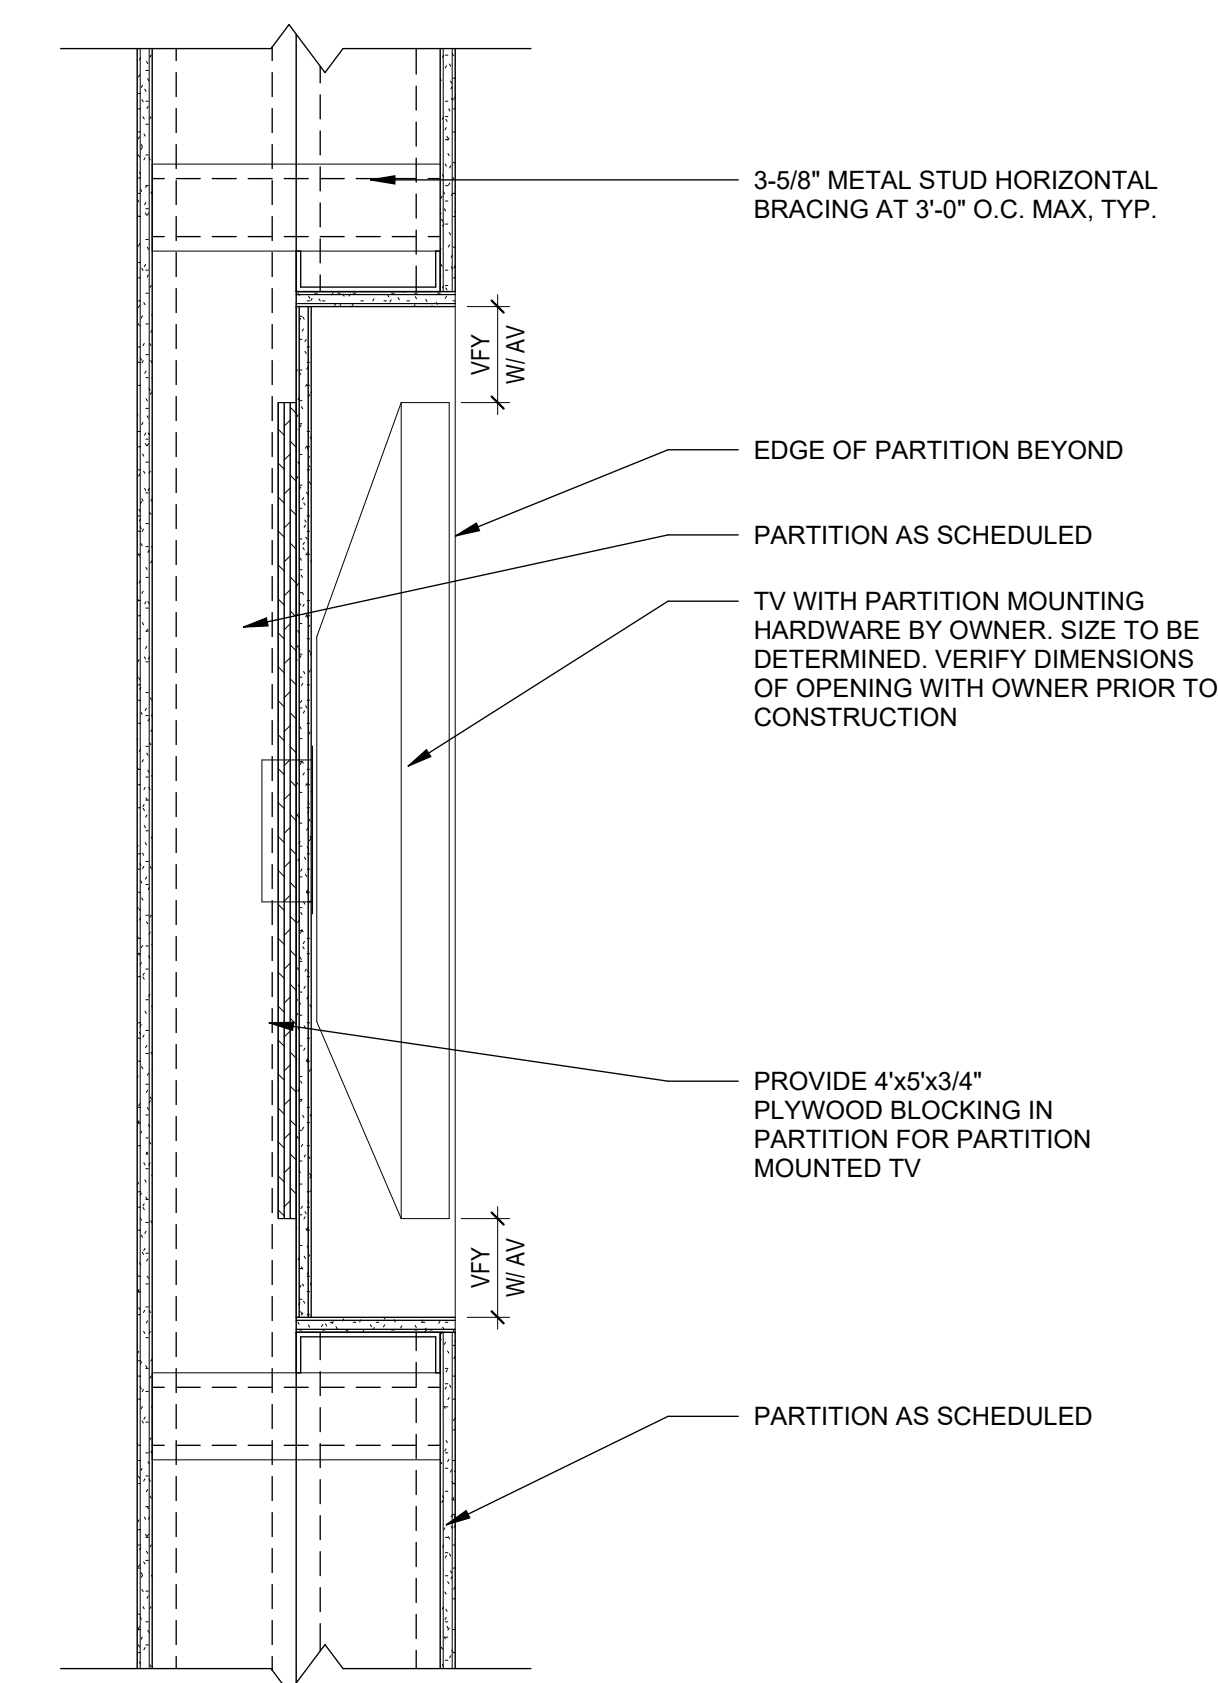


4 SECTION AT TYPICAL TV NICHE
1 1/2" = 1'-0"

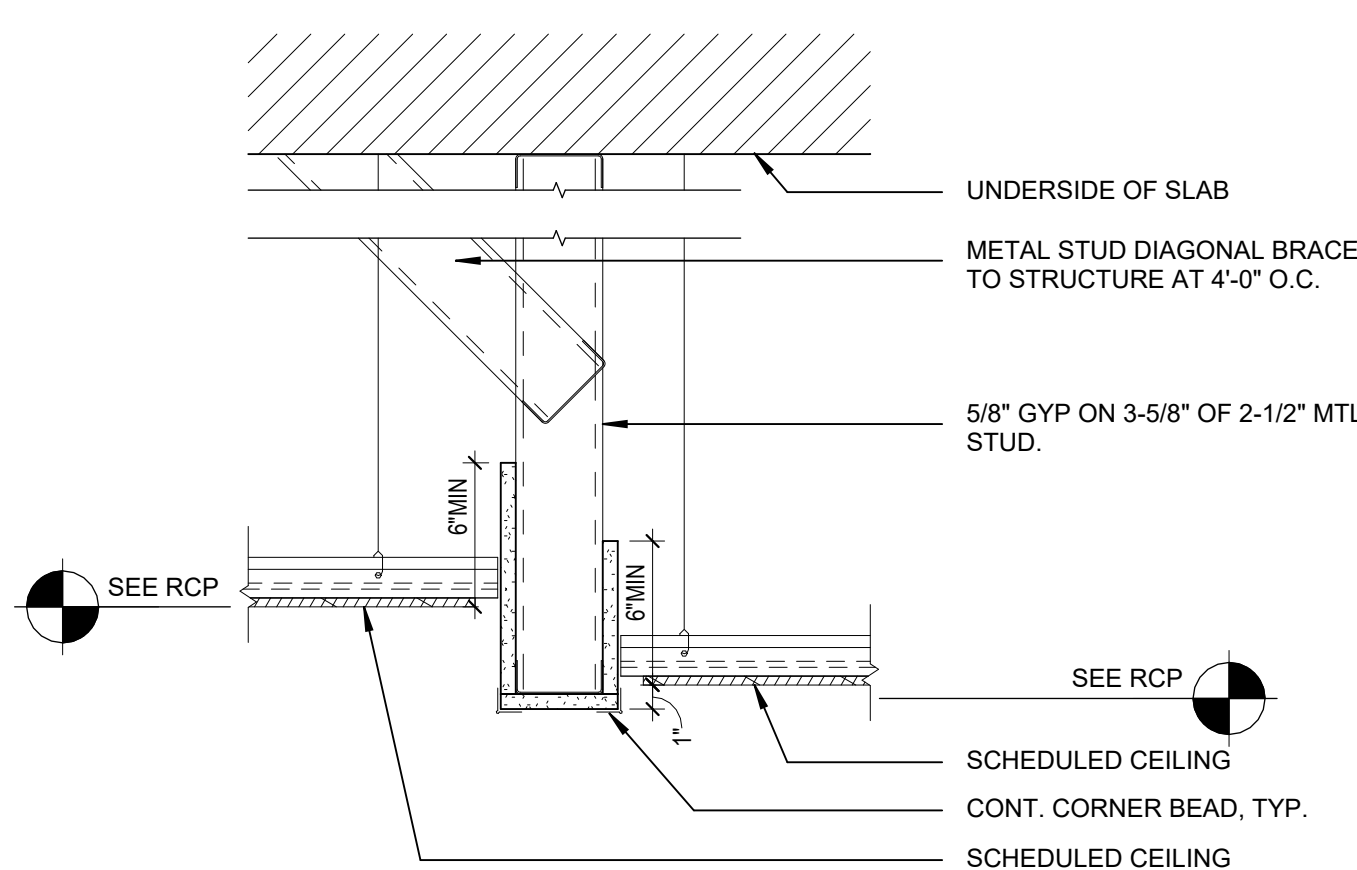

3 RCP DETAIL - BULKHEAD
1 1/2" = 1'-0"

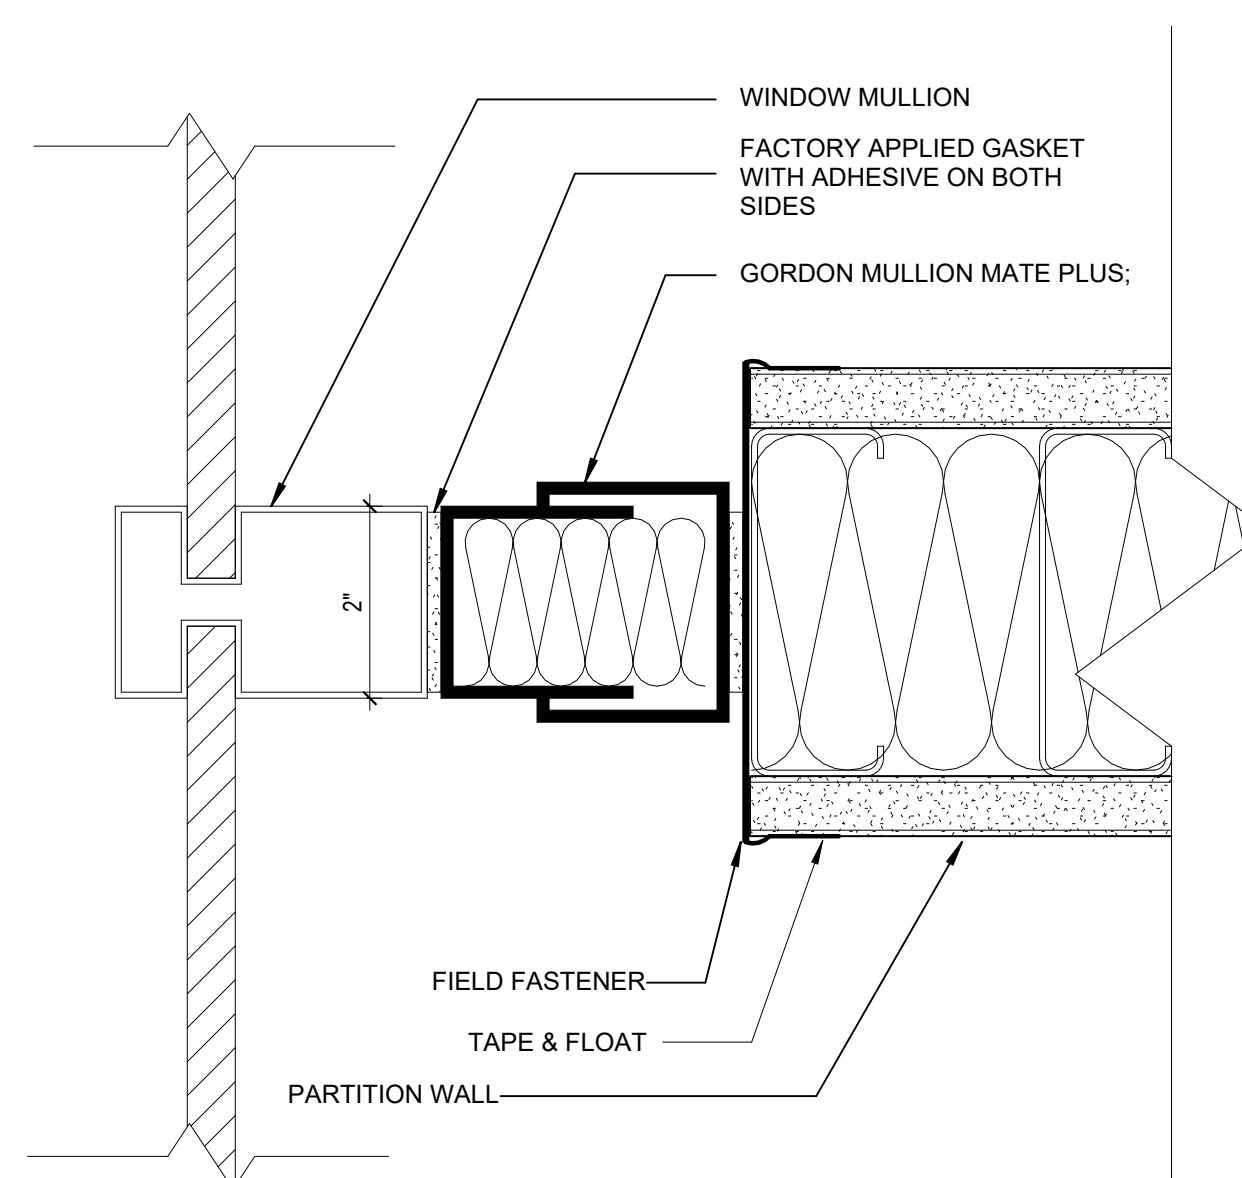

2 MULLION MATE PLUS
6" = 1'-0"

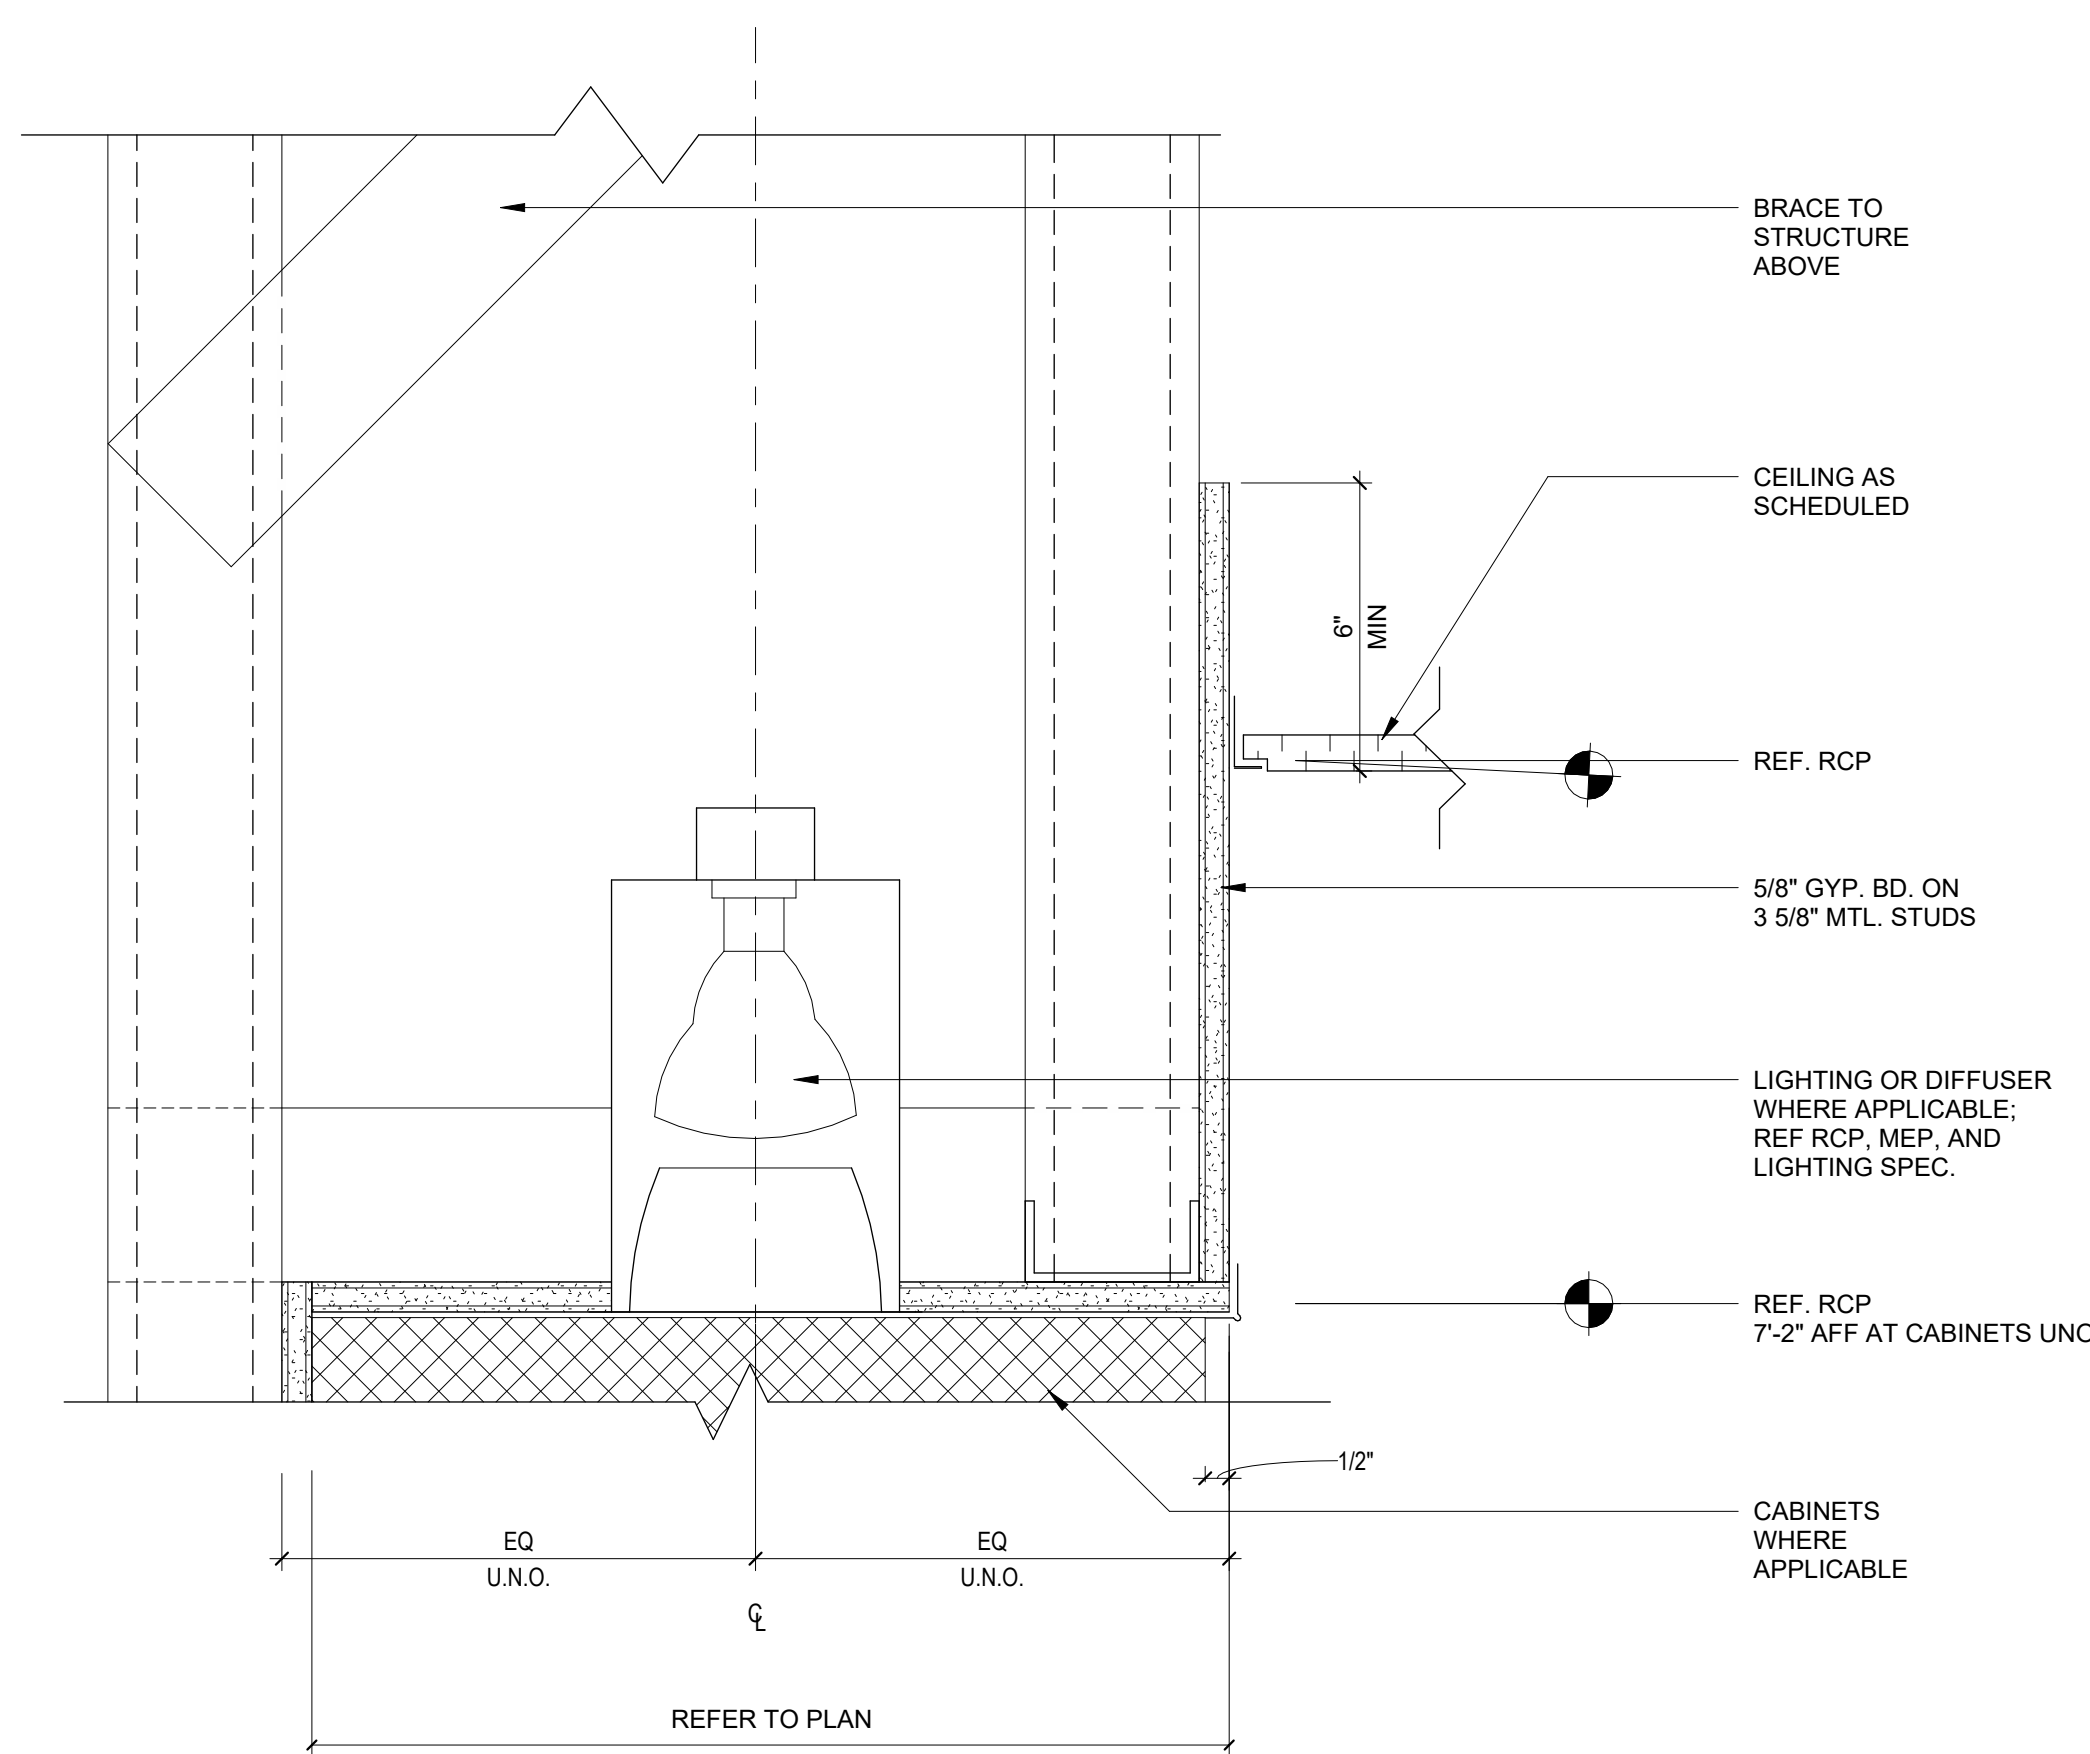

1 RCP DETAIL - FURR DOWN & UPPER CABINETS
3" = 1'-0"

LOCKER SCHEDULE

- NOTES:
1. REFER TO SPECIFICATION SECTION 10 51 13 FOR METAL LOCKER REQUIREMENTS
2. REFER TO SPECIFICATION SECTION ____ FOR PLAM LOCKER REQUIREMENTS


LOCKER CODES:

1. TYPE OF LOCKER: A THROUGH TYPE F NOTES THE TIER/ CONFIGURATION
NOTE: NOT ALL TYPES USED ON PROJECT
2. MATERIAL:
M - METAL (TYPICAL)
P - PLASTIC
PL - PLASTIC LAMINATE
W - WOOD, STAINED FINISH
3. TOP OF LOCKER:
FT - STANDARD TOP FOR GWB FURDOWN
ST - SLOPED TOP (TYPICAL)
FP - FASCIA PANEL (AT WOOD OR P LAM LOCKERS ONLY)
4. LOCK TYPES:
PAD - PADLOCK/ HASP
CAM - CAM LOCK (LIKE MILLWORK)
COMB - MECHANICAL COMBINATION LOCK
KPAD - KEYPAD


LOCKER TYPES:

NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED
A SINGLE TIER	B DOUBLE TIER	C TRIPLE TIER	D QUAD TIER	E QUINT TIER	F SIX TIER


ROOM NAME	QTY	TYPE	WIDTH (IN)	DEPTH (IN)	HEIGHT (IN)	MATERIAL	TOP	LOCK
116 LOCKERS	21	A	12	18	72	PL	ST	KPAD
116 LOCKERS	19	B	12	18	72	PL	ST	KPAD

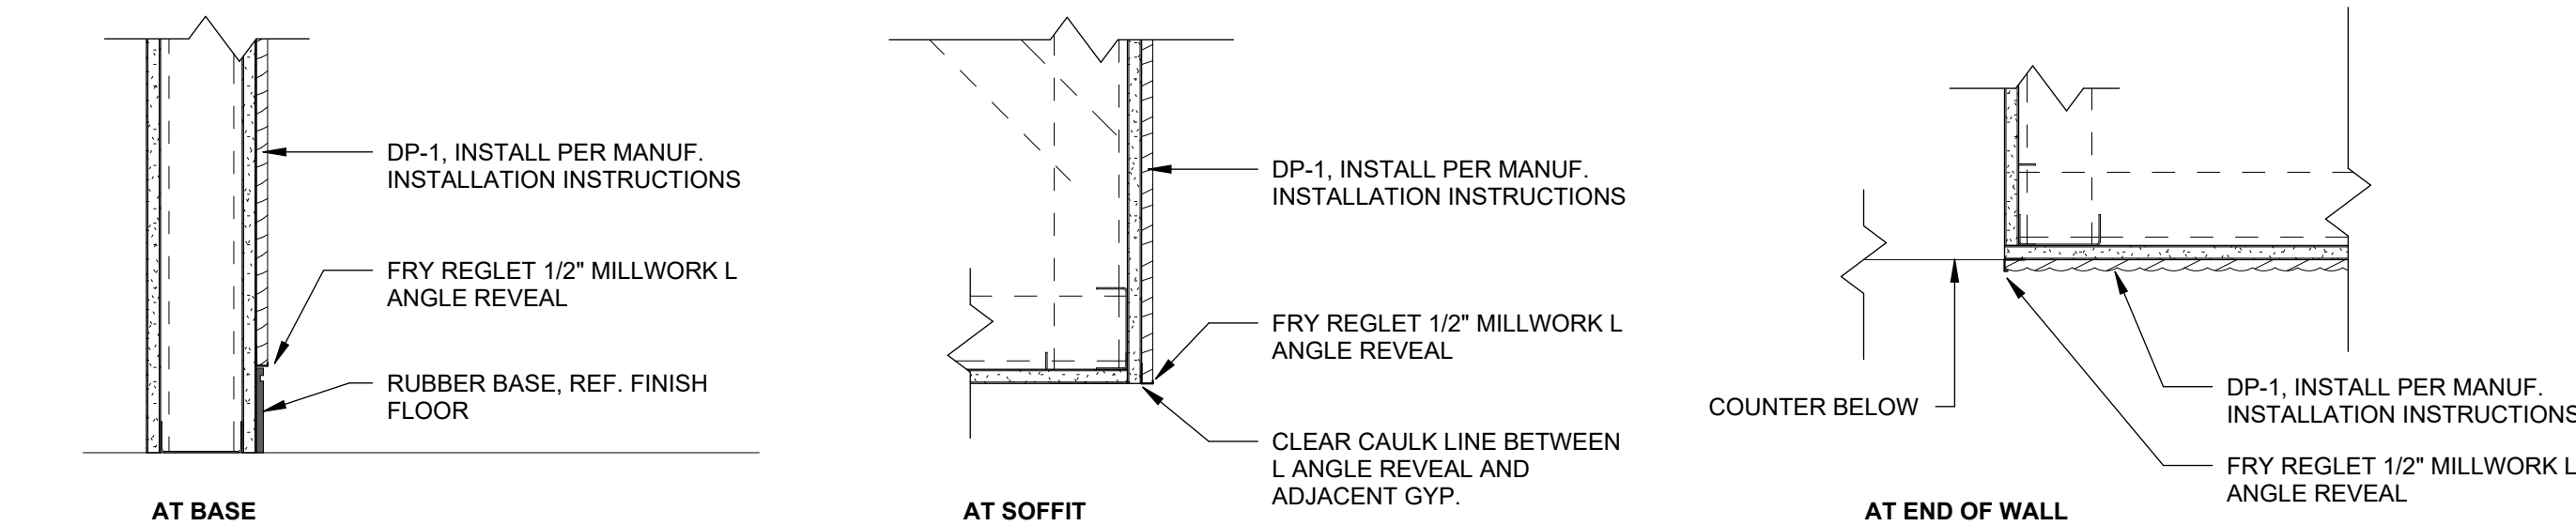


04 SECTION AT TAMBOUR PANEL
1 1/2" = 1'-0"

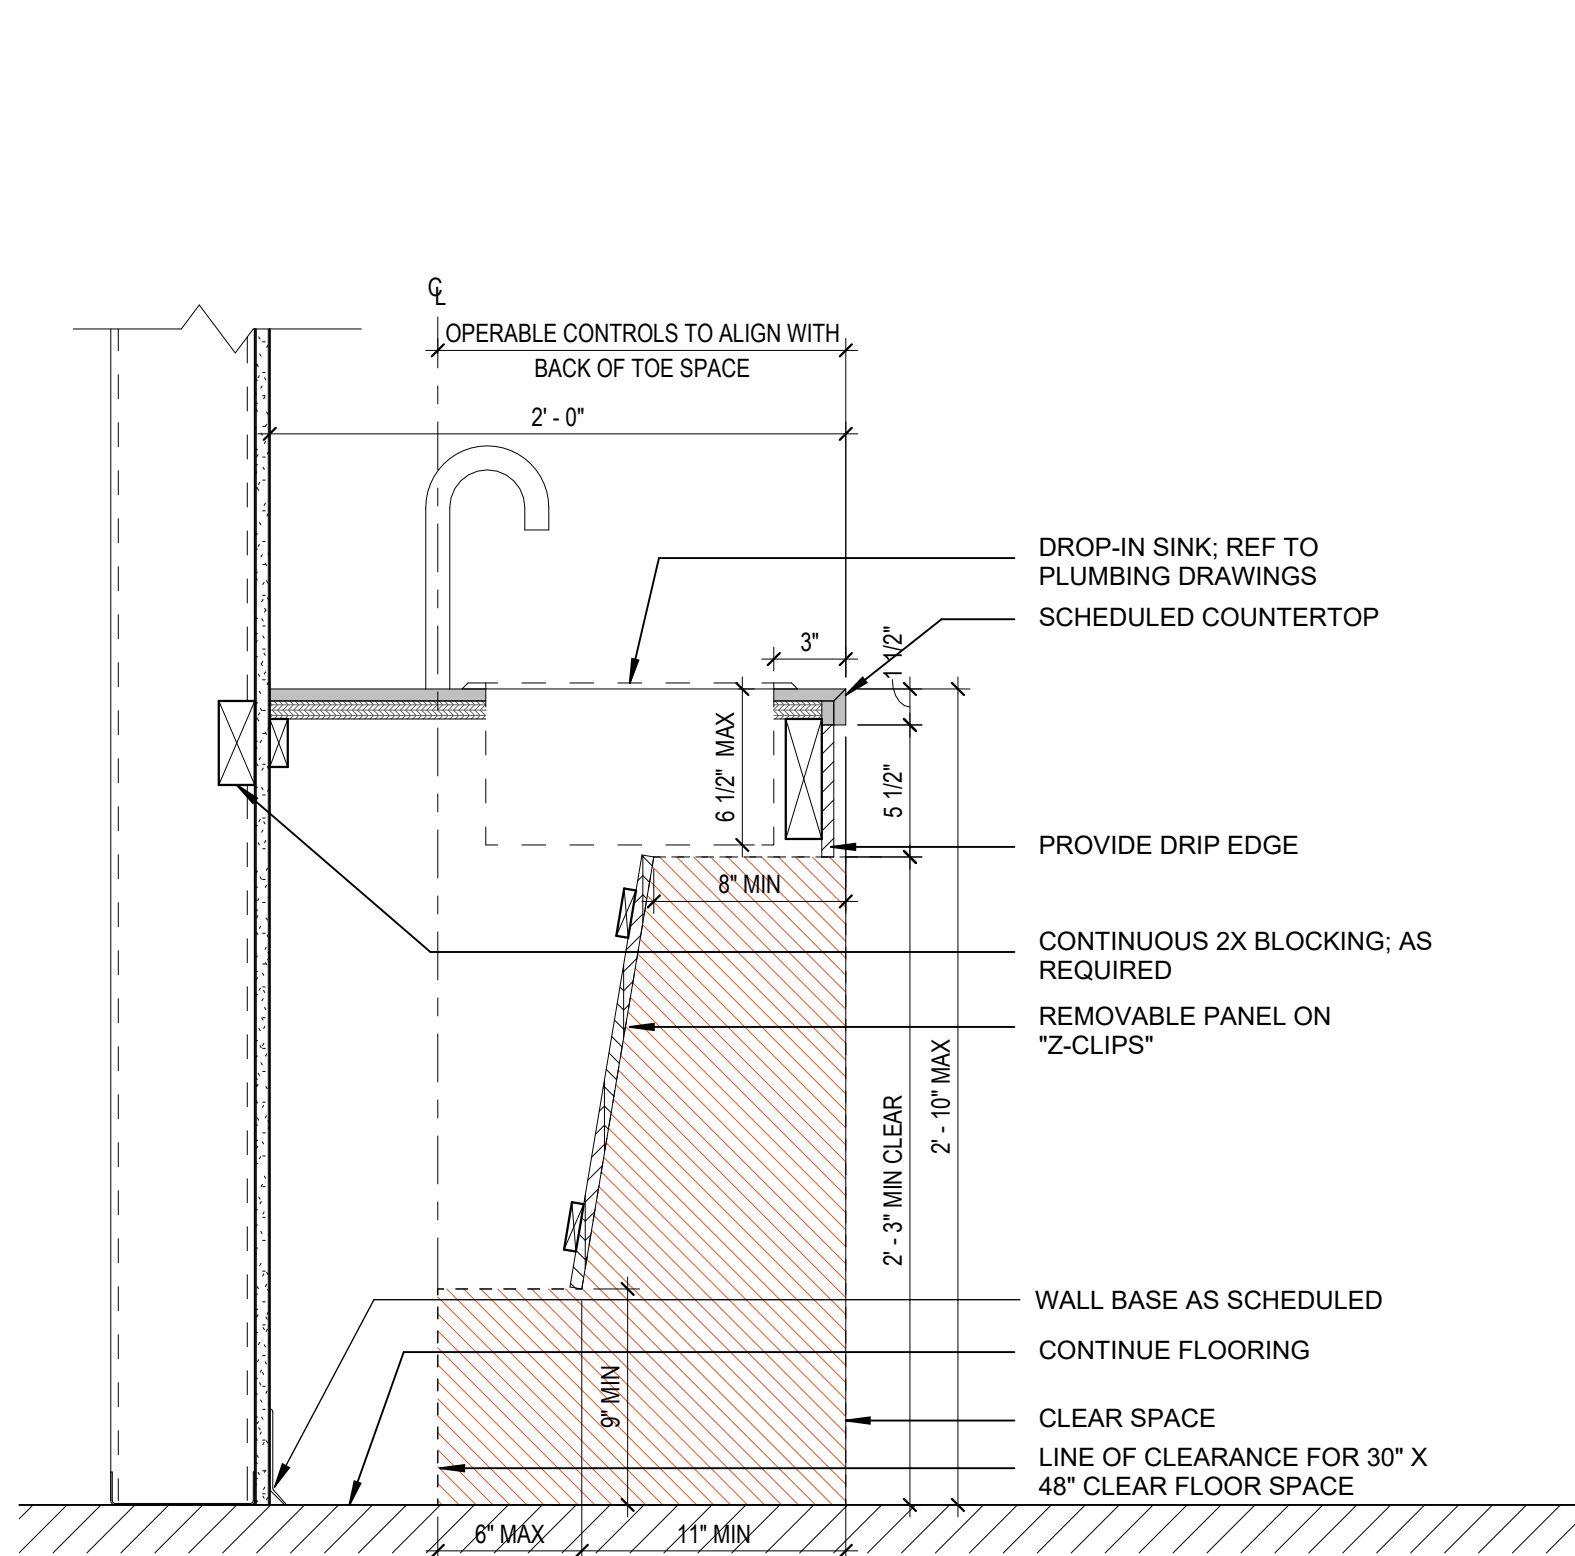

03 SECTION AT ADA SINK
1 1/2" = 1'-0"

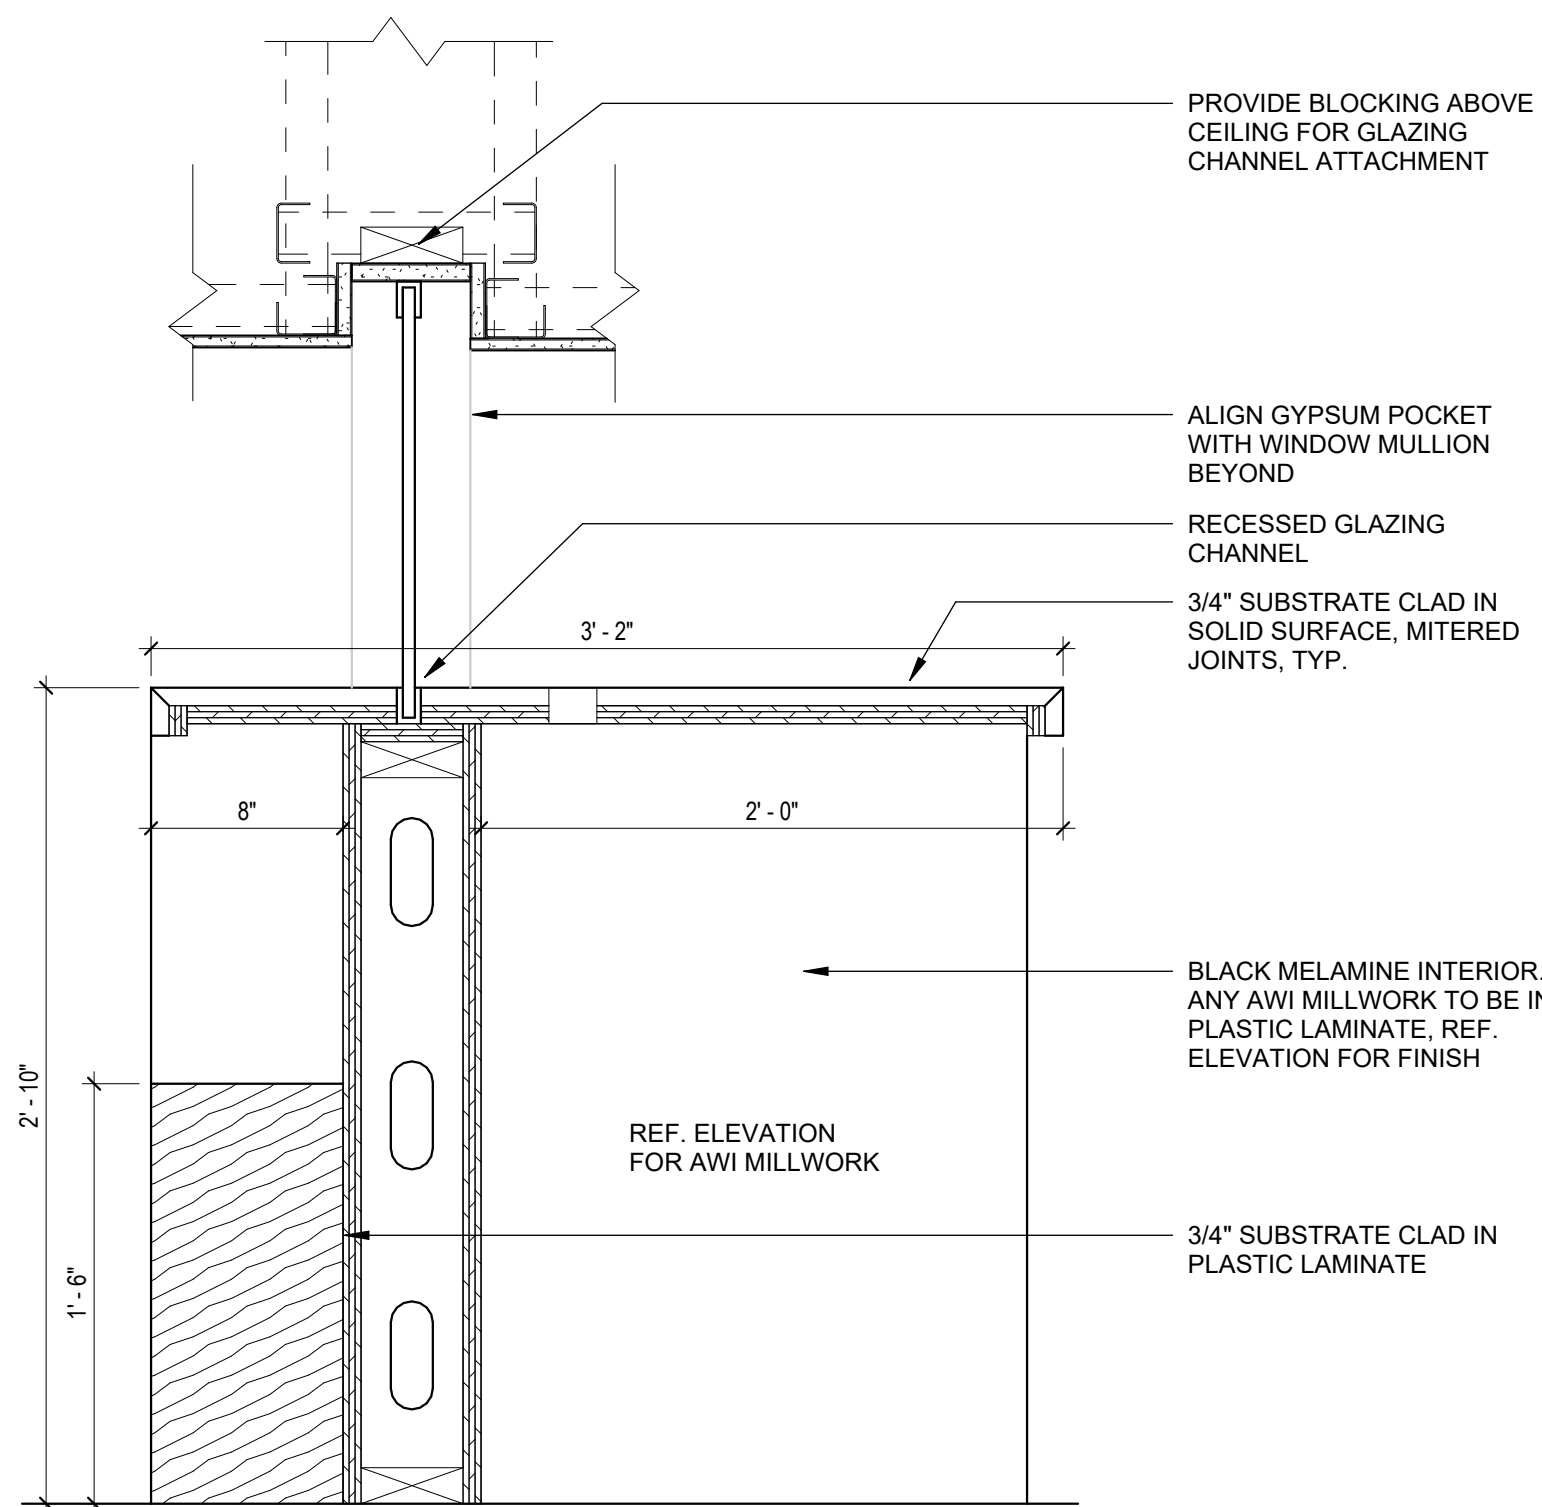


02 SECTION AT RECEPTION TRANSACTION
1 1/2" = 1'-0"

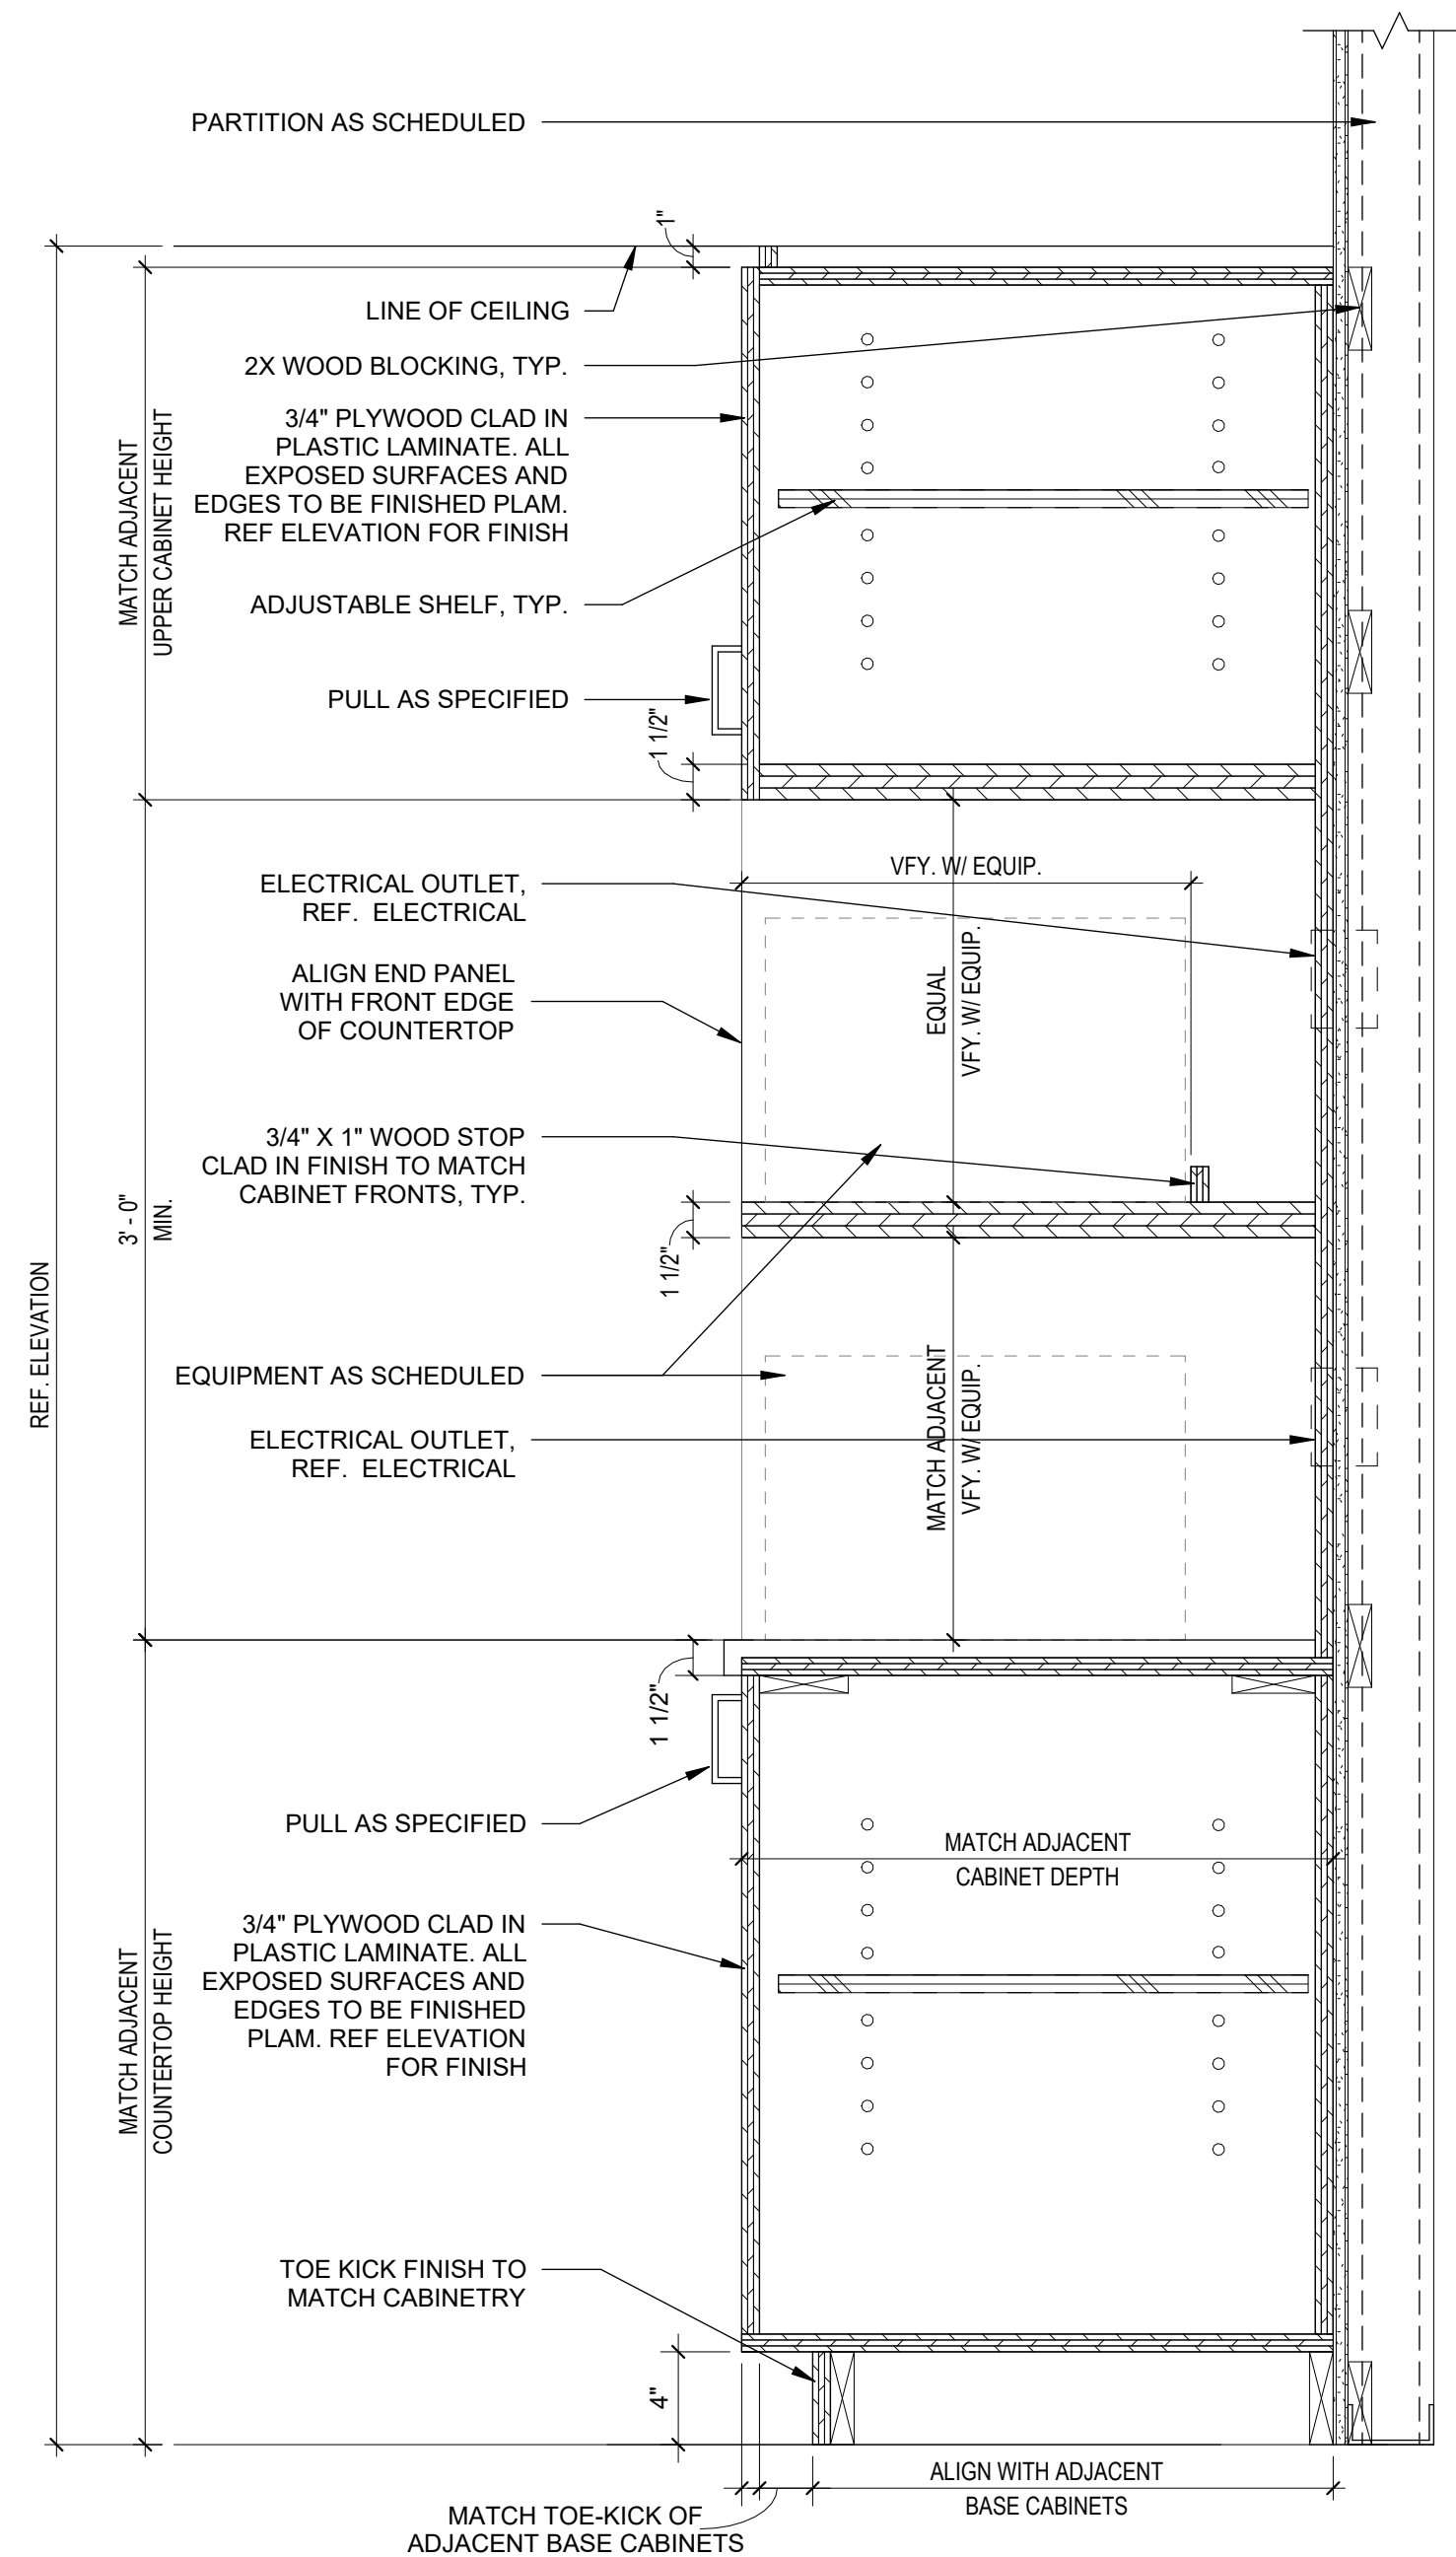


01 SECTION AT MICROWAVE CABINET
1 1/2" = 1'-0"


DOOR SCHEDULE																
DOOR NUMBER	DOOR						FRAME						HARDWARE SET	FIRE RATING	CARD READER	COMMENTS
	WIDTH	HEIGHT	PANEL TYPE	MATERIAL	FINISH	THICKNESS	DOOR GLAZING	FRAME TYPE	MATERIAL	FINISH	FRAME GLAZING	SIDELIGHT 1 WIDTH	SIDELIGHT 2 WIDTH			
L1																
100	3'-7 1/2"	7'-0"	DD	EXISTING	EXISTING	EXISTING	3	EXISTING	EXISTING	EXISTING	EXISTING			YES		EXISTING DOOR, CARD READER IN, FREE EGRESS OUT
101	5'-0"	7'-0"	DD	TBD	TBD	1 3/4"	GL-2	HM	PT-4	NO				02	YES	CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET, INTERCOM WITH REMOTE RELEASE
103	3'-0"	7'-0"	B	TBD	TBD	1 3/4"	GL-2	HM	PT-4	NO				02	YES	CARD READER IN, FREE EGRESS OUT
104	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	HM	PT-4	NO				02	YES	CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
106	3'-0"	7'-0"	1	EXISTING	TBD	1 3/4"	NO	EXISTING	PT-4	EXISTING	1'-2"			03	NO	EXISTING DOOR, PASSAGE SET.
107	3'-0"	7'-0"	A	EXISTING	TBD	1 3/4"	NO	3	EXISTING	PT-4	EXISTING	1'-3"		01	NO	EXISTING DOOR, OFFICE LOCK
108	3'-0"	7'-0"	A	EXISTING	TBD	1 3/4"	NO	3	EXISTING	PT-4	EXISTING	1'-3"		01	NO	EXISTING DOOR, OFFICE LOCK
109	3'-0"	7'-0"	A	EXISTING	TBD	1 3/4"	NO	3	EXISTING	PT-4	EXISTING	1'-3"		01	NO	EXISTING DOOR, OFFICE LOCK
110	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	3	HM	PT-4	GL-3	1'-6"		TBD		
111	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4				04	YES	CARD READER IN, FREE EGRESS OUT
117	6'-0"	7'-0"	AA	TBD	TBD	1 3/4"	<By Category>	1	HM	PT-4	NO			TBD		CARD READER IN, CONFIRM WITH OWNER
118	6'-0"	7'-0"	AA	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			TBD		CARD READER IN, CONFIRM WITH OWNER
119	3'-0"	7'-0"	1	EXISTING	TBD	1 3/4"	NO	2	EXISTING	PT-4	EXISTING	1'-4"		04	YES	EXISTING DOOR, CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
120	3'-0"	7'-0"	1	EXISTING	TBD	1 3/4"	NO	2	EXISTING	PT-4	EXISTING	1'-4"		04	YES	EXISTING DOOR, CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
122A	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			04	YES	EXISTING DOOR, CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
123	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			05	NO	CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
124	3'-0"	7'-0"	A	EXISTING	TBD	1 3/4"	NO	1	HM	PT-4	NO			03	NO	STOREROOM FUNCTION LOCKSET
125	3'-0"	7'-0"	A	EXISTING	TBD	1 3/4"	NO	1	EXISTING	PT-4	NO			03	NO	EXISTING DOOR, PASSAGE SET
126	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			04	YES	EXISTING DOOR, PASSAGE SET
127	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			06	NO	CARD READER IN, FREE EGRESS OUT
130	6'-0"	7'-0"	AA	TBD	TBD	1 3/4"	GL-2	1	HM	PT-4	NO			08	YES	PRIVACY LOCK, PRIVACY INDICATOR INTO THE DOOR
131	3'-0"	7'-0"	A	EXISTING	EXISTING	1 3/4"	NO	1	EXISTING	EXISTING	NO			05	NO	PUSH SIDE ALARM ACTIVATED FREE OR DELAYED EGRESS WITH CR AUDIT ONLY, PULL SIDE CR ACCESS CONTROL
132	3'-0"	7'-0"	A	EXISTING	EXISTING	1 3/4"	NO	1	EXISTING	EXISTING	NO			05	NO	EXISTING DOOR, STOREROOM FUNCTION LOCKSET
133	3'-0"	7'-0"	HM	MATCH EXISTING	1 3/4"	NO	1	HM	MATCH EXISTING	NO				05	NO	EXISTING DOOR, STOREROOM FUNCTION LOCKSET
134	3'-0"	7'-0"	A	HM	MATCH EXISTING	1 3/4"	NO	1	HM	MATCH EXISTING	NO			05	NO	EXISTING DOOR, STOREROOM FUNCTION LOCKSET
135	3'-0"	7'-0"	A	EXISTING	EXISTING	1 3/4"	NO	1	HM	EXISTING	NO			08	YES	EMERGENCY EGRESS ONLY WITH ALARM, NO HARDWARE FROM EXTERIOR SIDE GOING INTO SUITE
136	3'-0"	7'-0"	A	EXISTING	EXISTING	1 3/4"	NO	1	HM	EXISTING	NO			08	YES	PUSH SIDE ALARM ACTIVATED FREE OR DELAYED EGRESS WITH CR AUDIT ONLY, PULL SIDE CR ACCESS CONTROL
137	3'-0"	7'-0"	A	SECURITY GATE SYSTEM	TBD	1 3/4"	NO	1	HM	SECURITY GATE SYSTEM	NO			YES		CARD READER IN, SECURITY VESTIBULE GATE SYSTEM WITH ACCESS CONTROL SWING DOOR
138	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			04	YES	CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
139	3'-0"	7'-0"	A	SECURITY GATE SYSTEM	TBD	1 3/4"	NO	1	HM	By Category	By Category			04	YES	CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
140	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			04	YES	CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
141	3'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			08	YES	PUSH SIDE ALARM ACTIVATED FREE OR DELAYED EGRESS WITH CR AUDIT ONLY, PULL SIDE CR ACCESS CONTROL
142	4'-0"	7'-0"	A	TBD	TBD	1 3/4"	NO	1	HM	PT-4	NO			04	YES	CARD READER IN, FREE EGRESS OUT, STOREROOM FUNCTION LOCKSET
143	3'-0"	10'-0"	A	TBD	TBD	6"								NO		
144	3'-0"	7'-0"	A	SECURITY GATE SYSTEM	TBD	1 3/4"	NO	1	HM	By Category	By Category		1'-6"	YES		

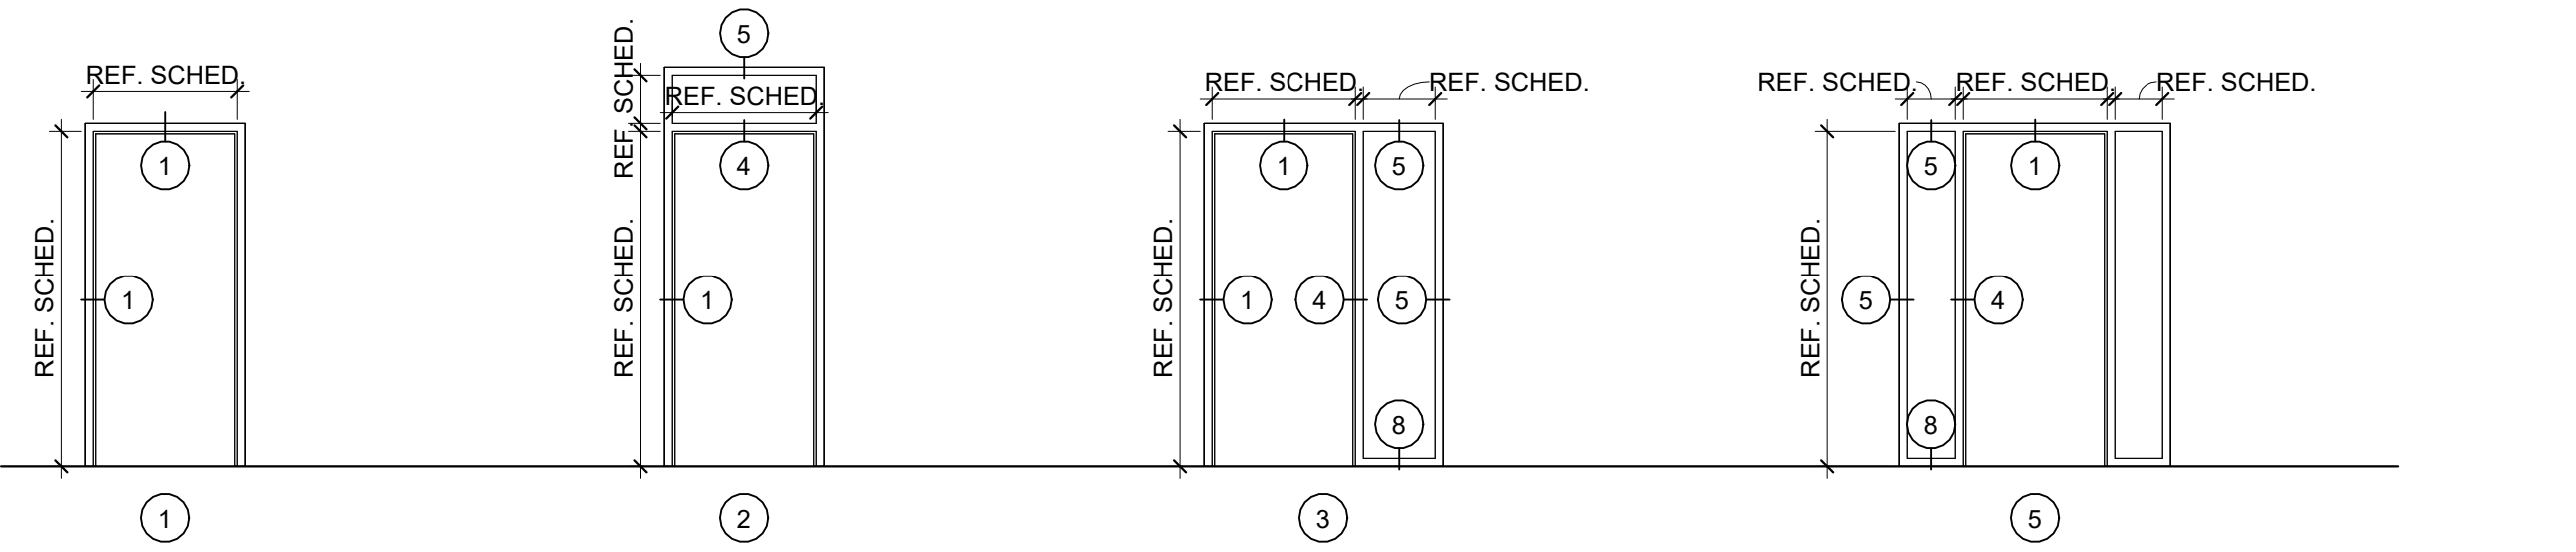




FRAME TYPES
1/4" = 1'-0"

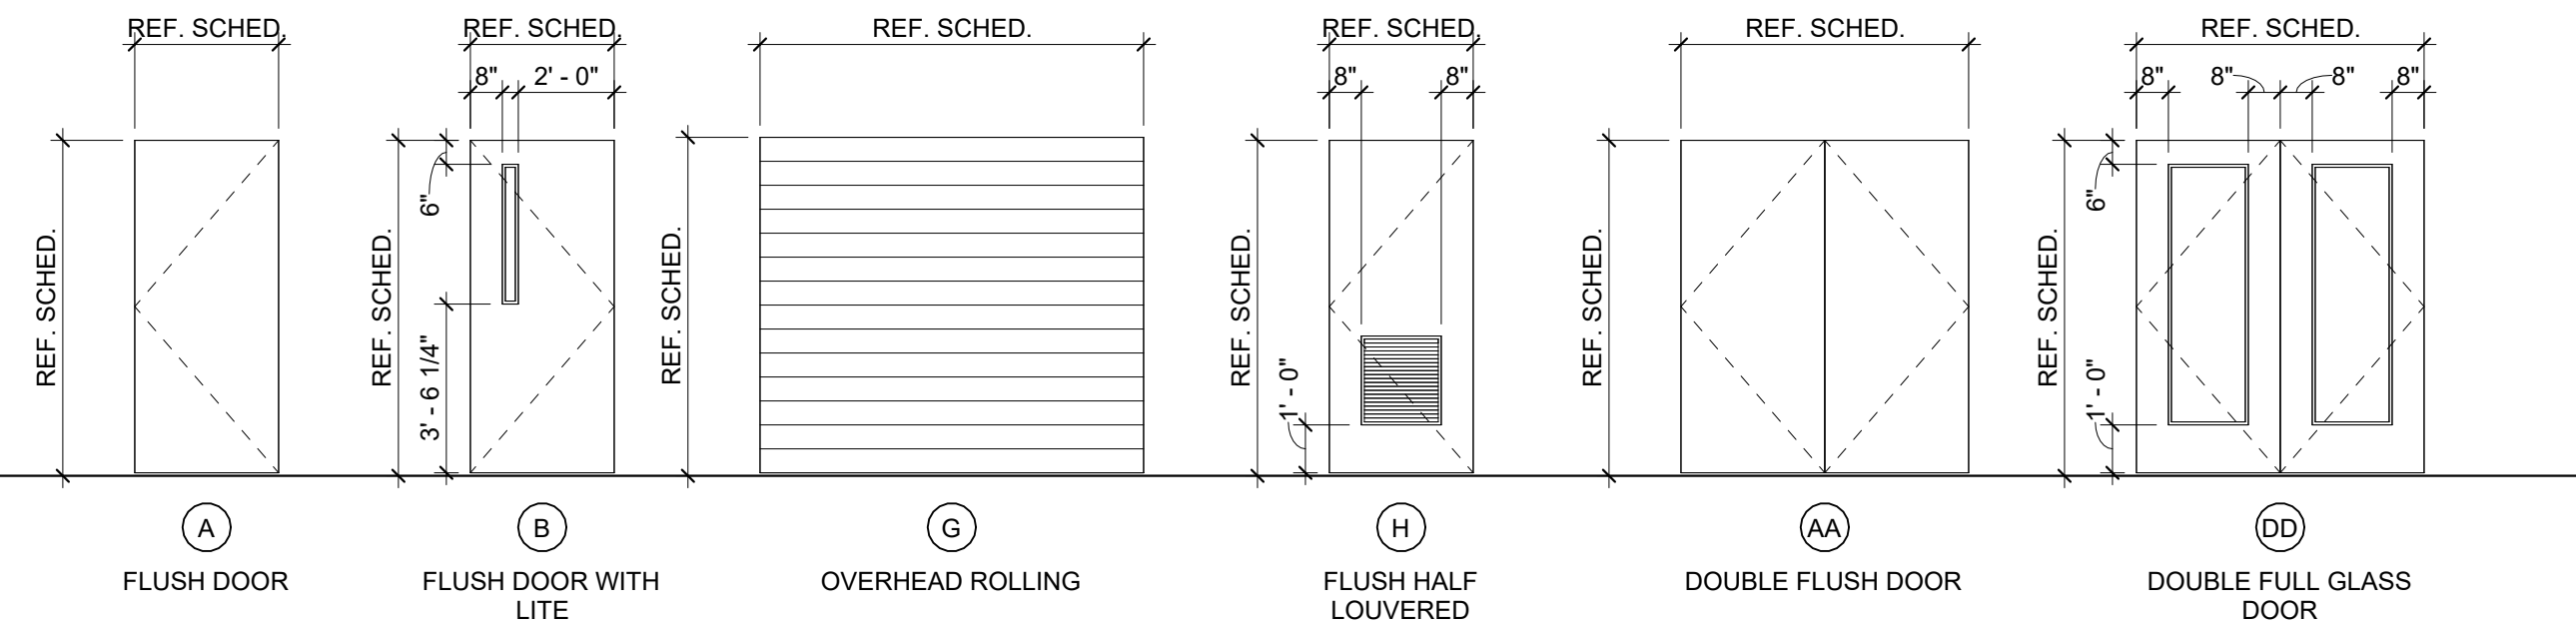

STANDARD PANEL TYPES
1/4" = 1'-0"

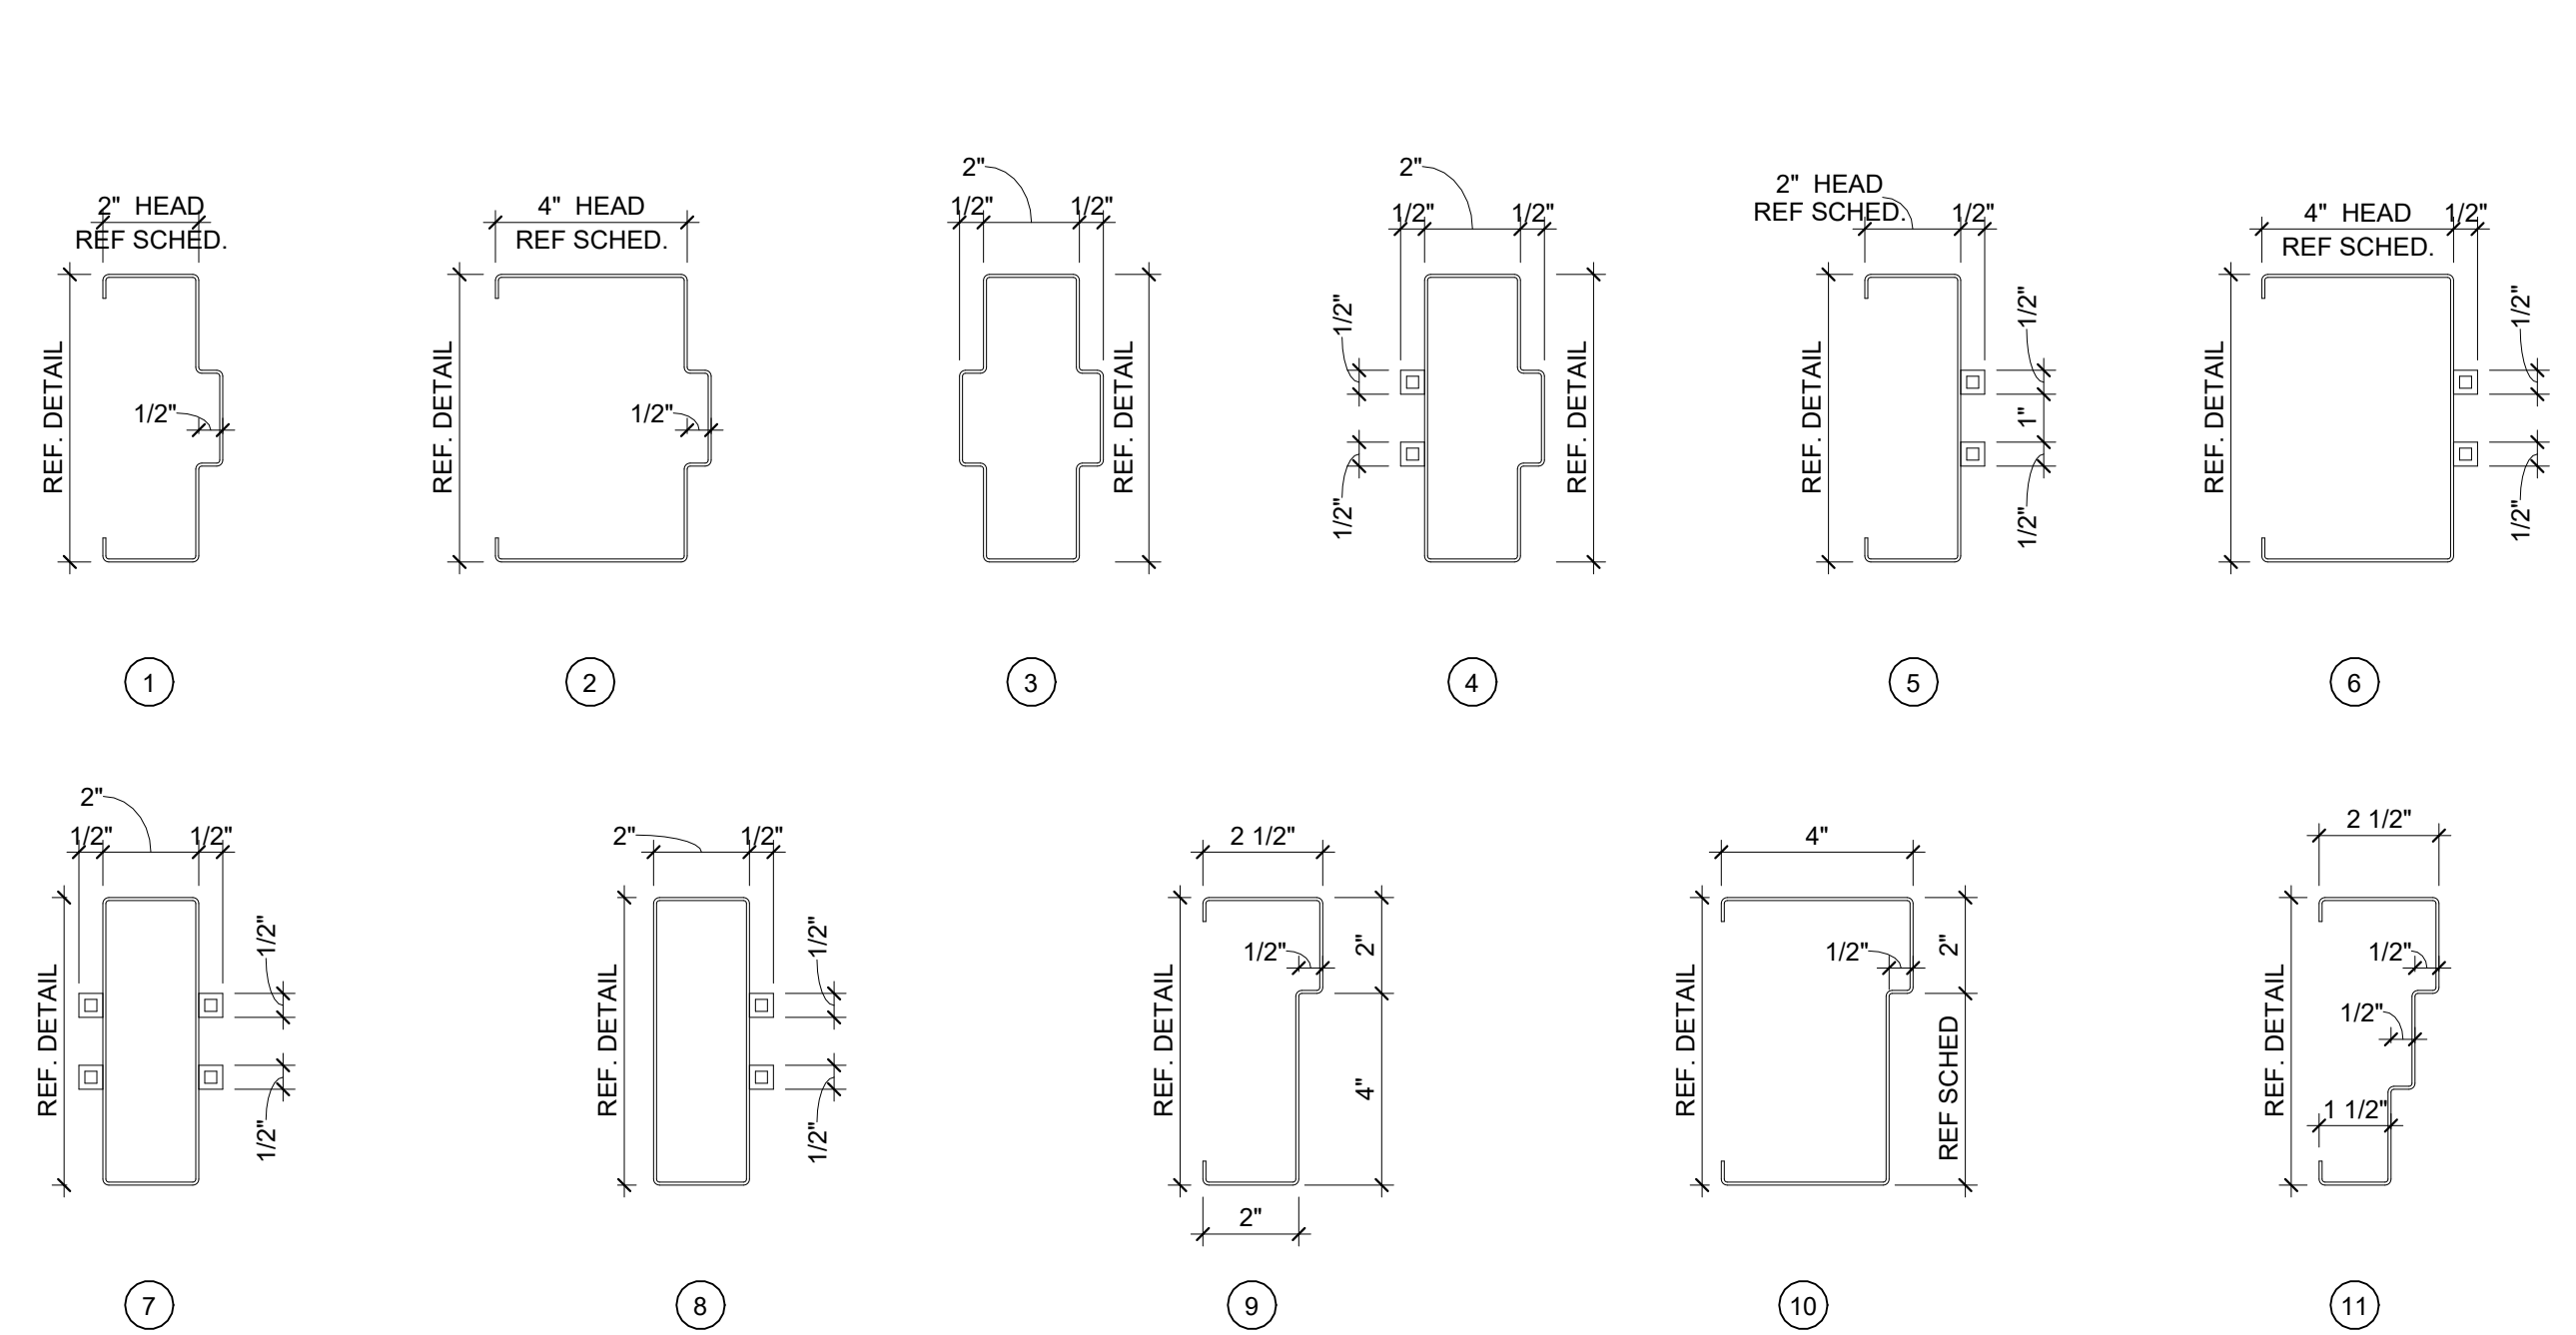

H.M. FRAME PROFILES
3" = 1'-0"

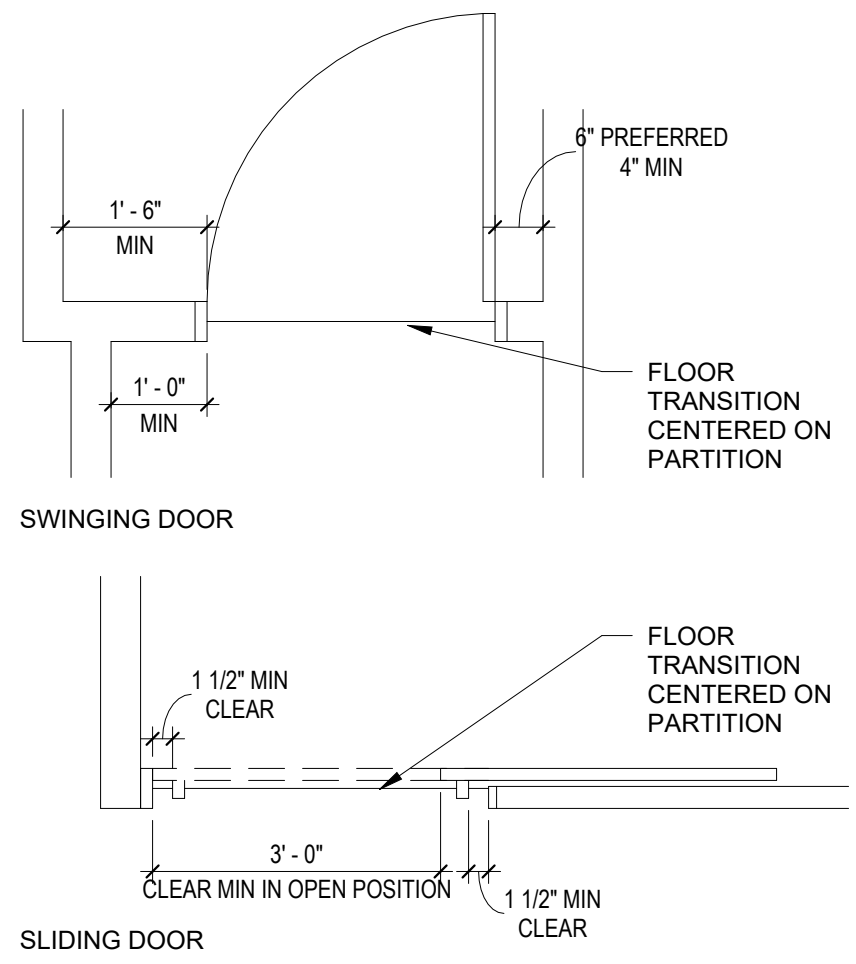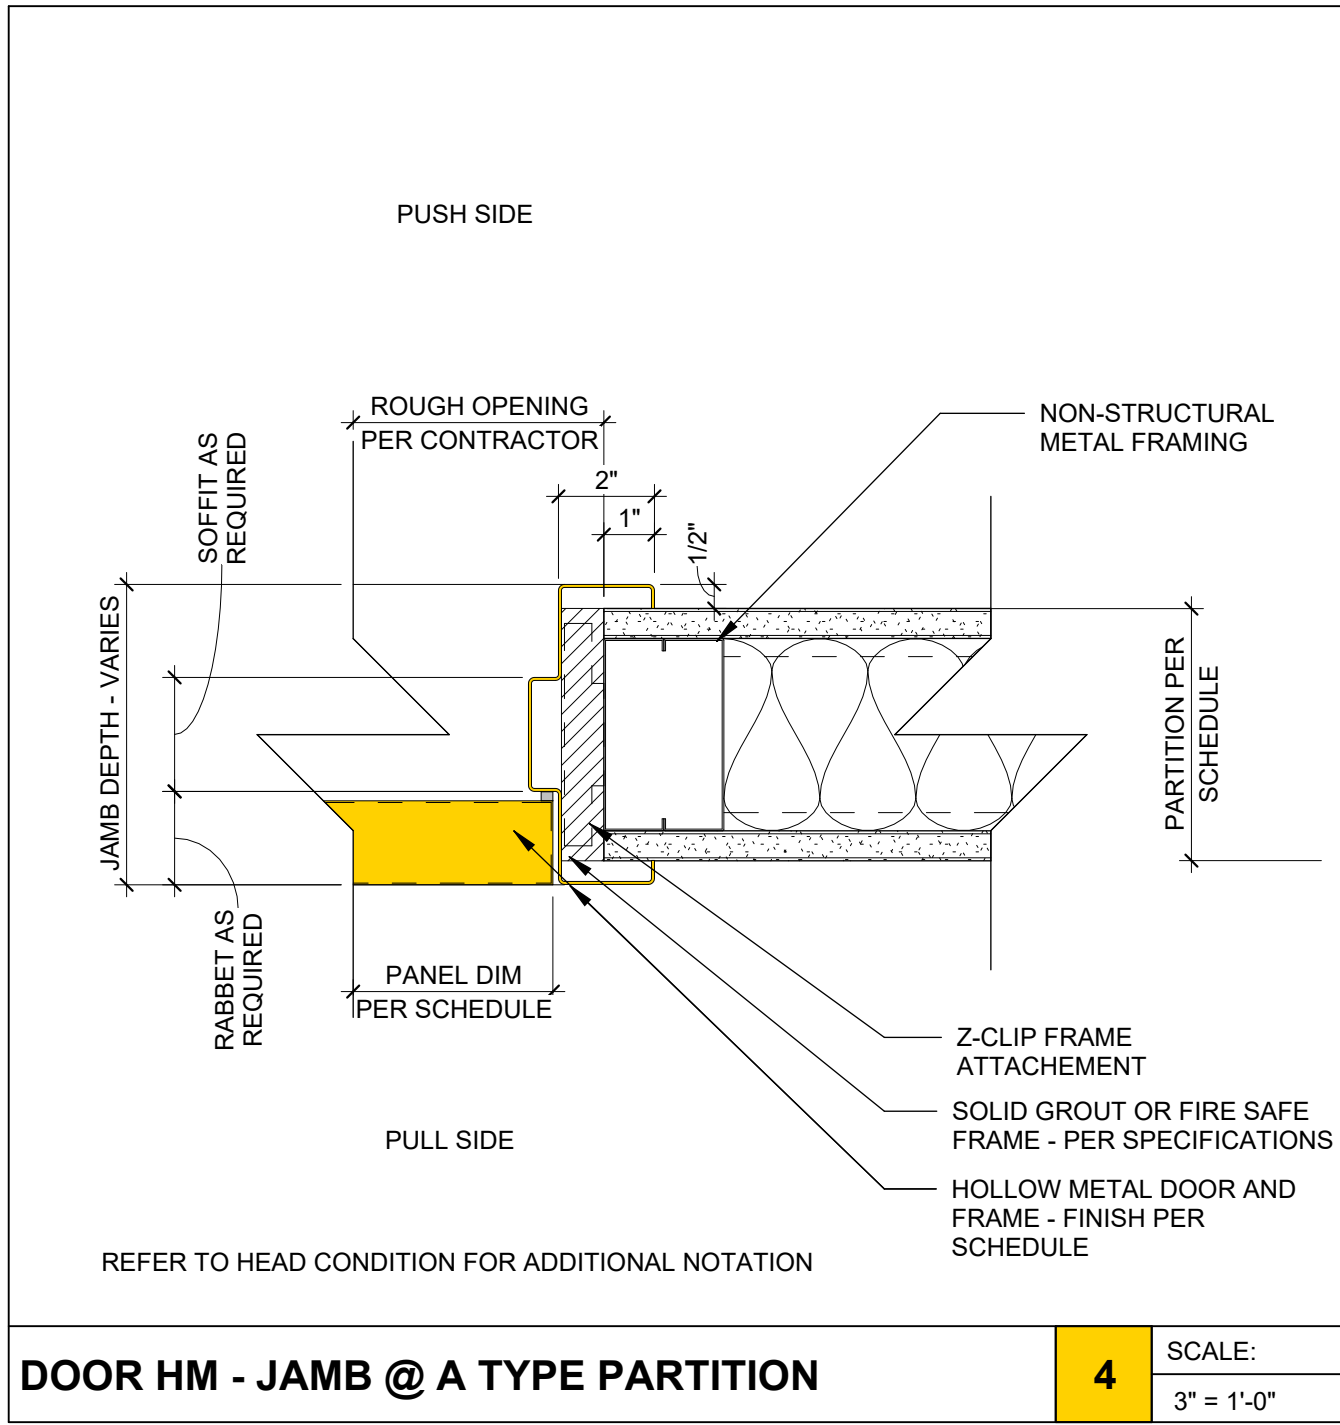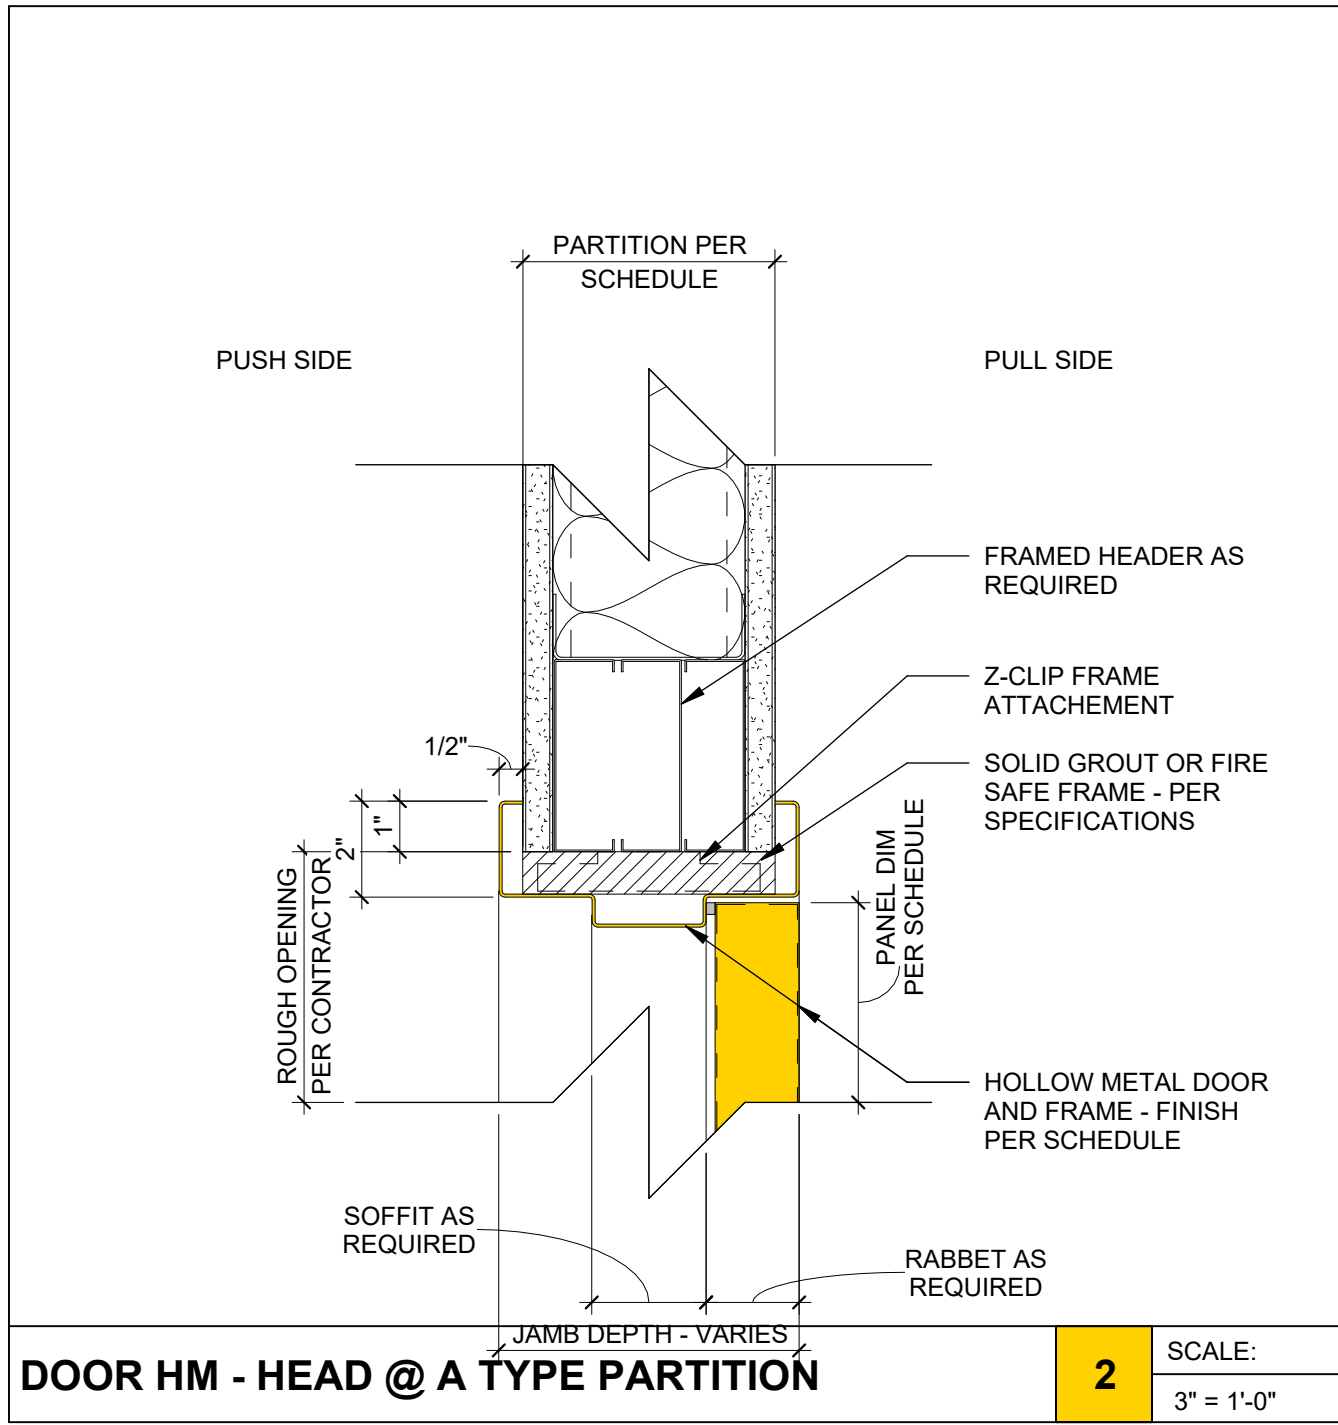

DOOR CLEARANCE DIAGRAMS

GENERAL DOOR NOTES

- REFERENCE SPECIFICATIONS FOR ADDITIONAL DOOR AND DOOR HARDWARE INFORMATION.
- G.C. TO COORDINATE AND REVIEW ALL HARDWARE SUBMITTALS WITH ARCHITECT AND TENANT PRIOR TO PLACING DOOR HARDWARE ORDER.
- WHERE A DOOR IS INDICATED WITHOUT A DOOR BUBBLE, NO WORK TO EXISTING DOOR, FRAME OR HARDWARE IS REQUIRED. ALL DOORS, FRAMES, AND/OR HARDWARE NOTED AS EXISTING TO REMAIN OR REUSED ARE TO BE CLEANED AND POLISHED TO LIKE NEW CONDITION.
- MODIFICATIONS TO RATED FRAMES ARE UNACCEPTABLE. MODIFICATIONS TO RATED FRAMES WILL CAUSE RATING TO BE VOID. IF MODIFICATIONS ARE NECESSARY TO ACCOMMODATE NEW DOOR OR HARDWARE, NEW ASSEMBLY WITH RATING TO MATCH EXISTING IS REQUIRED. RATED ASSEMBLY PROVIDED SHALL MEET AHJ REQUIREMENTS.
- LOCK SETS SHALL BE KEYED IN ACCORDANCE WITH THE BUILDING REQUIREMENTS. RE-KEY EXISTING HARDWARE TO COORDINATE WITH NEW HARDWARE. KEYS ARE TO BE DELIVERED TO TENANT PROPERLY TESTED. THE NUMBER OF MASTER AND PASS KEYS SHALL BE COORDINATED WITH OWNER. G.C. TO COORDINATE KEY SCHEDULE (IE: MASTER | SUB-MASTER) WITH OWNER AND TENANT.
- ALL GLASS IS TO BE 1/2" TEMPERED CLEAR GLASS, UNLESS NOTED OTHERWISE. ALL DOOR PANELS WITH GLASS LITES TO RECEIVE 1/4" GLASS UNLESS NOTED OTHERWISE. COORDINATE WITH DOOR AND WINDOW TYPES.
- ALL CLOSERS SHALL BE SURFACE MOUNTED ON THE INTERIOR SIDE OF DOOR AND INSTALLED WITH CONCEALED FASTENERS, U.N.O.
- ADJUST ALL CLOSERS TO MEET ADAAG GUIDELINES.
- ALL PACKING STICKERS TO BE REMOVED FROM DOORS AND FRAMES WITHIN THE SCOPE OF WORK.
- REFER TO DRAWING BELOW FOR MINIMUM DOOR CLEARANCE DIMENSIONS. ALL NEW DOORS SHALL BE LOCATED 6" FROM THE NEAREST CORNER TO INSIDE EDGE OF FRAME, U.N.O.
- ALL SECURITY ITEMS INCLUDING CARD READERS TO BE PROVIDED BY TENANT'S SECURITY VENDOR. ALL SECURITY DEVICES AND WIRING, INCLUDING CARD READERS, MOTION SENSORS, AND DOOR POSITION SWITCHES TO BE PROVIDED AND INSTALLED BY TENANT'S SECURITY CONTRACTOR. G.C. TO PROVIDE ALL NECESSARY CONDUIT AND LOW VOLTAGE POWER. G.C. TO COORDINATE INSTALLATION.
- GC TO PROVIDE KEYLESS ELECTRONIC LOCKSETS.
- ALL DOOR HARDWARE, INCLUDING ELECTRIC STRIKES, TO BE PROVIDED BY GC.
- COMPLY WITH AIA QUALITY STANDARD, PREMIUM GRADE FOR VENEER GLAD DOORS AND FINISH.
- CONTRACTOR TO ENSURE DRYWALL EDGE AND STUD ARE NOT EXPOSED AT DOOR STRIKE LOCATIONS.
- ALL VISIBLE DOOR HARDWARE TO MATCH FINISH OF DOOR FRAME. U.N.O. GC TO CONFIRM EXACT FINISH OF DOOR HARDWARE WITH ARCHITECT.
- CARD READERS ARE SURFACE MOUNTED AND DO NOT REQUIRE A ROUGH IN BOX OR PARTITION CAVITY EXCEPT TO GET CABLE CONNECTIONS TO BACK SIDE OF READER.

DOOR SCHEDULE ABBREV.

MATERIALS
HM: HOLLOW METAL
WD: WOOD
GL: GLASS
AL: ALUMINUM
XTR: EXISTING TO REMAIN

FINISHES
PT-X: PAINT (REF. FINISH SCHEDULE)
CLR: CLEAR ALUMINUM

GLAZING MATERIALS

GL-1: 1/2" TEMPERED CLEAR GLASS
GL-2: 1/4" TEMPERED CLEAR GLASS
GL-3: 1/4" FIRE RATED CLEAR GLASS
GL-4: MATCH EXISTING


ISSUANCES



Date of issue:
04/24/2026

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

JOB 26136.0000
DATE 04/24/2026

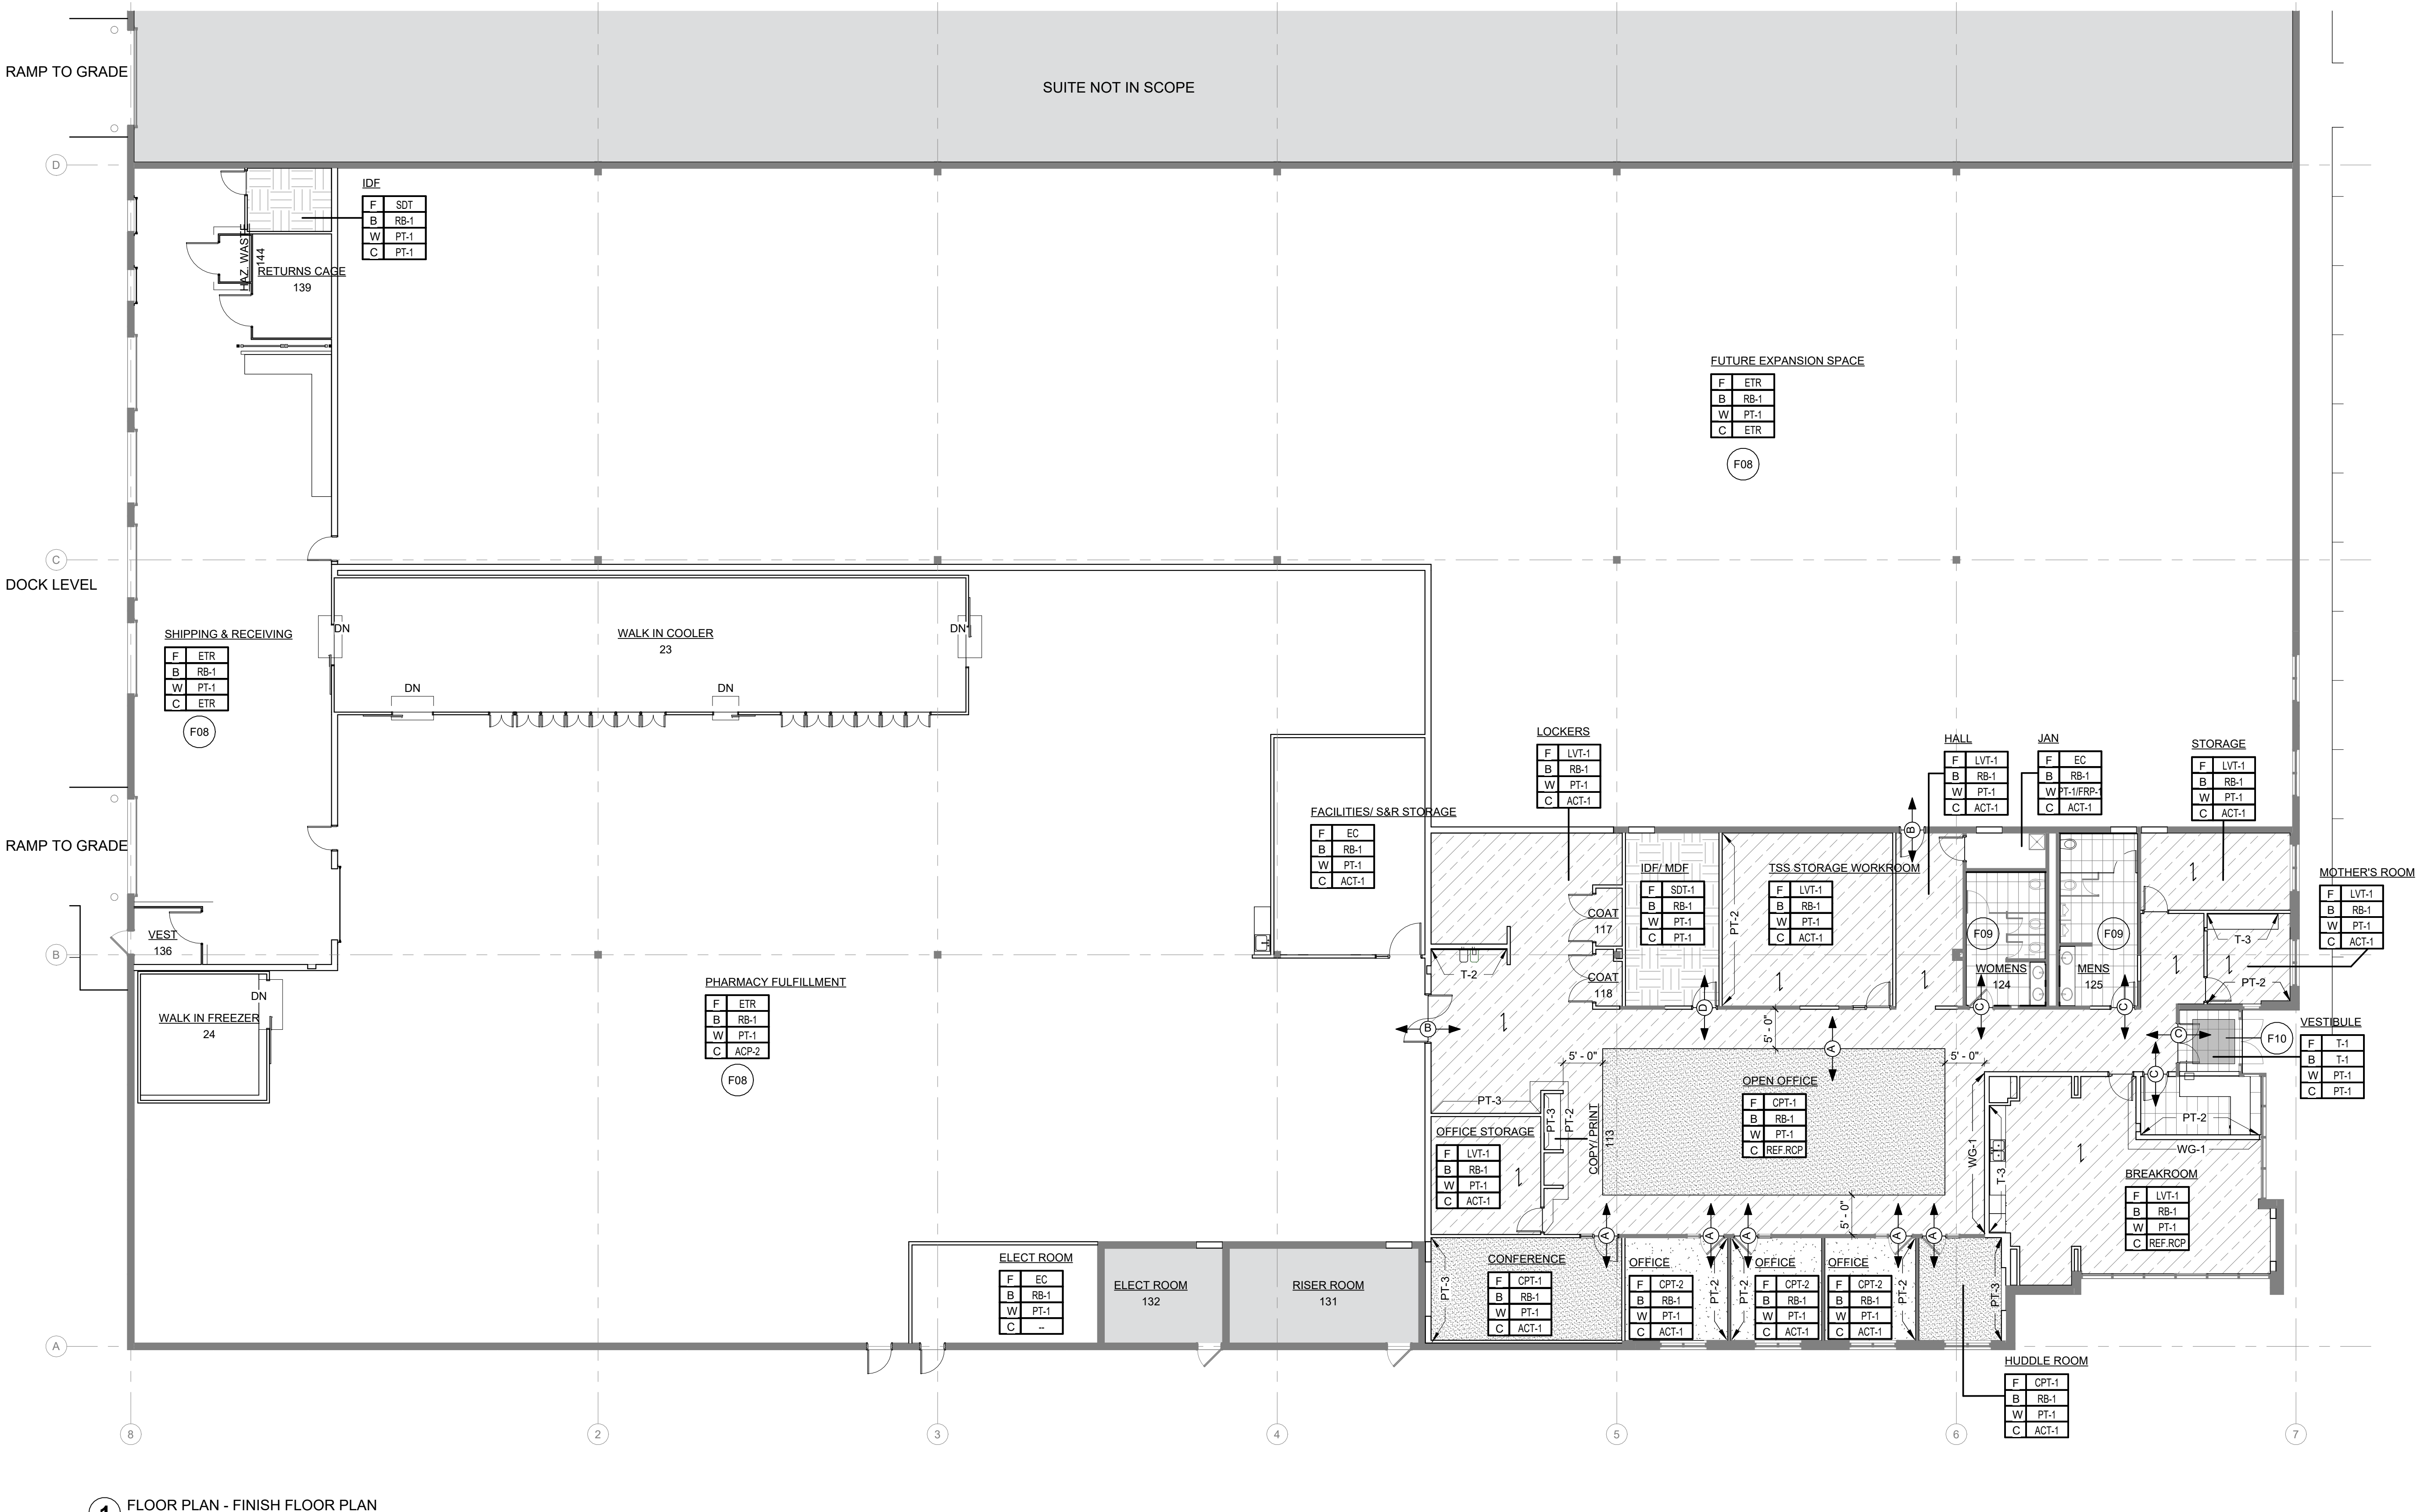

1 FLOOR PLAN - FINISH FLOOR PLAN
3/32" = 1'-0"

FINISH SCHEDULE									
CODE	DESCRIPTION	MANUFACTURER	STYLE	COLOR / FINISH	SIZE	COMMENTS	CONTACT		
ACT-1	ACOUSTIC CEILING TILE	ARMSTRONG	ULTIMA	WHITE	24" X 24"	USE WITH 15/16" WHITE GRID	ENTER CONTACT		
CG-1	CORNER GUARD	INPRO	130 HIGH IMPACT CORNER GUARD	WHITE SAND 0103	3" WING	FULL HEIGHT	ENTER CONTACT		
CPT-1	CARPET TILE	SHAW CONTRACT	GRIT TILE ST486	FLINT 84761	24" X 24"	OPEN AREA CARPET, MONOLITHIC INSTALL	ENTER CONTACT		
CPT-2	CARPET TILE	SHAW CONTRACT	GRIT TILE ST486	PEBBLE 84111	24" X 24"	OFFICE CARPET, MONOLITHIC INSTALL			
CPT-3	CARPET TILE	SHAW CONTRACT	BONJOUR I	BLACK CHOCOLATE 31751	24" X 24"	ENTRYWAY CARPET TILE			
DP-1	DECORATIVE PANEL	SURFACING SOLUTIONS	SOLID WOOD TAMBOUR PROFILE: 693	WOOD SPECIES: WALNUT, CLEAR SEALANT					
EC	EXPOSED CONCRETE	--	--	--	--	--			
FRP-1	FIBER REINFORCED PANELING								
LVT-1	LUXURY VINYL TILE	SHAW CONTRACT	BRANCHING OUT 4480V	RIVERSIDE OAK 56140		STAGGER INSTALL	ENTER CONTACT		
PL-1	PLASTIC LAMINATE	WILSONART		7992-38 PINNACLE WALNUT	6" X 48"	GRAIN TO RUN VERTICALLY, U.N.O.	ENTER CONTACT		
PT-1	PAINT	SHERWIN WILLIAMS	EGGSHELL	SW 7551 GREEK VILLA		GENERAL PAINT	ENTER CONTACT		
PT-2	PAINT	SHERWIN WILLIAMS	EGGSHELL	SW 7045 INTELLECTUAL GRAY		ACCENT PAINT			
PT-3	PAINT	SHERWIN WILLIAMS	EGGSHELL	SW 7750 OLYMPIC RANGE		ACCENT PAINT			
PT-4	PAINT	SHERWIN WILLIAMS	SEMI GLOSS	SW 7045 INTELLECTUAL GRAY		DOOR FRAME PAINT			
RB-1	RUBBER BASE	JOHNSONITE	TRADITIONAL VINYL BASE	32 PEBBLE	4" H		ENTER CONTACT		
RB-2	RUBBER BASE	JOHNSONITE	MILLWORK REVEAL - MW-XX-F	32 PEBBLE	4.25" H				
RS-1	ROLLER SHADE	MECHOSHADE	MANUAL MECO 5 - STANDARD MOUNT	BROOME (LIGHT GREY)		VERIFY % OPENNESS WITH OWNER			
SC-1	SEALED CONCRETE	REF. SPECIFICATIONS	REF. SPECIFICATIONS	REF. SPECIFICATIONS		REF. SPECIFICATIONS	ENTER CONTACT		
SDT-1	STATIC DISSIPATIVE TILE	SHAW CONTRACT	STATIC SMART ESD VINYL TILE, SUMMIT SERIES	RAINIER C6005	12" X 12"		ENTER CONTACT		
SSM-1	QUARTZ	CAMBRIA	BERKSHIRE BRASS SCULPTED, CAMBRIA MATTE FINISH		2CM	EASED EDGE			
T-1	TILE - FLOOR	SHAW CONTRACT	SETT CT74J	ASH 00550	12" X 24"	GROUT: LATICRETE, 60 DUSTY GREY, BASE TO BE 4" U.N.O	ENTER CONTACT		
T-2	TILE - WALL	SHAW CONTRACT	SETT CT74J	BEACH 00200	12" X 24"	GROUT: LATICRETE, 27 HEMP			
T-3	TILE - ACCENT WALL	CEMENTO	FLUTED HONED MOSAIC TILE	VERDI ALPI LI-AX-103F	11.25" X 11.75" MESH MOUNTED	GROUT: LATICRETE, 60 DUSTY GREY			
WG-1	WALL GRAPHIC	--	--	--	--	PROPOSED LOCATION OF WALL GRAPHIC; COORDINATE WITH OWNER ON FINAL LOCATION.			
WP-1	SHEET WALL PROTECTION	INPRO	PALLADIUM RIGID SHEET	WHITE SAND 0103	4" H	BASE TO BE APPLIED OVER WALL PROTECTION			

TRANSITION DETAILS

- TRANSITION A: CARPET TO RESILIENT FLOORING, SCHLUTER VINPRO-S IN BRUSHED NICKEL ANODIZED FINISH
- TRANSITION B: RESILIENT FLOORING TO CONCRETE, SCHLUTER VINPRO-U IN BRUSHED NICKEL ANODIZED FINISH
- TRANSITION C: RESILIENT FLOORING TO TILE, SCHLUTER RENO-U IN BRUSHED NICKEL ANODIZED FINISH
- TRANSITION D: RESILIENT FLOORING TO SDT, SCHLUTER VINPRO-T IN BRUSHED NICKEL ANODIZED FINISH. FLOAT FLOOR TO ENSURE EVEN TRANSITION

FINISH PLAN NOTES

- FINISHES SHALL COMPLY WITH LOCAL AND NATIONAL CODES.
- INSPECT FINISHES ON SITE FOR ANY DEFECTS OR DYE LOT INCONSISTENCIES. NOTIFY ARCHITECT OF DEFECTS OR INSTALLATION PROBLEMS.
- CONTRACTOR IS RESPONSIBLE FOR DELIVERY AND LEAD TIMES. THE OWNER AND ARCHITECT ARE NOT BE RESPONSIBLE FOR EXPEDITION FEES.
- INSTALL FINISHES PER MANUFACTURERS INSTRUCTIONS. FINISHES WITH A PATTERN, REPEAT, OR NAP SHALL ALIGN AND RUN IN THE SAME DIRECTION.
- PREPARE SURFACES APPROPRIATELY TO RECEIVE THE CORRECT FINISH.
- BRING CONDITIONS NOT SUITABLE FOR THE FINISH TO THE ARCHITECT ATTENTION.
- WORKMANSHIP NOT COMPLYING WITH SPECIFIED QUALITY STANDARDS WILL NOT BE ACCEPTED.
- PROTECT FINISHES.
- COORDINATE DISCREPANCIES BETWEEN FINISH PLANS AND FINISH SCHEDULES WITH THE ARCHITECT PRIOR TO ORDERING PRODUCT.
- REFERENCE A04 & A07 SERIES FOR ADDITIONAL WALL AND MILLWORK FINISH CALLOUTS.
- REFER TO A08-01 FOR DOOR AND FRAME FINISH DESIGNATIONS

FINISH WALL NOTES

- PAINT SURFACE MOUNTED PLUG MOLD AND CONDUIT TO MATCH ADJACENT WALL.
- TOUCH UP WORK BEFORE SUBSTANTIAL COMPLETION.
- WORKMANSHIP WHICH IS JUDGED LESS THAN FIRST QUALITY BY THE ARCHITECT WILL BE REJECTED.
- INSTALL DRYWALL REVEAL ABOVE EACH DOOR AT EACH CORNER OF THE DOOR FRAME UP TO FINISHED CEILING TO PREVENT CRACKING IN DRYWALL.
- PAINT METAL ACCESS PANELS, INTERIOR SUPPLY AND RETURN DIFFUSERS TO MATCH ADJACENT SURFACES IN A NAY ACCENT-PAINTED WALL OR MATERIAL.

FINISH FLOOR NOTES

- PREPARE FLOORS TO ACCEPT SPECIFIED FINISH INCLUDING MOISTURE AND FLOOR LEVELING.
- COMPLY WITH ADAAG REGULATIONS FOR TRANSITIONS AND WHERE TRANSITION MEETS AT DOORWAYS, AND THE CENTER OF THAT DOORWAY. FEATHER SUBFLOOR OR PROVIDE JOHNSONITE SUBFLOOR LEVELERS TO PROVIDE FLUSH TRANSITION, U.N.O.
- ENSURE FACTORY CUT TILE EDGE IS EXPOSED.
- FLOORING TO CONTINUE UNDER TOEKICK AT CASEWORK/MILLWORK, OR BASE OF WALL, OR UNDER APPLIANCE.
- FLOOR GROUT LINES AT TILE FINISH TO ALIGN WITH WALL GROUT LINES.

FINISH CEILING NOTES

- SPRINKLER HEADS SHALL RECEIVE A COVER PLATE. FACTORY FINISH COVER PLATES TO MATCH ADJACENT SURFACE ON ACCENT-PAINTED SOFFIT OR MATERIAL.
- GYP. CEILING SHALL BE PT-1, U.N.O. REF. RCPS FOR ACCENT PAINT LOCATIONS.
- PAINT SOFFITS TO MATCH ADJACENT WALLS U.N.O.
- PAINT ACCENT-PAINTED SOFFITS ON THE VERTICAL AND UNDERSIDE OF SOFFIT, U.N.O.
- GYP. BOARDS SOFFITS ABOVE UPPER CABINETS SHALL BE PROVIDE 1" OF CABINET ON ALL EXPOSED EDGES, U.N.O.
- PROVIDE COVERED GYP. WALL AND CEILING CORNERS.

FINISH MILLWORK NOTES

- 4" TOE KICK IS STANDARD AT CASEWORK, U.N.O.
- WOOD GRAIN LAMINATES GRAIN DIRECTION TO RUN VERTICALLY, U.N.O.
- PROVIDE PLASTIC LAMINATE BASE AT PLASTIC LAMINATE FACED BASE CABINET MILLWORK EXCEPT WHERE SHEET FLOORING SELF-COVES.
- BACKSPASHES SHALL BE 4" H U.N.O.

FINISH WALL PROTECTION NOTES

- INSTALL SHEET WALL PROTECTION TO THE FLOOR WITH THE BASE APPLIED ON TOP OF IT
- SHEET WALL PROTECTION THAT IS NOT FULL HEIGHT SHALL HAVE J-MOLD TRIM AT TOP OF WAINSCOT WITH CLEAR SEALANT AT TOP OF J-MOLD AND WALL TRANSITION. THE J-MOLD TRIM COLOR SHALL MATCH THE WALL PROTECTION, U.N.O.
- WALL PROTECTION SHALL MATCH THE COLOR OF THE WALL ON WHICH IT IS INSTALLED, U.N.O.

TRANSITION LEGEND

- (A) CARPET TO RESILIENT FLOORING
- (B) RESILIENT FLOORING TO CONCRETE
- (C) RESILIENT FLOORING TO TILE
- (D) RESILIENT FLOORING TO SDT

CONSTRUCTION KEYNOTE LEGEND

- F08 PROVIDE WALL AND BASE FINISHES AS INDICATED BY THE ROOM FINISH TAG AT ALL EXISTING AND NEW GYPSUM WALL PARTITIONS.
- F09 REFERENCE ENLARGED PLANS FOR ELEVATIONS AND FINISH LOCATIONS.
- F10 NEW TILE TO BE INSTALLED UP TO EXISTING RECESSED WALK-OFF MATT.

FINISH FLOOR LEGEND

- CPT-1
- CPT-2
- LVT-1
- SDT-1
- T-1
- EC



CORGAN
401 North Houston Street, Dallas TX
7520
T: 972-852-1270

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

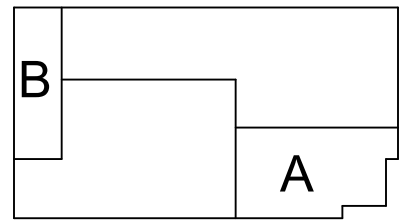

FINISH FLOOR PLAN

4/24/2026 2:14:56 PM A10-01 FF&E FLOOR PLAN

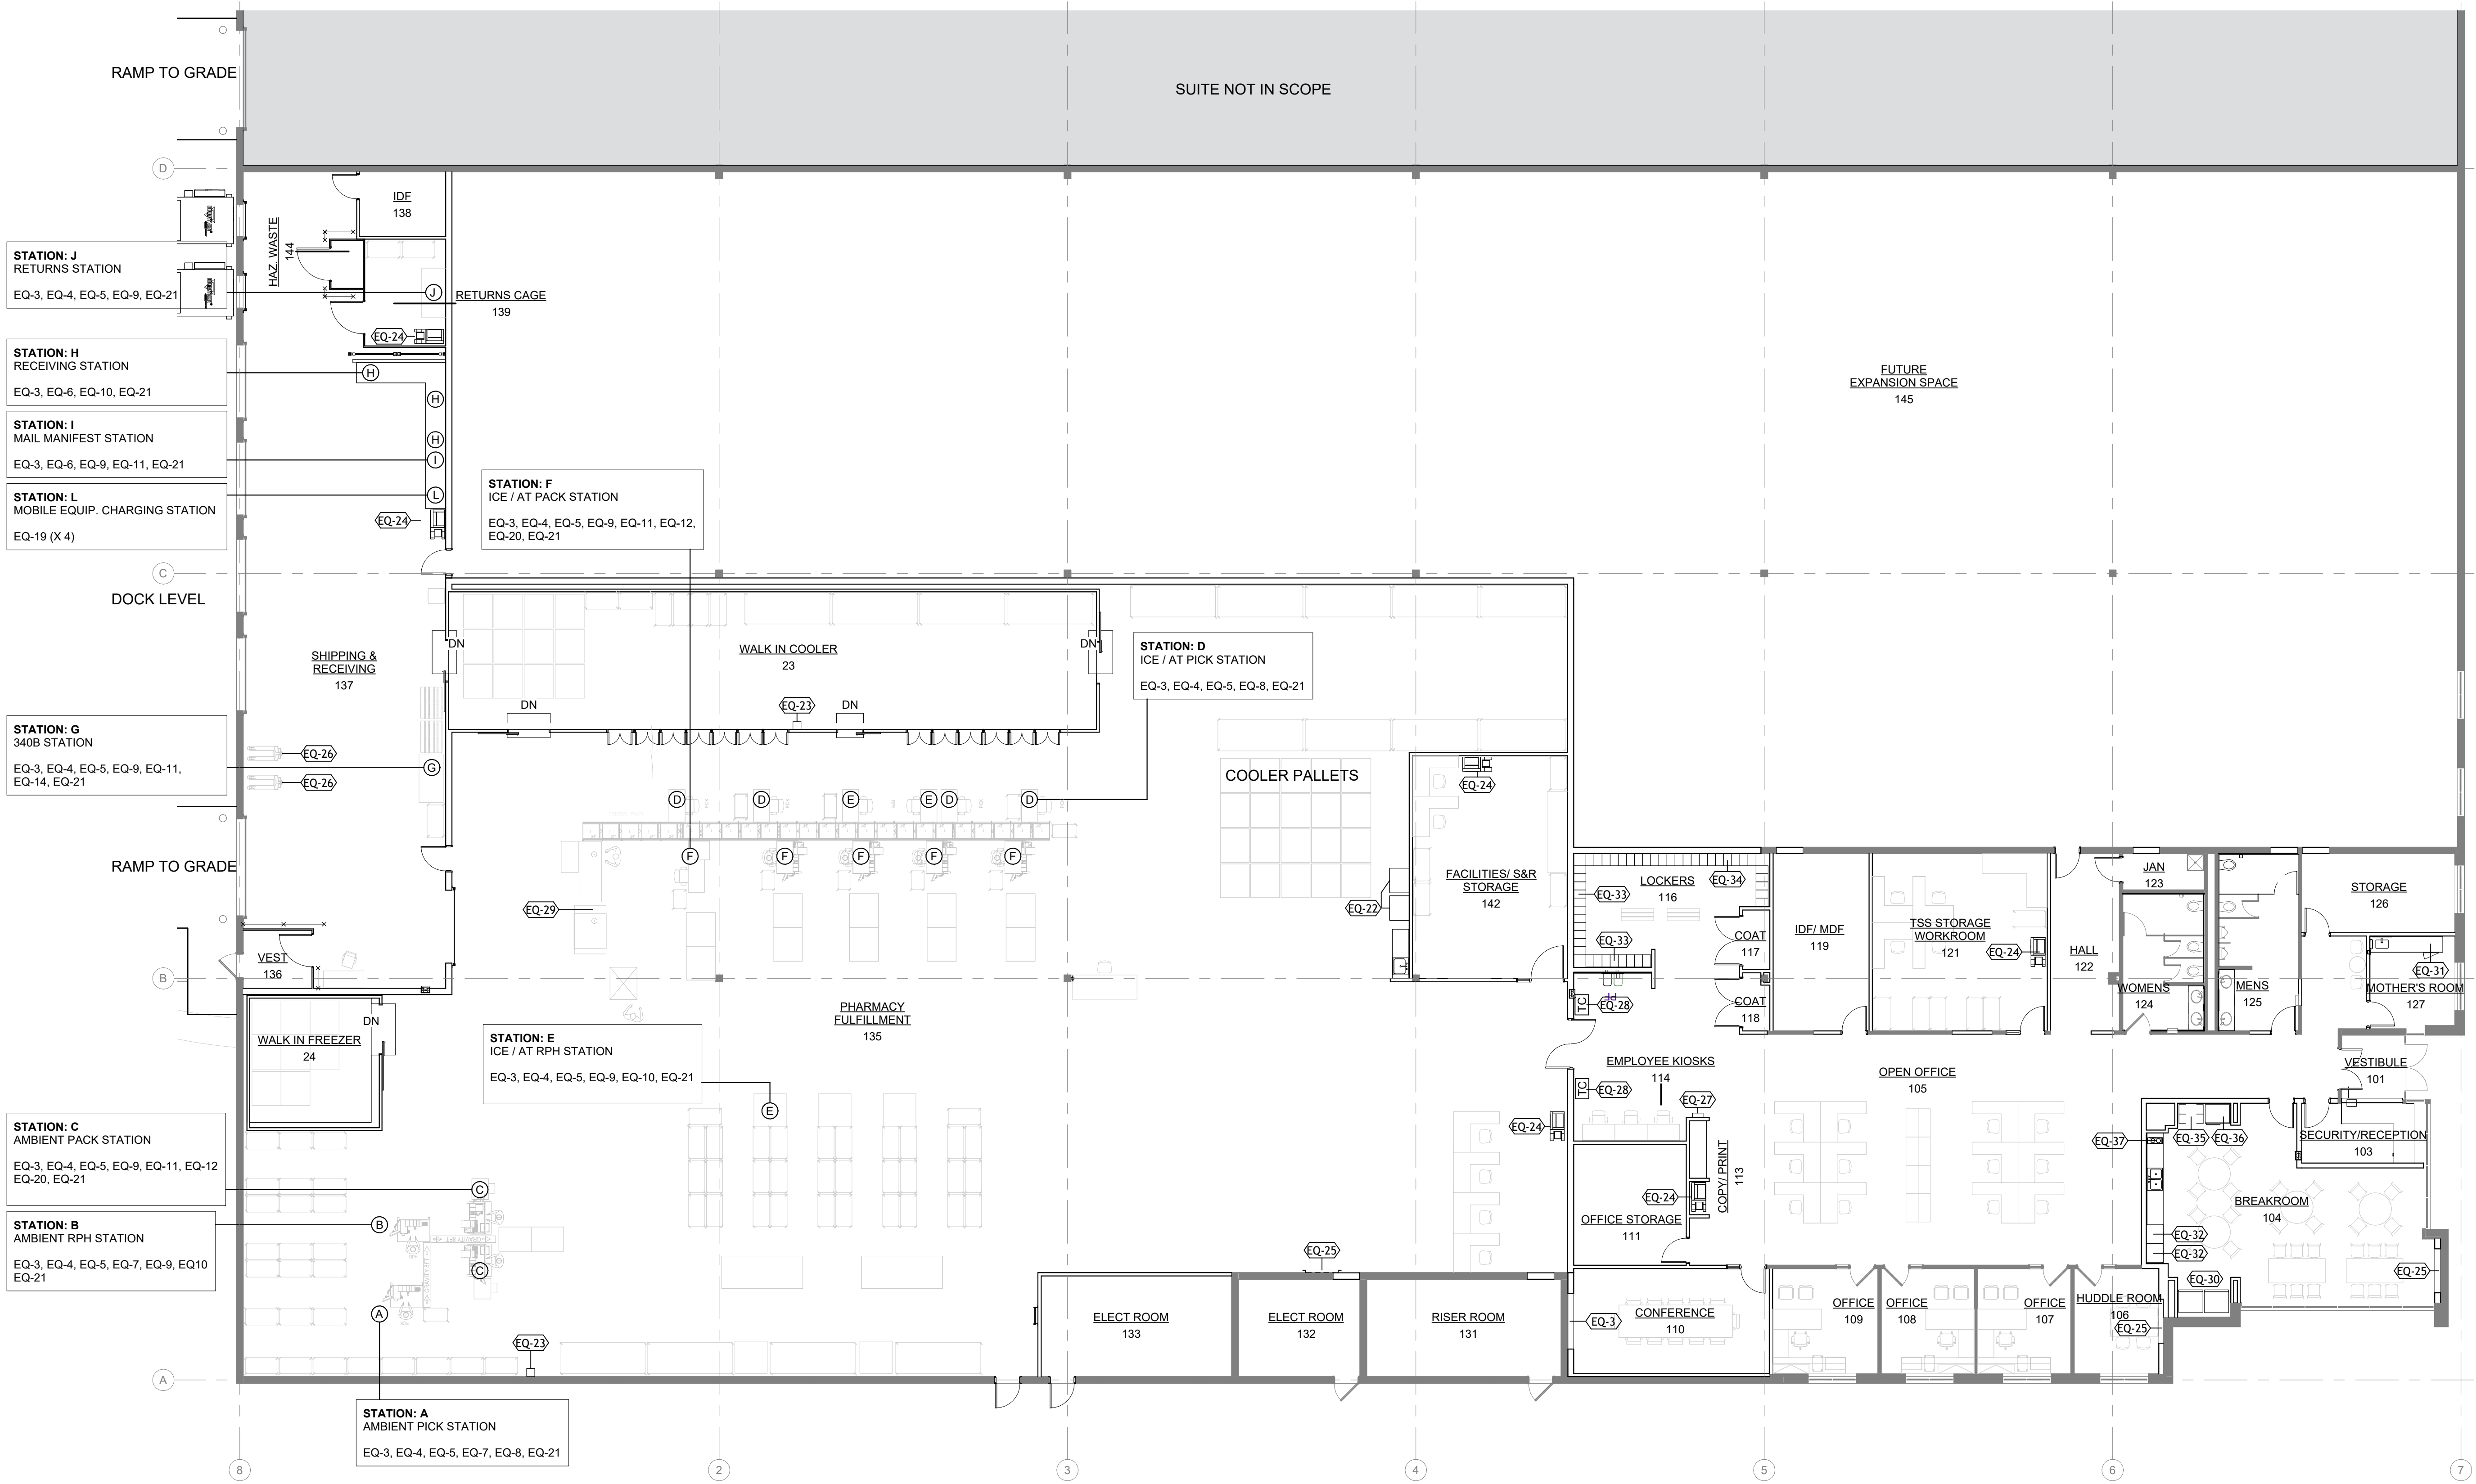

1 FF&E PLAN - OVERALL
3/32" = 1'-0"

EQUIPMENT SCHEDULE						
CODE	STATION / DESCRIPTION	MAKE	MODEL	POWER	DATA	COMMENTS
EQ-1	WORKSTATION	LENOVO	M750	X	X	
EQ-2	SECURITY WORKSTATION	LENOVO	P340 TINY	X	X	
EQ-3	TOUCH SCREEN MONITOR	LENOVO	TIO24	X		
EQ-4	MONITOR	LENOVO	T24-40	X		
EQ-5	BARCODE SCANNER CRADLE	ZEBRA	DS3678	X		
EQ-6	BARCODE SCANNER	ZEBRA	DS9908	X		
EQ-7	PILL COUNTER	EVECON	9420 / 9430 / 9400	X		
EQ-8	LABEL PRINTER (BOTTLE)	ZEBRA	ZT411-43	X	X	
EQ-9	LABEL PRINTER (PACKING / DOSING)	ZEBRA	ZT411-42	X	X	
EQ-10	LABEL PRINTER (SMALL VERSION)	ZEBRA	ZD621-43	X	X	
EQ-11	SCALE	METTLER TOLEDO	IN0570	X		
EQ-12	LIT PRINTER (PRODUCTION)	RICOH	IM8000	X	X	
EQ-13	LIT PRINTER (SKINNY 4 TRAY)	RICOH	IM350FSE	X	X	
EQ-14	LIT PRINTER (TABLETOP)	RICOH	P800	X	X	
EQ-15	LIT PRINTER (COLOR)	RICOH	IMC3510	X	X	
EQ-16	BRaille EMOSSER	SCRIPTABILITY	BRALLERAX 01-00203-0006	X		
EQ-17	SCRIPTALK STATION 2	SCRIPTABILITY	SCRIP TALK 01-00201-NS	X		
EQ-18	SCRIPTVIEW PRINTER SV208	SCRIPTABILITY	SCRIPTVIEW 01-00203-SV-NET	X		
EQ-19	MOBILE DEVICE 5 SLOT CRADLE	ZEBRA	TC53 / TC58 5 - SLOT CRADLE	X		
EQ-20	AIR PILLOW MACHINE	SEALED AIR	FILL - AIR ROCKET	X		
EQ-21	PC			X	X	
EQ-22	USP800 HOOD			X		ONE NEW UNIT, ONE UNIT RELOCATED FROM EXISTING SITE
EQ-23	CONTROL SUBSTANCE CABINET					
EQ-24	AUXILIARY PRINTERS			X	X	
EQ-25	PRODUCTION MONITORS			X	X	
EQ-26	ELECTRIC PALLET JACK			X		
EQ-27	MORSE KEY BOX			X	X	
EQ-28	TIME CLOCKS			X	X	
EQ-29	MANUAL SHRINK WRAP MACHINE			X		
EQ-30	FRIDGE / FREEZER COMBO			X		WATER
EQ-31	UNDERCOUNTER FRIDGE			X	X	
EQ-32	MICROWAVE			X		
EQ-33	LOCKERS - 2 TIER			X		
EQ-34	LOCKERS - SINGLE			X		
EQ-35	VENDING MACHINE			X		
EQ-36	ICE / WATER DISPENSER			X		WATER
EQ-37	COFFEE MAKER			X		WATER
EQ-38	DRINKING FOUNTAIN W/ BOTTLE FILLER			X		WATER
EQ-39	PAPER TOWEL DISPENSER	BRADLEY CORP	ELVARI MODEL 2B1			SURFACE MOUNTED, BRUSHED STAINLESS FINISH
EQ-40	SOAP DISPENSER	BRADLEY CORP	ELVARI MODEL 8B1			LIQUID DISPENSER, RECESSED, IN BRUSHED STAINLESS FINISH
EQ-41	MIRROR ABOVE SINK	BRADLEY CORP	ELVARI MODEL 7B1			BRUSHED STAINLESS STEEL

GENERAL POWER AND DATA NOTES

- REFERENCE ELECTRICAL PLANS FOR POWER AND DATA PLAN
- REFERENCE G00-10 FOR STANDARDS, CODE INFORMATION AND ADDITIONAL LEGENDS.
- POWER AND DATA LOCATIONS ARE FOR REFERENCE ONLY. REFER TO MEP DOCUMENTS FOR POWER CIRCUITRY.
- ALL OUTLET DEVICES SHOWN ARE NEW, U.N.O. GANG TOGETHER WHEN LOCATED ON PLAN. COORDINATE WITH MEP SHEETS.
- ALL ELECTRICAL DATA/COMMUNICATION OUTLET LOCATIONS TO BE APPROVED BY TENANT PRIOR TO COMPLETING PARTITION CONSTRUCTION. REFERENCE MEP SHEETS.
- COORDINATE HEIGHT OF STANDARD OUTLETS WITH MOUNTING HEIGHTS LISTED ON G00-10.
- ALL OUTLETS THAT ARE NOT DIMENSIONED ARE TO BE LOCATED ON THE CENTER OF GYP. BD. PARTITION, U.N.O.
- ALL POWER/DATA DIMENSIONS SHOWN ARE TO THE CENTERLINE OF DEVICE OR GROUPING OF DEVICES. GANG ALL OUTLET DEVICES TOGETHER WHEN LOCATED TOGETHER ON PLAN.
- ALL EXISTING TO REMAIN, NEW DEVICES AND COVER PLATES TO BE WHITE, UNLESS NOTED OTHERWISE.
- ALL DEDICATED DEVICES TO BE INDICATED BY GRAY RECEPTACLE. COORDINATE WITH MEP.
- ALL DATA AND TELEPHONE WIRING BY TENANT, CONTRACTOR TO PROVIDE ROUGH-IN WITH PULL STRINGS.
- G.C. TO COORDINATE ALL FLOOR CORES WITH OWNER'S FURNITURE VENDOR. VENDOR WILL LOCATE IN FIELD. NO XRAYING OR CORE DRILLING TO OCCUR WITHOUT APPROVAL OF LOCATIONS.
- DISTANCE BETWEEN FLOOR CORES TO BE COORDINATED WITH ALL CODES TO MAINTAIN EXISTING FIRE RATINGS AND STRUCTURAL INTEGRITY.
- G.C. TO PROVIDE AND INSTALL EQUIPMENT, U.N.O. AND SHEET SERIES A10.
- COORDINATE LOCATION OF CEILING MOUNTED DEVICES WITH REFLECTED CEILING PLAN (A03 SERIES.)
- ALL SECURITY EQUIPMENT BY TENANT. SECURITY CONSULTANT TO INSTALL ALL SECURITY EQUIPMENT AND ASSOCIATED WIRING/INFRASTRUCTURE.
- COORDINATE FINAL LOCATIONS, MOUNTING HEIGHTS, AND ADDITIONAL AV REQUIREMENTS FOR PARTITION MOUNTED TV DISPLAYS AND MONITORS WITH TENANT.
- ALL APPLIANCES SHALL BE PROVIDED AND INSTALLED BY CONTRACTOR, U.N.O. COORDINATE WITH DRAWINGS IN THIS SHEET SERIES, AND SHEET SERIES A10.
- REFER TO THIS SHEET FOR CONTRACTOR PROVIDED EQUIPMENT.
- BLOCKING, AND CONDUIT. ELECTRICIAN TO PROVIDE ALL CONDUIT TO SUPPORT AV/IT/SECURITY. REFERENCE ENTIRE DRAWING PACKAGE FOR CONDUIT ROUGH-IN LOCATIONS, AV EQUIPMENT AND SYSTEMS, STRUCTURED CABLING (CAT6, FIBER, AND CABLE TRAYS) AND CARD READER SYSTEMS AND CAMERAS BY TENANT'S AV PROVIDER.
- EQUIPMENT CANNOT PROTRUDE MORE THAN 4" FROM FACE OF PARTITION.
- PUTTY PACKS TO BE PROVIDED AT ALL ELECTRICAL OUTLETS AND PARTITION PENETRATIONS.



CORGAN
401 North Houston Street, Dallas TX
7520
T: 972-852-1270

ISSUANCES



Date of issue:
04/24/2026


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

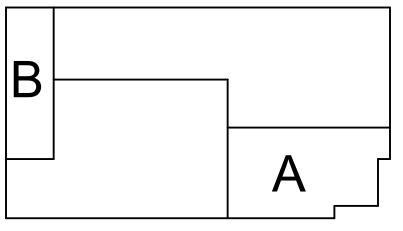

FF&E FLOOR PLAN

FIELD MOUNTED CONTROLS			
① THERMOSTAT OR TEMPERATURE SENSOR	① _{SD} DUCT SMOKE DETECTOR	② PRESSURE SENSOR	
② HUMIDISTAT OR HUMIDITY SENSOR	② _{CO} CARBON MONOXIDE SENSOR	② _{CO2} CARBON DIOXIDE SENSOR	
③ NIGHT CYCLE CONTROL THERMOSTAT	③ _{O2} OXYGEN SENSOR	③ _{VOC} VOC SENSOR	
④ ASPIRATING THERMOSTAT	④ _R REFRIGERANT SENSOR		
⑤ THERMOSTAT WITH INSULATING BASE			
⑥ PRESSURE TRANSMITTER			
⑦ PRESSURE DIFFERENTIAL TRANSMITTER			
COMMON INSTRUMENTATION DEVICES			
OR TEMPERATURE INDICATOR (THERMOMETER) WITH THERMOWELL	OR PRESSURE INDICATOR (PRESSURE GAUGE) WITH GAUGE VALVE		
THERMOWELL	PRESSURE DIFFERENTIAL TRANSMITTER		
TEMPERATURE ELEMENT (DIRECT INSERTION)	OR FLOW ELEMENT (FLOW SENSOR)		
STRAP ON PIPE TEMPERATURE INSTRUMENT (AQUASTAT)	FLOW ELEMENT WITH TRANSMITTER (FLOW METER)		
TEMPERATURE ELEMENT WITH TRANSMITTER AND THERMOWELL	FLOW INDICATOR/FLOW METER		
TEMPERATURE ELEMENT WITH TRANSMITTER AND THERMOWELL	OR FLOW SWITCH		
GENERAL			
ADJ - ADJUSTABLE	LAT - LEAVING AIR TEMPERATURE		
AFF - ABOVE FINISHED FLOOR	LWT - LEAVING WATER TEMPERATURE		
AL - ALUMINUM	MBH - THOUSANDS OF BTU PER HOUR		
ALT - ALTERNATE	MC - MECHANICAL CONTRACTOR		
AP - ACCESS PANEL	MEP - MECHANICAL, ELECTRICAL AND PIPING		
BOD - BOTTOM OF DUCT	MER - MECHANICAL EQUIPMENT ROOM		
BOP - BOTTOM OF PIPE	NA - NOT APPLICABLE		
BTU - BRITISH THERMAL UNIT	NC - NORMALLY CLOSED		
BTUH - BRITISH THERMAL UNITS PER HOUR	NIC - NOT IN CONTRACT		
CA - COMBUSTION AIR	NO - NORMALLY OPEN		
CAV - CONSTANT AIR VOLUME	NPS - NOMINAL PIPE SIZE		
CFCI - CONTRACTOR FURNISHED, CONTRACTOR INSTALLED	NPT - NATIONAL PIPE THREAD		
CFM - CUBIC FEET PER MINUTE	NTS - NOT TO SCALE		
CLG - CENTERLINE	OA - OUTSIDE AIR		
COND - CONDENSATE/CONDENSER	OC - ON CENTER		
COP - CENTER OF PIPE	OED - OPEN END DUCT		
CS - CARBON STEEL	OF - OWNER FURNISHED, CONTRACTOR INSTALLED		
CU - COPPER	OFI - OWNER FURNISHED, OWNER INSTALLED		
DB - DRY BULB	OV - OUTLET VELOCITY		
DDC - DIRECT DIGITAL CONTROL	PA - PLANT AIR		
DX - DIRECT EXPANSION	PC - PLUMBING CONTRACTOR		
EA - EXHAUST AIR	PCF - POUNDS PER CUBIC FOOT		
EAT - ENTERING AIR TEMPERATURE	PD - PRESSURE DROP		
EDR - EQUIVALENT DIRECT RADIATION	PH - PHASE		
EL - ELEVATION	PP - POLYPROPYLENE		
ESP - EXTERNAL STATIC PRESSURE	PSF - POUNDS PER SQUARE FOOT		
ETR - EXISTING TO REMAIN	PSI - POUNDS PER SQUARE INCH		
EWT - ENTERING WATER TEMPERATURE	PSIA - POUNDS PER SQUARE INCH ABSOLUTE		
EXH - EXHAUST	PSIG - POUNDS PER SQUARE INCH GAUGE		
FA - FRESH AIR INTAKE/ FIELD ADJUSTABLE	RA - RETURN AIR		
FAT - FINAL AIR TEMPERATURE	RPM - REVOLUTIONS PER MINUTE		
FE - FINE HOOD EXHAUST	SA - SUPPLY AIR		
FLA - FULL LOAD AMPS	SA - SCHEDULE		
FLR - FLOOR	SOG - SLAB ON GRADE		
FO - FAIL OPEN	SP - STATIC PRESSURE		
FPM - FEET PER MINUTE	SS - STAINLESS STEEL		
FPS - FEET PER SECOND	TA - TRANSFER AIR		
GA - GAUGE	TBR - TO BE REMOVED		
GC - GENERAL CONTRACTOR	TOD - TOP OF DECK		
GE - GENERAL EXHAUST	TOJ - TOP OF JOIST		
GPM - GALLONS PER MINUTE	TOP - TOP OF PIPE		
GS - GALVANIZED STEEL	TOS - TOP OF SLAB		
HP - HORSE POWER/HIGH POINT	TSP - TOTAL STATIC PRESSURE		
IA - INSTRUMENT AIR	V - VOLTS		
IE - INVERT ELEVATION	VAV - VARIABLE AIR VOLUME		
KO - KNOCK-OUT	VP - VELOCITY PRESSURE		
	VTR - VENT THRU ROOF		
	WB - WET BULB		
	WC - WATER COLUMN		
	WG - WATER GAUGE		
	X - EXISTING		
EQUIPMENT			
AC - AIR CONDITIONING UNIT/ AIR COMPRESSOR	H - HUMIDIFIER		
ACC - AIR COOLED CONDENSER	HC - HEATING COIL		
ACCU - AIR COOLED CONDENSING UNIT	HP - HEAT PUMP		
ACU - AIR CONDITIONING UNIT	HRC - HEAT RECOVERY COIL		
AHU - AIR HANDLING UNIT	HR - HOSE REEL		
AMD - AIR MIXING DEVICE	HRD - HEAT RECLAIM DEVICE		
AS - AIR SEPARATOR	HT - HEAT TRACE		
AT - AIR TERMINAL DEVICE	HX - HEAT EXCHANGER		
B - BOILER	IH - INTAKE HOOD		
BBS - BOILER BLOWDOWN SEPARATOR	MCC - MOTOR CONTROL CENTER		
BFS - BOILER FEEDWATER SYSTEM	P - PUMP		
BH - BOOSTER HUMIDIFIER	RAH - ROOFTOP AIR HANDLING UNIT		
C - CONVECTOR	RC - REHEAT COIL		
CC - COOLING COIL	RCP - RADIANT CEILING PANEL		
CH - CHILLER	REF - ROOF EXHAUST FAN		
CP - CONDENSATE PUMP/ CONTROL PANEL	RH - RELIEF HOOD		
CT - COOLING TOWER	SAD - SOUND ATTENUATING DEVICE		
CUH - CABINET UNIT HEATER	SD - SUCTION DIFFUSER		
CV - CONVERTOR	SF - SUPPLY FAN		
D - DAMPER	ST - STORAGE TANK/STEAM TRAP		
DC - DUST COLLECTOR	T - TANK		
DH - DEHUMIDIFIER	TAV - THERMAL EXPANSION VALVE		
EF - EXHAUST FAN	UH - UNIT HEATER		
EH - EXHAUST HOOD/ ELECTRIC HEATER	UST - UNDERGROUND STORAGE TANK		
EJ - EXPANSION JOINT	UV - UNIT VENTILATOR		
EV - EXHAUST VALVE	V - VALVE		
F - FILTER	VFD - VARIABLE FREQUENCY DRIVE		
FCU - FAN COIL UNIT	WCC - WATER COOLED CONDENSER		
FD - FLOOR DRAIN	WF - WATER FILTER		
FOP - FUEL OIL PUMP			
FOT - FUEL OIL TANK			
FR - FLASH TANK			
FU - FURNACE			

MECHANICAL SYMBOLS AND ABBREVIATIONS			
SYMBOLS INDICATED HERE AND NOT USED IN THE CONTRACT DOCUMENTS DO NOT APPLY TO THIS PROJECT. ADDITIONAL SYMBOLS MAY BE INDICATED IN THE CONTRACT DOCUMENTS.			
DUCTWORK SPECIALTIES			
DUCT REHEAT COIL	FLEXIBLE DUCT		
ACCESS DOOR	DUCT FLEXIBLE CONNECTION		
BUTTERFLY TYPE VALVE WITH CONTROLLER LOCATED ON SIDE OF VALVE	POINT OF CHANGE IN DUCT CONSTRUCTION BY PRESSURE CLASS		
BUTTERFLY TYPE VALVE WITH CONTROLLER ANGLED DOWN SEE DETAIL	VAV SUPPLY AIR VALVE		
VENTURI VALVE WITH CONTROLLER LOCATED ON SIDE OF VALVE	AIR FLOW MEASURING STATION		
VENTURI VALVE WITH CONTROLLER ANGLED DOWN SEE DETAIL			
MISCELLANEOUS		VIBRATION ISOLATOR	
POINT OF NEW CONNECTION TO EXISTING			
POINT OF DISCONNECTION TO EXISTING			
SPECIAL DESIGNATION			
EQUIPMENT (PUMP INDICATED)	DETAIL REFERENCE (TOP=DETAIL NO., BOTTOM=DRAWING NO. SHOWN ON)		
SPECIALTY ITEMS (I.E. GAUGE FILTER, ETC.)	A/15B-6 OR 15B-6		
PLAN CONTINUATION REFERENCE	REVISION REFERENCE		
SECTION DESIGNATION (TOP DESIGNATES SECTION NUMBER, BOTTOM DESIGNATES ON WHICH SHEET SECTION APPEARS)	GENERAL OR SPECIAL NOTES REFERENCE		
MATCHLINE DESIGNATION	ROOM NUMBER DESIGNATION		
	CONSTRUCTION BULLETIN REVISION NUMBER		
VALVES			
BUTTERFLY VALVE	DRAIN VALVE		
GATE VALVE	DRAIN VALVE WITH CAP		
GLOBE VALVE	LOCKSHIELD VALVE		
BALL VALVE	PRESSURE REDUCING VALVE-PRV (DOWNSTREAM SETPOINT)		
SHUTOFF VALVE (BUTTERFLY VALVE FOR 2 1/2" AND LARGER BALL VALVE FOR 2" AND SMALLER)	AIR-LOADED PRESSURE REDUCING VALVE-PRV (DOWNSTREAM SETPOINT)		
GAUGE VALVE			
PLUG VALVE			
BALANCING VALVE	PRESSURE REDUCING VALVE-PRV (UPSTREAM SETPOINT)		
THERMAL EXPANSION VALVE	GAS REGULATOR		
SPRING CHECK VALVE			
SWING CHECK VALVE	REDUCED PRESSURE BACKFLOW PREVENTER (RPBP)		
DIAPHRAGM VALVE			
2-WAY SOLENOID CONTROL VALVE (VALVE BODY AS SPECIFIED)			
2-WAY MOTOR CONTROL VALVE (VALVE BODY AS SPECIFIED)	PRESSURE RELIEF VALVE (RV) OR SAFETY VALVE (SV)		
2-WAY CONTROL VALVE (VALVE BODY AS SPECIFIED)	VACUUM RELIEF/VACUUM BREAKER		
3-WAY MIXING VALVE WITH ARROW INDICATING FAIL POSITION	RUPTURE DISK PRESSURE RELIEF		
3-WAY DIVERTING VALVE WITH ARROW INDICATING FAIL POSITION	RUPTURE DISK VACUUM RELIEF		
TRIPLE DUTY VALVE	FLOAT OPERATED VALVE		
GAS SHUTOFF VALVE	QUICK OPENING VALVE		
ANGLE VALVE			
(XX) = DEFINES FAIL POSITION OR NORMAL POSITION (FC) = FAIL CLOSED (CONTROL VALVE OR DAMPER) (FO) = FAIL OPEN (CONTROL VALVE OR DAMPER) (NC) = NORMALLY CLOSED (CONTROL VALVE OR DAMPER) (NO) = NORMALLY OPEN (CONTROL VALVE OR DAMPER)			
DAMPERS			
MANUAL BALANCING DAMPER	SMOKE DAMPER		
CONTROL DAMPER	COMBINATION FIRE/SMOKE DAMPER		
BACKDRAFT DAMPER	OPPOSED BLADE DAMPER		
3 HOUR RATED FIRE DAMPER	PARALLEL BLADE DAMPER		
1 1/2 HOUR RATED FIRE DAMPER	GENERAL		
BUBBLE TIGHT DAMPER			
(XX) = DEFINES FAIL POSITION OR NORMAL POSITION (FC) = FAIL CLOSED (CONTROL VALVE OR DAMPER) (FO) = FAIL OPEN (CONTROL VALVE OR DAMPER) (NC) = NORMALLY CLOSED (CONTROL VALVE OR DAMPER) (NO) = NORMALLY OPEN (CONTROL VALVE OR DAMPER)			
ACTUATORS			
MANUAL	ELECTRIC MOTOR DRIVEN		
GENERAL	TWO POSITION SPRING RETURN		
MODULATING	DOUBLE ACTING TWO POSITION		
MODULATING WITH PILOT POSITIONER	FUSIBLE LINK		
SOLENOID			

DUCTWORK AT DIFFUSERS AND GRILLES			
SINGLE LINE-HARD OR FLEXIBLE CONNECTION	DOUBLE LINE-HARD OR FLEXIBLE CONNECTION	SUPPLY DIFFUSER OR GRILLE (HORIZONTAL MOUNT)	
ROUND DIFFUSER		RETURN REGISTER OR GRILLE (HORIZONTAL MOUNT)	
EXHAUST REGISTER OR GRILLE (HORIZONTAL MOUNT)		EXHAUST OR RETURN REGISTER OR GRILLE (VERTICAL MOUNT)	
SUPPLY REGISTER OR GRILLE (VERTICAL MOUNT)			
DIFFUSER NOTATION			
DUCT SIZE IN INCHES (NET INSIDE DIMENSIONS) (ROUND SHOWN) Ø INDICATES ROUND ➤ or ## INDICATES OVAL FIRST FIGURE: SIDE SHOWN SECOND FIGURE: SIDE NOT SHOWN			
DIFFUSER AIR PATTERN 1 ARROW: 1 WAY 2 ARROWS: 2 WAY 3 ARROWS: 3 WAY 4 ARROWS: 4 WAY NO ARROWS: 4 WAY			
GRILLE REGISTER NOTATION EXHAUST AIR DUCT (RA) RETURN AIR DUCT (RA)			
DUCT SIZE IN INCHES (NET INSIDE DIMENSIONS) FIRST FIGURE: SIDE SHOWN SECOND FIGURE: SIDE NOT SHOWN			
NECK SIZE IN INCHES 106 CD-1 450 106 SA 250 AIR QUANTITY (CFM)			
NECK SIZE IN INCHES 126 S-1 250 126 S-1 250 RETURN OR EXHAUST GRILLE (G) SUPPLY GRILLE (S) LINEAR DIFFUSER (LD) LINEAR RET/EXH GRILLE (LG) TRANSFER GRILLE (TG) AIR QUANTITY (CFM)			
DUCTWORK			
SINGLE	DOUBLE	RECTANGULAR/ROUND BRANCH TAKE-OFF OR ROUND/ROUND BRANCH TAKE-OFF	
RADIUS ELBOW		45° LATERAL BRANCH	
RADIUS TEE		SQUARE TEE (FOR LOW PRESSURE SA DIVERGING ONLY)	
BULLHEAD TEE (FOR LOW PRESSURE SA DUCTWORK ONLY)		15" MAX. FOR DIVERGING, 25" MAX FOR CONVERGING TRANSITION - ECCENTRIC	
15" MAX. FOR DIVERGING, 25" MAX FOR CONVERGING TRANSITION - CONCENTRIC		EXISTING DUCT TO REMAIN	
EXISTING DUCT TO BE REMOVED		LINE CONTINUATION BREAK (RECTANGULAR, ROUND)	
SUPPLY AIR (SA) OR OUTDOOR AIR (OA) DUCT (SOLID LINES TYPICAL FOR SUPPLY AIR AND OUTDOOR AIR UP, HIDDEN LINE DOWN)		RETURN AIR (RA), RELIEF AIR, OR TRANSFER AIR (TA) DUCT (SOLID LINES TYPICAL FOR RETURN, RELIEF, OR TRANSFER AIR UP, HIDDEN LINE DOWN)	
EXHAUST AIR (EA) DUCT (SOLID LINES TYPICAL FOR EXHAUST AIR UP, HIDDEN LINE DOWN)		DUCT RISE/DROP W/90° ELBOWS (SUPPLY RECTANGULAR DUCT SHOWN)	
DUCT RISE (R)/DROP (D) W/45° ELBOWS (RECTANGULAR DUCTS)		DUCT RISE/DROP W/90° ELBOWS (ROUND DUCTS)	
DUCT RISE/DROP W/90° ELBOWS (OVAL DUCTS)		DUCT RISE(R)/DROP(D) W/45° ELBOWS (ROUND OR OVAL DUCTS)	

PIPING SYSTEM LABELS			
—BF—	BOILER FEED	—IA(XX)—	INSTRUMENT AIR
—BBD—	BOILER BLOW DOWN	—JWR—	JACKET WATER RETURN
—CA(XX)—	COMPRESSED AIR	—JWS—	JACKET WATER SUPPLY
—CC—	CONDENSATE COOLING COIL	—LP—	LIQUEFIED PETROLEUM GAS
—CHS—	CHILLED WATER SUPPLY	—LOR—	LUBRICATION OIL RETURN
—CHR—	CHILLED WATER RETURN	—LOS—	LUBRICATION OIL SUPPLY
—CPD—	CONDENSATE PUMP DISCHARGE	—LPS—	LOW PRESSURE STEAM
—D—	DRAIN	—LPC—	LOW PRESSURE CONDENSATE
—DOW—	DOMESTIC COLD WATER	—NG—	NATURAL GAS
—FS—	FUEL SUPPLY	—NPCW—	NON-POTABLE COLD WATER
—FR—	FUEL RETURN	—PCWR—	PROCESS COOLING WATER RETURN
—FOP—	FUEL OIL FILL	—PCWS—	PROCESS COOLING WATER SUPPLY
—FOG—	FUEL OIL GAUGE	—PHWR—	PREHEAT WATER RETURN
—FOR—	FUEL OIL RETURN	—PHWS—	PREHEAT WATER SUPPLY
—FOS—	FUEL OIL SUPPLY	—RL—	REFRIGERANT LIQUID
—FOV—	FUEL OIL VENT	—RS—	REFRIGERANT SUCTION
—G—	LOW PRESSURE GAS	—RHG—	REFRIGERANT HOT GAS
—GWR—	GLYCOL WATER RETURN	—RWR—	RECLAIM WATER RETURN
—GWS—	GLYCOL WATER SUPPLY	—RWS—	RECLAIM WATER SUPPLY
—HPC—	HIGH PRESSURE CONDENSATE	—TWR—	TOWER WATER RETURN
—HPS(XX)—	HIGH PRESSURE GAS	—TWS—	TOWER WATER SUPPLY
—HPS(XX)—	HIGH PRESSURE STEAM	—V—	VENT
—HWR—	HEATING HOT WATER RETURN		
—HWS—	HEATING HOT WATER SUPPLY		
(XX) = SYSTEM PRESSURE IN PSIG			
PIPING SPECIALTIES			
	GENERAL PIPELINE STRAINER WITHOUT DRAIN		FILTER/REGULATOR
	GENERAL PIPELINE STRAINER WITH DRAIN		THERMOMETER
	STEAM & CONDENSATE PIPELINE STRAINER		PRESSURE GAUGE (WITH GAUGE VALVE)
	WATER SYSTEM PIPELINE STRAINER		FLOW SENSOR
	SUCTION DIFFUSER		FLOW SWITCH
	DUPLEX STRAINER		AUTOMATIC AIR VENT
	BASKET STRAINER		MANUAL AIR VENT
	FLANGE		THERMOSTATIC AIR VENT
	UNION		TEST PLUG (PRESSURE/TEMP.)
	2" AND SMALLER, CAP OR PLUG		ECCENTRIC REDUCER
	2-1/2" AND LARGER, BLIND FLANGE		DIRECTION OF PITCH (DOWN)
	INVERTED BUCKET TRAP		DIRECTION OF FLOW
	FLOAT AND THERMOSTATIC TRAP		PIPE GUIDE
	THERMOSTATIC TRAP		PIPE SLEEVE
	EXPANSION JOINT		ANCHOR
	PIPE FLEXIBLE CONNECTION		
	BALL JOINT		
PIPING			
	SINGLE		DOUBLE
			ELBOW DOWN
			ELBOW UP
			BOTTOM CONNECTION (45° OR 90°)
			TOP CONNECTION (45° OR 90°)
			45° PIPE RISE(R) / DROP(D)
			TEE (REFER TO SPECIFICATION FOR SIDE, TOP OR BOTTOM TEE)
			EXISTING PIPING TO REMAIN
			EXISTING PIPING TO BE REMOVED
			LINE CONTINUATION BREAK
			ECCENTRIC REDUCER
			CONCENTRIC REDUCER
Drawing List - Mechanical			
M00-01	MECHANICAL SYMBOLS AND ABBREVIATIONS		
M00-02	MECHANICAL CODE COMPLIANCE		
MD02-01	HVAC DEMOLITION PLAN - LEVEL ONE		
MD02-01A	HVAC DEMOLITION PLAN - LEVEL ONE - SEGMENT A		
MD02-01B	HVAC DEMOLITION PLAN - LEVEL ONE - SEGMENT B		
MD02-02	HVAC DEMOLITION PLAN - ROOF		
MD02-02A	HVAC DEMOLITION PLAN - ROOF - SEGMENT A		
MD02-02B	HVAC DEMOLITION PLAN - ROOF - SEGMENT B		
M02-01	HVAC PLAN - LEVEL ONE		
M02-01A	HVAC PLAN - LEVEL ONE - SEGMENT A		
M02-01B	HVAC PLAN - LEVEL ONE - SEGMENT B		
M02-02	HVAC PLAN - ROOF		
M02-02A	HVAC PLAN - ROOF - SEGMENT A		
M02-02B	HVAC PLAN - ROOF - SEGMENT B		
M03-01	PIPING PLAN - LEVEL ONE		
M03-01A	PIPING PLAN - LEVEL ONE - SEGMENT A		
M03-01B	PIPING PLAN - LEVEL ONE - SEGMENT B		



Compliance Certificate

Project Information

Energy Code:	2024 IECC	
Project Title:	Evernorth Elgin Pharmacy	
Location:	Elgin, Illinois	
Climate Zone:	5a	
Project Type:	Alteration	
Project No:	105503	
Project Sub Type:	Substantial Alteration	
All Electric:	false	
Is Renewable:	false	
Has Battery:	false	
Has Charger:	false	
Has Heat Pump:	false	
Construction Site:	Owner/Agent:	Designer/Contractor:

Notes:

Renewable energy

Number of Floors:	1
Area of Three Largest Floors:	0
Proposed Capacity:	0
Required Capacity:	0
Proposed Off-site Energy:	0
Required Off-site Energy:	0
Exception:	None

Renewables Pass

Building Area

Description	Floor Area
1-Health Care-Clinic (Health Care Clinic) : Nonresidential	40873



Project Information

Energy Code:	2024 IECC	
Project Title:	Evernorth Elgin Pharmacy	
Location:	Elgin, Illinois	
Climate Zone:	5a	
Project Type:	Alteration	
Construction Site:	Owner/Agent:	Designer/Contractor:

Mechanical Systems List

Quantity	Component	Description
HVAC Systems		
5	Split Systems (Single Zone):	Cooling: 1 each - Split System (DPF1-4 - Elec-5), Capacity = 22 kBtu/h, Air-Cooled Condenser, No Economizer, Economizer exception: None Proposed Efficiency = 0.00 , Required Efficiency = 0.00 Proposed Part Load Efficiency = 21.00 SEER2, Required Part Load Efficiency = 13.40 SEER2 Fan System: ACU-1-5 Single zone (DFFElec - Compliance (Motor nameplate HP and fan efficiency method) : Passes Fans: IU Supply, Constant Volume, 605 CFM, 0.0 motor nameplate hp, 0.00 fan energy index , fan exception: Single fan < 1 HP or < 0.89 kW
4	GUH-1-4 (Single Zone):	Heating: 1 each - Duct Furnace (Heating Equip), Gas, Capacity = 83 kBtu/h Proposed Efficiency = 82.00% Et, Required Efficiency: 80.00 % Et Fan System: Gas Heater Fans Warehouse single zone - Compliance (Motor nameplate HP and fan efficiency method) : Passes Fans: Supply Supply, Constant Volume, 1490 CFM, 0.2 motor nameplate hp, 0.00 fan energy index , fan exception: Single fan < 1 HP or < 0.89 kW
1	RTU-1 (Multiple-Zone):	Heating: 1 each - Central Furnace (Heating Equip), Gas, Capacity = 73 kBtu/h Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00 % Et or 80% AFUE Cooling: 1 each - Single Package DX Unit (Cooling Equip), Capacity = 74 kBtu/h, Air-Cooled Condenser , Air Economizer Proposed Efficiency = 0.00 , Required Efficiency = 0.00 Proposed Part Load Efficiency = 14.80 IEER, Required Part Load Efficiency = 14.60 IEER Fan System: RTU-1-1 - Compliance (Brake HP and fan efficiency method) : Passes Fans: RTU1.1 Supply, Multi-Zone VAV, 2100 CFM, 2.0 motor nameplate hp, 1.3 design brake hp (1.3 max. BHP), 1.23 fan energy index Pressure Drop Credits: Particulate filtration credit: MERV 13 through 15, 0.4575 credit Fully ducted return and/or exhaust air systems, 0.2542 credit
1	RTU-2 (Multiple-Zone):	Heating: 1 each - Central Furnace (Heating Equip), Gas, Capacity = 170 kBtu/h Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00 % Et or 80% AFUE Cooling: 1 each - Single Package DX Unit (Cooling Equip), Capacity = 117 kBtu/h, Air-Cooled Condenser , Air Economizer Proposed Efficiency = 0.00 , Required Efficiency = 0.00 Proposed Part Load Efficiency = 14.90 IEER, Required Part Load Efficiency = 14.60 IEER Fan System: RTU-2-1 - Compliance (Brake HP and fan efficiency method) : Passes Fans: 2.1 Supply, Multi-Zone VAV, 3500 CFM, 3.0 motor nameplate hp, 2.6 design brake hp (2.6 max. BHP), 1.07 fan energy index Pressure Drop Credits: Particulate filtration credit: MERV 13 through 15, 0.7628 credit Fully ducted return and/or exhaust air systems, 0.4236 credit

Quantity	Component	Description
7	RTU-3,4,5,6,7,8,9 (Single Zone):	Heating: 1 each - Central Furnace (Heating Equip), Gas, Capacity = 158 kBtu/h Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00 % Et or 80% AFUE Cooling: 1 each - Single Package DX Unit (Cooling Equip), Capacity = 166 kBtu/h, Air-Cooled Condenser , Air Economizer Proposed Efficiency = 0.00 , Required Efficiency = 0.00 Proposed Part Load Efficiency = 14.99 IEER, Required Part Load Efficiency = 14.00 IEER Fan System: RTU-3-1 - Compliance (Brake HP and fan efficiency method) : Passes Fans: 3.1 Supply, Single-Zone VAV, 2800 CFM, 2.0 motor nameplate hp, 1.1 design brake hp (1.1 max. BHP), 1.45 fan energy index Pressure Drop Credits: Particulate filtration credit: MERV 13 through 15, 0.6100 credit
2	RTU-10,11 (Single Zone):	Heating: 1 each - Central Furnace (Heating Equip), Gas, Capacity = 170 kBtu/h Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00 % Et or 80% AFUE Cooling: 1 each - Single Package DX Unit (Cooling Equip), Capacity = 117 kBtu/h, Air-Cooled Condenser , Air Economizer Proposed Efficiency = 0.00 , Required Efficiency = 0.00 Proposed Part Load Efficiency = 14.90 IEER, Required Part Load Efficiency = 14.60 IEER Fan System: RTU-10.1 - Compliance (Brake HP and fan efficiency method) : Passes Fans: 10.1 Supply, Single-Zone VAV, 3200 CFM, 3.0 motor nameplate hp, 2.2 design brake hp (2.2 max. BHP), 1.12 fan energy index Pressure Drop Credits: Particulate filtration credit: MERV 13 through 15, 0.6972 credit

Mechanical Compliance Statement

Compliance Statement: The proposed mechanical design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed mechanical systems have been designed to meet the 2024 IECC requirements in COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Brock Jensen - Project Engineer			04/24/2026
Name - Title	Signature	Date	



CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270



Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

--



Date of issue: 04/24/2026
Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.


EVERNORTH -
ELGIN PHARMACY
300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB	26136.0000
DATE	04/24/2026

--

MECHANICAL
CODE
COMPLIANCE

4/24/2026 2:44:31 PM MD02-01 HVAC DEMOLITION PLAN - LEVEL ONE

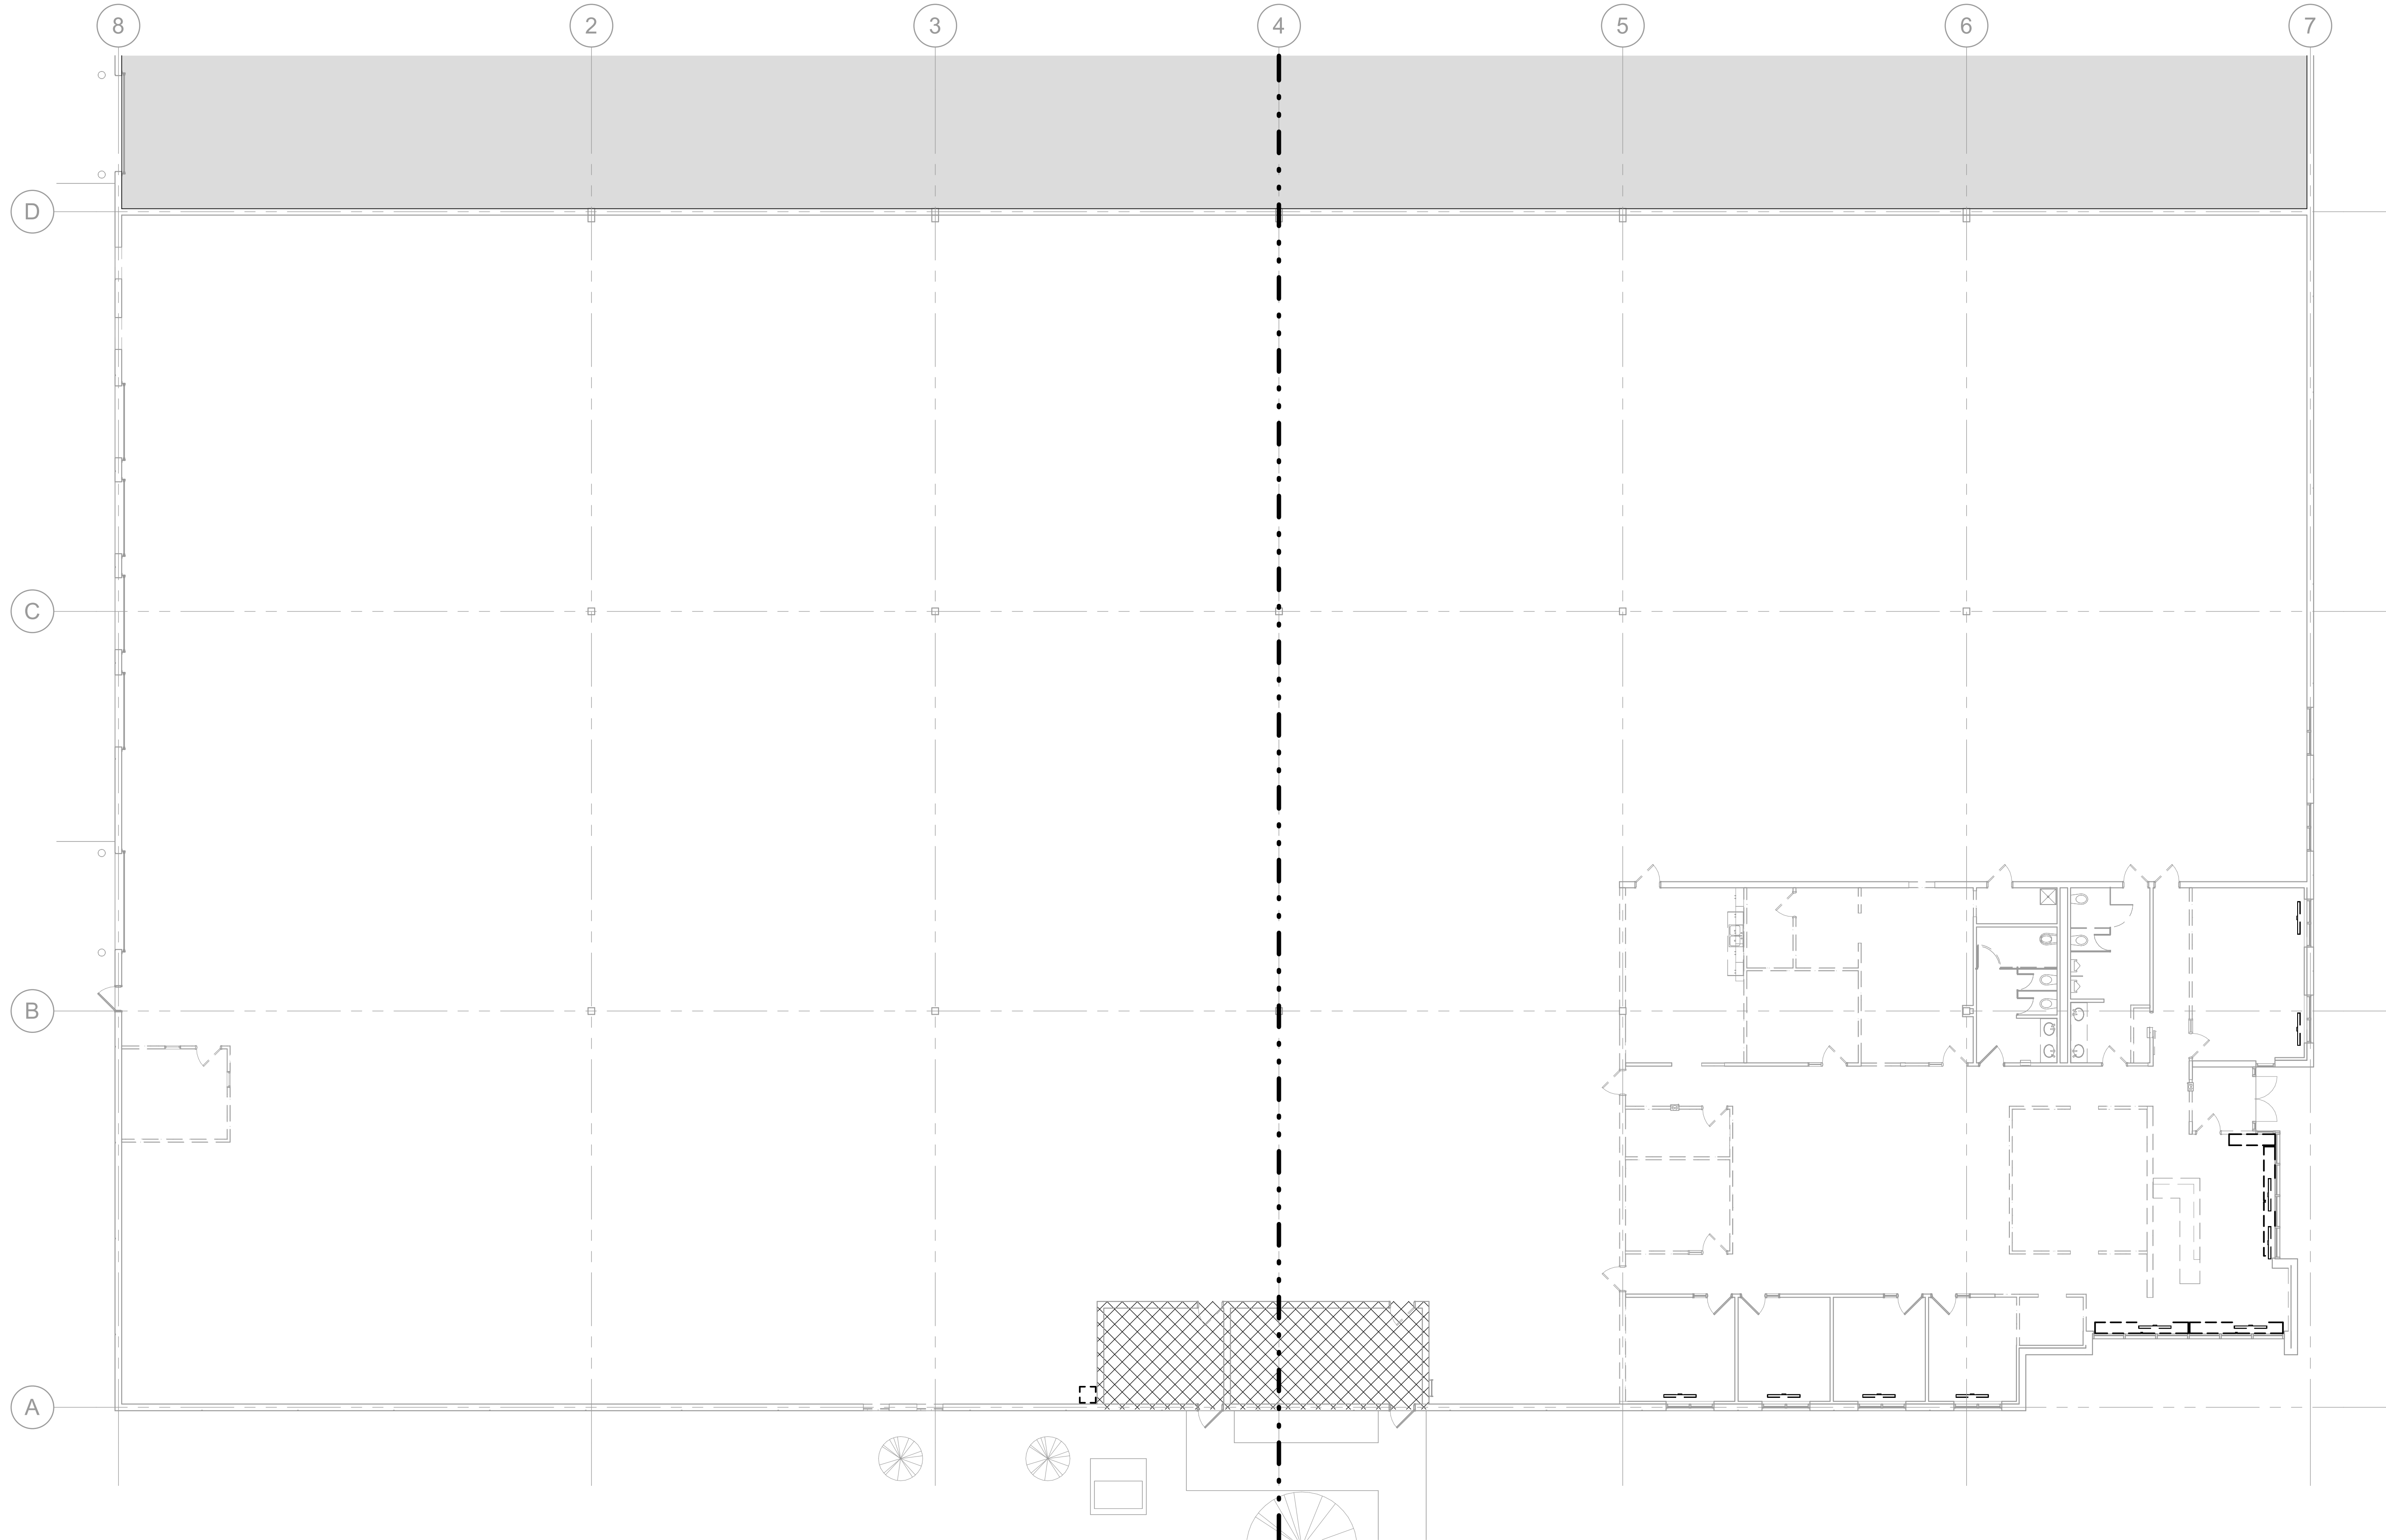

1 HVAC DEMOLITION PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

GENERAL NOTES

- EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
- COORDINATE ALL DEMOLITION WITH OWNER PRIOR TO BEGINNING WORK. SHUT DOWNS WILL BE NECESSARY. IDENTIFY COMPLEXITY OF ITEMS TO BE REMOVED. ROUTING OF NEW DUCTWORK AND PIPING, AND ANY NECESSARY REROUTING OF EXISTING DUCTWORK AND PIPING REQUIRED. IDENTIFY DEMOLISHED ITEMS TO BE SALVAGED.
- SEAL ALL ABANDONED OPENINGS TO MATCH EXISTING RATINGS AND FINISHES. COORDINATE WITH ARCHITECT AND GENERAL CONTRACTOR.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of Issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

- NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
- DEMOLISH EXISTING FLOOR MOUNTED HEATERS.
- DEMOLISH ALL EXISTING DUCTWORK AND DIFFUSERS.
- DEMOLISH EXISTING RADIANT HEATER.


**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

HVAC
DEMOLITION PLAN
- LEVEL ONE

MD02-01

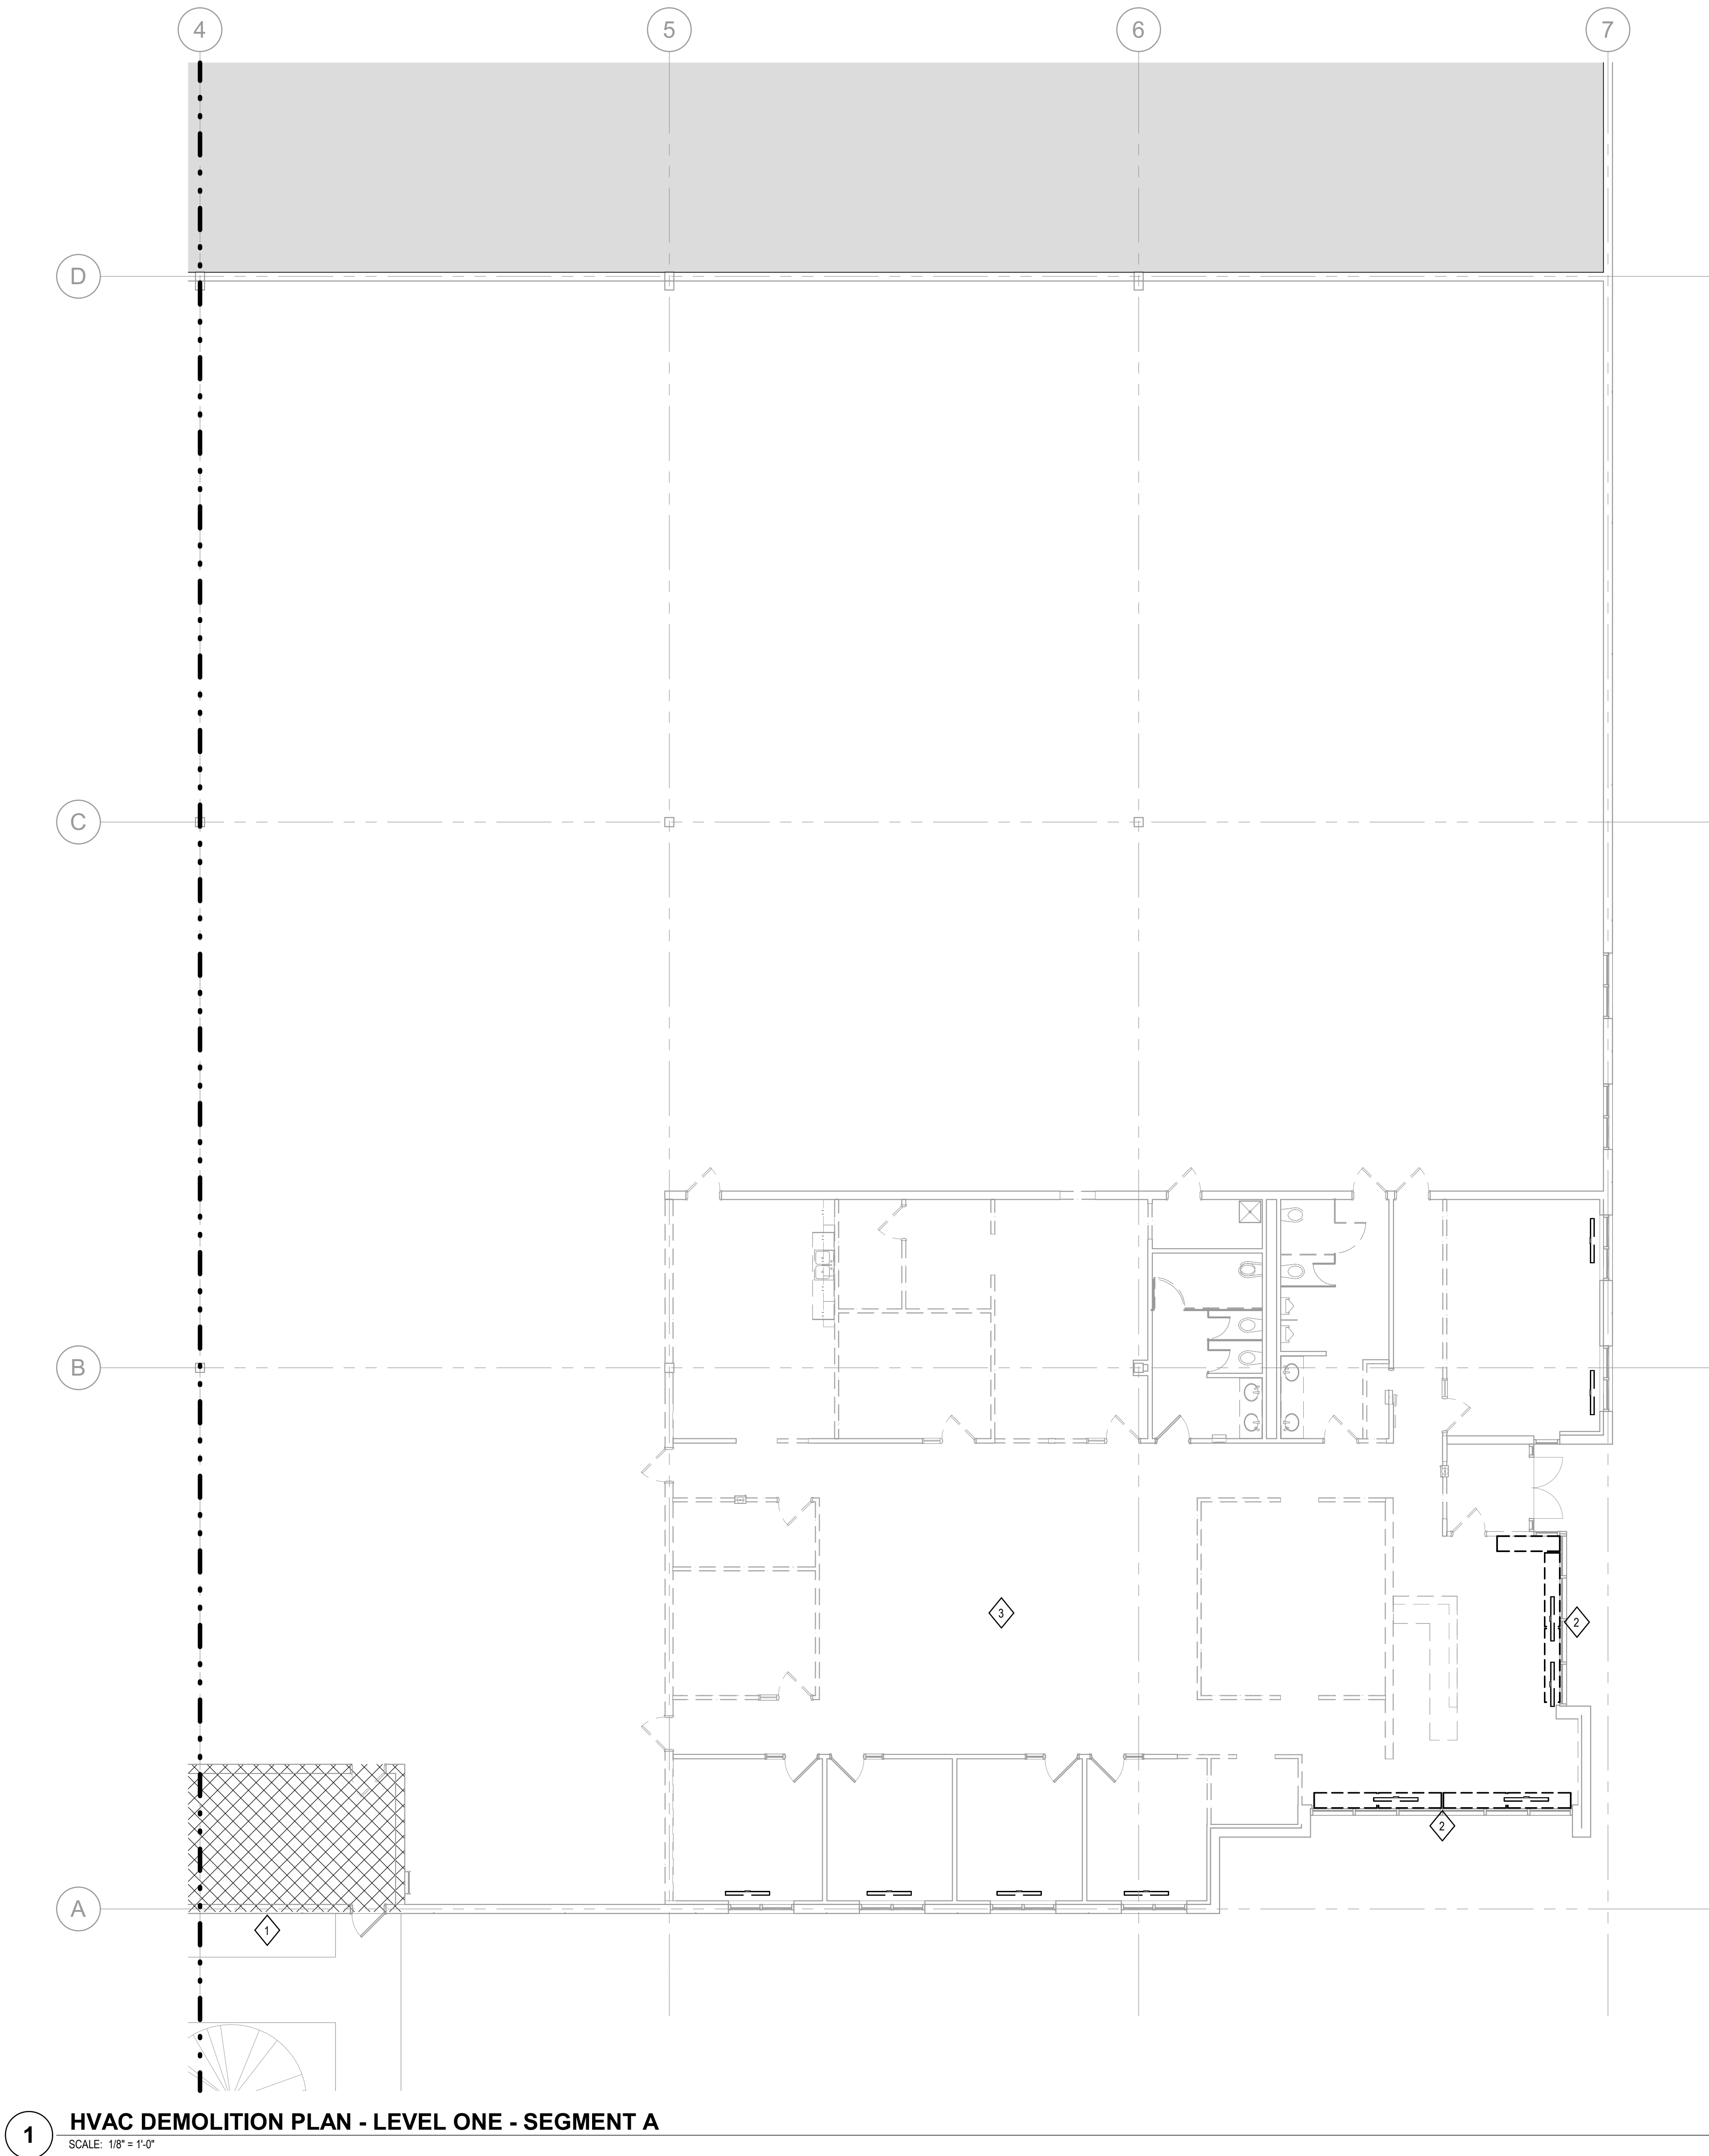

1 HVAC DEMOLITION PLAN - LEVEL ONE - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
- COORDINATE ALL DEMOLITION WITH OWNER PRIOR TO BEGINNING WORK. SHUT DOWNS WILL BE NECESSARY. IDENTIFY COMPLEXITY OF ITEMS TO BE REMOVED. ROUTING OF NEW DUCTWORK AND PIPING, AND ANY NECESSARY REROUTING OF EXISTING DUCTWORK AND PIPING REQUIRED. IDENTIFY DEMOLISHED ITEMS TO BE SALVAGED.
- SEAL ALL ABANDONED OPENINGS TO MATCH EXISTING RATINGS AND FINISHES. COORDINATE WITH ARCHITECT AND GENERAL CONTRACTOR.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

- NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
- DEMOLISH EXISTING FLOOR MOUNTED HEATERS.
- DEMOLISH ALL EXISTING DUCTWORK AND DIFFUSERS.
- DEMOLISH EXISTING RADIANT HEATER.

**EVERNORTH -
ELGIN PHARMACY**


300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

HVAC
DEMOLITION PLAN
- LEVEL ONE -
SEGMENT A

MD02-01A

4/24/2026 2:44:32 PM MD02-01HVAC DEMOLITION PLAN - LEVEL ONE - SEGMENT B

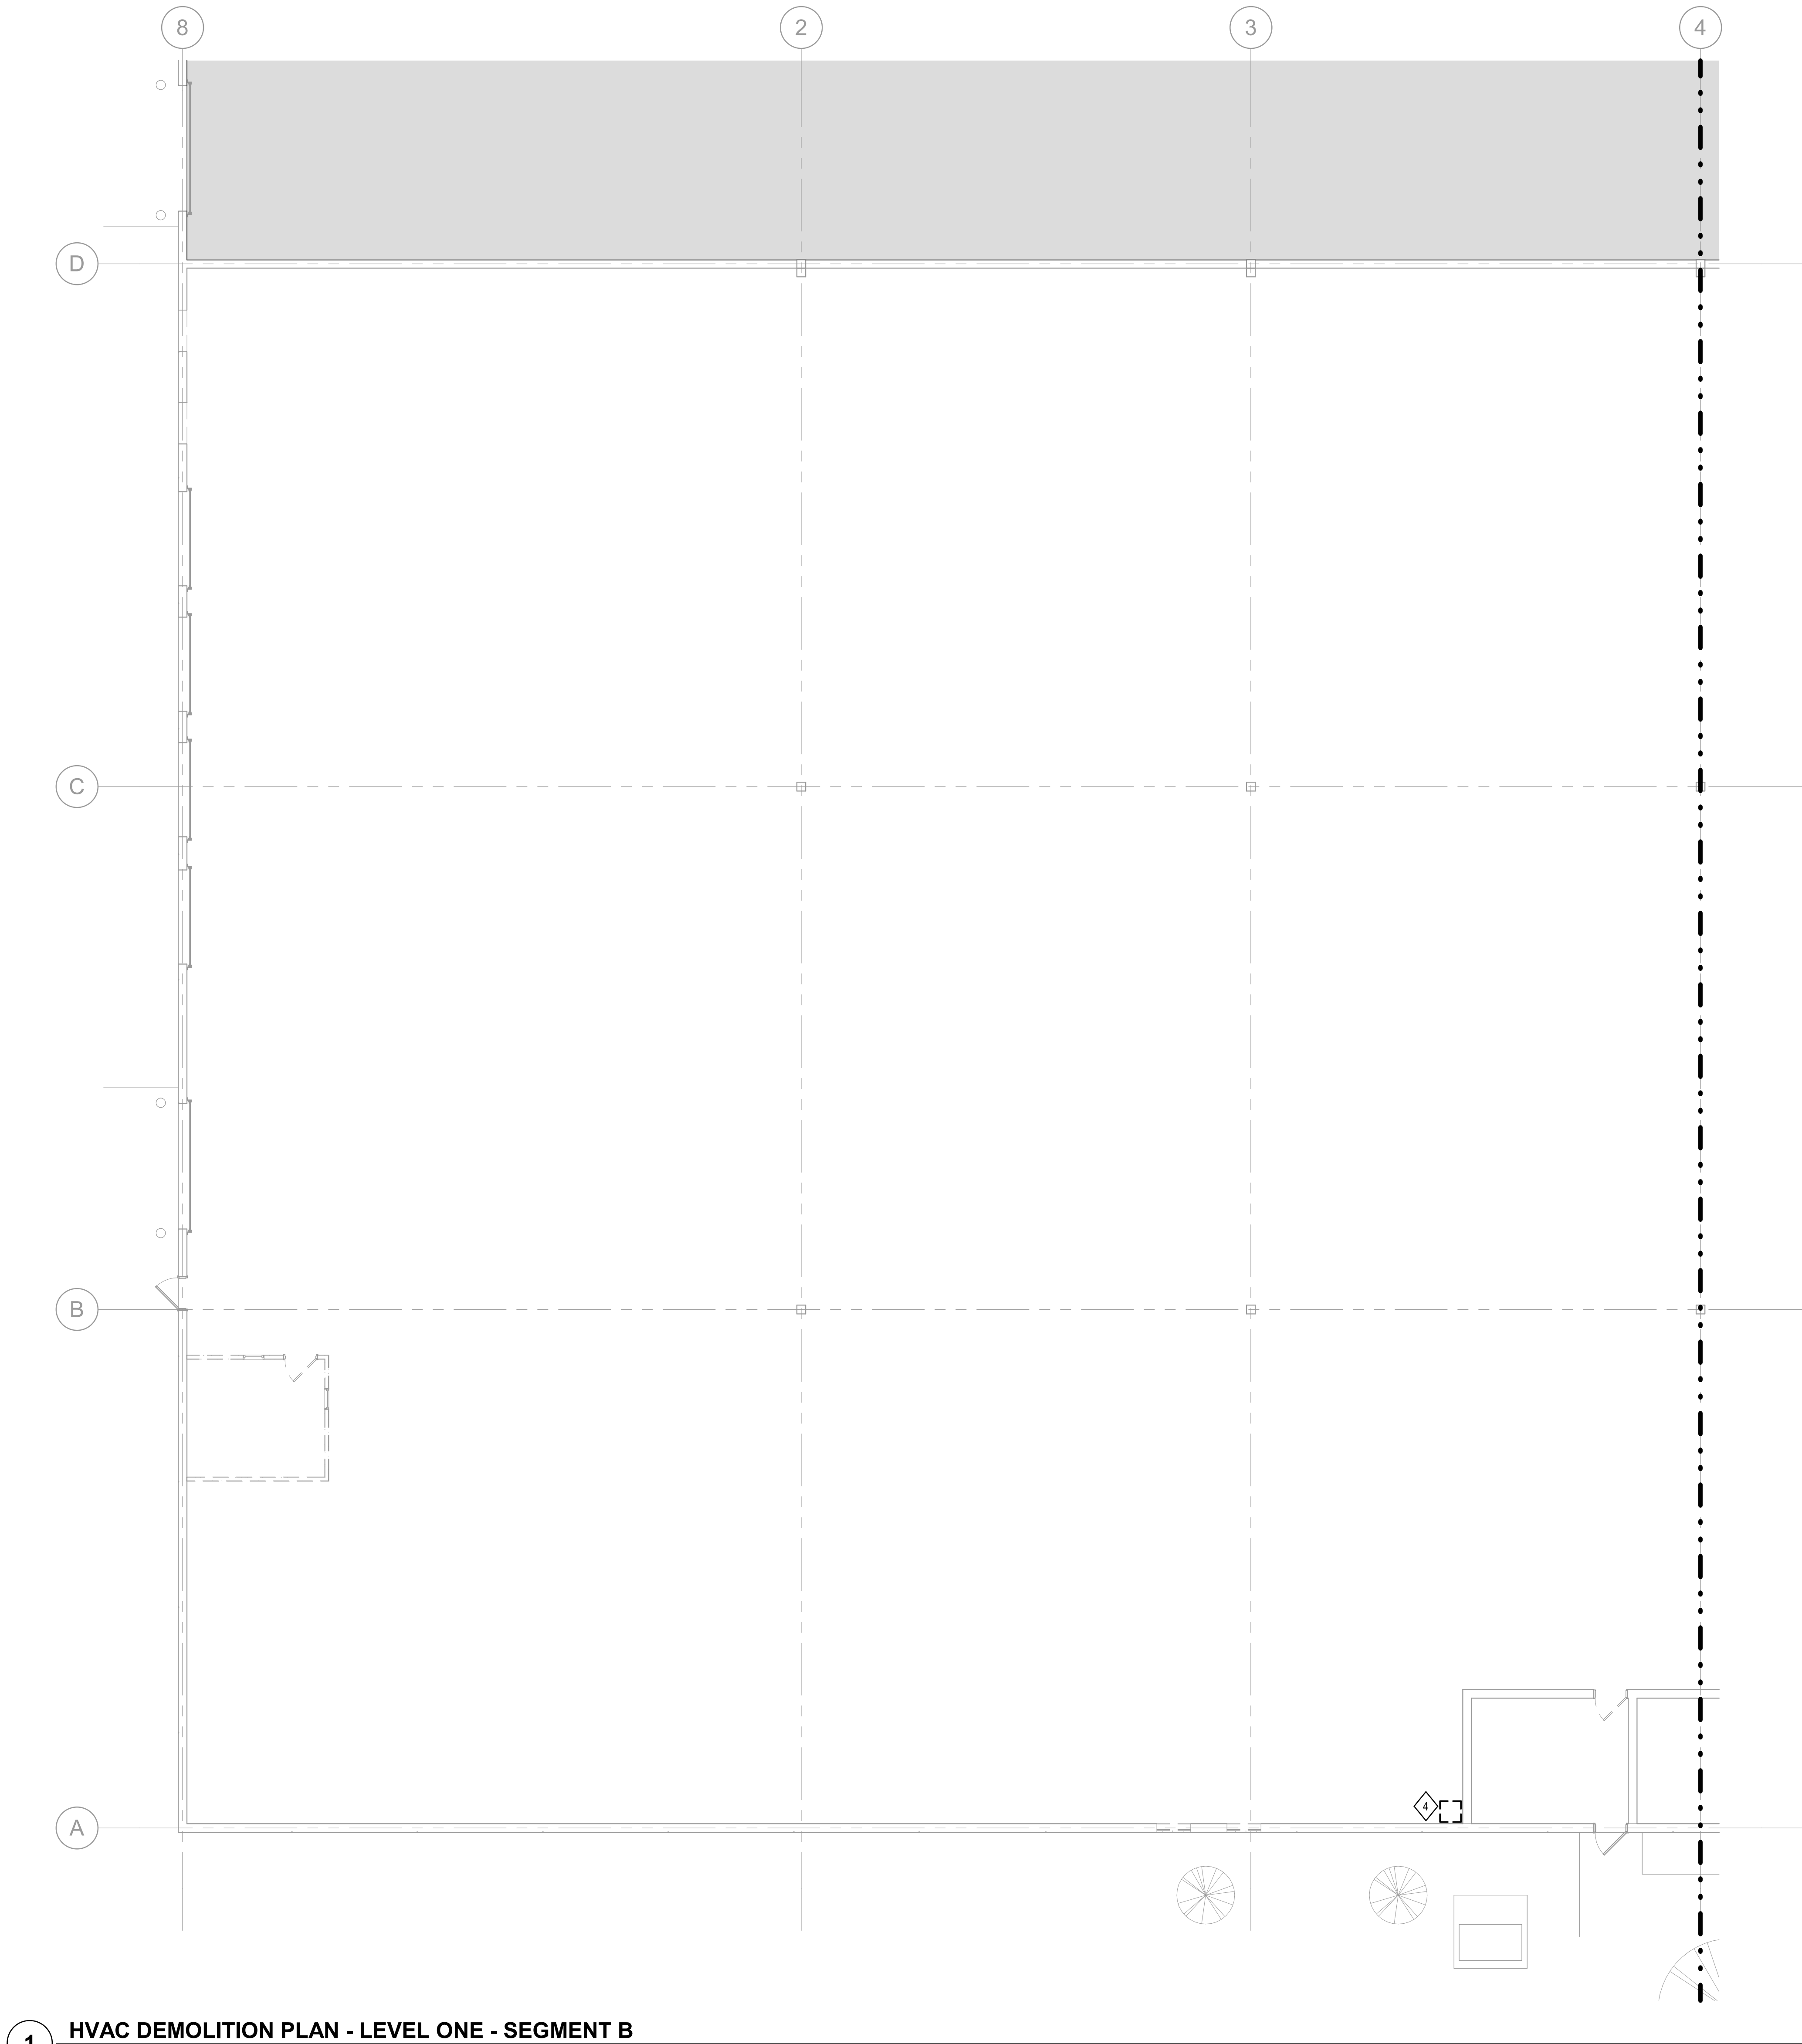

1 HVAC DEMOLITION PLAN - LEVEL ONE - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
- COORDINATE ALL DEMOLITION WITH OWNER PRIOR TO BEGINNING WORK. SHUT DOWNS WILL BE NECESSARY. IDENTIFY COMPLEXITY OF ITEMS TO BE REMOVED. ROUTING OF NEW DUCTWORK AND PIPING, AND ANY NECESSARY REROUTING OF EXISTING DUCTWORK AND PIPING REQUIRED. IDENTIFY DEMOLISHED ITEMS TO BE SALVAGED.
- SEAL ALL ABANDONED OPENINGS TO MATCH EXISTING RATINGS AND FINISHES. COORDINATE WITH ARCHITECT AND GENERAL CONTRACTOR.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

- NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
- DEMOLISH EXISTING FLOOR MOUNTED HEATERS.
- DEMOLISH ALL EXISTING DUCTWORK AND DIFFUSERS.
- DEMOLISH EXISTING RADIANT HEATER.

**EVERNORTH -
ELGIN PHARMACY**


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

HVAC
DEMOLITION PLAN
- LEVEL ONE -
SEGMENT B

MD02-01B

4/24/2026 2:44:33 PM MD02-02 HVAC DEMOLITION PLAN - ROOF

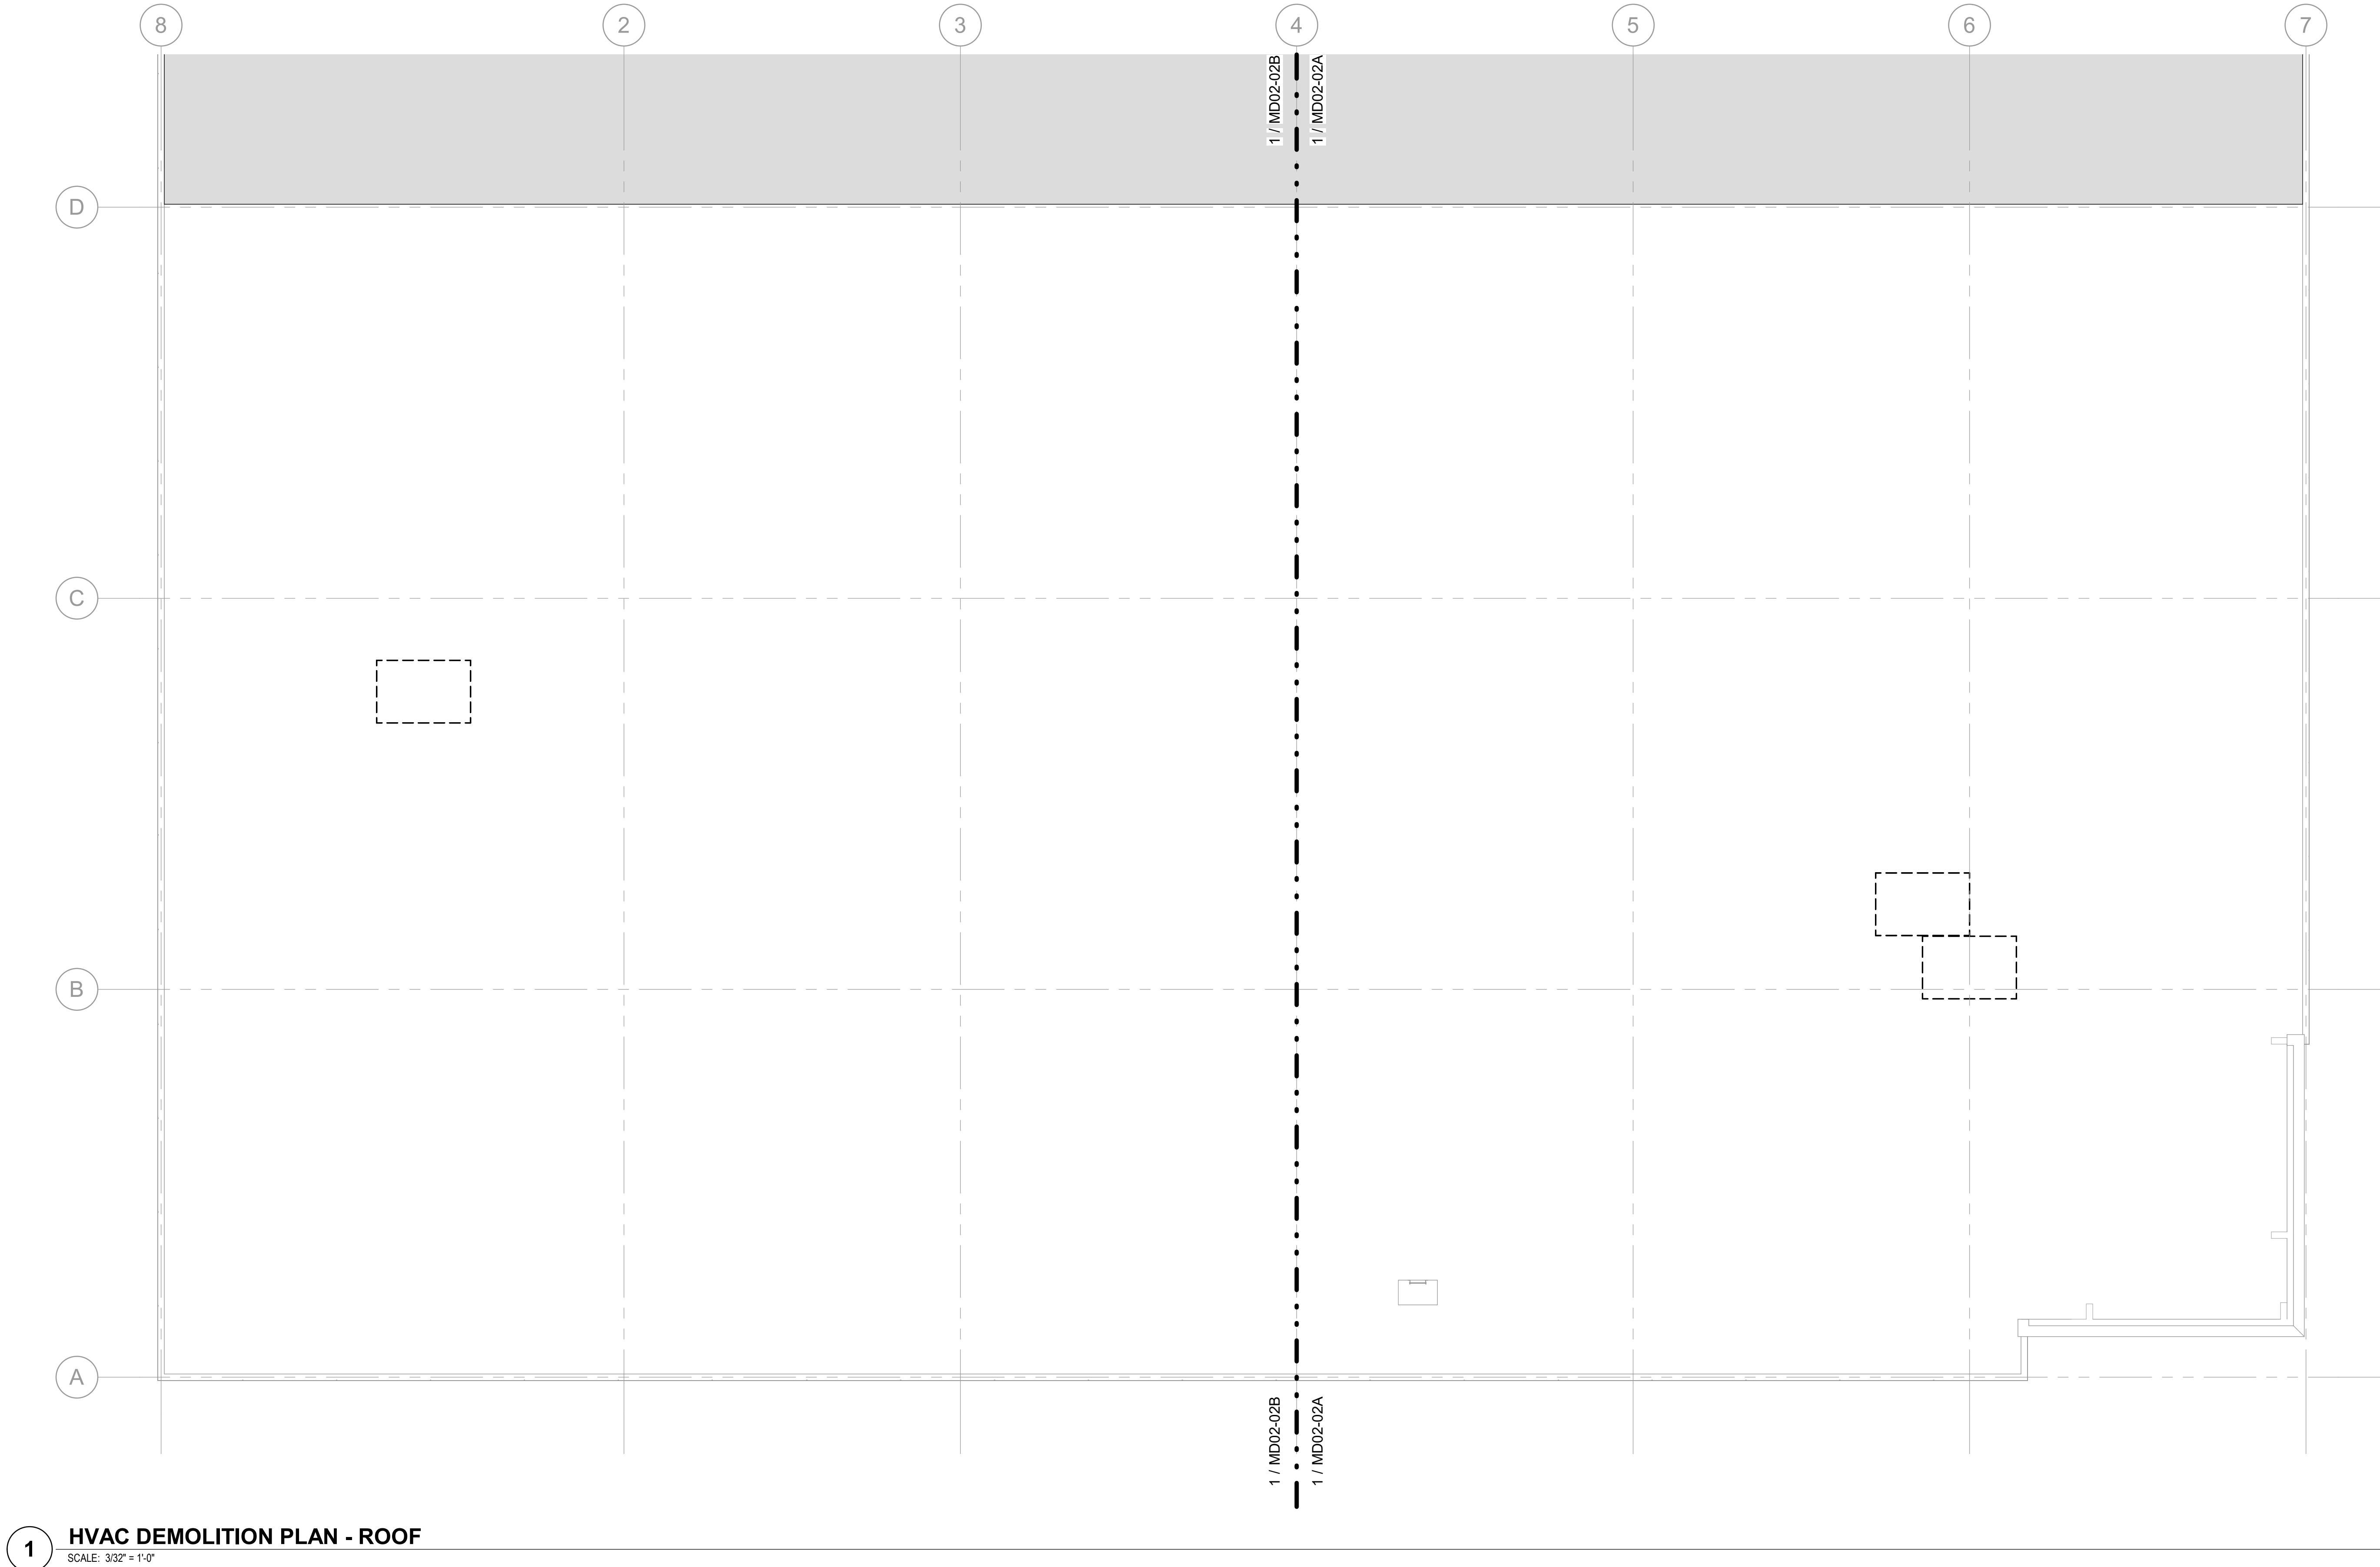

GENERAL NOTES

- EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
- COORDINATE ALL DEMOLITION WITH OWNER PRIOR TO BEGINNING WORK. SHUT DOWNS WILL BE NECESSARY. IDENTIFY COMPLEXITY OF ITEMS TO BE REMOVED. ROUTING OF NEW DUCTWORK AND PIPING, AND ANY NECESSARY REROUTING OF EXISTING DUCTWORK AND PIPING REQUIRED. IDENTIFY DEMOLISHED ITEMS TO BE SALVAGED.
- SEAL ALL ABANDONED OPENINGS TO MATCH EXISTING RATINGS AND FINISHES. COORDINATE WITH ARCHITECT AND GENERAL CONTRACTOR.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of Issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


- DEMOLISH EXISTING CONNECTING DUCTWORK AND EQUIPMENT.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

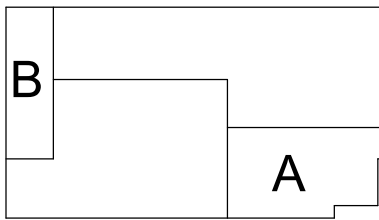

HVAC
DEMOLITION PLAN
- ROOF

MD02-02

4/24/2026 2:44:34 PM MD02-02HVAC DEMOLITION PLAN - ROOF - SEGMENT A

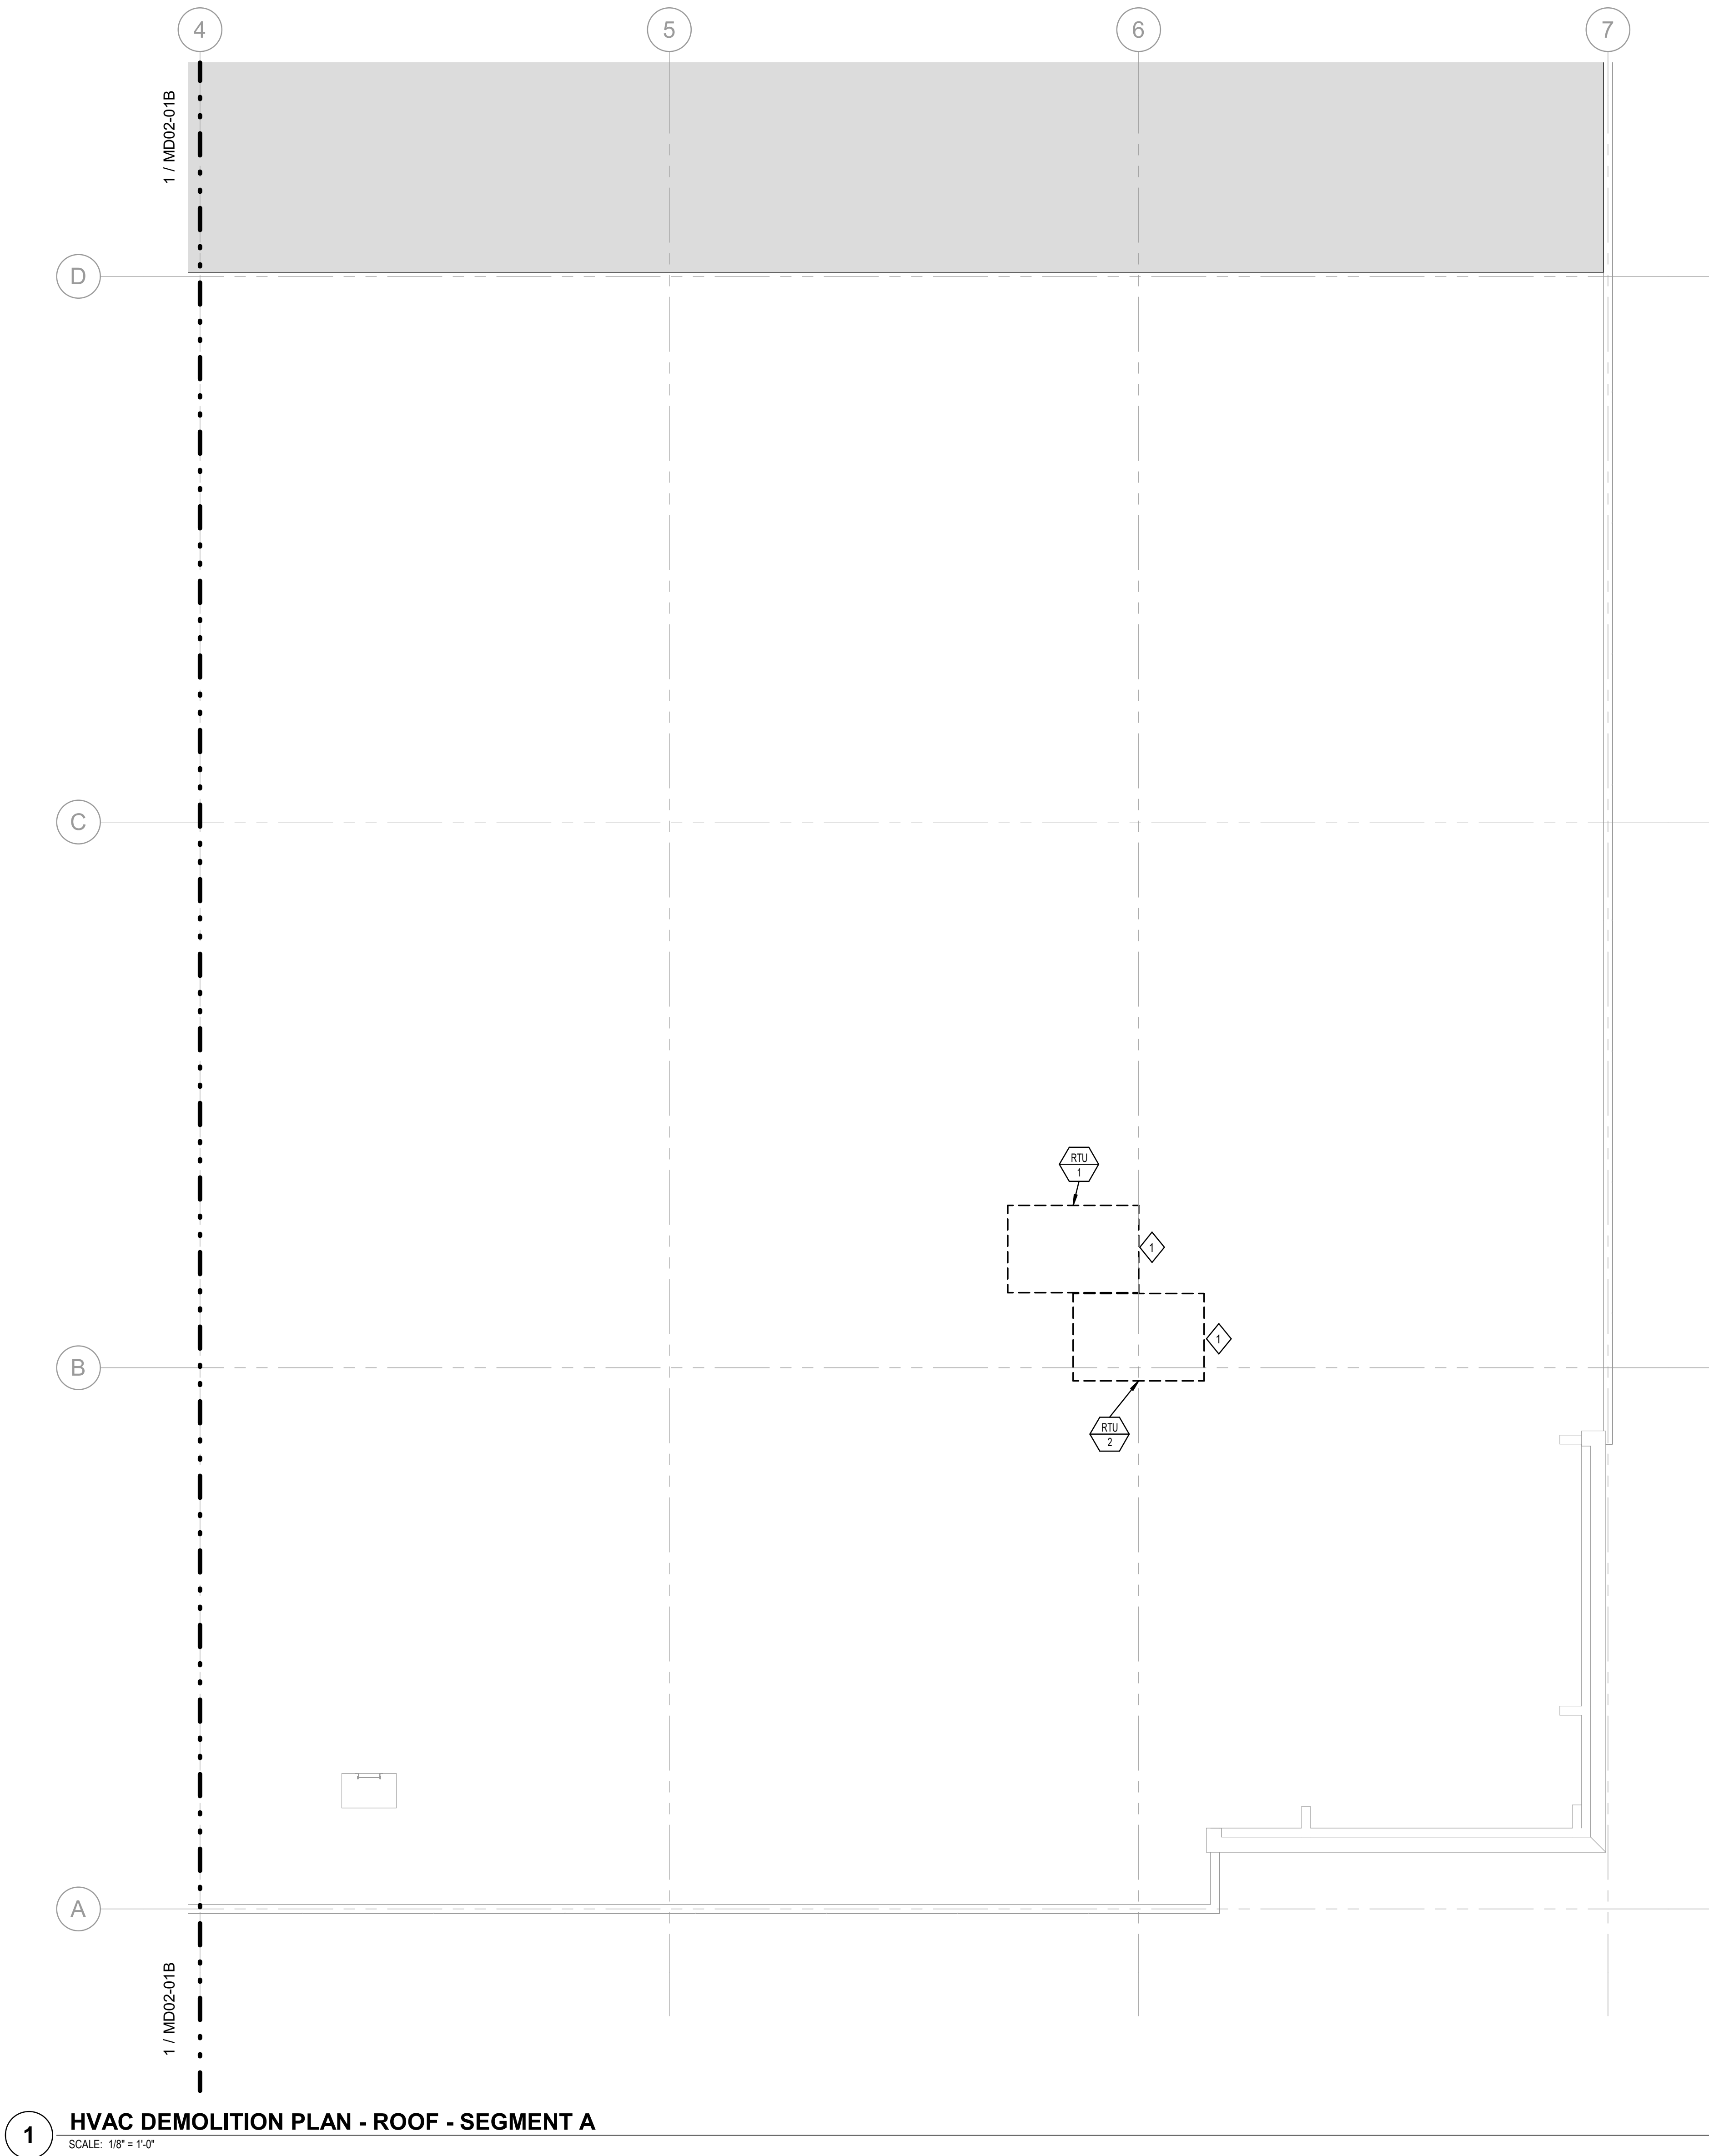

1 HVAC DEMOLITION PLAN - ROOF - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
- COORDINATE ALL DEMOLITION WITH OWNER PRIOR TO BEGINNING WORK. SHUT DOWNS WILL BE NECESSARY. IDENTIFY COMPLEXITY OF ITEMS TO BE REMOVED. ROUTING OF NEW DUCTWORK AND PIPING, AND ANY NECESSARY REROUTING OF EXISTING DUCTWORK AND PIPING REQUIRED. IDENTIFY DEMOLISHED ITEMS TO BE SALVAGED.
- SEAL ALL ABANDONED OPENINGS TO MATCH EXISTING RATINGS AND FINISHES. COORDINATE WITH ARCHITECT AND GENERAL CONTRACTOR.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


- DEMOLISH EXISTING CONNECTING DUCTWORK AND EQUIPMENT.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

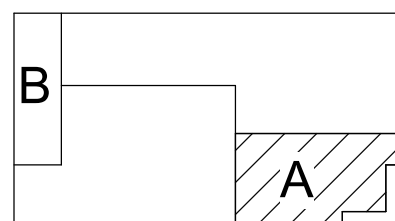

HVAC
DEMOLITION PLAN
- ROOF -
SEGMENT A

MD02-02A

4/24/2026 2:44:34 PM MD02-02HVAC DEMOLITION PLAN - ROOF - SEGMENT B

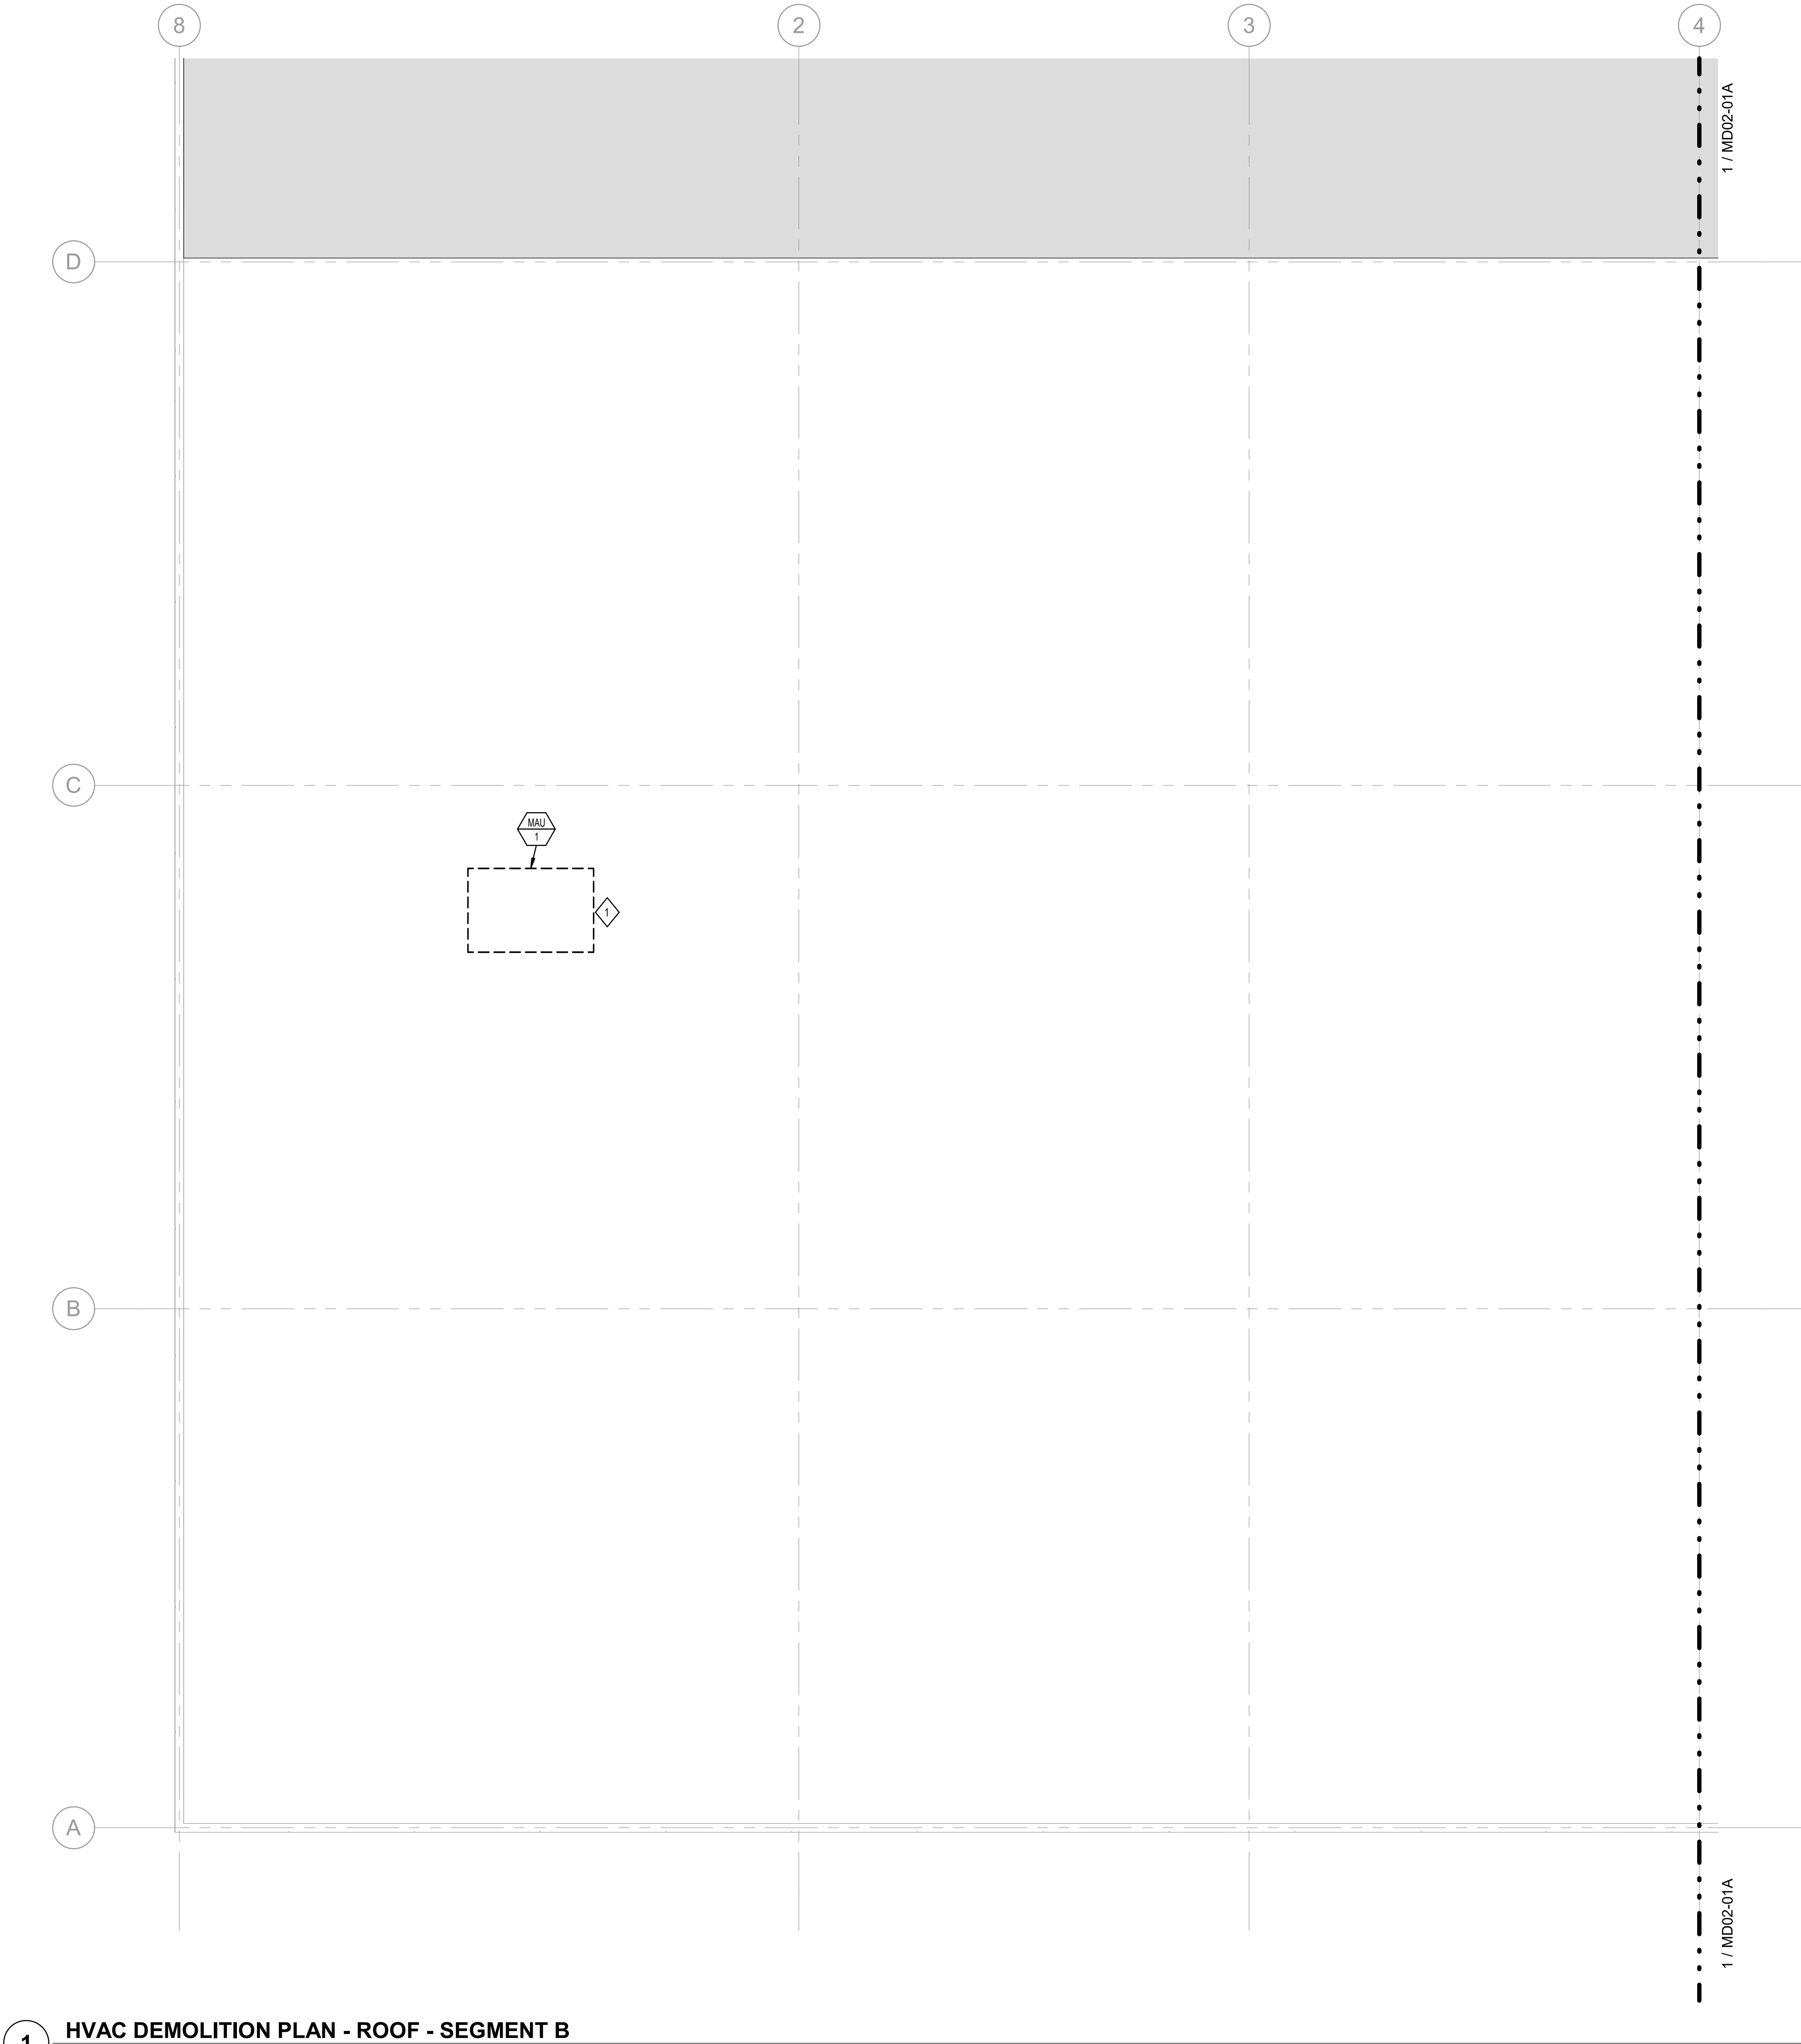

1 HVAC DEMOLITION PLAN - ROOF - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
- COORDINATE ALL DEMOLITION WITH OWNER PRIOR TO BEGINNING WORK. SHUT DOWNS WILL BE NECESSARY. IDENTIFY COMPLEXITY OF ITEMS TO BE REMOVED, ROUTING OF NEW DUCTWORK AND PIPING, AND ANY NECESSARY REROUTING OF EXISTING DUCTWORK AND PIPING REQUIRED. IDENTIFY DEMOLISHED ITEMS TO BE SALVAGED.
- SEAL ALL ABANDONED OPENINGS TO MATCH EXISTING RATINGS AND FINISHES. COORDINATE WITH ARCHITECT AND GENERAL CONTRACTOR.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

- DEMOLISH EXISTING CONNECTING DUCTWORK AND EQUIPMENT.


**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000

DATE 04/24/2026


KEYPLAN

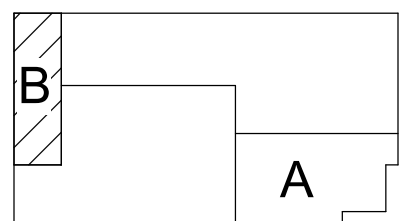

**HVAC
DEMOLITION PLAN
- ROOF -
SEGMENT B**

MD02-02B

4/24/2026 2:44:38 PM M02-01 HVAC PLAN - LEVEL ONE

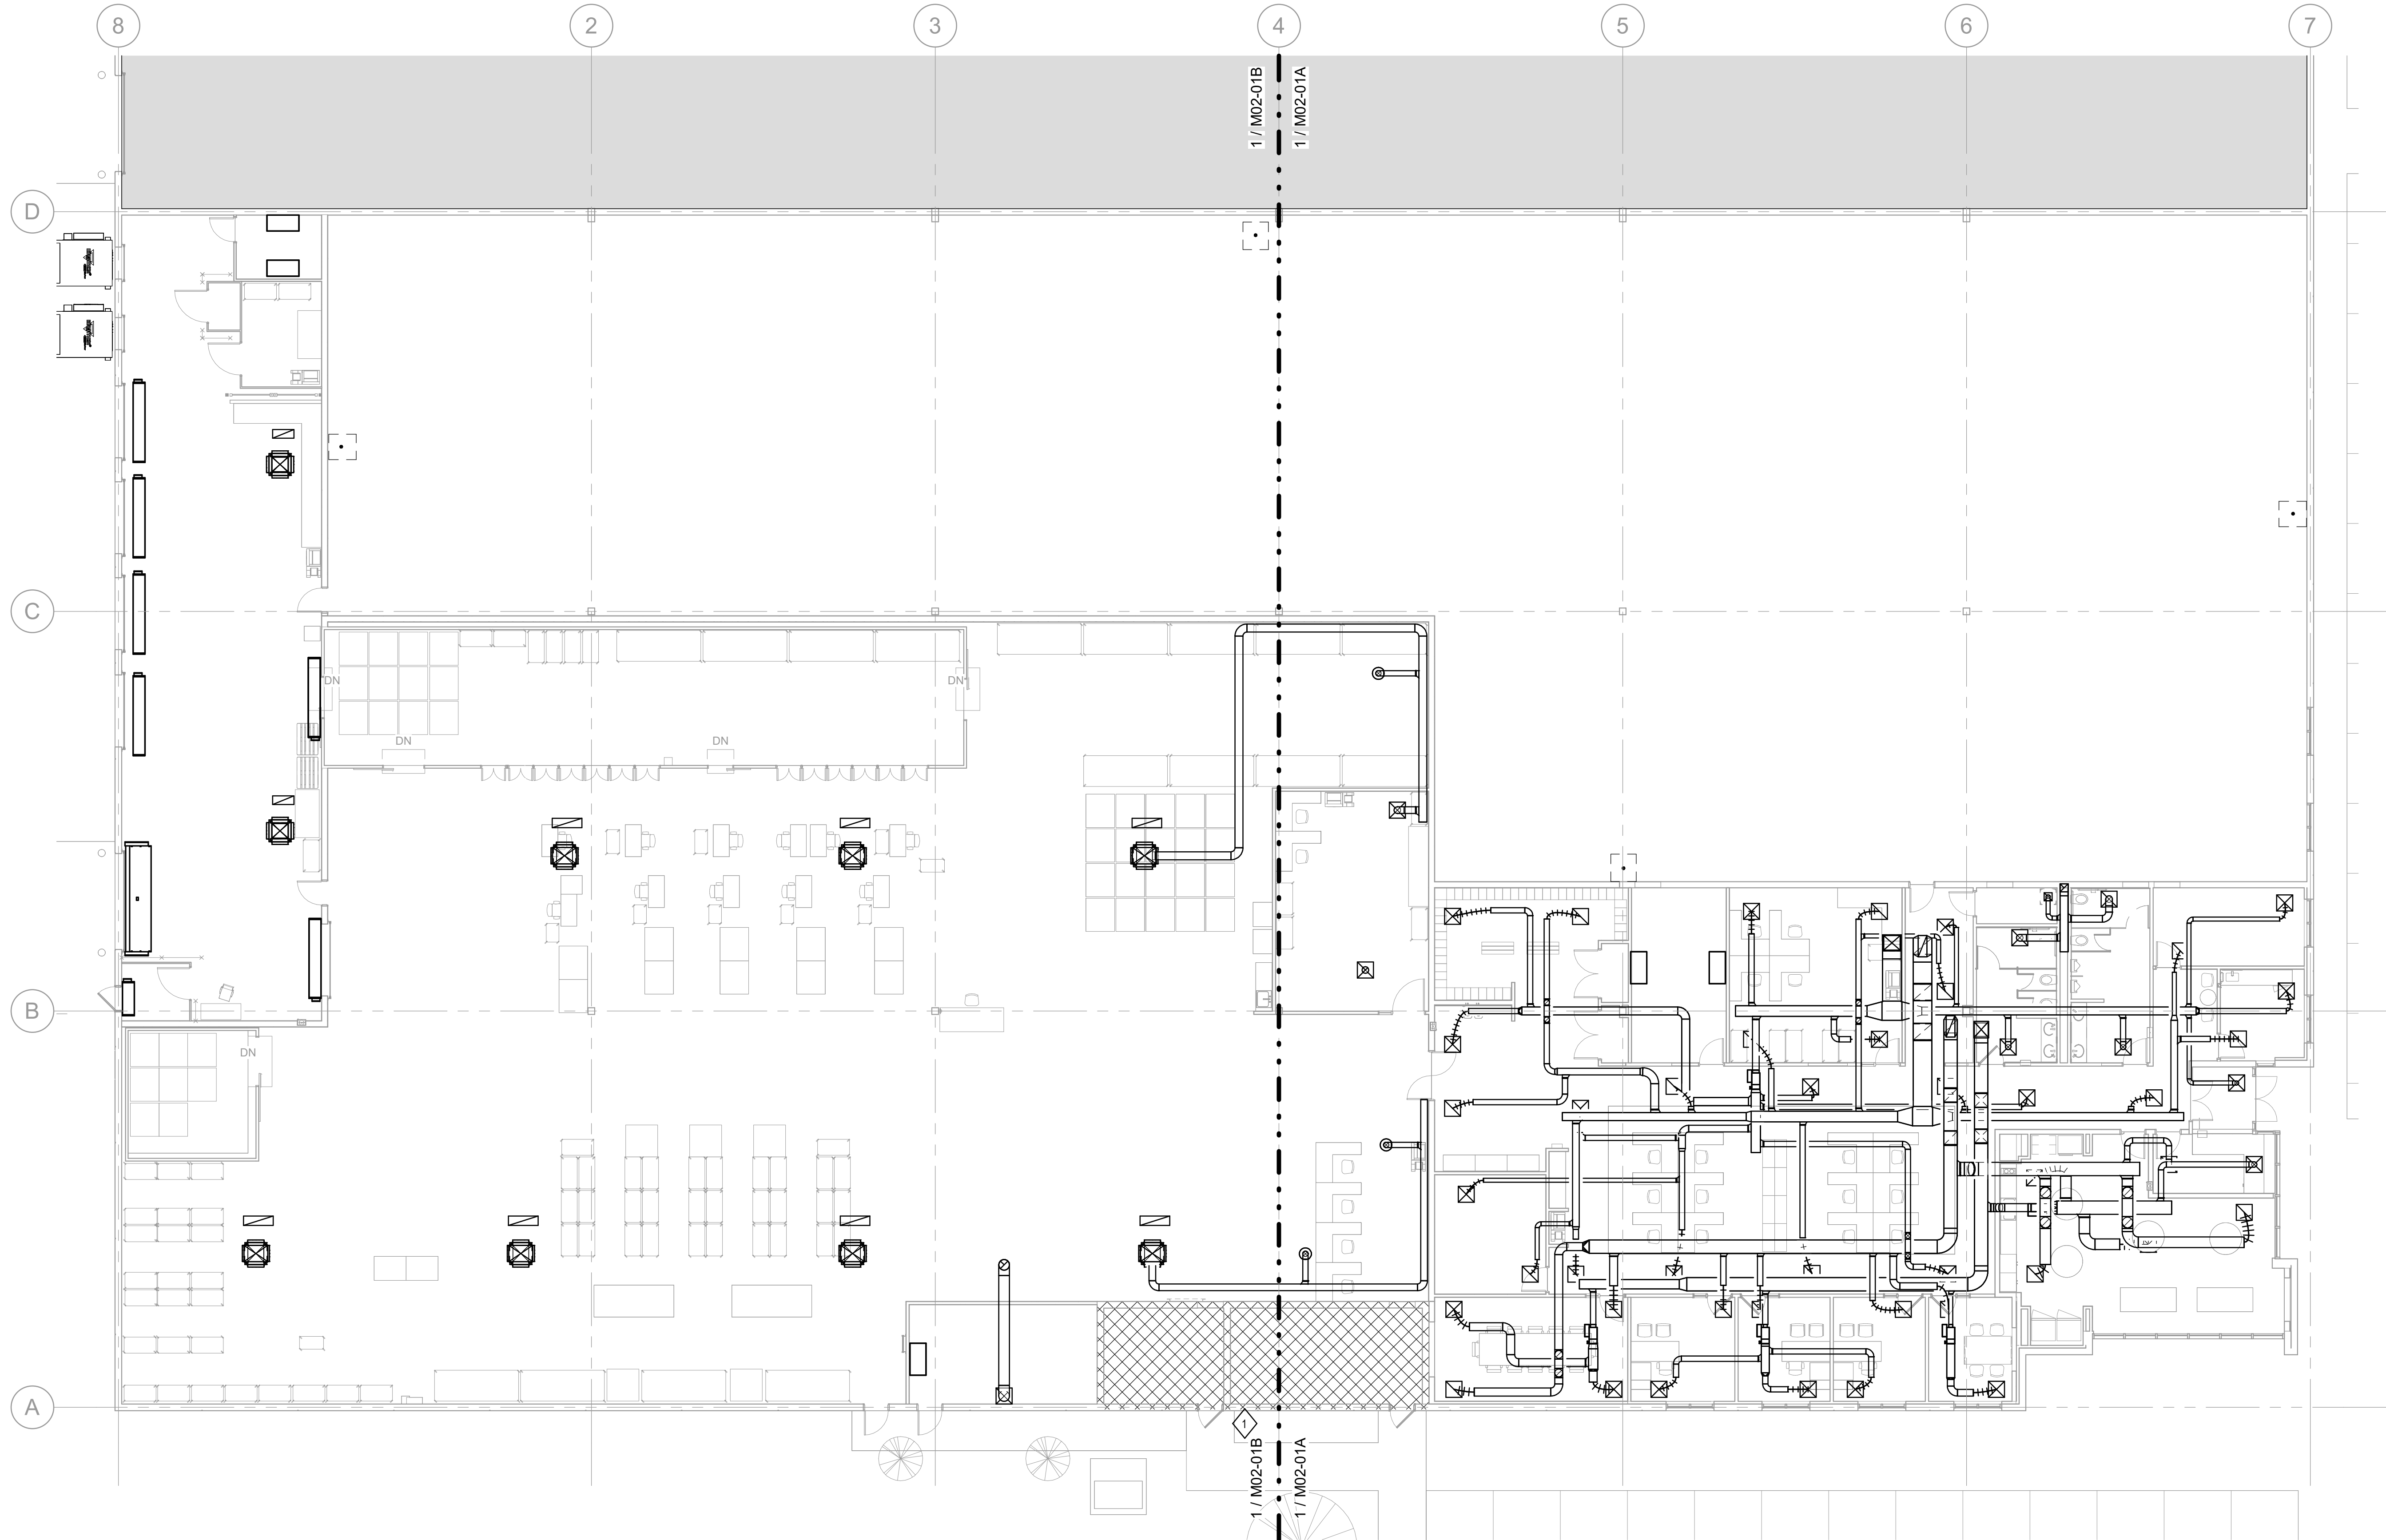

1 HVAC PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

GENERAL NOTES

- CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
- CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
- CONTRACTOR SHALL COORDINATE THE LOCATION OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL THE OTHER APPLICABLE TRADES PRIOR INSTALLATION.
- MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK, AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL EXPOSED STEEL INCLUDING DUCTWORK, SUPPORTS AND ACCESSORIES SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINT COLOR.
- NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATE WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
- AIR VALVE AND FANCOIL UNIT CONTROLLERS SHALL BE MOUNTED ON SAME SIDE AS HEATING AND/OR COOLING COIL PIPING. COIL PIPING TO RUN ABOVE ACTUATOR AND CONTROLLERS TO ALLOW ACCESS.
- COORDINATES ACCESS TO ALL MECHANICAL EQUIPMENT, DAMPERS, ETC. WITH REFLECTED CEILING PLAN.
- PROVIDE BALANCING DAMPER FOR EACH DIFFUSER, REGISTER, GRILLE, AND SNORKEL. BALANCING DAMPER IS NOT REQUIRED IF A SINGLE DIFFUSER, REGISTER, GRILLE, OR SNORKEL IS SERVED BY AN AIR VALVE. LOCATE BALANCING DAMPER AS CLOSE TO BRANCH TAKEOFF AS POSSIBLE WHILE AVOIDING IMPEDANCE INTO AIR STREAM AT DUCTWORK MAIN.
- DUCT SIZE TO DIFFUSERS, REGISTERS AND GRILLES SHALL BE SAME SIZE AS NECK SIZE UNLESS NOTED OR DETAILED OTHERWISE.
- INLET DUCT SIZE TO SUPPLY, RETURN AND EXHAUST VALVES SHALL BE THE SAME AS INLET UNLESS NOTED OTHERWISE.
- PROVIDE FLEXIBLE DUCWORK FOR FINAL CONNECTIONS TO DIFFUSERS, REGISTERS AND GRILLES UNLESS PROHIBITED BY SPECIFICATIONS. FLEXIBLE DUCT SIZE SHALL BE SAME AS NECK SIZE OF DIFFUSER, REGISTER, GRILLE, OR OTHER EQUIPMENT. REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT REQUIREMENTS.
- OPEN RETURN PLENUM RECTANGULAR ELBOWS SHALL NOT HAVE TURN VANES.
- CONDENSATE PIPING SHOWN REPRESENTS BOTH PRIMARY AND OVERFLOW. BOTH SHALL BE ROUTED IN THEIR ENTIRETY FROM SOURCE TO TERMINATION POINT SHOWN. PROVIDE SECONDARY DRAIN PAN WITH OVERFLOW ALARM AT UNIT DRAIN REPORTING TO BAS.
- COORDINATE ALL ROOF PENETRATIONS WITH ARCHITECTURAL AND STRUCTURAL ROOF PLAN.

KEYNOTES

- NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
- PROVIDE HARDWARE CLOTH AT OPENING. INTERNALLY LINE RETURN AIR DUCT UP.
- THERMOSTAT FOR RTU-1.
- THERMOSTAT FOR RTU-2.
- THERMOSTAT FOR RTU-3.
- THERMOSTAT FOR RTU-4.
- THERMOSTAT FOR RTU-5.
- THERMOSTAT FOR RTU-6.
- THERMOSTAT FOR RTU-7.
- THERMOSTAT FOR RTU-8.
- THERMOSTAT FOR RTU-9.
- THERMOSTAT FOR RTU-10.
- THERMOSTAT FOR RTU-11.
- THERMOSTAT FOR VAV-1.
- THERMOSTAT FOR VAV-2.
- THERMOSTAT FOR VAV-3.
- THERMOSTAT FOR VAV-4.
- THERMOSTAT FOR VAV-5.
- MOUNT MIN 8 FT ABOVE AFF.



EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of Issue: 04/24/2026

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

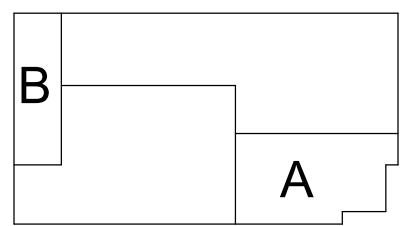

HVAC PLAN -
LEVEL ONE

M02-01

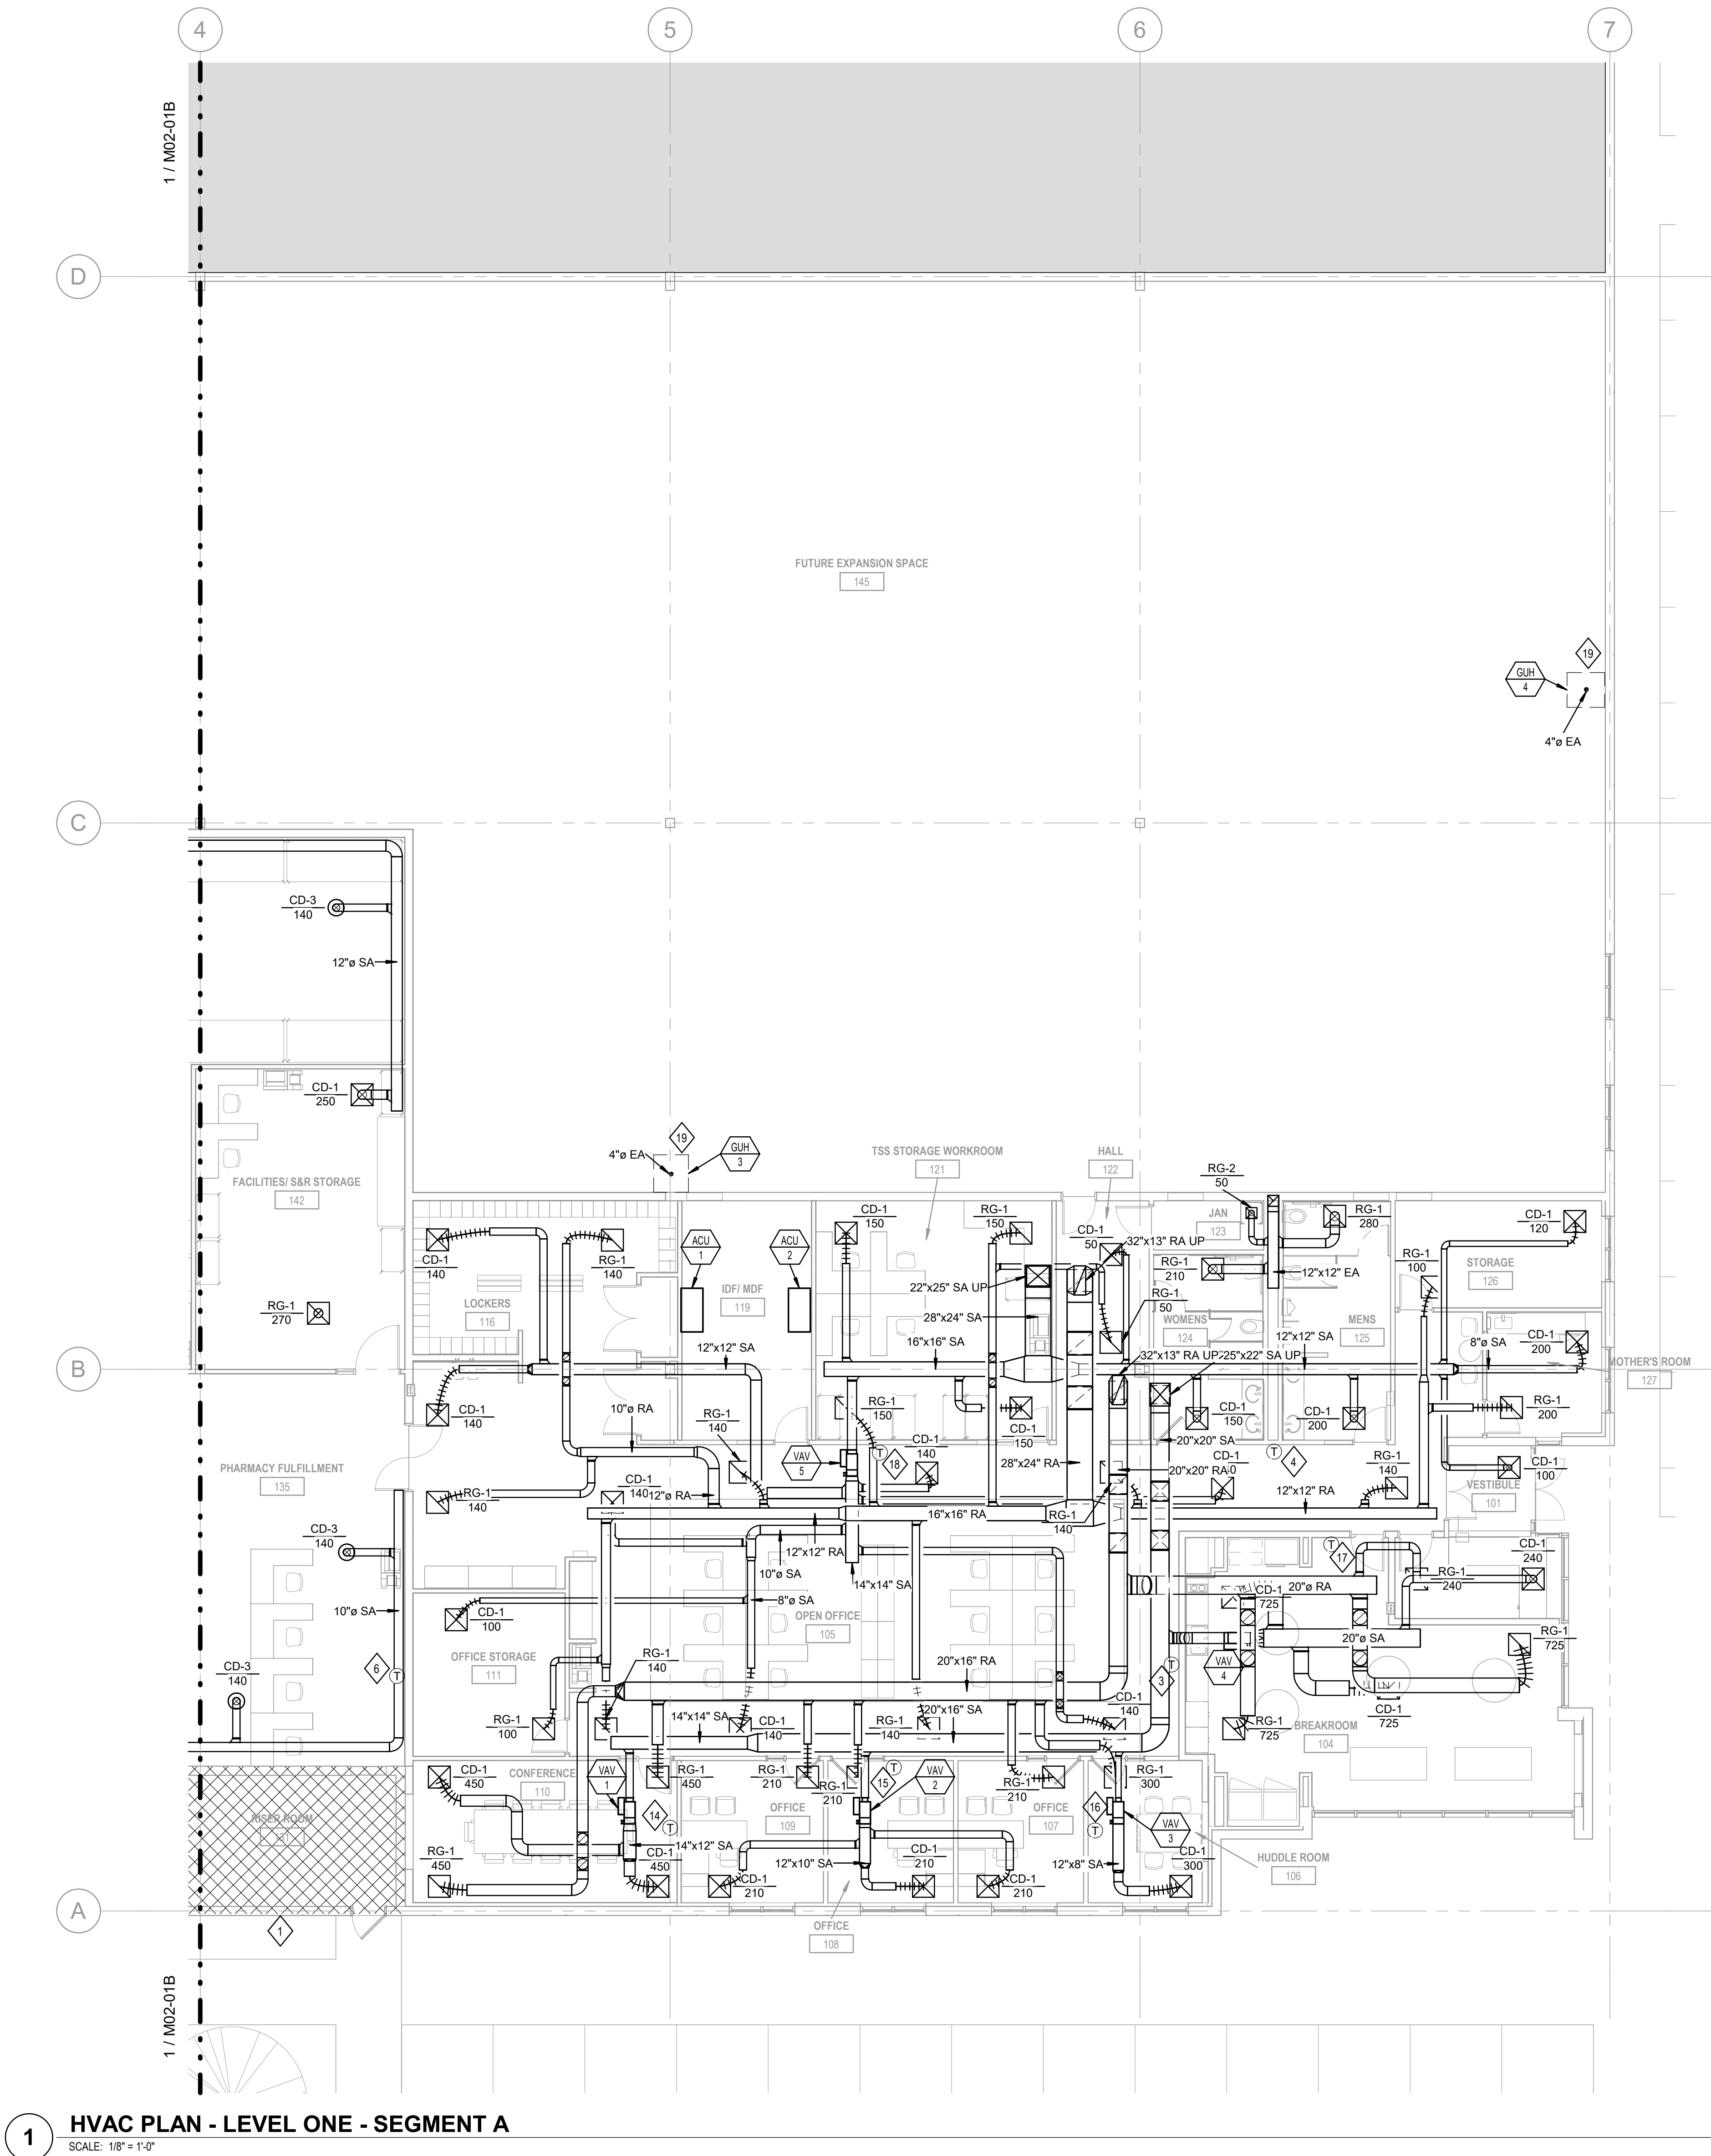

1 HVAC PLAN - LEVEL ONE - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
- CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
- CONTRACTOR SHALL COORDINATE THE LOCATION OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL THE OTHER APPLICABLE TRADES PRIOR INSTALLATION.
- MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK, AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL EXPOSED STEEL INCLUDING DUCTWORK, SUPPORTS AND ACCESSORIES SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINT COLOR.
- NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATE WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
- AIR VALVE AND FANCOIL UNIT CONTROLLERS SHALL BE MOUNTED ON SAME SIDE AS HEATING AND/OR COOLING COIL PIPING. COIL PIPING TO RUN ABOVE ACTUATOR AND CONTROLLERS TO ALLOW ACCESS.
- COORDINATES ACCESS TO ALL MECHANICAL EQUIPMENT, DAMPERS, ETC. WITH REFLECTED CEILING PLAN.
- PROVIDE BALANCING DAMPER FOR EACH DIFFUSER, REGISTER, GRILLE, AND SNORKEL. BALANCING DAMPER IS NOT REQUIRED IF A SINGLE DIFFUSER, REGISTER, GRILLE, OR SNORKEL IS SERVED BY AN AIR VALVE. LOCATE BALANCING DAMPER AS CLOSE TO BRANCH TAKEOFF AS POSSIBLE WHILE AVOIDING IMPEDANCE INTO AIR STREAM AT DUCTWORK MAIN.
- DUCT SIZE TO DIFFUSERS, REGISTERS AND GRILLES SHALL BE SAME SIZE AS NECK SIZE UNLESS NOTED OR DETAILED OTHERWISE.
- INLET DUCT SIZE TO SUPPLY, RETURN AND EXHAUST VALVES SHALL BE THE SAME AS INLET UNLESS NOTED OTHERWISE.
- PROVIDE FLEXIBLE DUCWORK FOR FINAL CONNECTIONS TO DIFFUSERS, REGISTERS AND GRILLES UNLESS PROHIBITED BY SPECIFICATIONS. FLEXIBLE DUCT SIZE SHALL BE SAME AS NECK SIZE OF DIFFUSER, REGISTER, GRILLE, OR OTHER EQUIPMENT. REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT REQUIREMENTS.
- OPEN RETURN PLENUM RECTANGULAR ELBOWS SHALL NOT HAVE TURN VANES.
- CONDENSATE PIPING SHOWN REPRESENTS BOTH PRIMARY AND OVERFLOW. BOTH SHALL BE ROUTED IN THEIR ENTIRETY FROM SOURCE TO TERMINATION POINT SHOWN. PROVIDE SECONDARY DRAIN PAN WITH OVERFLOW ALARM AT UNIT DRAIN REPORTING TO BAS.
- COORDINATE ALL ROOF PENETRATIONS WITH ARCHITECTURAL AND STRUCTURAL ROOF PLAN.

KEYNOTES

- NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
- PROVIDE HARDWARE CLOTH AT OPENING. INTERNALLY LINE RETURN AIR DUCT UP.
- THERMOSTAT FOR RTU-1.
- THERMOSTAT FOR RTU-2.
- THERMOSTAT FOR RTU-3.
- THERMOSTAT FOR RTU-4.
- THERMOSTAT FOR RTU-5.
- THERMOSTAT FOR RTU-6.
- THERMOSTAT FOR RTU-7.
- THERMOSTAT FOR RTU-8.
- THERMOSTAT FOR RTU-9.
- THERMOSTAT FOR RTU-10.
- THERMOSTAT FOR RTU-11.
- THERMOSTAT FOR VAV-1.
- THERMOSTAT FOR VAV-2.
- THERMOSTAT FOR VAV-3.
- THERMOSTAT FOR VAV-4.
- THERMOSTAT FOR VAV-5.
- MOUNT MIN 8 FT ABOVE AFF.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

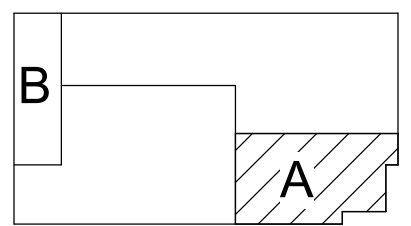


HVAC PLAN -
LEVEL ONE -
SEGMENT A

M02-01A

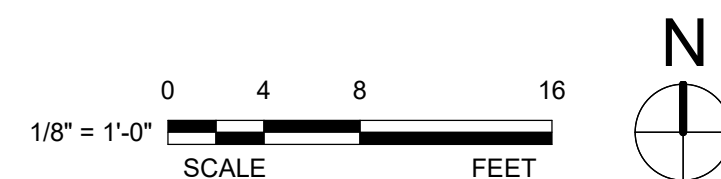

4/24/2026 2:44:45 PM M02-01B HVAC PLAN - LEVEL ONE - SEGMENT B

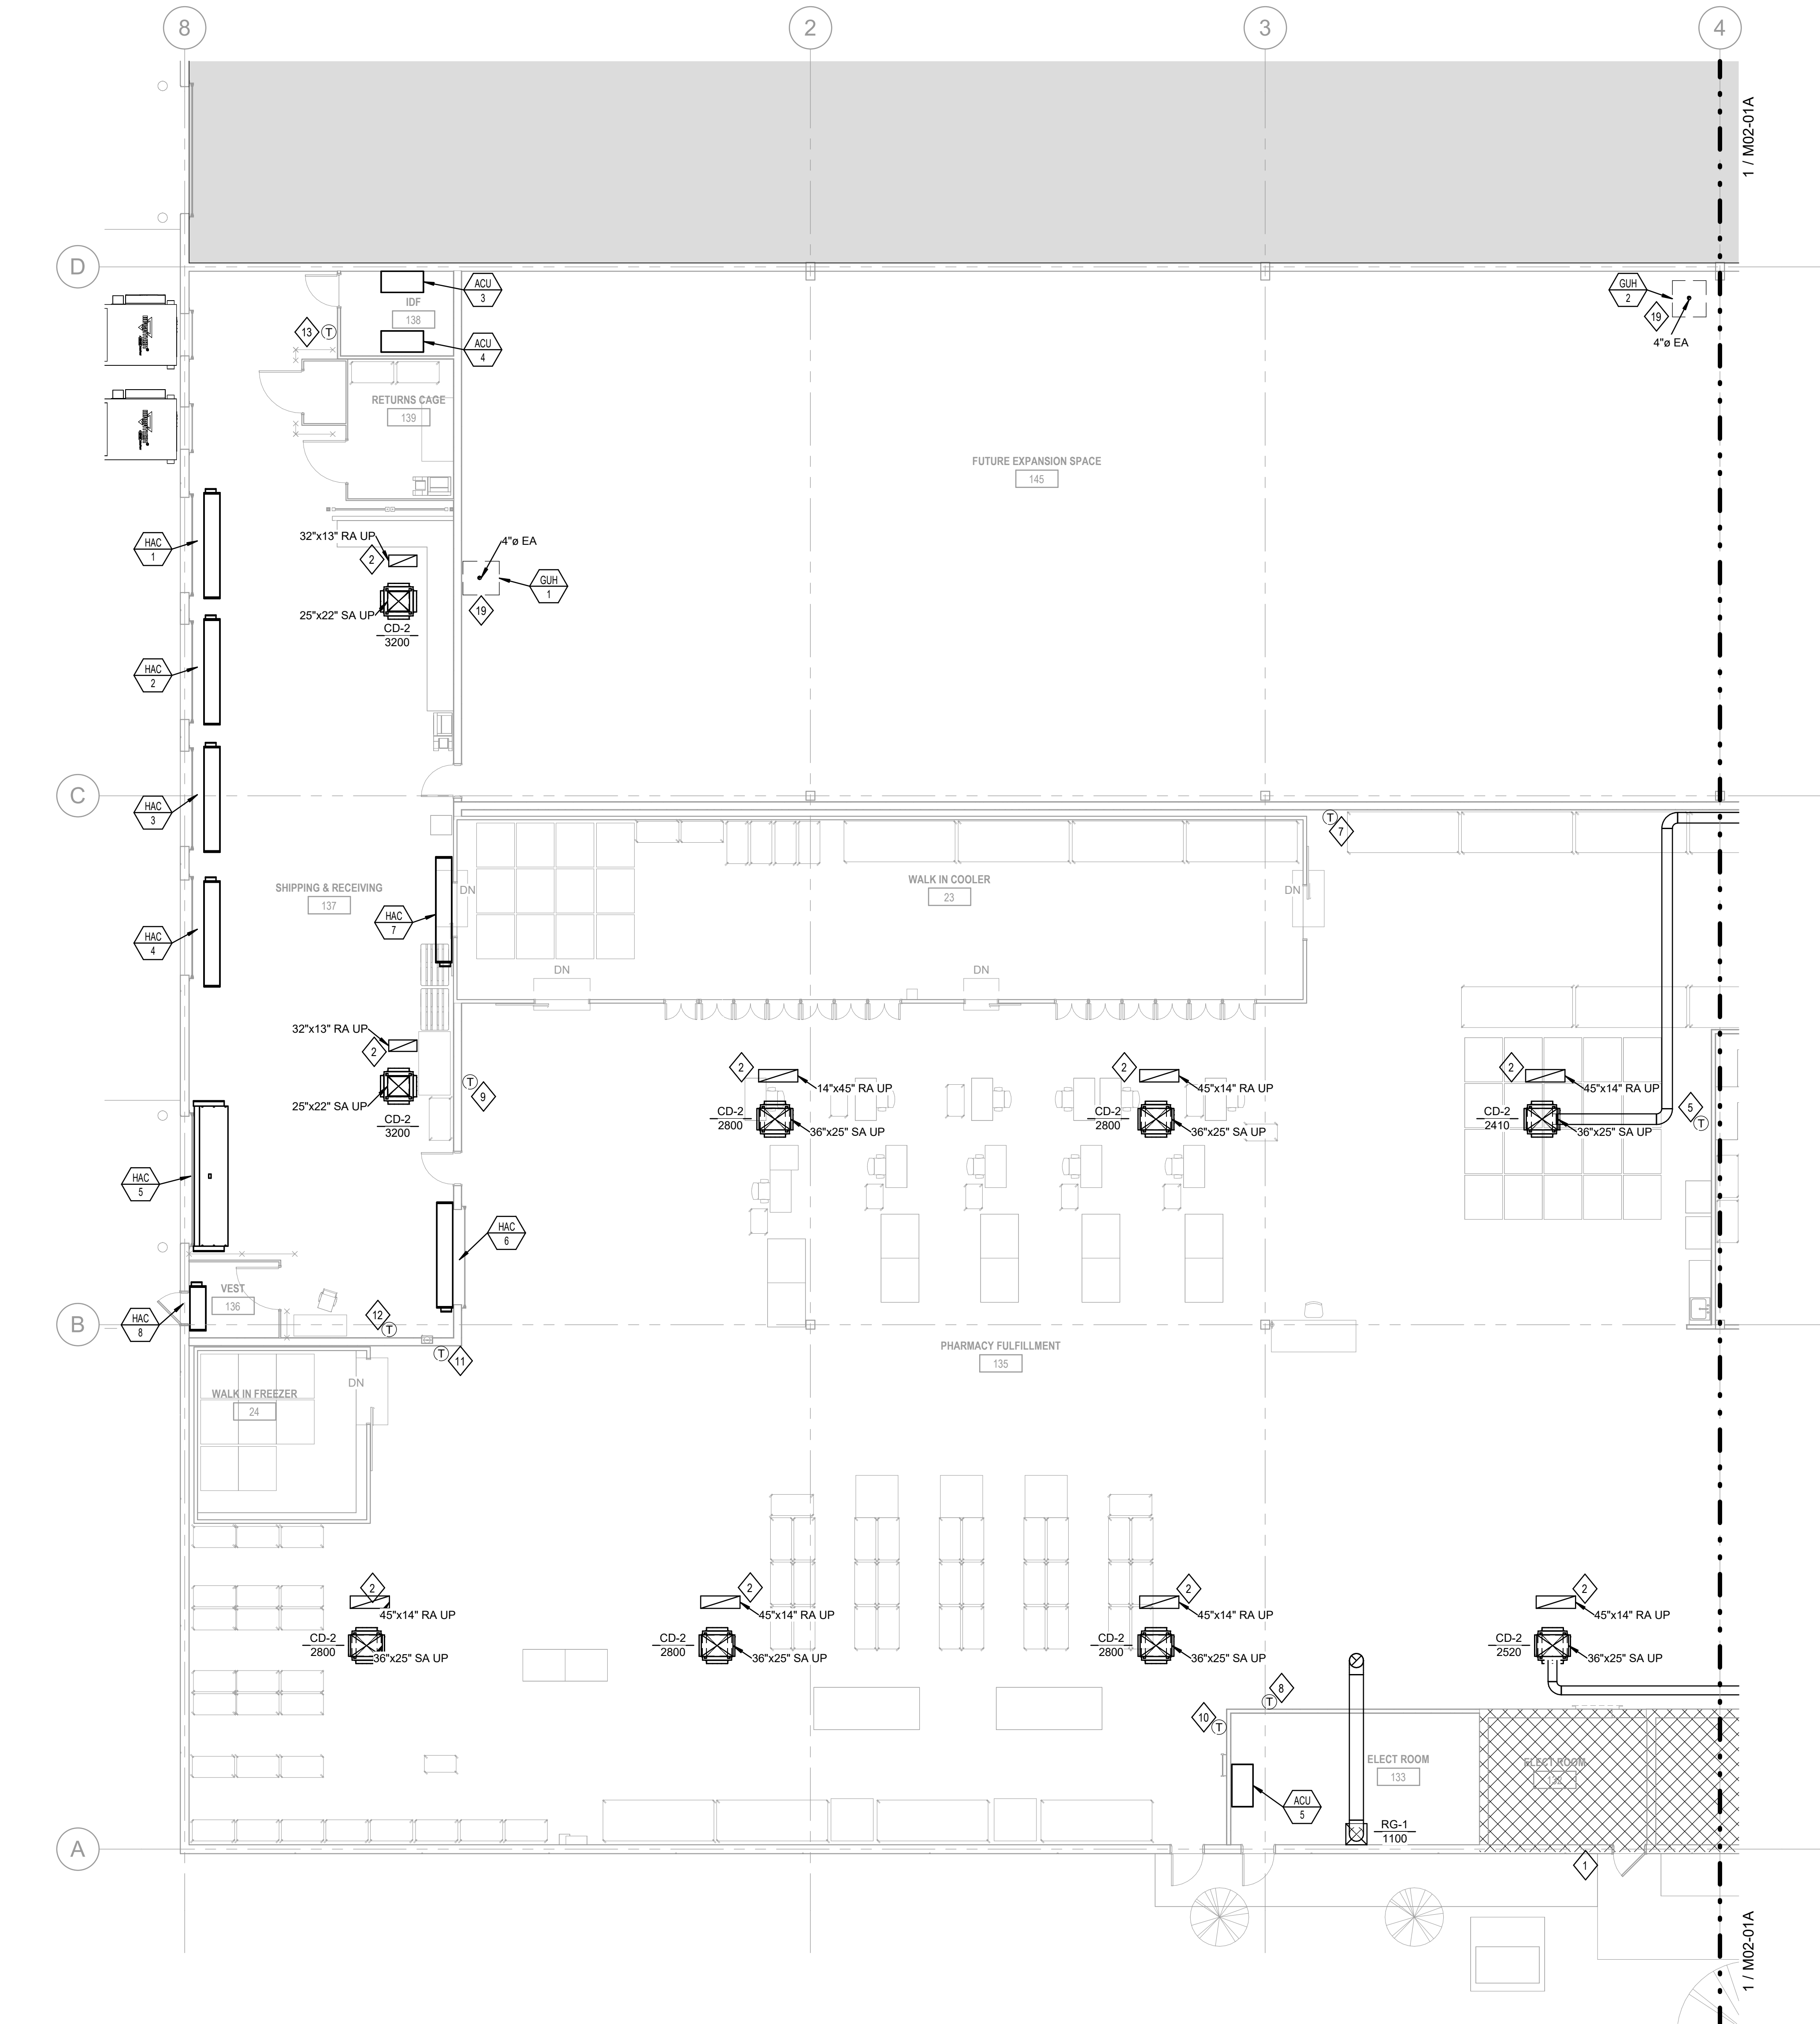

1 HVAC PLAN - LEVEL ONE - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
- CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
- CONTRACTOR SHALL COORDINATE THE LOCATION OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL THE OTHER APPLICABLE TRADES PRIOR TO INSTALLATION.
- MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK, AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL EXPOSED STEEL INCLUDING DUCTWORK, SUPPORTS AND ACCESSORIES SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINT COLOR.
- NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATE WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
- AIR VALVE AND FANCOIL UNIT CONTROLLERS SHALL BE MOUNTED ON SAME SIDE AS HEATING AND/OR COOLING COIL PIPING. COIL PIPING TO RUN ABOVE ACTUATOR AND CONTROLLERS TO ALLOW ACCESS.
- COORDINATES ACCESS TO ALL MECHANICAL EQUIPMENT, DAMPERS, ETC. WITH REFLECTED CEILING PLAN.
- PROVIDE BALANCING DAMPER FOR EACH DIFFUSER, REGISTER, GRILLE, AND SNORKEL. BALANCING DAMPER IS NOT REQUIRED IF A SINGLE DIFFUSER, REGISTER, GRILLE, OR SNORKEL IS SERVED BY AN AIR VALVE. LOCATE BALANCING DAMPER AS CLOSE TO BRANCH TAKEOFF AS POSSIBLE WHILE AVOIDING IMPEDANCE INTO AIR STREAM AT DUCTWORK MAIN.
- DUCT SIZE TO DIFFUSERS, REGISTERS AND GRILLES SHALL BE SAME SIZE AS NECK SIZE UNLESS NOTED OR DETAILED OTHERWISE.
- INLET DUCT SIZE TO SUPPLY, RETURN AND EXHAUST VALVES SHALL BE THE SAME AS INLET UNLESS NOTED OTHERWISE.
- PROVIDE FLEXIBLE DUCWORK FOR FINAL CONNECTIONS TO DIFFUSERS, REGISTERS AND GRILLES UNLESS PROHIBITED BY SPECIFICATIONS. FLEXIBLE DUCT SIZE SHALL BE SAME AS NECK SIZE OF DIFFUSER, REGISTER, GRILLE, OR OTHER EQUIPMENT. REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT REQUIREMENTS.
- OPEN RETURN PLENUM RECTANGULAR ELBOWS SHALL NOT HAVE TURN VANES.
- CONDENSATE PIPING SHOWN REPRESENTS BOTH PRIMARY AND OVERFLOW. BOTH SHALL BE ROUTED IN THEIR ENTIRETY FROM SOURCE TO TERMINATION POINT SHOWN. PROVIDE SECONDARY DRAIN PAN WITH OVERFLOW ALARM AT UNIT DRAIN REPORTING TO BAS.
- COORDINATE ALL ROOF PENETRATIONS WITH ARCHITECTURAL AND STRUCTURAL ROOF PLAN.

KEYNOTES

- NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
- PROVIDE HARDWARE CLOTH AT OPENING. INTERNALLY LINE RETURN AIR DUCT UP.
- THERMOSTAT FOR RTU-1.
- THERMOSTAT FOR RTU-2.
- THERMOSTAT FOR RTU-3.
- THERMOSTAT FOR RTU-4.
- THERMOSTAT FOR RTU-5.
- THERMOSTAT FOR RTU-6.
- THERMOSTAT FOR RTU-7.
- THERMOSTAT FOR RTU-8.
- THERMOSTAT FOR RTU-9.
- THERMOSTAT FOR RTU-10.
- THERMOSTAT FOR RTU-11.
- THERMOSTAT FOR VAV-1.
- THERMOSTAT FOR VAV-2.
- THERMOSTAT FOR VAV-3.
- THERMOSTAT FOR VAV-4.
- THERMOSTAT FOR VAV-5.
- MOUNT MIN 8 FT ABOVE AFF.

0 4 8 16
1/8" = 1'-0"
SCALE FEET



EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

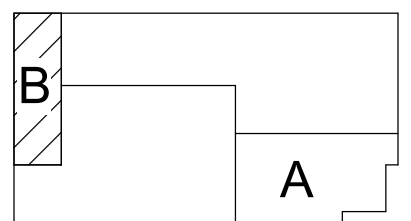

**HVAC PLAN -
LEVEL ONE -
SEGMENT B**

M02-01B

4/24/2026 2:44:46 PM M02-02 HVAC PLAN - ROOF

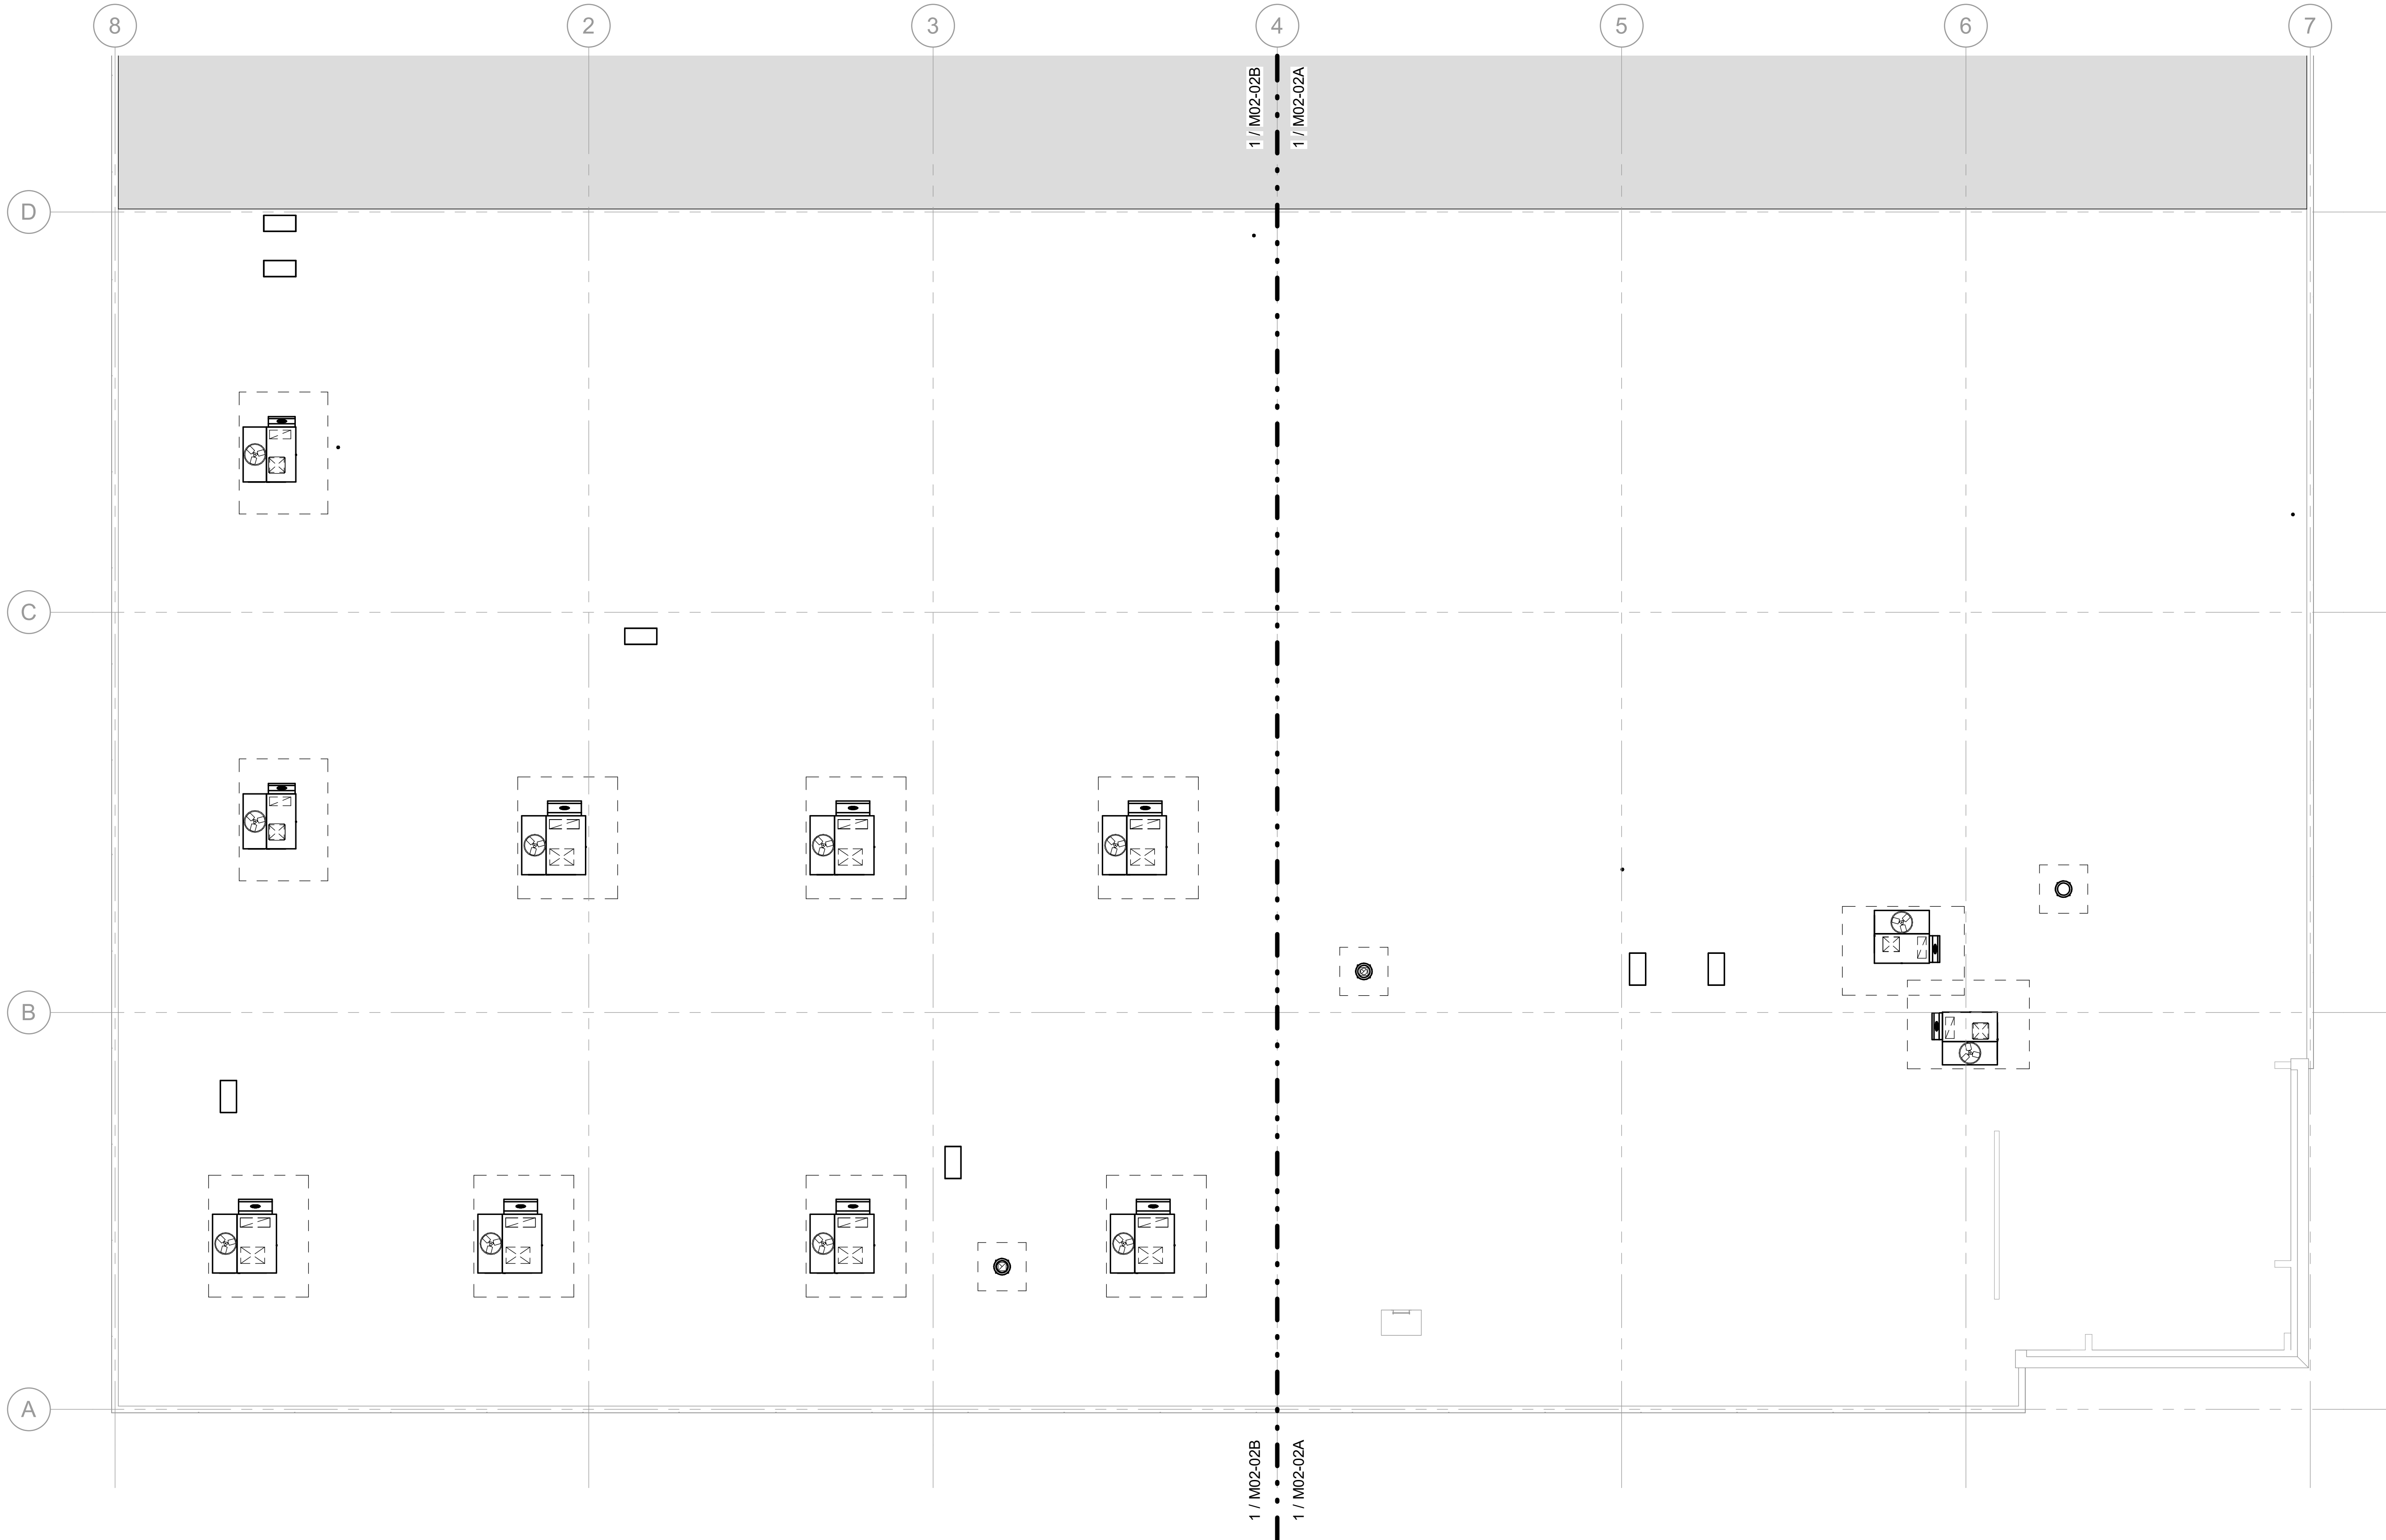

1 HVAC PLAN - ROOF
SCALE: 3/32" = 1'-0"

GENERAL NOTES

- CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
- CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
- CONTRACTOR SHALL COORDINATE THE LOCATION OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL THE OTHER APPLICABLE TRADES PRIOR TO INSTALLATION.
- MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK, AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL EXPOSED STEEL INCLUDING DUCTWORK, SUPPORTS AND ACCESSORIES SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINT COLOR.
- NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATE WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
- AIR VALVE AND FANCOIL UNIT CONTROLLERS SHALL BE MOUNTED ON SAME SIDE AS HEATING AND/OR COOLING COIL PIPING. COIL PIPING TO RUN ABOVE ACTUATOR AND CONTROLLERS TO ALLOW ACCESS.
- COORDINATES ACCESS TO ALL MECHANICAL EQUIPMENT, DAMPERS, ETC. WITH REFLECTED CEILING PLAN.
- PROVIDE BALANCING DAMPER FOR EACH DIFFUSER, REGISTER, GRILLE, AND SNORKEL. BALANCING DAMPER IS NOT REQUIRED IF A SINGLE DIFFUSER, REGISTER, GRILLE, OR SNORKEL IS SERVED BY AN AIR VALVE. LOCATE BALANCING DAMPER AS CLOSE TO BRANCH TAKEOFF AS POSSIBLE WHILE AVOIDING IMPEDANCE INTO AIR STREAM AT DUCTWORK MAIN.
- DUCT SIZE TO DIFFUSERS, REGISTERS AND GRILLES SHALL BE SAME SIZE AS NECK SIZE UNLESS NOTED OR DETAILED OTHERWISE.
- INLET DUCT SIZE TO SUPPLY, RETURN AND EXHAUST VALVES SHALL BE THE SAME AS INLET UNLESS NOTED OTHERWISE.
- PROVIDE FLEXIBLE DUCWORK FOR FINAL CONNECTIONS TO DIFFUSERS, REGISTERS AND GRILLES UNLESS PROHIBITED BY SPECIFICATIONS. FLEXIBLE DUCT SIZE SHALL BE SAME AS NECK SIZE OF DIFFUSER, REGISTER, GRILLE, OR OTHER EQUIPMENT. REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT REQUIREMENTS.
- OPEN RETURN PLENUM RECTANGULAR ELBOWS SHALL NOT HAVE TURN VANES.
- CONDENSATE PIPING SHOWN REPRESENTS BOTH PRIMARY AND OVERFLOW. BOTH SHALL BE ROUTED IN THEIR ENTIRETY FROM SOURCE TO TERMINATION POINT SHOWN. PROVIDE SECONDARY DRAIN PAN WITH OVERFLOW ALARM AT UNIT DRAIN REPORTING TO BAS.
- COORDINATE ALL ROOF PENETRATIONS WITH ARCHITECTURAL AND STRUCTURAL ROOF PLAN.

KEYNOTES

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of Issue: 04/24/2026

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026


KEYPLAN

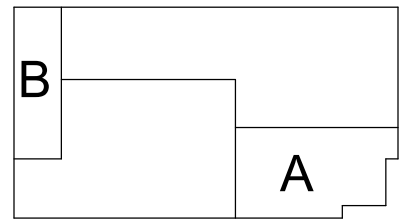

**HVAC PLAN -
ROOF**

M02-02

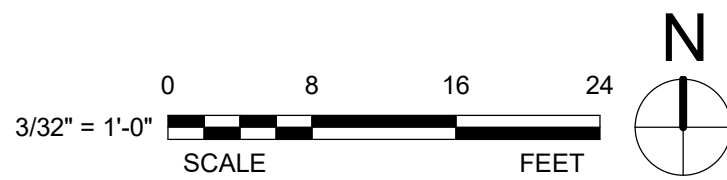

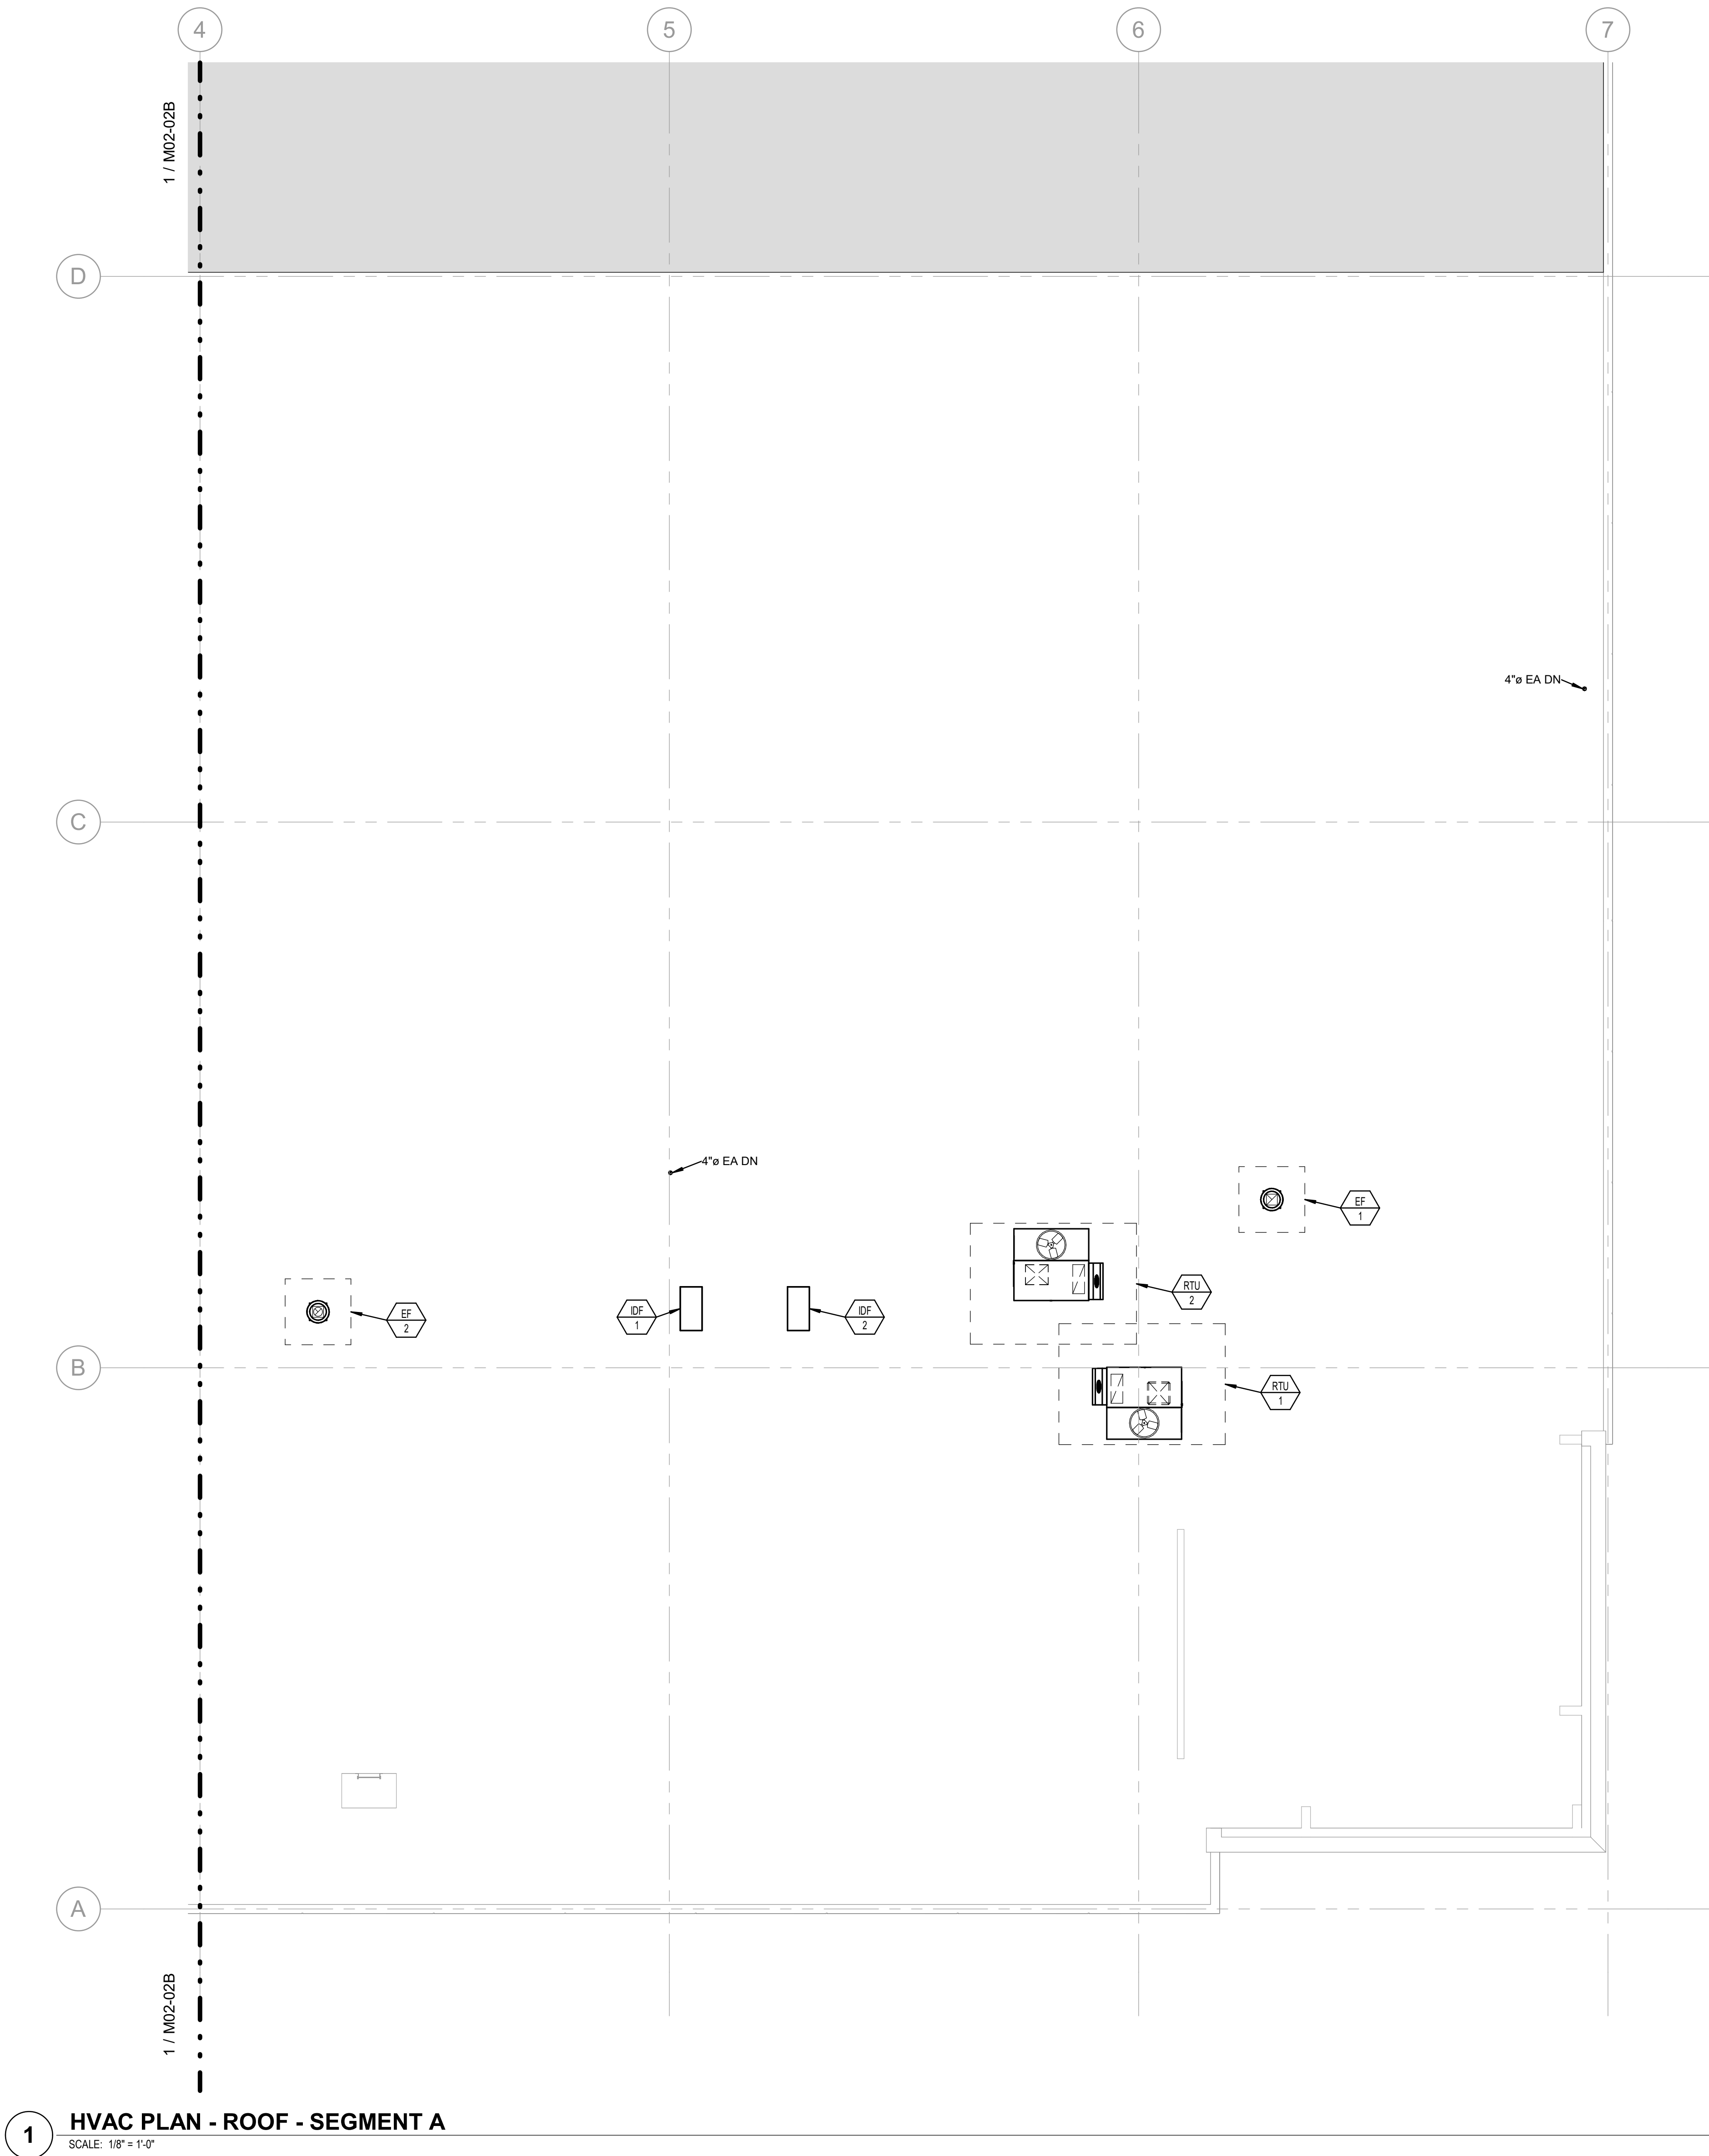

GENERAL NOTES

- CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
- CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
- CONTRACTOR SHALL COORDINATE THE LOCATION OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL THE OTHER APPLICABLE TRADES PRIOR INSTALLATION
- MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK, AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL EXPOSED STEEL INCLUDING DUCTWORK, SUPPORTS AND ACCESSORIES SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINT COLOR.
- NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATE WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
- AIR VALVE AND FANCOIL UNIT CONTROLLERS SHALL BE MOUNTED ON SAME SIDE AS HEATING AND/OR COOLING COIL PIPING. COIL PIPING TO RUN ABOVE ACTUATOR AND CONTROLLERS TO ALLOW ACCESS.
- COORDINATES ACCESS TO ALL MECHANICAL EQUIPMENT, DAMPERS, ETC. WITH REFLECTED CEILING PLAN.
- PROVIDE BALANCING DAMPER FOR EACH DIFFUSER, REGISTER, GRILLE, AND SNORKEL. BALANCING DAMPER IS NOT REQUIRED IF A SINGLE DIFFUSER, REGISTER, GRILLE, OR SNORKEL IS SERVED BY AN AIR VALVE. LOCATE BALANCING DAMPER AS CLOSE TO BRANCH TAKEOFF AS POSSIBLE WHILE AVOIDING IMPEDANCE INTO AIR STREAM AT DUCTWORK MAIN.
- DUCT SIZE TO DIFFUSERS, REGISTERS AND GRILLES SHALL BE SAME SIZE AS NECK SIZE UNLESS NOTED OR DETAILED OTHERWISE.
- INLET DUCT SIZE TO SUPPLY, RETURN AND EXHAUST VALVES SHALL BE THE SAME AS INLET UNLESS NOTED OTHERWISE.
- PROVIDE FLEXIBLE DUCWORK FOR FINAL CONNECTIONS TO DIFFUSERS, REGISTERS AND GRILLES UNLESS PROHIBITED BY SPECIFICATIONS. FLEXIBLE DUCT SIZE SHALL BE SAME AS NECK SIZE OF DIFFUSER, REGISTER, GRILLE, OR OTHER EQUIPMENT. REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT REQUIREMENTS.
- OPEN RETURN PLENUM RECTANGULAR ELBOWS SHALL NOT HAVE TURN VANES.
- CONDENSATE PIPING SHOWN REPRESENTS BOTH PRIMARY AND OVERFLOW. BOTH SHALL BE ROUTED IN THEIR ENTIRETY FROM SOURCE TO TERMINATION POINT SHOWN. PROVIDE SECONDARY DRAIN PAN WITH OVERFLOW ALARM AT UNIT DRAIN REPORTING TO BAS.
- COORDINATE ALL ROOF PENETRATIONS WITH ARCHITECTURAL AND STRUCTURAL ROOF PLAN.

KEYNOTES

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No. - 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026
Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

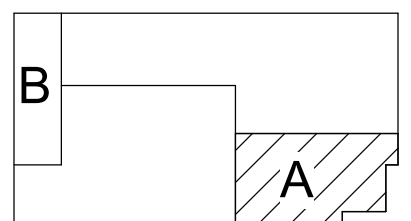

HVAC PLAN -
ROOF - SEGMENT
A

M02-02A

4/24/2026 2:44:47 PM M02-02B HVAC PLAN - ROOF - SEGMENT B

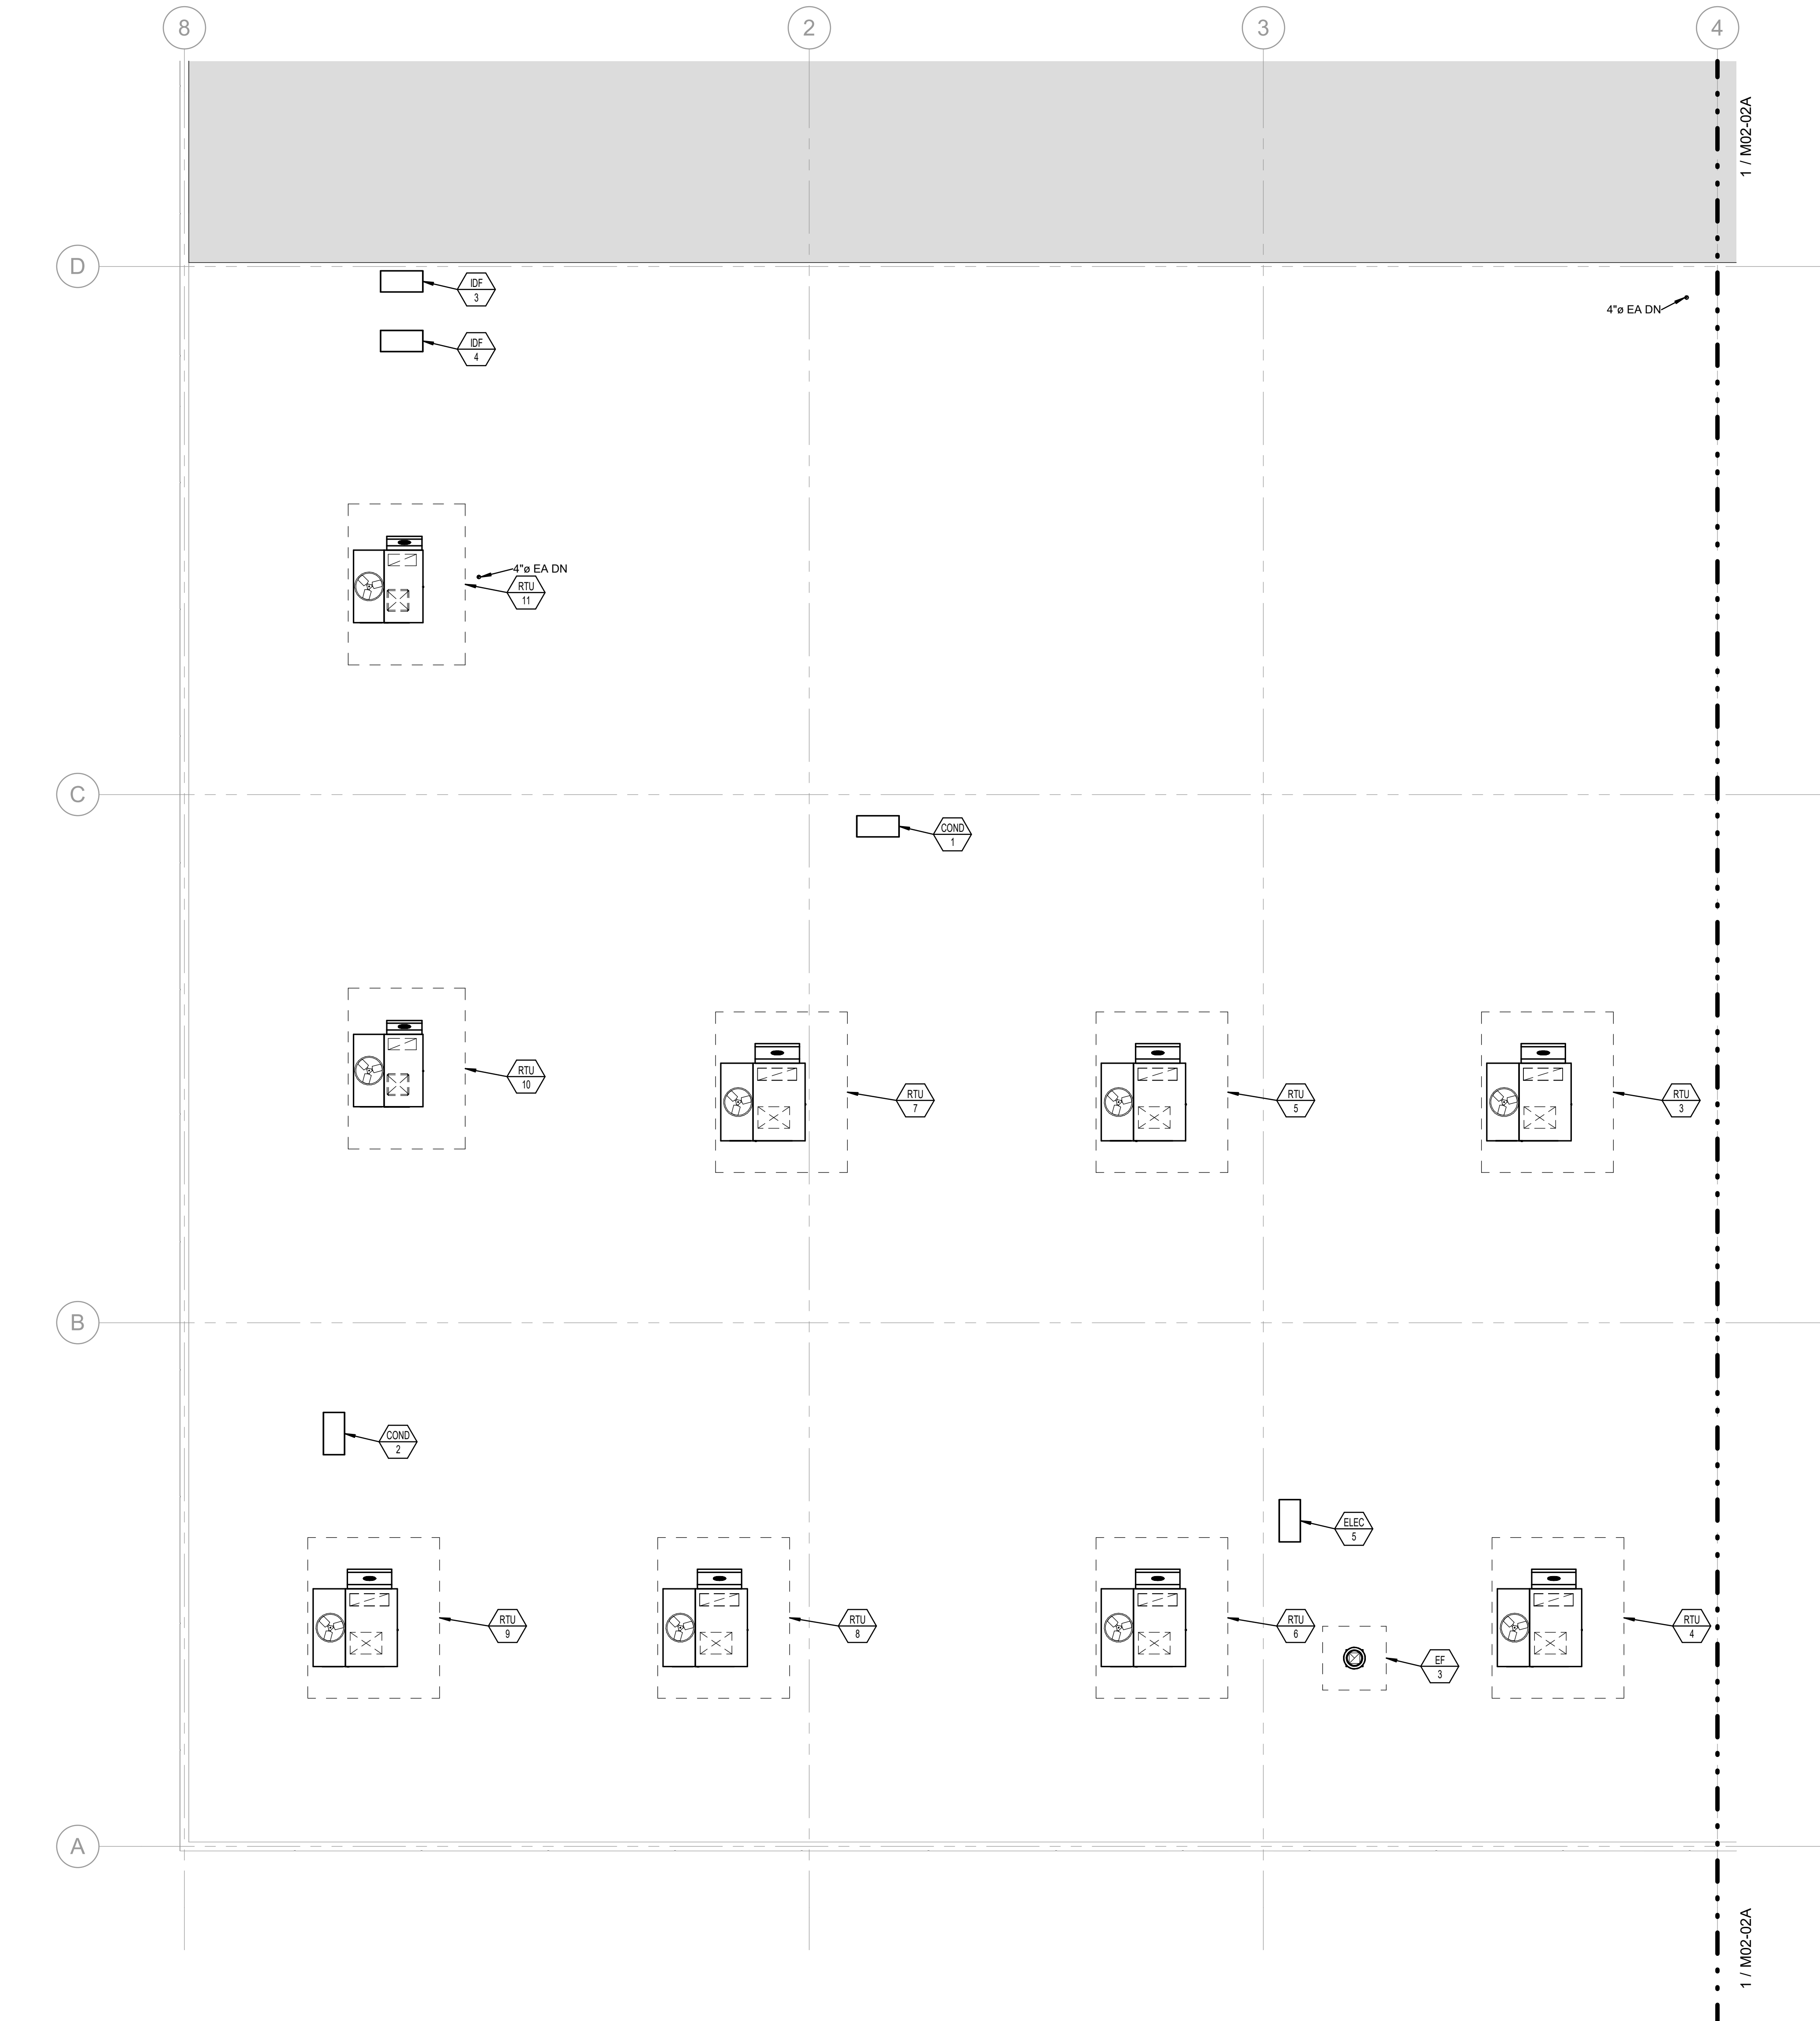


1 HVAC PLAN - ROOF - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
- CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
- CONTRACTOR SHALL COORDINATE THE LOCATION OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL THE OTHER APPLICABLE TRADES PRIOR INSTALLATION
- MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK, AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL EXPOSED STEEL INCLUDING DUCTWORK, SUPPORTS AND ACCESSORIES SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINT COLOR.
- NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATE WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
- AIR VALVE AND FANCOIL UNIT CONTROLLERS SHALL BE MOUNTED ON SAME SIDE AS HEATING AND/OR COOLING COIL PIPING. COIL PIPING TO RUN ABOVE ACTUATOR AND CONTROLLERS TO ALLOW ACCESS.
- COORDINATES ACCESS TO ALL MECHANICAL EQUIPMENT, DAMPERS, ETC. WITH REFLECTED CEILING PLAN.
- PROVIDE BALANCING DAMPER FOR EACH DIFFUSER, REGISTER, GRILLE, AND SNORKEL. BALANCING DAMPER IS NOT REQUIRED IF A SINGLE DIFFUSER, REGISTER, GRILLE, OR SNORKEL IS SERVED BY AN AIR VALVE. LOCATE BALANCING DAMPER AS CLOSE TO BRANCH TAKEOFF AS POSSIBLE WHILE AVOIDING IMPEDANCE INTO AIR STREAM AT DUCTWORK MAIN.
- DUCT SIZE TO DIFFUSERS, REGISTERS AND GRILLES SHALL BE SAME SIZE AS NECK SIZE UNLESS NOTED OR DETAILED OTHERWISE.
- INLET DUCT SIZE TO SUPPLY, RETURN AND EXHAUST VALVES SHALL BE THE SAME AS INLET UNLESS NOTED OTHERWISE.
- PROVIDE FLEXIBLE DUCWORK FOR FINAL CONNECTIONS TO DIFFUSERS, REGISTERS AND GRILLES UNLESS PROHIBITED BY SPECIFICATIONS. FLEXIBLE DUCT SIZE SHALL BE SAME AS NECK SIZE OF DIFFUSER, REGISTER, GRILLE, OR OTHER EQUIPMENT. REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT REQUIREMENTS.
- OPEN RETURN PLENUM RECTANGULAR ELBOWS SHALL NOT HAVE TURN VANES.
- CONDENSATE PIPING SHOWN REPRESENTS BOTH PRIMARY AND OVERFLOW. BOTH SHALL BE ROUTED IN THEIR ENTIRETY FROM SOURCE TO TERMINATION POINT SHOWN. PROVIDE SECONDARY DRAIN PAN WITH OVERFLOW ALARM AT UNIT DRAIN REPORTING TO BAS.
- COORDINATE ALL ROOF PENETRATIONS WITH ARCHITECTURAL AND STRUCTURAL ROOF PLAN.

KEYNOTES

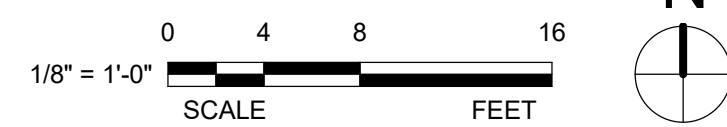

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No. - 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

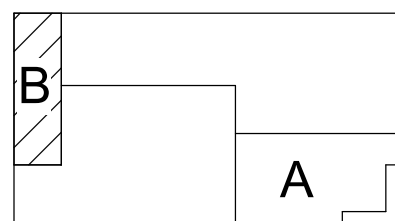


HVAC PLAN -
ROOF - SEGMENT
B

M02-02B

4/24/2026 2:44:49 PM M03-01 PIPING PLAN - LEVEL ONE

1 PIPING PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

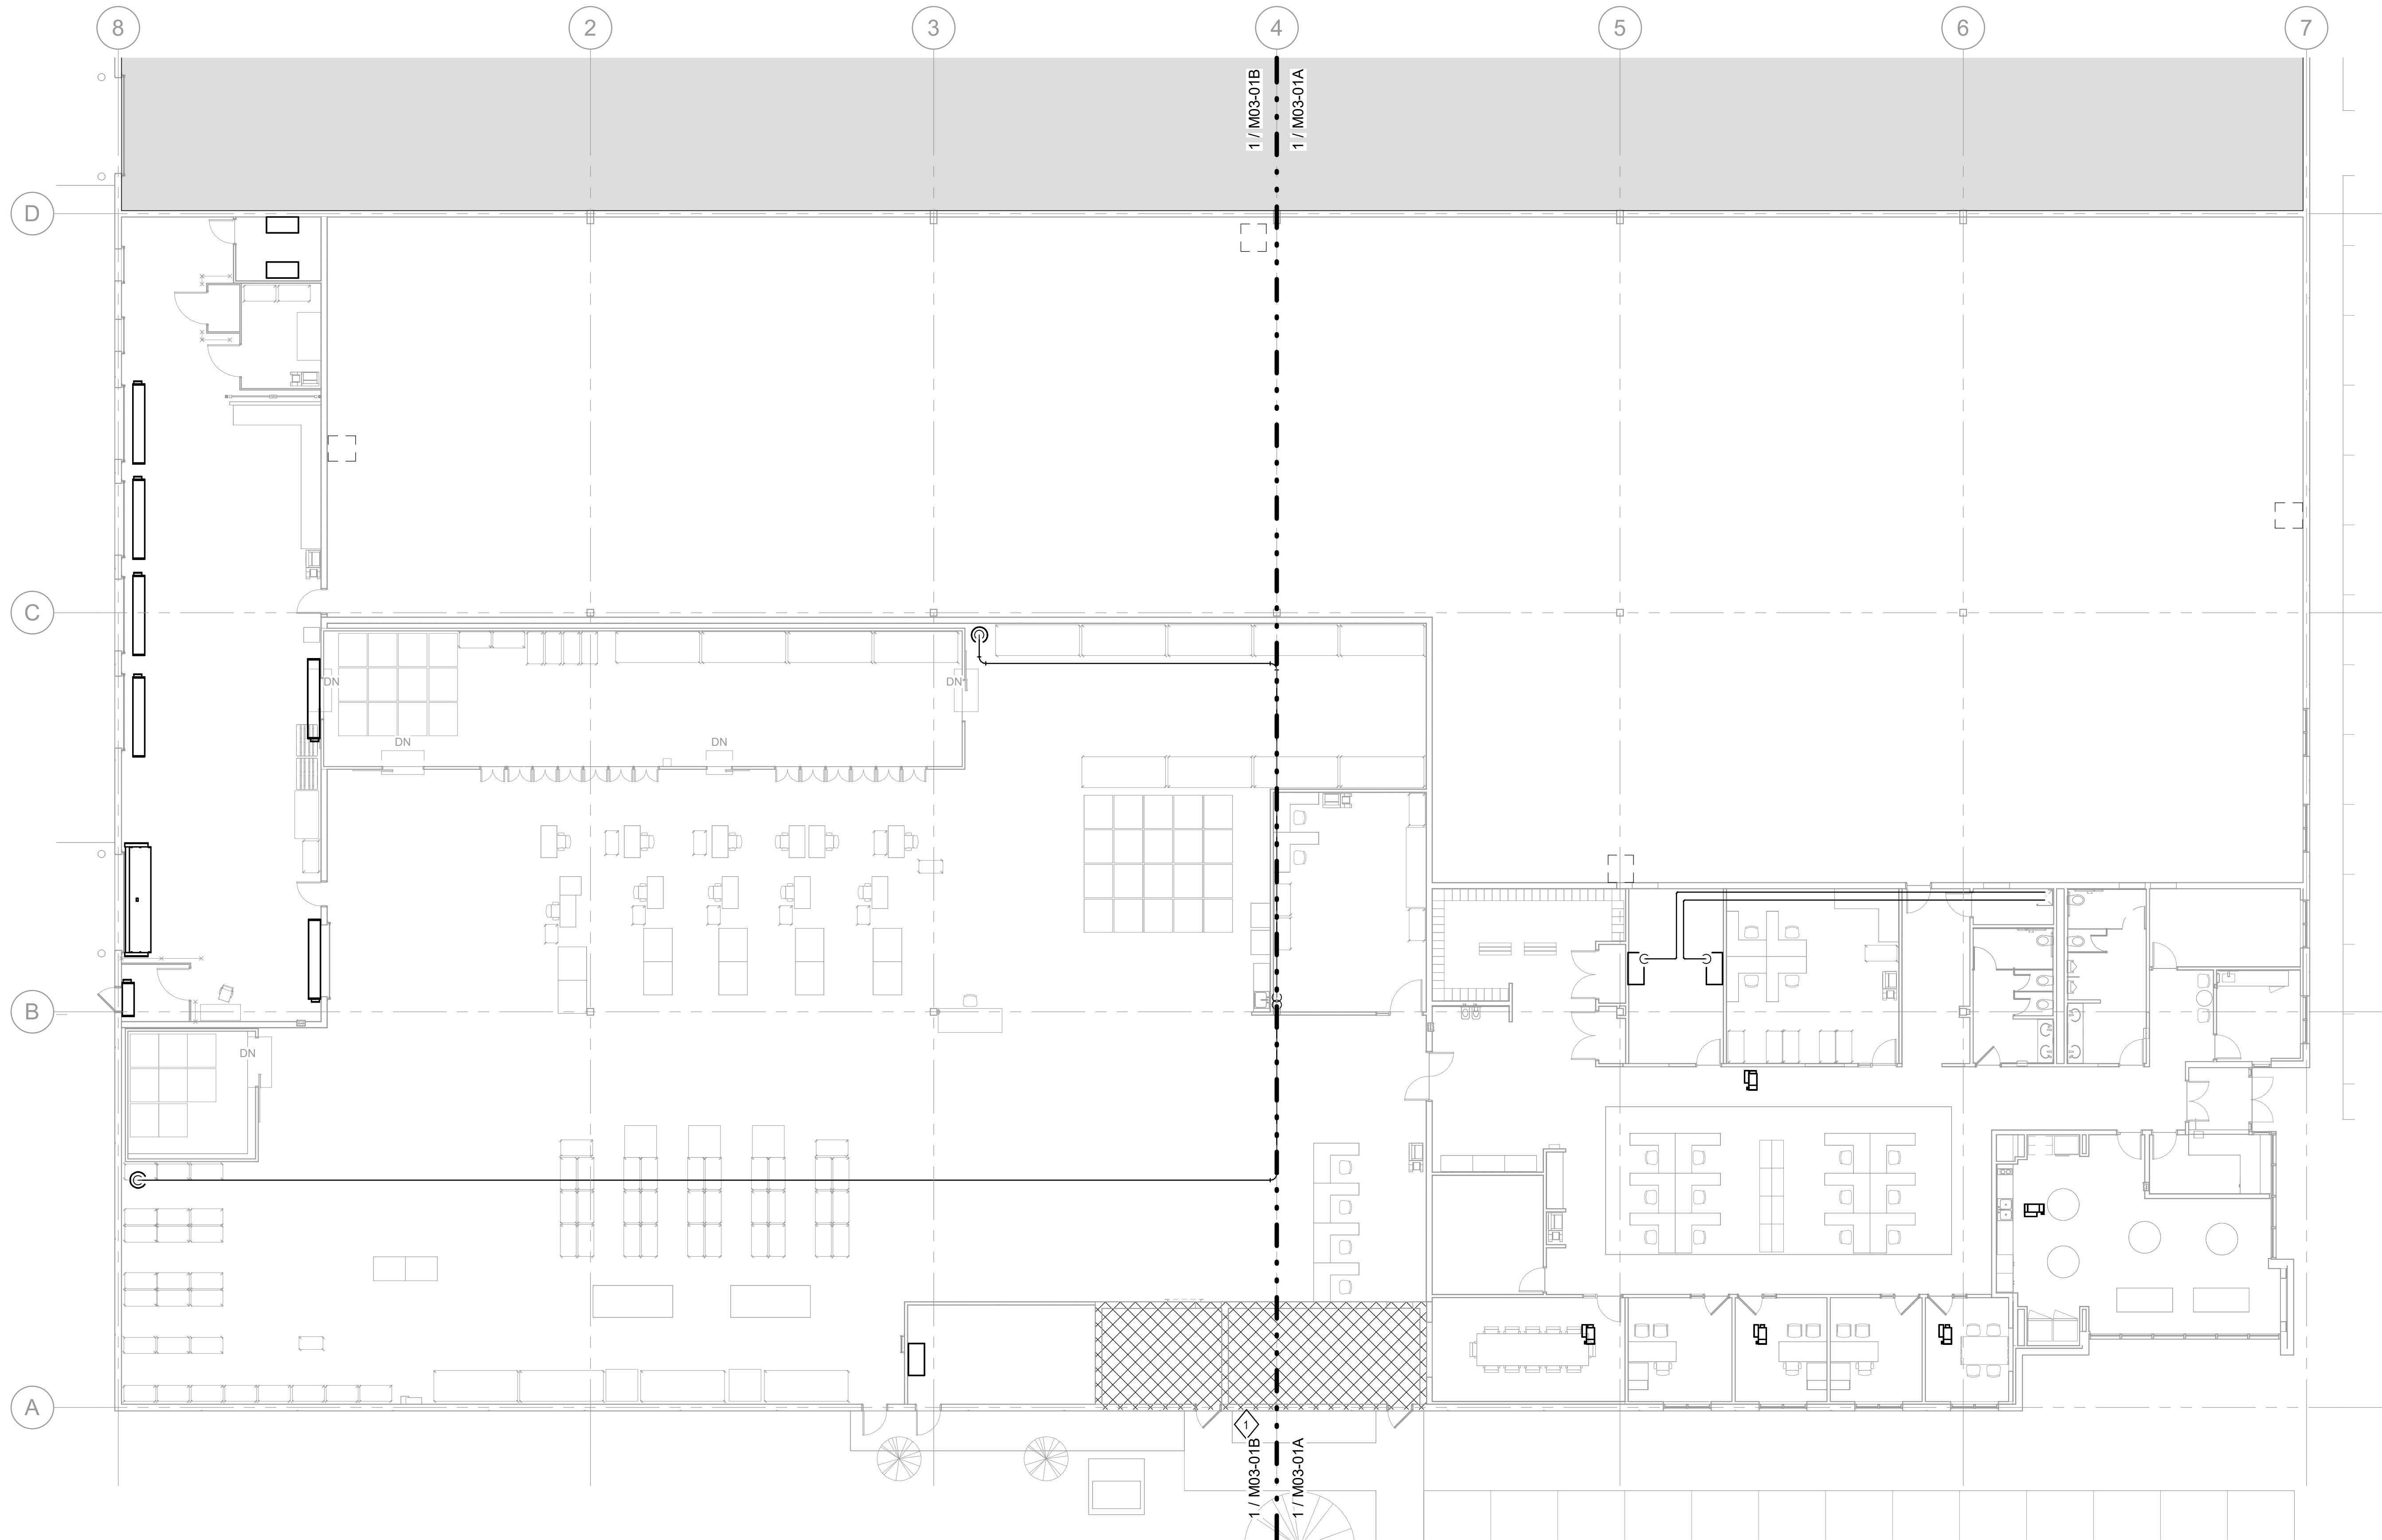

GENERAL NOTES

1. CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
2. CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
3. CONTRACTOR SHALL COORDINATE THE LOCATIONS OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL OTHER APPLICABLE TRADES PRIOR TO INSTALLATION.
4. MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL STEEL SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINTING COLOR.
6. NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATION WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
7. ANY TAP SERVING ONE OR MORE EQUIPMENT CONNECTION SHALL HAVE ISOLATION VALVES.
8. ALL CONTROL VALVES TO BE 2-WAY UNLESS NOTED OTHERWISE. THE LAST CONTROL VALVE AT THE END OF THE PIPING RUN ON EACH FLOOR SHALL BE 3-WAY CONTROL VALVE.
9. ALL ELEVATIONS NOTED ARE RELATIVE TO FINISHED FLOOR ELEVATION.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


1. NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
2. PROVIDE CONDENSATE PIPING TO CONDENSATE EVAPORATOR.
3. PROVIDE CONDENSATE PUMP.
4. PROVIDE REFRIGERATION PIPING BETWEEN OUTDOOR UNIT AND REFRIGERATION POINT OF CONNECTION.
5. CONTRACTOR TO PROVIDE PUMP IN A BASIN FOR CONDENSATE REMOVAL. DISCHARGE PIPING TO PUMP UP TO DECK FROM BASIN AND GRAVITY FLOW TO HUB DRAIN. PUMP, BASIN AND PIPING SPECIFICATIONS TO BE PROVIDED BASED UPON REFRIGERATION MFG PRODUCT PERFORMANCE AND REQUIREMENTS.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026


KEYPLAN

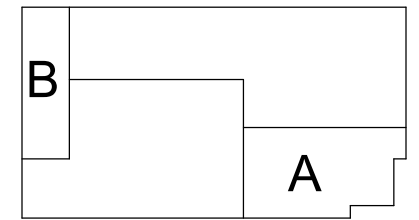

PIPING PLAN -
LEVEL ONE

M03-01

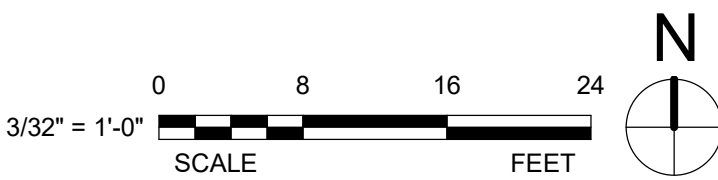

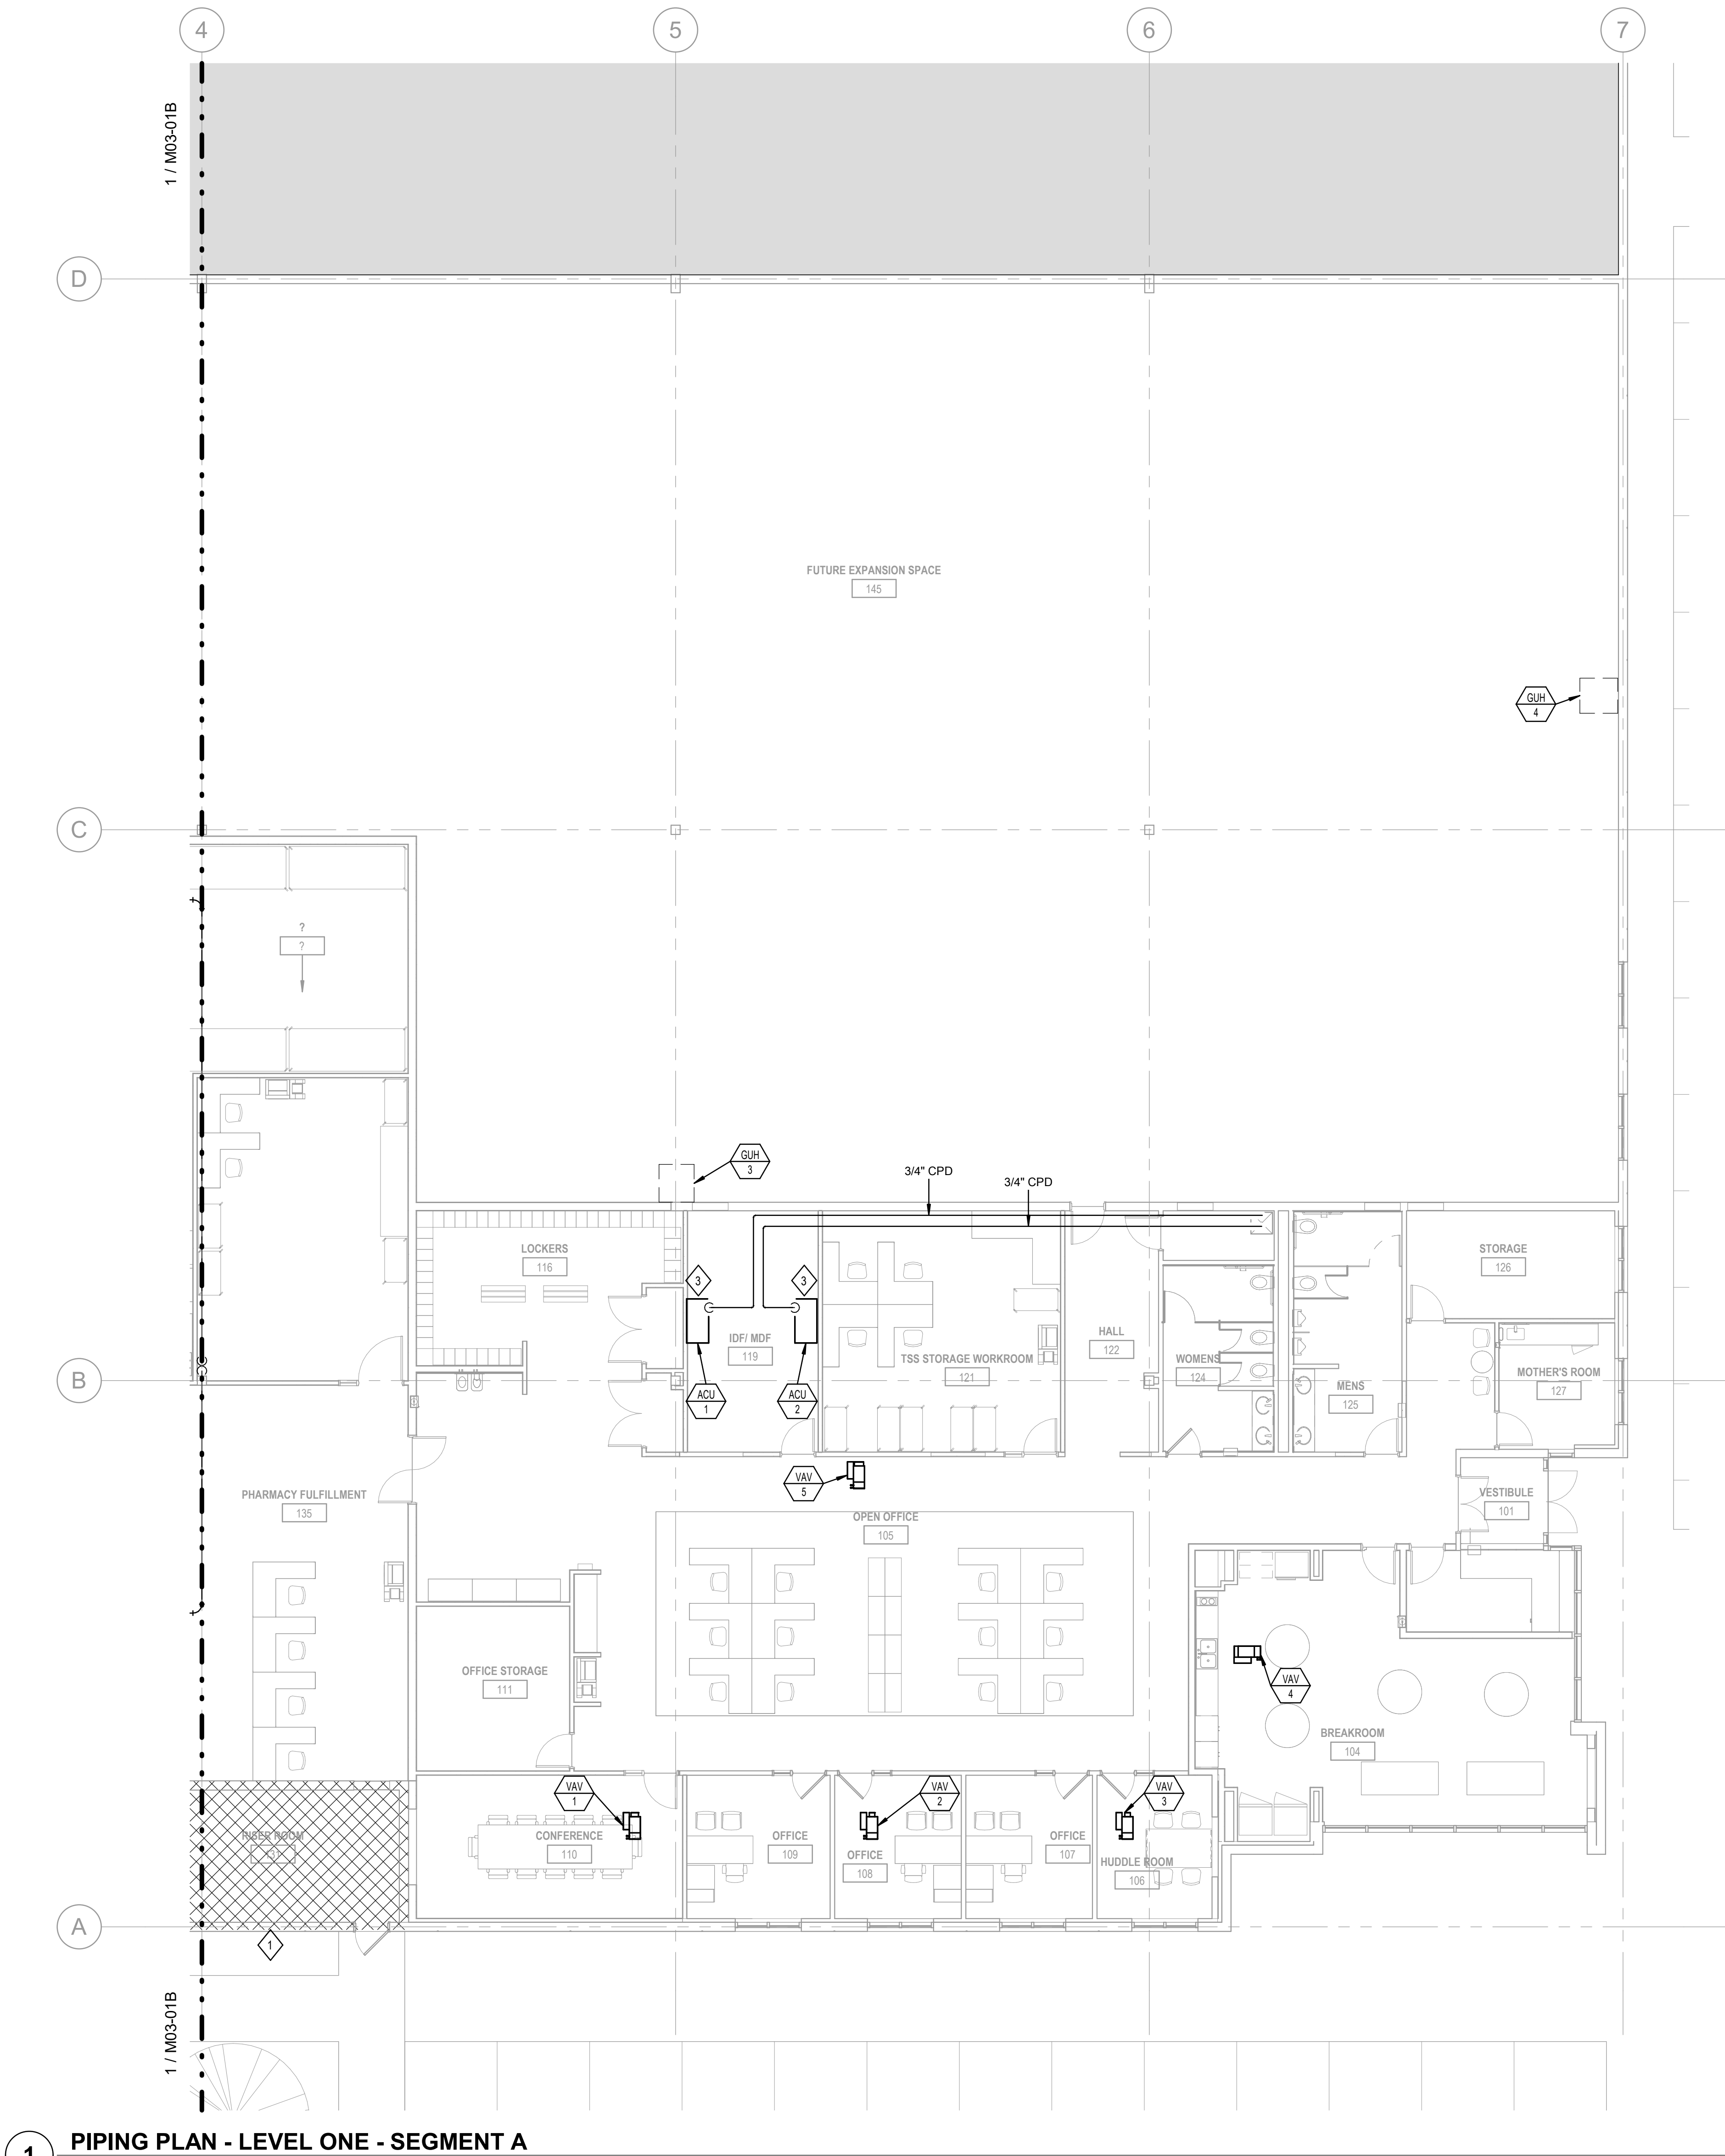

1 PIPING PLAN - LEVEL ONE - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
2. CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
3. CONTRACTOR SHALL COORDINATE THE LOCATIONS OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL OTHER APPLICABLE TRADES PRIOR TO INSTALLATION.
4. MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL STEEL SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINTING COLOR.
6. NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATION WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
7. ANY TAP SERVING ONE OR MORE EQUIPMENT CONNECTION SHALL HAVE ISOLATION VALVES.
8. ALL CONTROL VALVES TO BE 2-WAY UNLESS NOTED OTHERWISE. THE LAST CONTROL VALVE AT THE END OF THE PIPING RUN ON EACH FLOOR SHALL BE 3-WAY CONTROL VALVE.
9. ALL ELEVATIONS NOTED ARE RELATIVE TO FINISHED FLOOR ELEVATION.

KEYNOTES

1. NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
2. PROVIDE CONDENSATE PIPING TO CONDENSATE EVAPORATOR.
3. PROVIDE CONDENSATE PUMP.
4. PROVIDE REFRIGERATION PIPING BETWEEN OUTDOOR UNIT AND REFRIGERATION POINT OF CONNECTION.
5. CONTRACTOR TO PROVIDE PUMP IN A BASIN FOR CONDENSATE REMOVAL. DISCHARGE PIPING TO PUMP UP TO DECK FROM BASIN AND GRAVITY FLOW TO HUB DRAIN. PUMP, BASIN AND PIPING SPECIFICATIONS TO BE PROVIDED BASED UPON REFRIGERATION MFG PRODUCT PERFORMANCE AND REQUIREMENTS.



EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

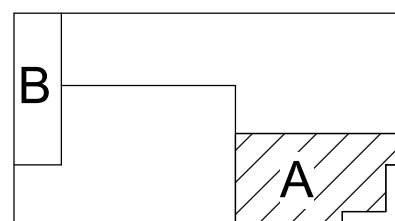

**PIPING PLAN -
LEVEL ONE -
SEGMENT A**

M03-01A

4/24/2026 2:44:52 PM M03-01B PIPING PLAN - LEVEL ONE - SEGMENT B

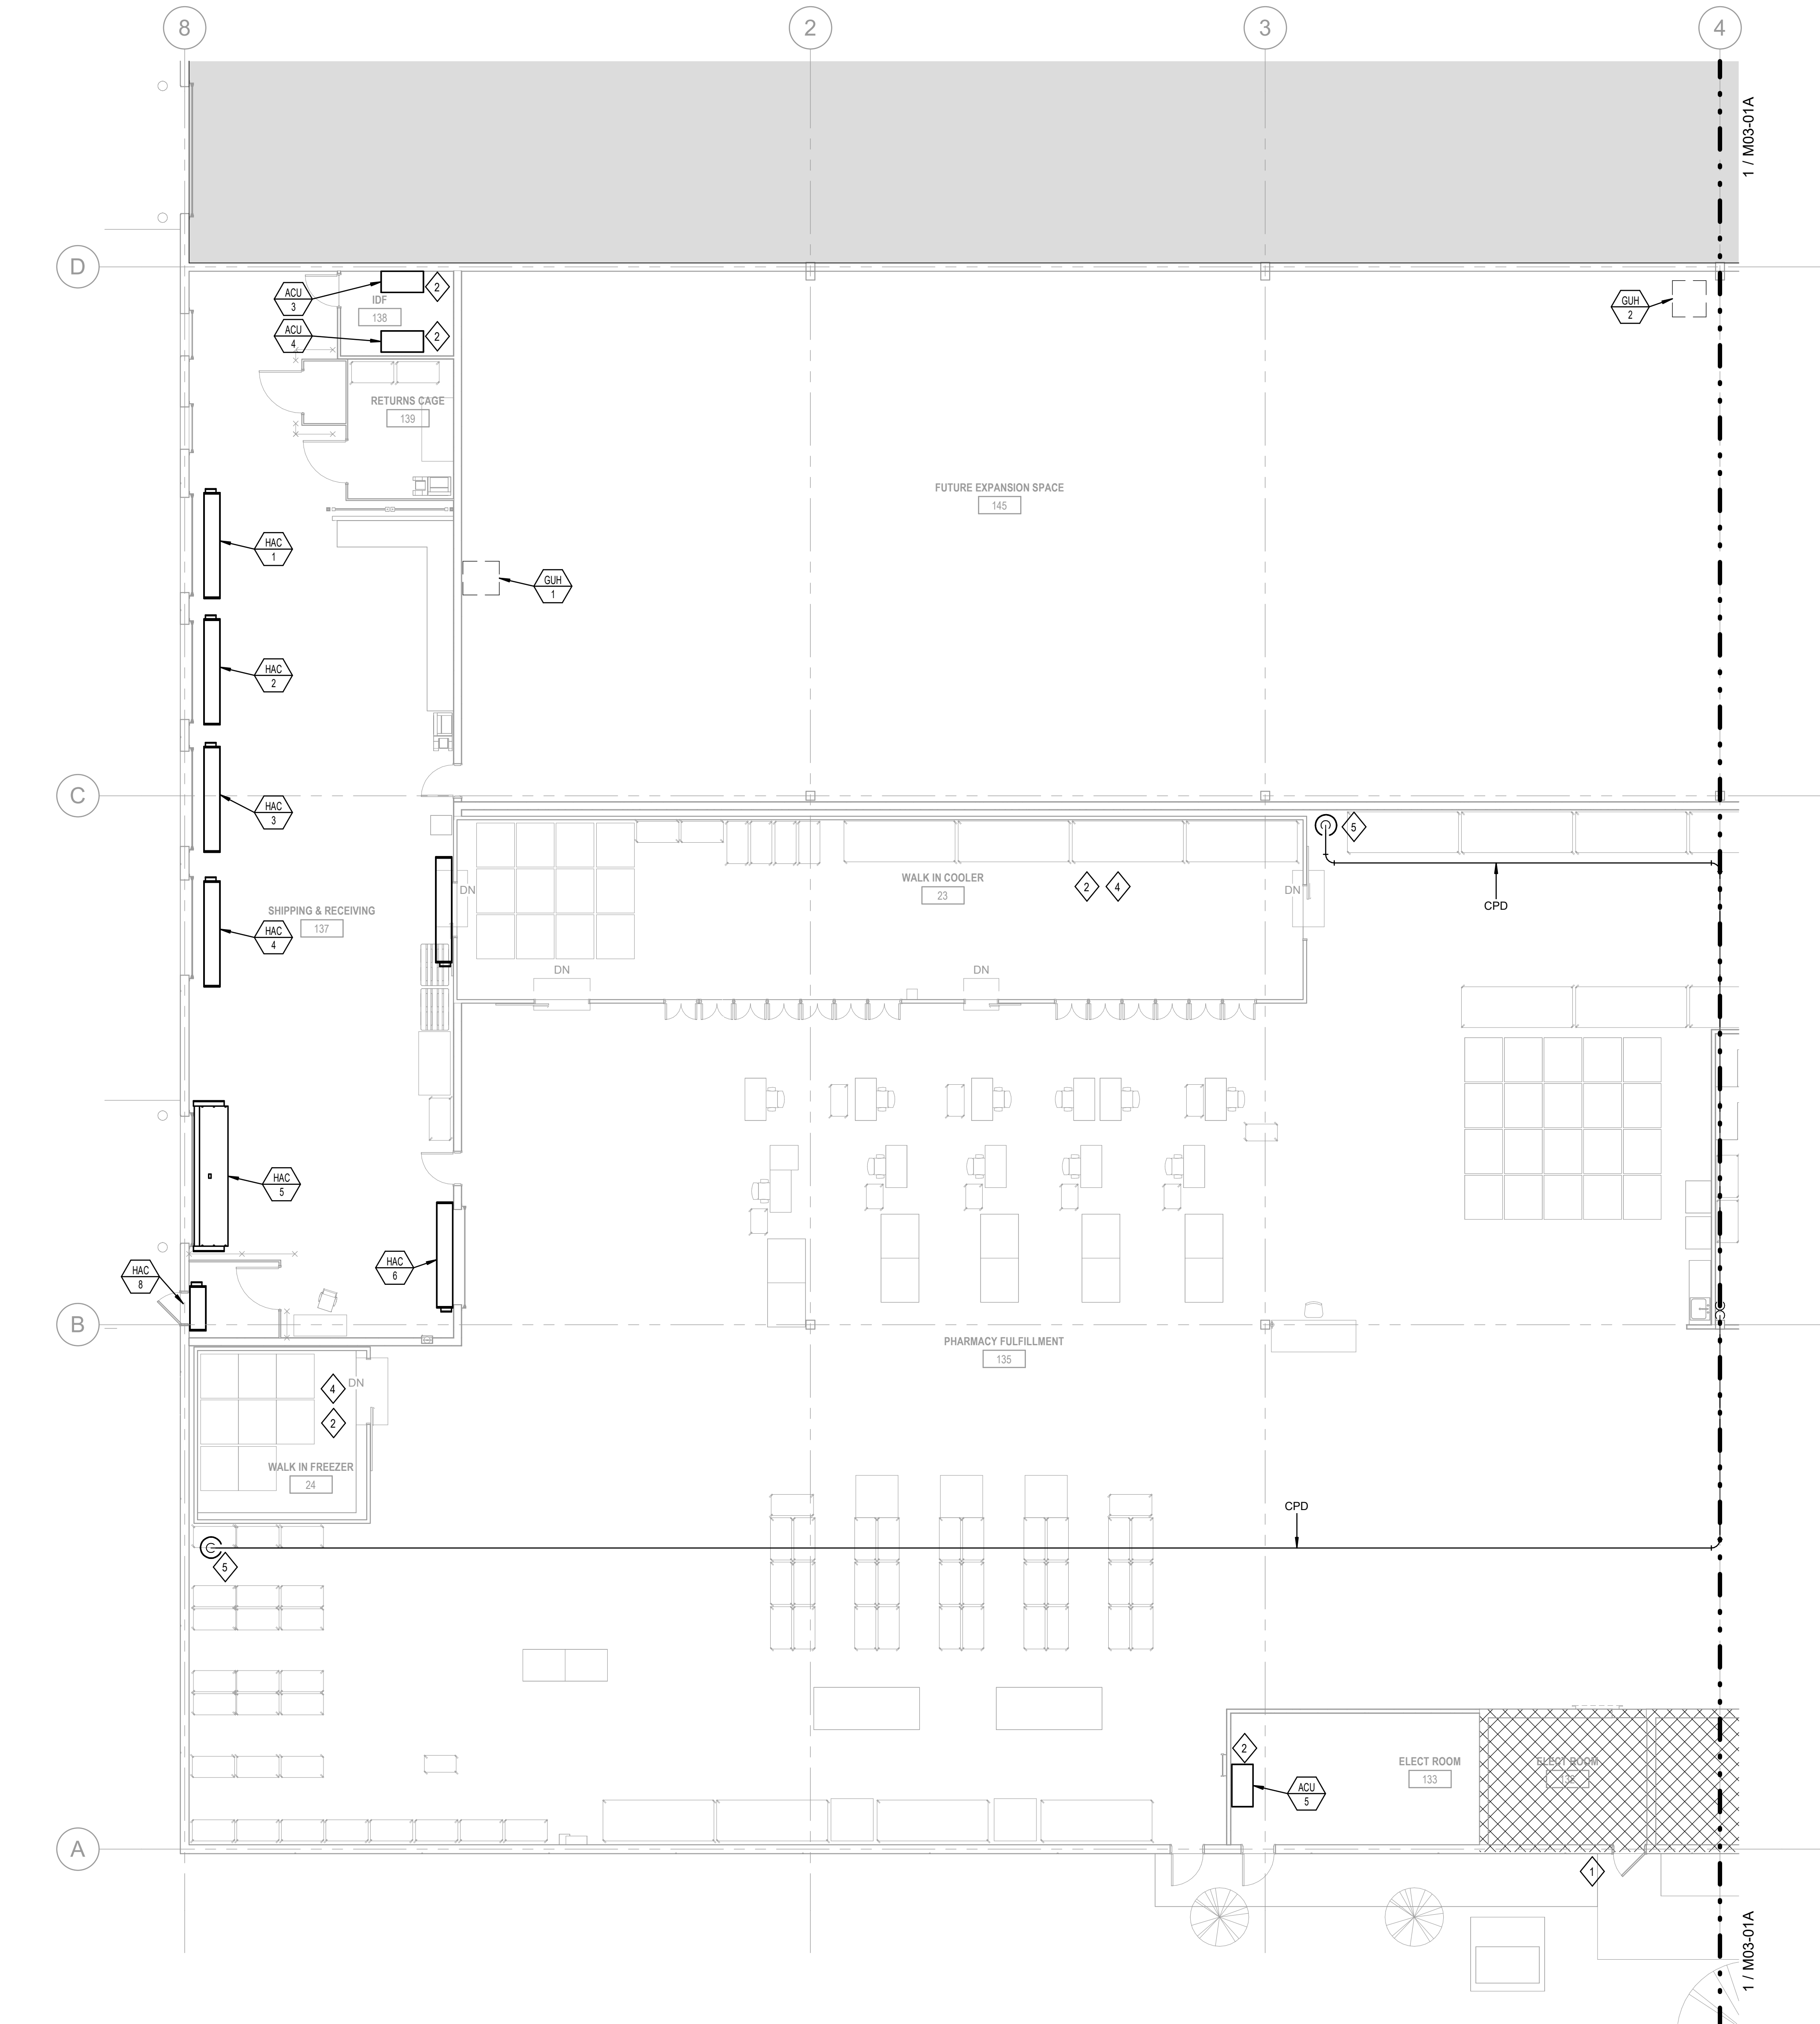

1 PIPING PLAN - LEVEL ONE - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. CONTRACTOR TO VERIFY THE EXACT LOCATION OF ALL EQUIPMENT AND COMPONENTS REQUIRING MECHANICAL CONNECTION PRIOR TO ANY WORK.
2. CONTRACTOR SHALL FIELD VERIFY LAYOUT AND INSTALLATION REQUIREMENTS FOR ACTUAL EQUIPMENT PROVIDED.
3. CONTRACTOR SHALL COORDINATE THE LOCATIONS OF DUCTWORK MAINS AND BRANCHES, AIR VALVES, CONTROL PANELS, PIPING VALVES, ETC. WITH ALL OTHER APPLICABLE TRADES PRIOR TO INSTALLATION.
4. MISCELLANEOUS STRUCTURAL STEEL FOR EQUIPMENT, EXPOSED DUCTWORK AND EXPOSED PIPE SUPPORTS SHALL BE PROVIDED. ALL STEEL SHALL BE FINISHED AND PAINTED. REFER TO ARCHITECTURAL SPECIFICATIONS FOR FINISHING AND PAINTING COLOR.
6. NO PIPING, DUCTWORK, OR MECHANICAL EQUIPMENT SHALL BE INSTALLED ABOVE ELECTRICAL EQUIPMENT. REFER TO ELECTRICAL ROOM, ELEVATOR MACHINE ROOM, AND IDF CLOSET DRAWING AND COORDINATION WITH E.C. AND G.C. FOR EXACT ELECTRICAL EQUIPMENT LOCATIONS.
7. ANY TAP SERVING ONE OR MORE EQUIPMENT CONNECTION SHALL HAVE ISOLATION VALVES.
8. ALL CONTROL VALVES TO BE 2-WAY UNLESS NOTED OTHERWISE. THE LAST CONTROL VALVE AT THE END OF THE PIPING RUN ON EACH FLOOR SHALL BE 3-WAY CONTROL VALVE.
9. ALL ELEVATIONS NOTED ARE RELATIVE TO FINISHED FLOOR ELEVATION.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of Issue: 04/24/2026
Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


1. NO MECHANICAL SCOPE IN THIS HATCHED AREA. SYSTEMS TO REMAIN AS EXISTING.
2. PROVIDE CONDENSATE PIPING TO CONDENSATE EVAPORATOR.
3. PROVIDE CONDENSATE PUMP.
4. PROVIDE REFRIGERATION PIPING BETWEEN OUTDOOR UNIT AND REFRIGERATION POINT OF CONNECTION.
5. CONTRACTOR TO PROVIDE PUMP IN A BASIN FOR CONDENSATE REMOVAL. DISCHARGE PIPING TO PUMP UP TO DECK FROM BASIN AND GRAVITY FLOW TO HUB DRAIN. PUMP, BASIN AND PIPING SPECIFICATIONS TO BE PROVIDED BASED UPON REFRIGERATION MFG PRODUCT PERFORMANCE AND REQUIREMENTS.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

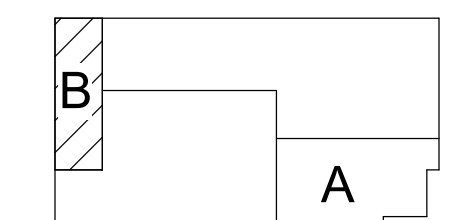

PIPING PLAN -
LEVEL ONE -
SEGMENT B

M03-01B

ISSUANCES


04/24/2026 ISSUE FOR PERMIT

Date of Issue: 04/24/2026
Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY300 AIRPORT RD., SUITE 4
ELGIN, IL 60123JOB 26136.0000
DATE 04/24/2026MECHANICAL
RISER DIAGRAM

M07-01

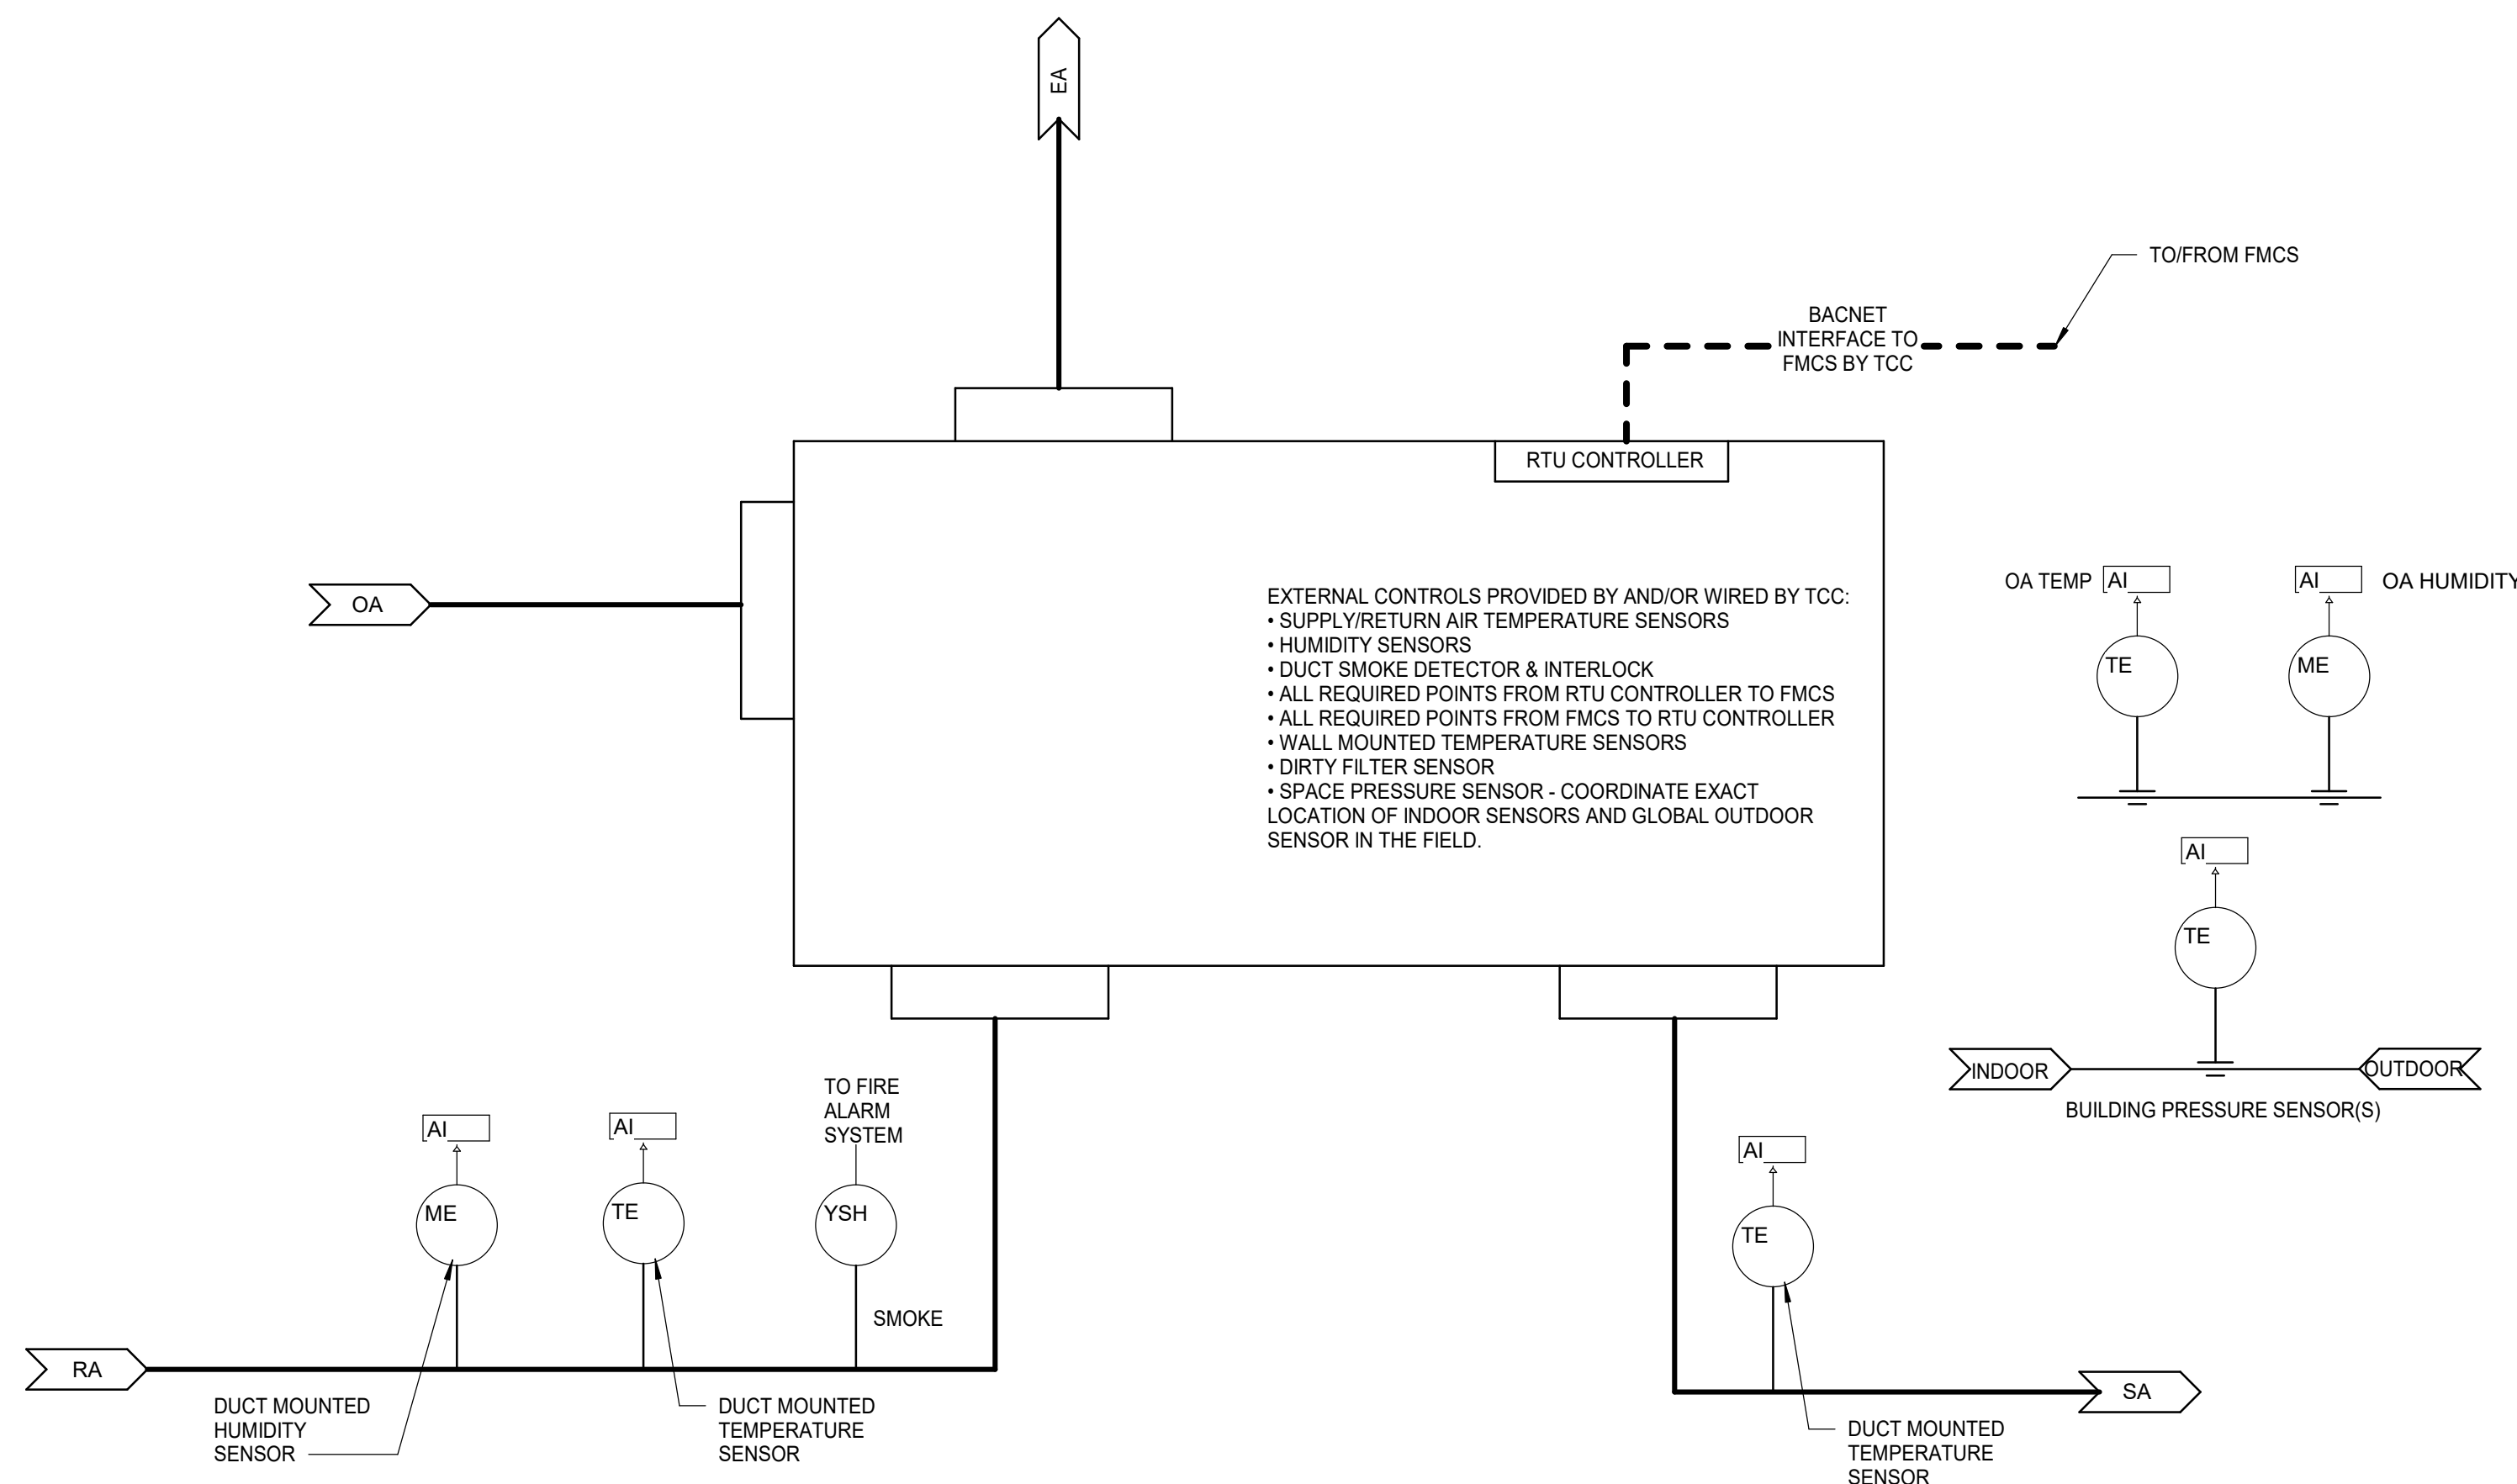

ROOF TOP UNITS - CONTROL SEQUENCE

A. SCOPE

1. SYSTEM SHALL CONSIST OF PACKAGED SINGLE ZONE VARIABLE VOLUME SYSTEM WITH SUPPLY FAN, FACTORY INSTALLED CONTROLLER, MERV 8 PREFILTER, BAROMETRIC RELIEF, AND EXPANSION COOLING SECTION.
2. SENSORS SHALL BE PROVIDED BY ROOFTOP UNIT MANUFACTURER AND POINTS MONITORED BY BUILDING AUTOMATION SYSTEM.
3. UNIT MANUFACTURER, MECHANICAL CONTRACTOR, AND CONTROL CONTRACTOR SHALL COORDINATE TO PROVIDE ALL NECESSARY DEVICES, HARDWARE, SOFTWARE, AND PROGRAMMING REQUIRED FOR INTERFACE WITH BAS UNIT CONTROLLER, AND ALL SEQUENCES.

B. SYSTEM AND FAN OPERATION

1. UNIT OPERATION SHALL BE AUTOMATIC AND ACTIVATED THROUGH BUILDING AUTOMATION SYSTEM.
2. BAS SHALL BE PROGRAMMED WITH THE FOLLOWING TENTATIVE OCCUPANCY SCHEDULE FOR OFFICE RTU-1 AND RTU-2 TO INTERFACE WITH RTU CONTROLLER:

1. MORNING START-UP MODE:

1. MONDAY THRU SATURDAY 6:00 - 7:00AM (ADJ.)
2. SUNDAY 7:00 - 8:00AM (ADJ.)

2. OCCUPIED MODE:

1. MONDAY THRU SATURDAY 7:00AM - 7:00PM (ADJ.)
2. SUNDAY 8:00AM - 5:00PM (ADJ.)

3. UNOCCUPIED MODE:

1. PHARMACY AND SHIPPING & RECEIVING UNITS SHALL MAINTAIN OCCUPIED MODE AT ALL TIMES (ADJ.).

4. ALL OTHER TIMES:

2. FACTORY MOUNTED ONBOARD CONTROLLER SHALL OPERATE UNIT AND PROVIDE FEEDBACK TO BUILDING AUTOMATION SYSTEM.
3. UNIT SUPPLY FAN(S) SHALL RUN CONTINUOUSLY IN OCCUPIED MODE AND INTERMITTENTLY IN UNOCCUPIED MODE.

4. OFFICE UNIT RTU-1 AND RTU-2 SHALL MAINTAIN TEMPERATURE SETPOINT OF 75°F COOLING / 70°F HEATING (ADJ.) IN OCCUPIED MODE. SETBACK TO 85°F/85°F IN UNOCCUPIED MODE. SPACE TEMPERATURE SHALL BE DETERMINED BY WALL MOUNTED TEMPERATURE SENSOR.

5. PHARMACY AND SHIPPING & RECEIVING UNITS SHALL MAINTAIN TEMPERATURE SETPOINT OF 72 DEG COOLING / 72 DEG HEATING (ADJ.). SPACE TEMPERATURE SHALL BE DETERMINED BY WALL MOUNTED TEMPERATURE SENSOR.

- C. UNIT DISCHARGE SUPPLY AIR TEMPERATURE CONTROL:

1. DX COOLING WILL BE ENABLED WHEN THE ROOM TEMPERATURE IS HIGHER THAN THE ROOM TEMPERATURE SET POINT.

2. RTU INTEGRAL COOLING CONTROL SEQUENCE SHALL STAGE COMPRESSORS AND FANS AS NECESSARY TO ACHIEVE SET POINT.

3. HEATING WILL BE ENABLED WHEN THE ROOM TEMPERATURE IS LOWER THAN THE ROOM TEMPERATURE SET POINT.

D. ECONOMIZER CONTROL:

1. PROVIDE DRY BULB ECONOMIZER CONTROL.
2. ECONOMIZER CONTROL SHALL BE ENABLED WHEN OUTSIDE AIR DRY BULB TEMPERATURE IS LESS THAN

- RETURN AIR TEMPERATURE MINUS 2°F (ADJ.) FOR 10 CONSECUTIVE MINUTES (ADJ.) UNLESS OUTSIDE AIR ENTHALPY EXCEEDS 26 BTULB.

3. WHENEVER OUTSIDE AIR DRY BULB TEMPERATURE EXCEEDS THE RETURN AIR TEMPERATURE MINUS 5°F (ADJ.)

- FOR 10 CONSECUTIVE MINUTES, ECONOMIZER CONTROL SHALL SWITCH TO MINIMUM OUTSIDE AIR MODE.

4. UPON LOSS OF OUTSIDE AIR TEMPERATURE SENSOR, ECONOMIZER MODE SELECTION SHALL BE DEACTIVATED AND ALARM GENERATED.

E. GRAPHIC DISPLAY:

- A. DISPLAY GRAPHICS OF EACH RTU USING INFORMATION RECEIVED FROM BACNET INTERFACE. THE FOLLOWING RTU CONTROL PANEL POINTS (TO BE INCLUDED, BUT NOT LIMITED TO) SHALL BE MONITORED BY THE FMCS AND DISPLAYED AT THE OPERATOR WORK STATION FOR EACH RTU.

• COOLING STATUS

• HEATING STATUS

• FAN STATUS

• UNIT STATUS / OCCUPANCY

• SPACE TEMP

• SUPPLY AIR TEMP

• RETURN AIR HUMIDITY

• RETURN AIR TEMPERATURE

• FILTER STATUS

• SPACE PRESSURE

• GENERAL ALARM

• FIRE ALARM

• GLOBAL OUTSIDE AIR TEMPERATURE

• GLOBAL OUTSIDE AIR HUMIDITY

• BUILDING PRESSURE

F. SETPOINTS

1. OCCUPIED = 70°F HEATING, 75°F COOLING (ADJ.)

2. UNOCCUPIED = 55°F HEATING, 85°F COOLING (ADJ.)

3. MAXIMUM OCCUPIED HUMIDITY = 50% RH (ADJ.)

- G. ALARMS, INTERLOCKS AND SAFETIES (TO BE INSTALLED BY TCC)

1. FIRE ALARM RELAY


2. SUPPLY FAN FAULT

3. DIRTY FILTER ALARM (WHEN PRESSURE DROP EXCEEDS 0.5" W.C. (ADJ.))

4. IF DISCHARGE AIR TEMPERATURE IS LESS THAN 45°F (ADJ.) OR GREATER THAN 95°F (ADJ.).

5. SMOKE DETECTOR IN RETURN AIR DUCTWORK FOR UNITS OVER 2,000CFM

6. IF FIRE ALARM SYSTEM IS ACTIVATED ALL UNITS SHALL SHUT DOWN.

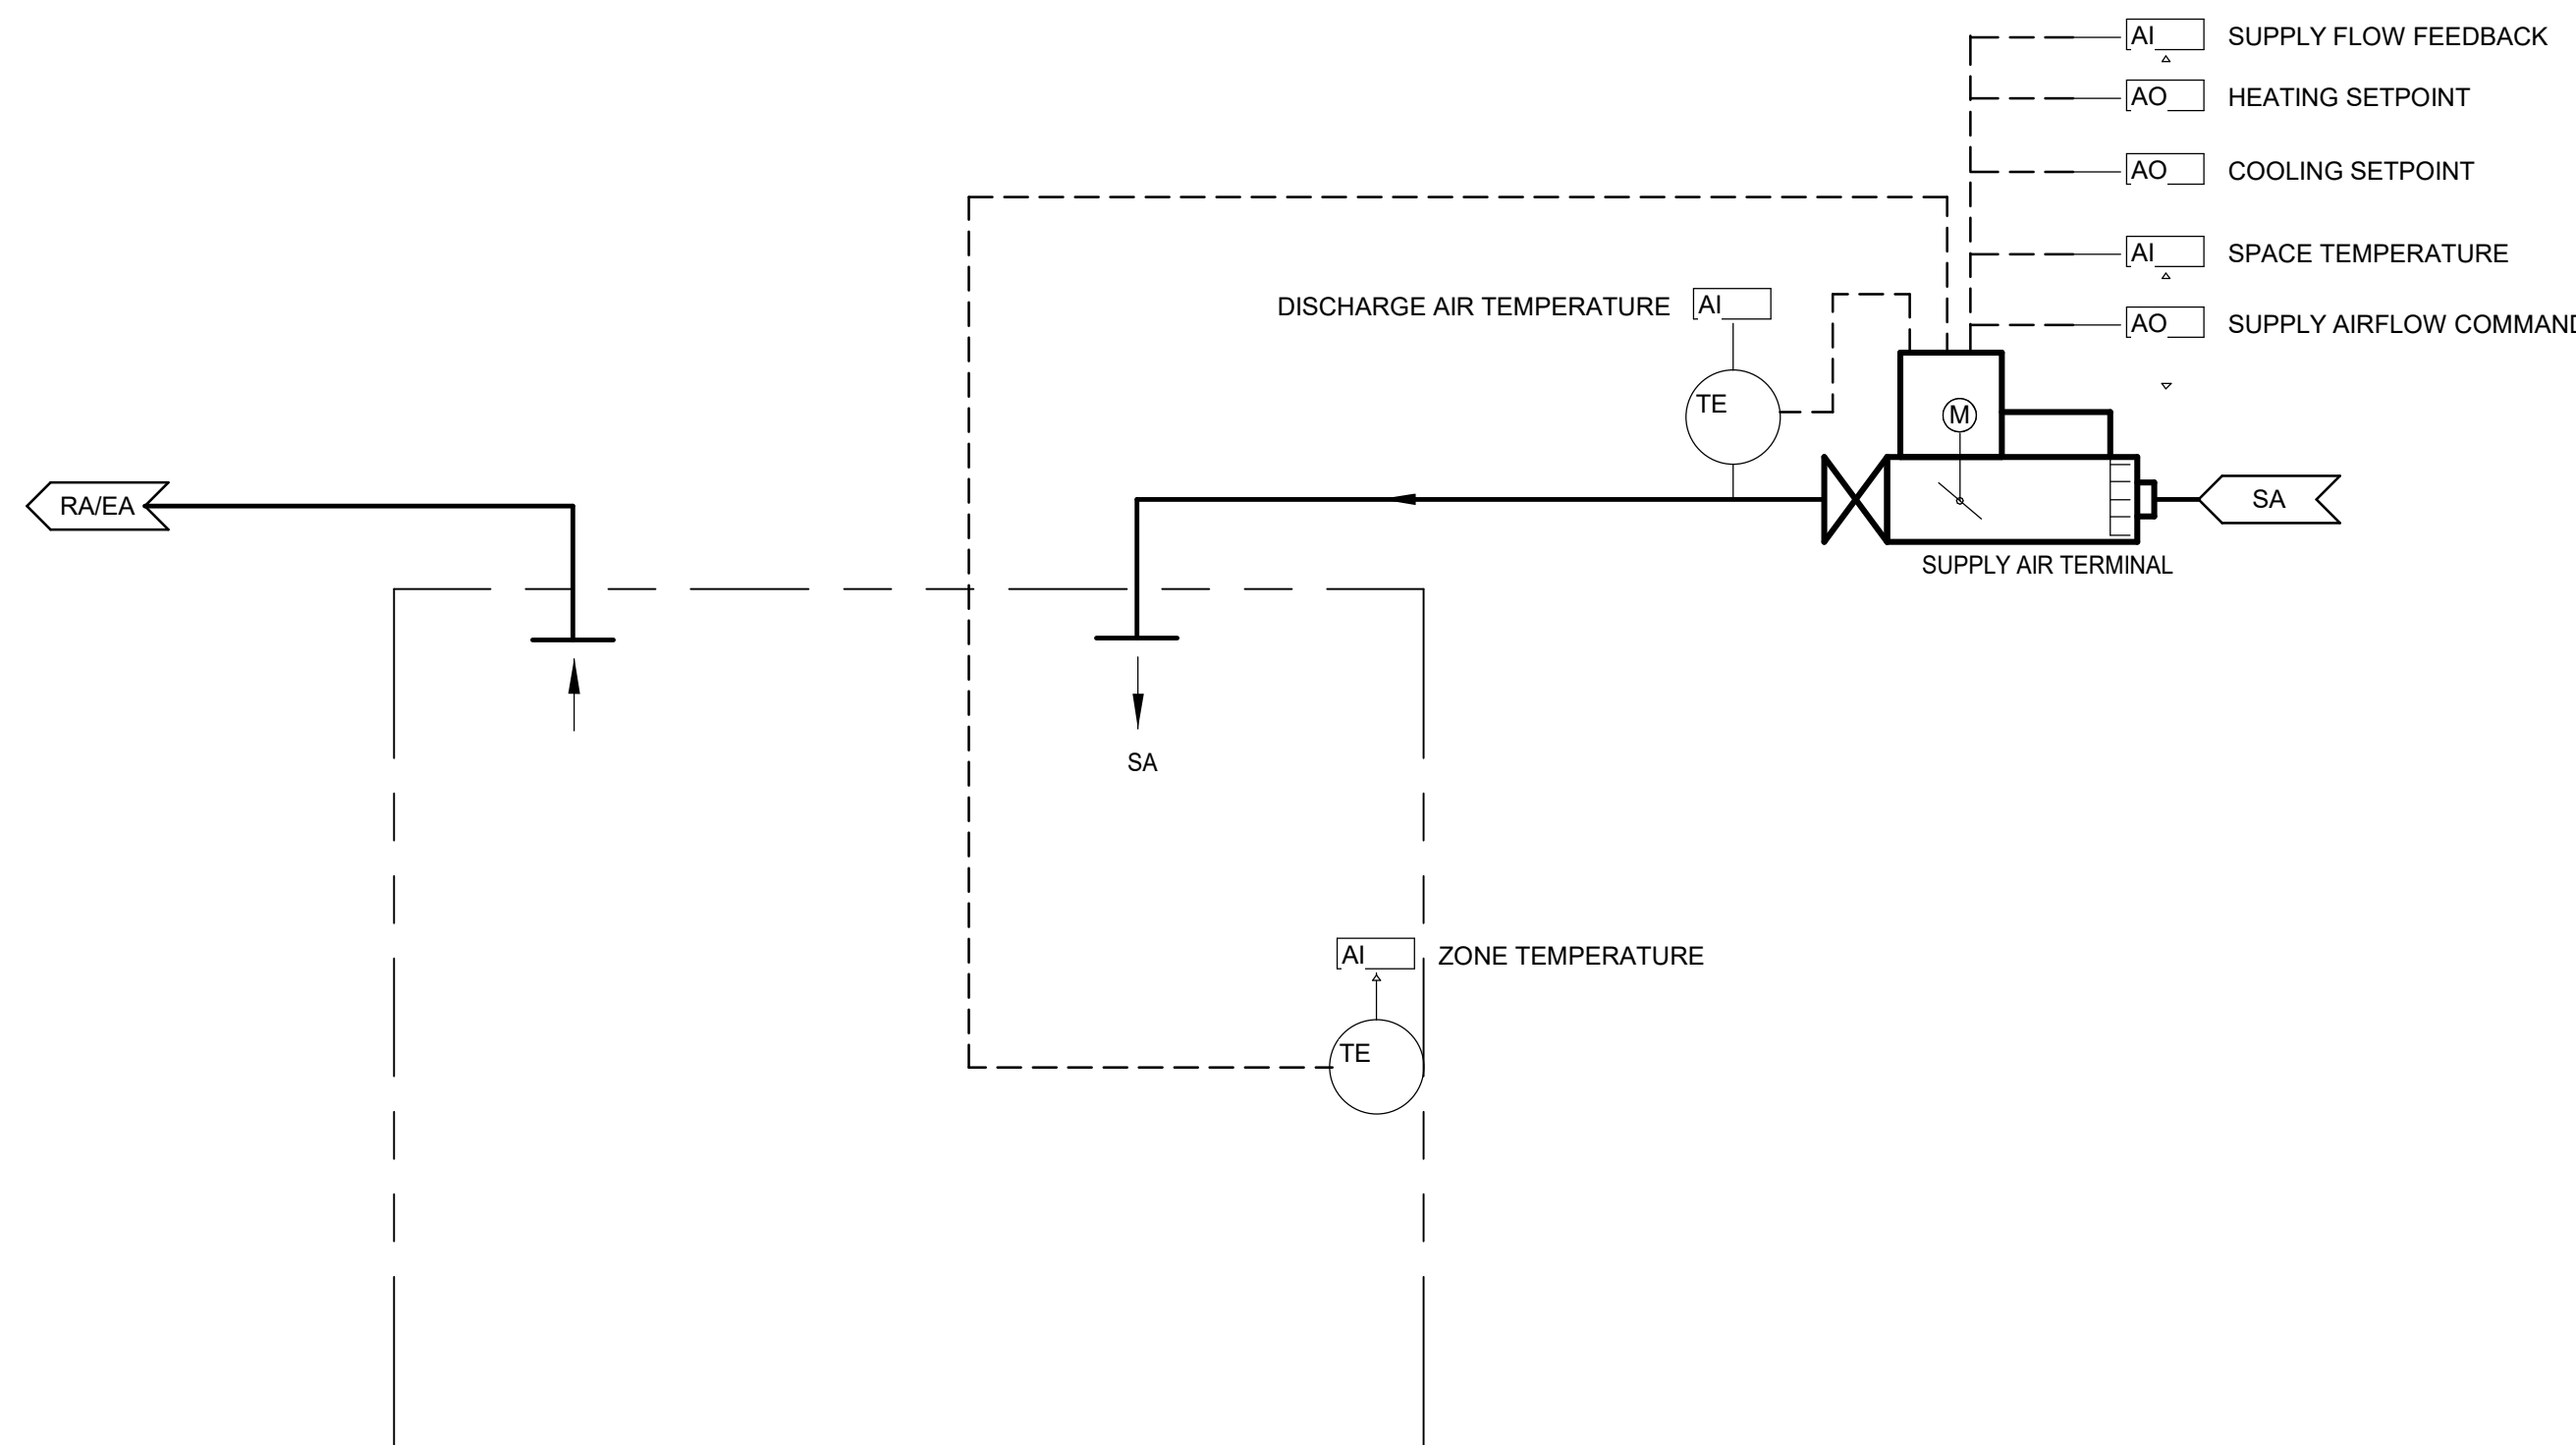

TERMINAL CONTROL SEQUENCE - SINGLE DUCT VARIABLE VOLUME AIR TERMINAL DEVICES WITH REHEAT COILS

A. GENERAL

1. AIR TERMINAL UNITS ARE SYSTEM PRESSURE INDEPENDENT TYPE WITH ELECTRIC ACTUATORS.
2. WALL MOUNTED, TEMPERATURE SENSOR SHALL BE PROVIDED IN SPACE WHERE SHOWN ON PLAN.
3. PROVIDE CONTROL POWER TO EACH CONTROLLER/DEVICE AS REQUIRED TO ACCOMPLISH SPECIFIC FUNCTION.

B. SPACE TEMPERATURE SETPOINTS (UNLESS NOTED OTHERWISE)

1. OCCUPIED SPACE TEMPERATURE SETPOINTS SHALL BE 70°F (FA) FOR HEATING AND 75°F (FA) FOR COOLING. LOCAL ADJUSTMENT SHALL BE LIMITED TO +/- 2°F (FA).

2. UNOCCUPIED SPACE TEMPERATURE SETPOINTS SHALL BE 65°F (FA) FOR HEATING AND 80°F (FA) FOR COOLING.

C. TEMPERATURE & VOLUME CONTROL

1. ON A RISE IN SPACE TEMPERATURE ABOVE COOLING SETPOINT, SUPPLY AIR VOLUME SHALL MODULATE BETWEEN MINIMUM AND MAXIMUM AIR FLOWS AS INDICATED IN SCHEDULES, WITH THE HOT WATER CONTROL VALVE CLOSED, TO MAINTAIN COOLING SPACE TEMPERATURE SETPOINT.

2. ON DROP IN SPACE TEMPERATURE BELOW THE COOLING SET POINT AIR FLOW SHALL MODULATE DOWN TO THE SCHEDULED MINIMUM FLOW.

3. WHEN AIR TERMINAL IS AT MINIMUM AIR FLOW, THE SPACE TEMPERATURE SHALL BE ALLOWED TO DRIFT BETWEEN COOLING AND HEATING SET POINTS WITHOUT ANY ADDITIONAL CONTROL ACTION.

4. ON A CONTINUED DROP IN SPACE TEMPERATURE BELOW THE HEATING SET POINT WITH THE AIR FLOW AT THE MINIMUM SETPOINT, THE HOT WATER CONTROL VALVE SHALL MODULATE TO MAINTAIN MINIMUM HEATING SPACE TEMPERATURE SETPOINT.

5. ON A CONTINUED DROP IN SPACE TEMPERATURE BELOW THE HEATING SET POINT WITH THE AIR FLOW AT THE MINIMUM SETPOINT AND THE HOT WATER CONTROL VALVE IS FULL OPEN, THE AIR FLOW SHALL MODULATE UPWARDS TOWARDS THE MAXIMUM HEAT AIR FLOW POSITION TO MAINTAIN MINIMUM HEATING SPACE TEMPERATURE SETPOINT.

6. WITH RISE IN SPACE TEMPERATURE REVERSE SEQUENCE SHALL OCCUR, WITH THE AIR FLOW MODULATING BACK DOWN TO THE MINIMUM POSITION FIRST, THEN THE HOT WATER CONTROL VALVE MODULATES CLOSED BEFORE THE UNIT MODULATES BACK OPEN FOR COOLING DEMAND.

D. UNOCCUPIED & UNOCCUPIED STANDBY MODES

1. A ZONE SHALL BE DETERMINED TO BE UNOCCUPIED IF ALL OF THE ROOMS IN THE ZONE ARE DETERMINED TO BE UNOCCUPIED BY THE LIGHTING CONTROL SYSTEM OCCUPANCY/VACANCY SENSORS.


2. A ZONE SHALL BE DETERMINED TO BE OCCUPIED IF ANY OF THE ROOMS IN THE ZONE ARE DETERMINED TO BE OCCUPIED BY THE LIGHTING CONTROL SYSTEM OR IF ANY IF THERMOSTAT OCCUPANCY OVERRIDE BUTTON IS PUSHED IN THAT ZONE. IF AN OCCUPANCY OVERRIDE BUTTON IS PUSHED THAT ZONE SHALL BE CONSIDERED OCCUPIED FOR 60 MINUTES (FA).

E. POWER FAILURE MODE

1. VAV BOX IS CONNECTED TO STANDBY POWER AND SHALL SHUT DOWN ON LOSS OF UTILITY POWER.

4 ROOFTOP UNIT DIAGRAM

SCALE: 12" = 1'-0"

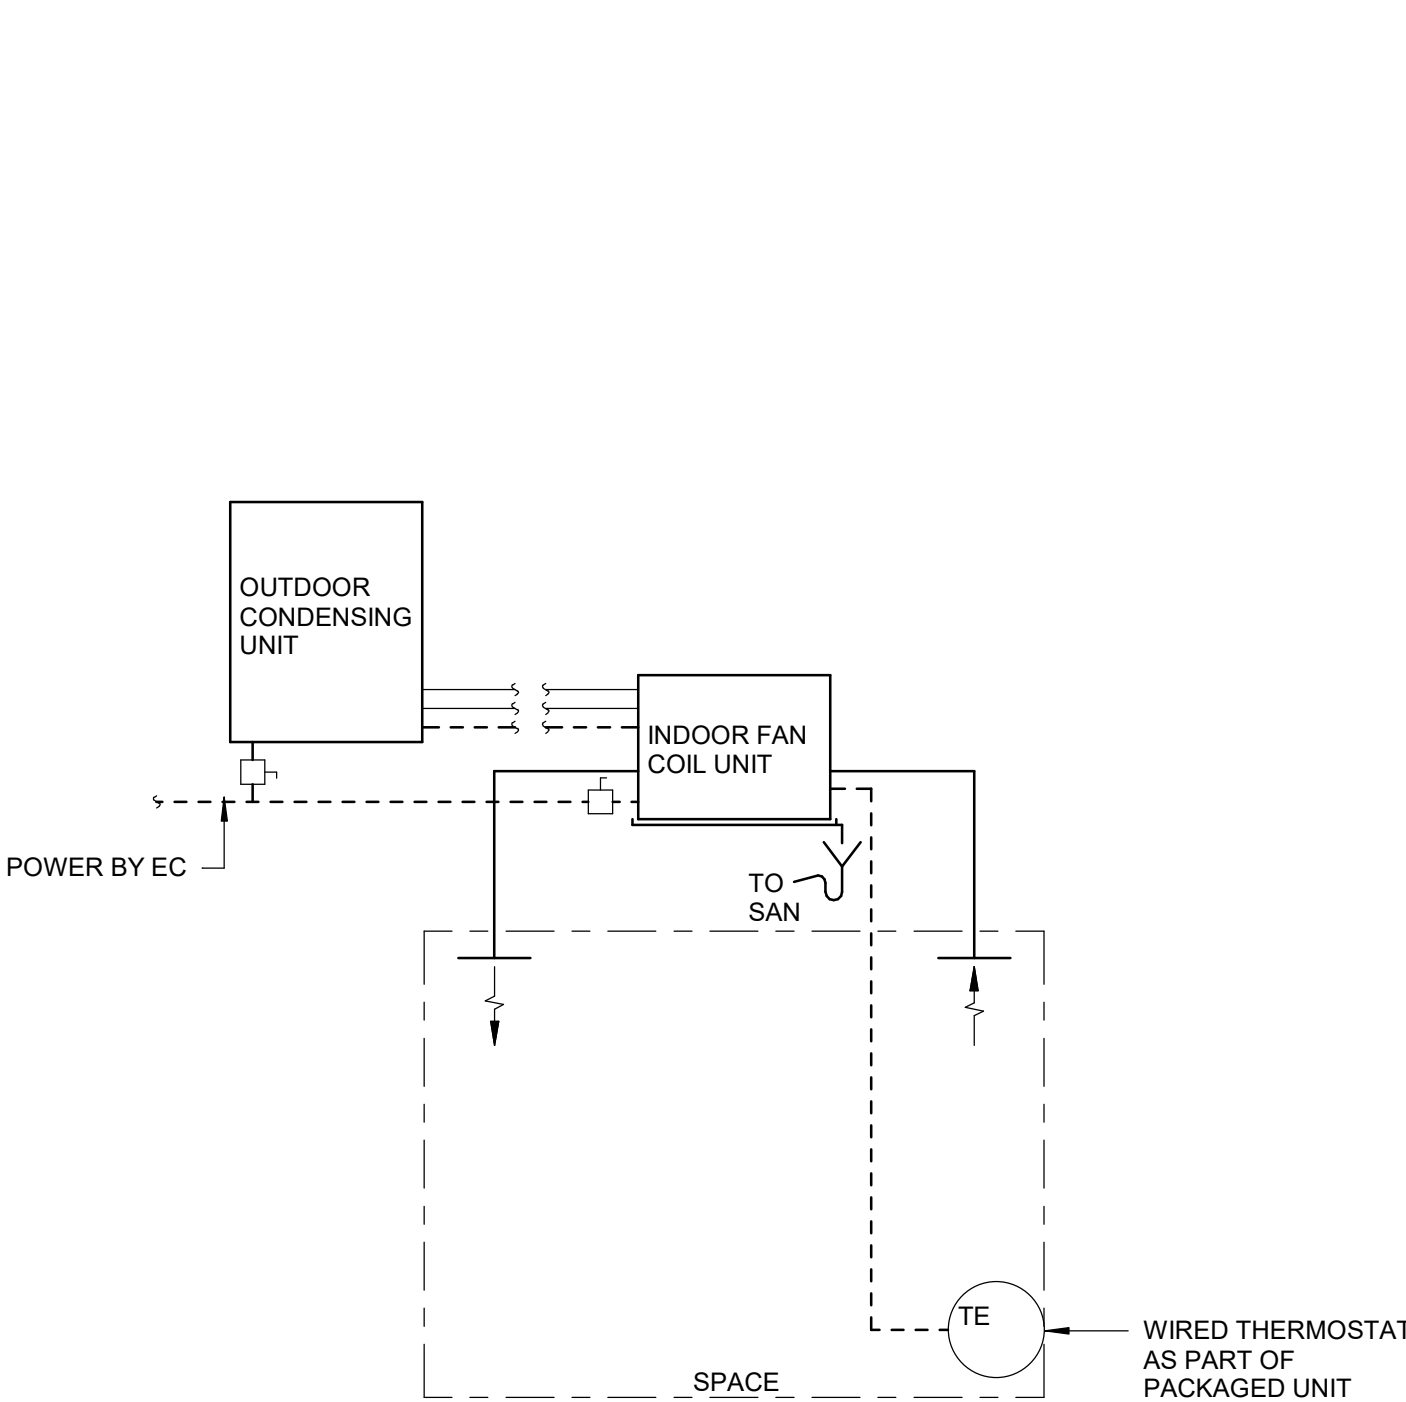

SPLIT DX SYSTEMS (COOLING ONLY)

A. GENERAL

1. THE SPLIT SYSTEM AIR CONDITIONING SYSTEM IS STARTED MANUALLY BY PLACING THE THERMOSTAT IN THE AUTOMATIC POSITION AND SELECTING THE COOLING MODE.

B. OPERATION:

1. PACKAGED SYSTEM CONTROLS AUTOMATICALLY START AND STOP THE EVAPORATOR FAN, CONDENSING FAN, AND COMPRESSOR TO MAINTAIN A ROOM TEMPERATURE SETPOINT OF 75°F F.

C. ALARM


1. UNIT TO ALARM LOCALLY IF TEMPERATURE IN THE SPACE EXCEEDS 90° F.

3 SPLIT DX SYSTEM

SCALE: NOT TO SCALE

2 VARIABLE AIR VOLUME WITH REHEAT

SCALE: NOT TO SCALE

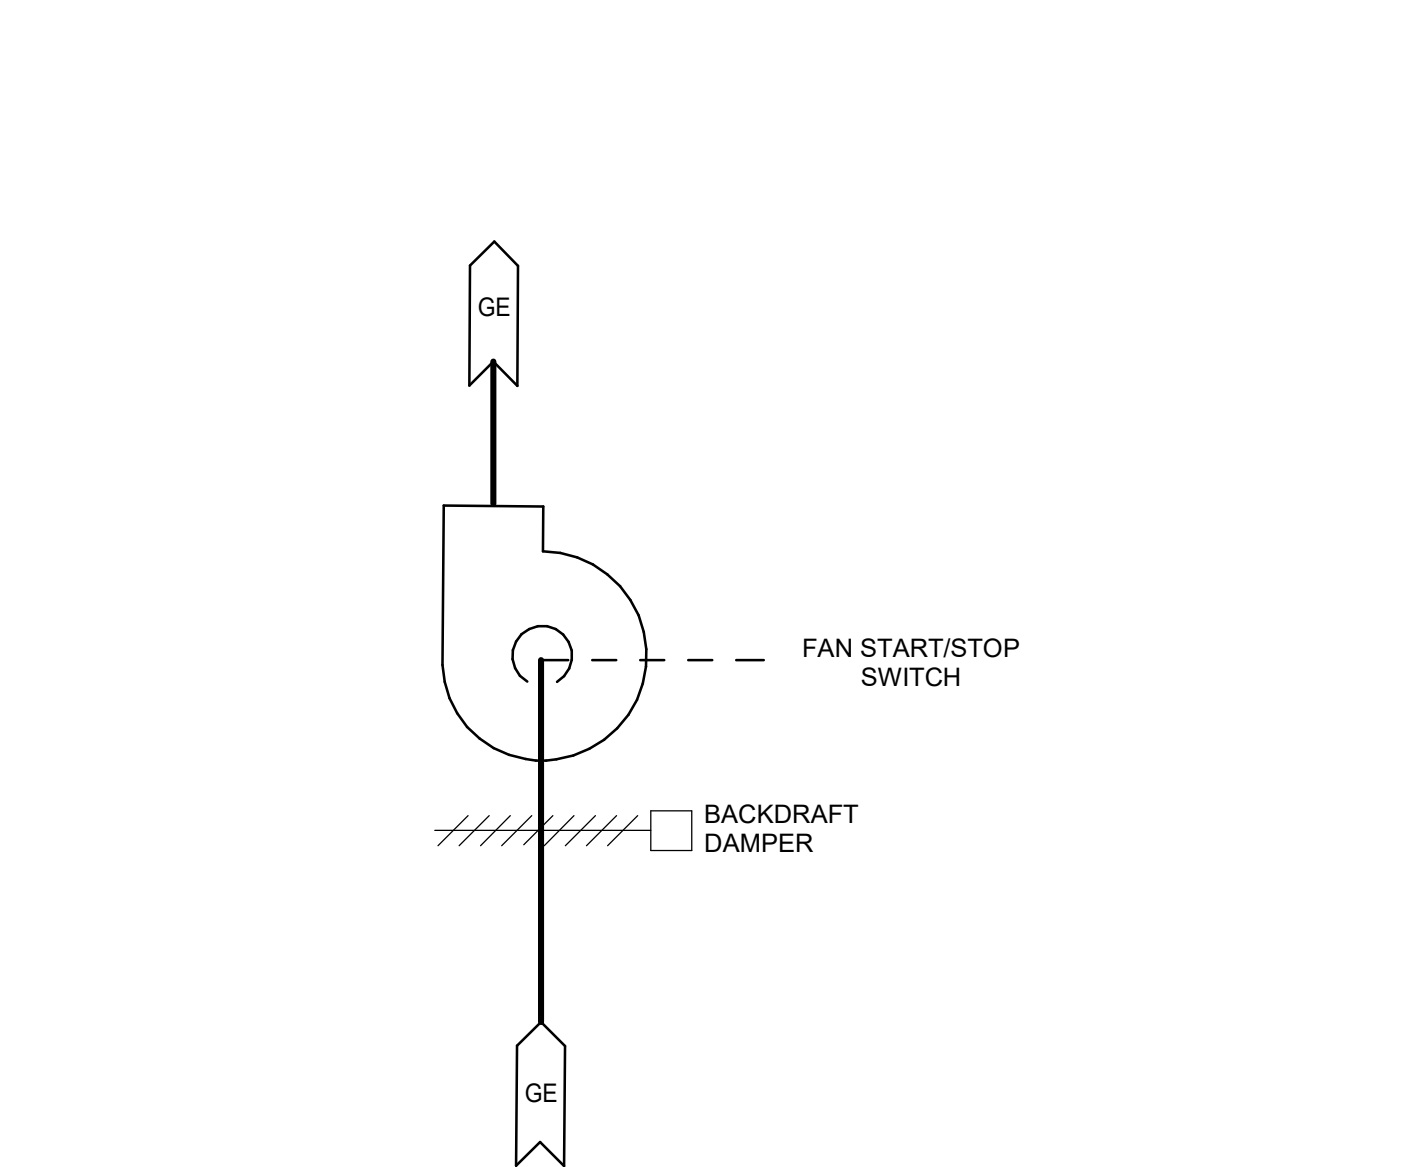

CONSTANT VOLUME EXHAUST FAN SEQUENCE:

A. SYSTEM AND FAN OPERATION:

1. SYSTEMS SHALL OPERATE CONTINUOUSLY IN MODES OF OPERATION AS DESCRIBED BELOW:
 - GENERAL EXHAUST (TOILETS, JANITOR CLOSETS, LOCKER ROOMS, ETC.) - (OCCUPIED / CONSTANT VOLUME)
 - PROGRAMMING TO INCLUDE OPTION FOR UNOCCUPIED OPERATION BASED ON BUILDING SCHEDULE.

2. PRODUCT EXHAUST (PHARMACY, ELECTRICAL, ETC.) - SYSTEM SHALL RUN CONTINUOUSLY.

B. FAN FAILURE DETECTION:


1. IF EXHAUST FAN FAILURE OCCURS, FAILED EXHAUST FAN SHALL BE LOCKED OUT AND REMAIN LOCKED OUT UNTIL MANUALLY RESET.
2. PROVIDE A MANUAL RESET SWITCH AT THE EXHAUST FAN CONTROL PANEL TO RESET ALL LOCKED OUT FANS LOCALLY.

C. POWER FAILURE MODE:

1. EXHAUST FANS AND ALL SUBCOMPONENTS ARE NOT CONNECTED TO STANDBY POWER AND SHALL SHUT DOWN UPON LOSS OF UTILITY POWER.

1 GENERAL EXHAUST FAN


SCALE: NOT TO SCALE

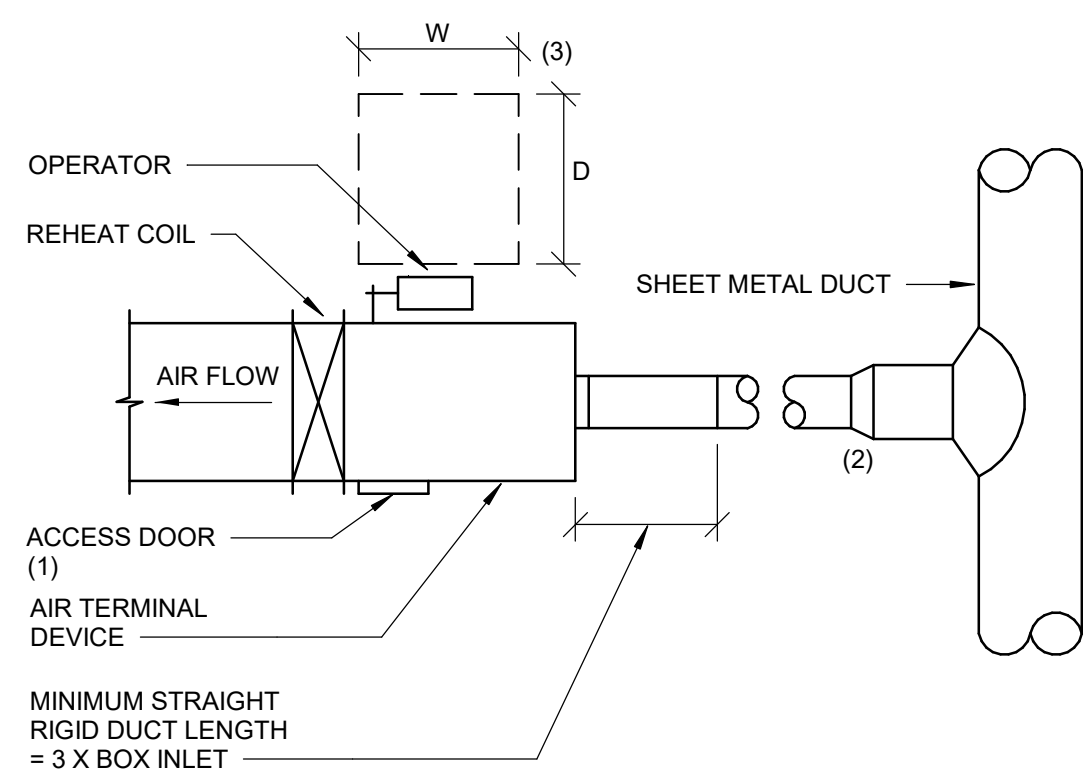

- NOTES:
- (1) ACCESS DOOR FURNISHED WITH UNIT.
 - (2) UNLESS OTHERWISE SHOWN, INCREASE INLET DUCT SIZE BY 2 INCHES IN DIAMETER IF RUNOUT IS LONGER THAN 8 FT.
 - (3) WORKING SPACE FOR ELECTRICAL DEVICES:
 - DEPTH (D) TO BE MINIMUM 3 FT.
 - WIDTH (W) TO BE 30" OR WIDTH OF ELECTRICAL DEVICE, WHICHEVER IS GREATER.

7 AIR TERMINAL DEVICE


SCALE: NOT TO SCALE

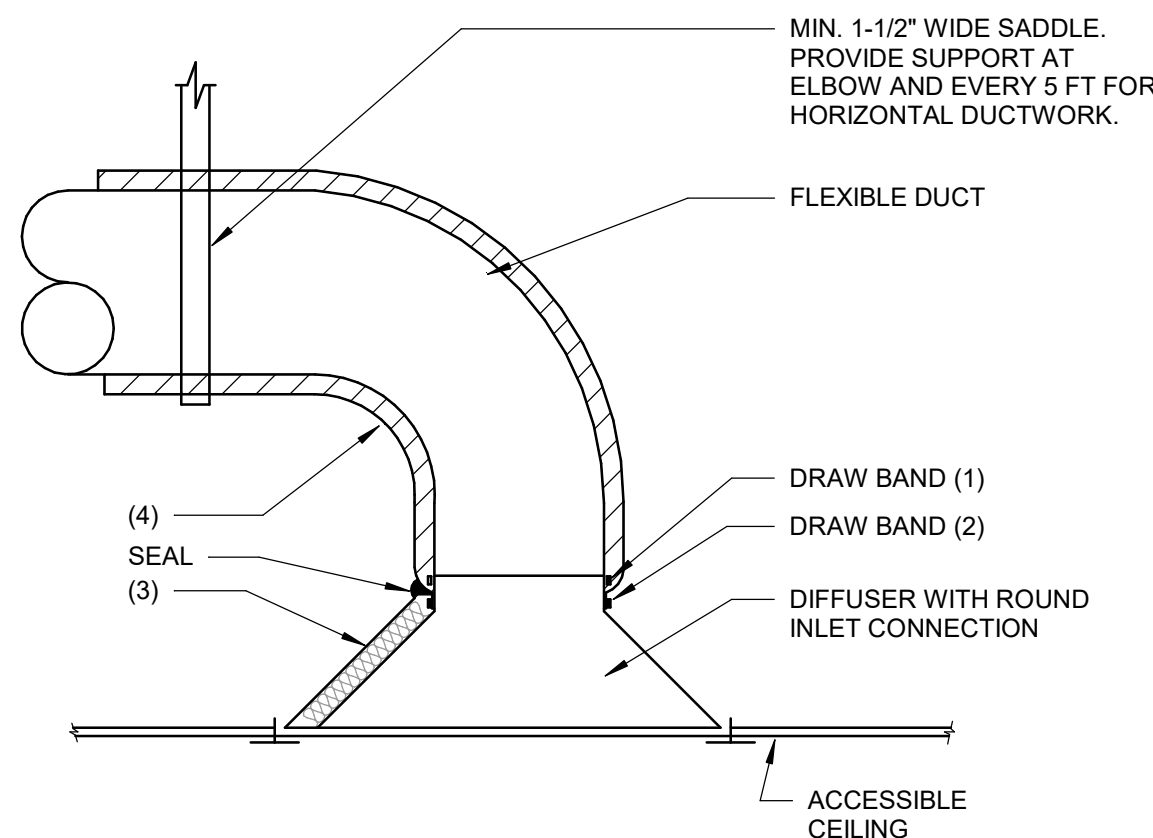

- NOTES:
- (1) PULL FLEXIBLE DUCT'S INNER LINER OVER DIFFUSER COLLAR AND SECURE WITH DRAW BAND.
 - (2) SECURE FLEXIBLE DUCT INSULATION AND OUTER JACKET WITH DRAW BAND.
 - (3) REFER TO SECTION 23 0700 FOR DIFFUSER INSULATION REQUIREMENT.
 - (4) PROVIDE ELBOW SUPPORT DEVICE SIMILAR TO THERMAFLEX FLEXLOW ELBOW IF 90° ELBOW SHAPE IS NOT MAINTAINED BY FLEXIBLE DUCT ITSELF.

6 FLEXIBLE DUCT CONNECTION TO DIFFUSER


SCALE: NOT TO SCALE

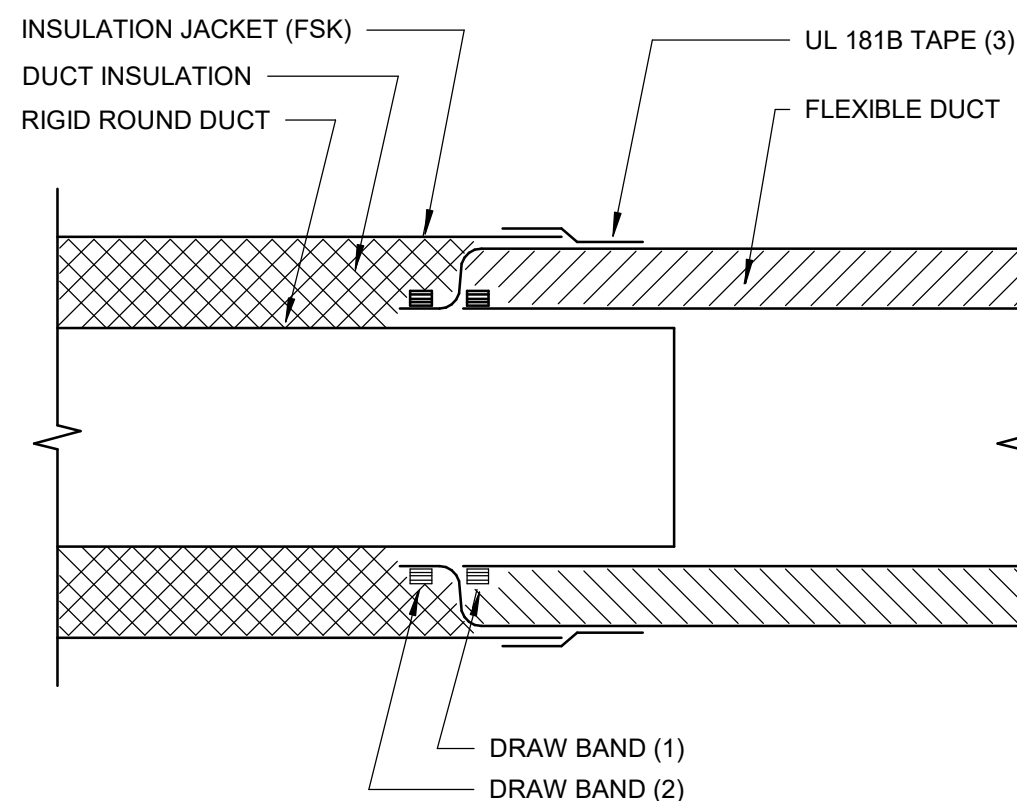

- NOTES:
- (1) PULL FLEXIBLE DUCT INNER LINER OVER RIGID DUCT WITH MINIMUM 4" OVERLAP. APPLY 2 WRAPS OF UL 181B TAPE, AND SECURE LINER WITH METAL OR PLASTIC DRAW BAND.
 - (2) SECURE FLEXIBLE DUCT INSULATION AND OUTER JACKET WITH TWO WRAPS OF UL 181B TAPE AND METAL OR PLASTIC DRAW BAND.
 - (3) PULL RIGID DUCT INSULATION AND BUTT JOINT TO TERMINATION OF FLEXIBLE DUCT. APPLY UL 181B TAPE TO CREATE VAPOR BARRIER SEAM.
 - (4) DUCT TAPE TO BE UL 181B AND MARKED 181B-FX.

5 FLEXIBLE DUCT CONNECTION TO INSUL RIGID ROUND DUCT

SCALE: NOT TO SCALE

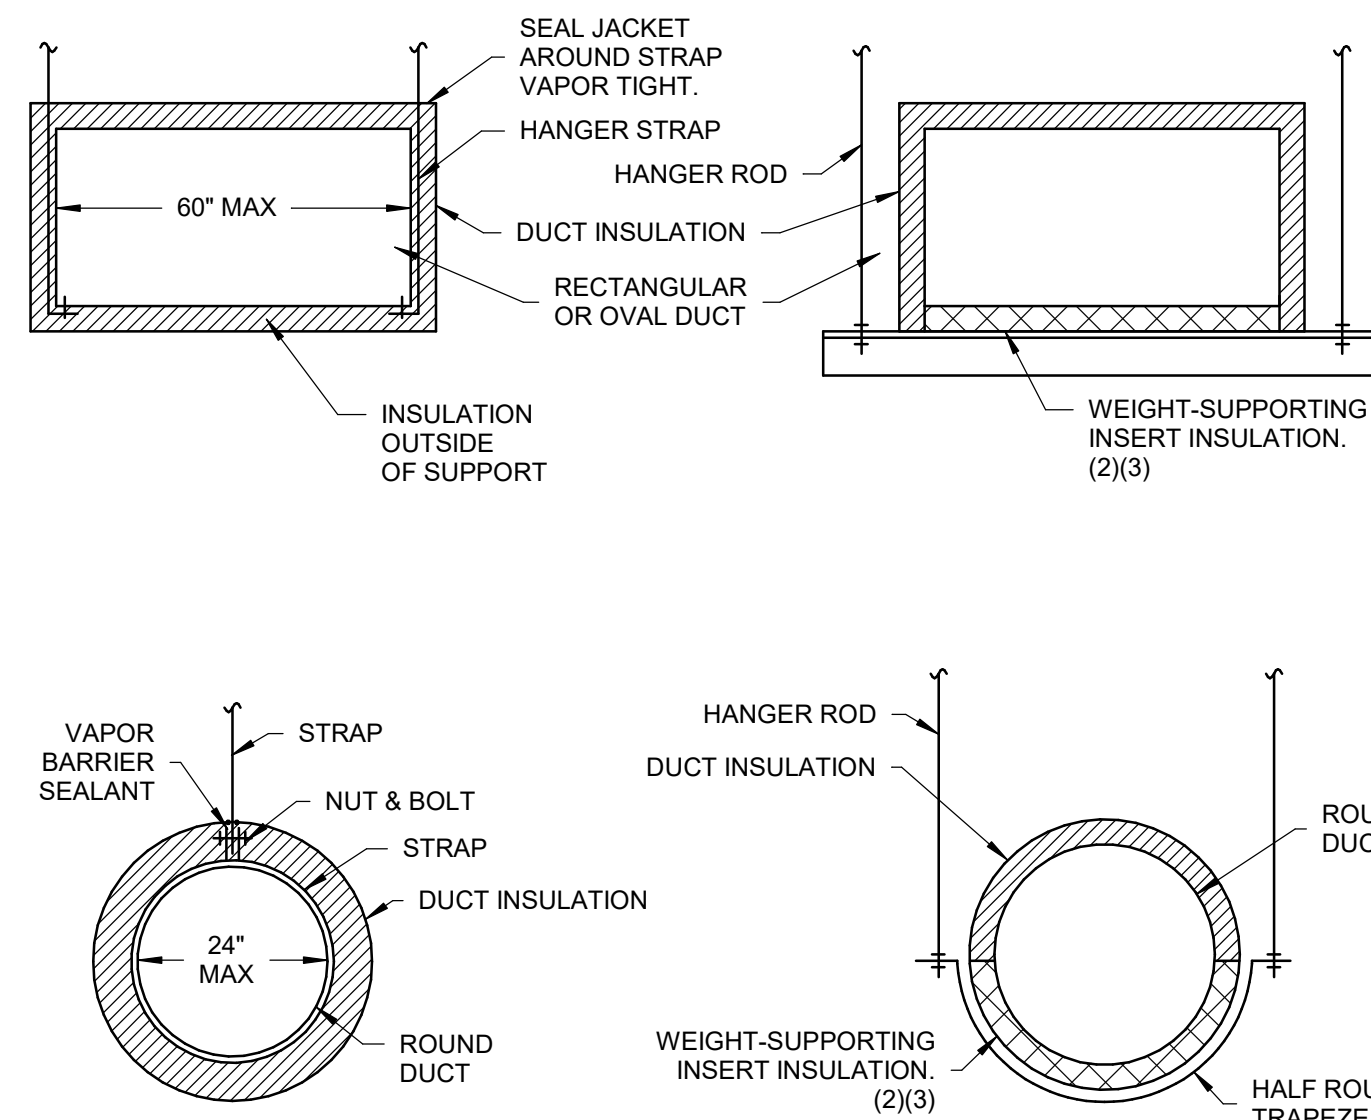


STRAP HANGERS

TRAPEZE HANGERS

- NOTES:
- (1) INSULATION JACKET SHALL RUN CONTINUOUSLY BETWEEN DUCT AND DUCT SUPPORTS FOR TRAPEZE SUPPORTS.
 - (2) REFER TO SPECIFICATION SECTION 23 0700 MECHANICAL SYSTEM INSULATION FOR WEIGHT-TRAPPEZE INSERT INSULATION AND OTHER REQUIREMENTS.
 - (3) WRAP 4 SIDES OF DUCT AT TRAPEZE SUPPORT WHEN TYPE F (FLEXIBLE BLANKET) INSULATION IS USED.

4 INSULATED DUCT SUPPORTS (FLEX GLASS FIBER INSUL TYPE-F)


SCALE: NOT TO SCALE

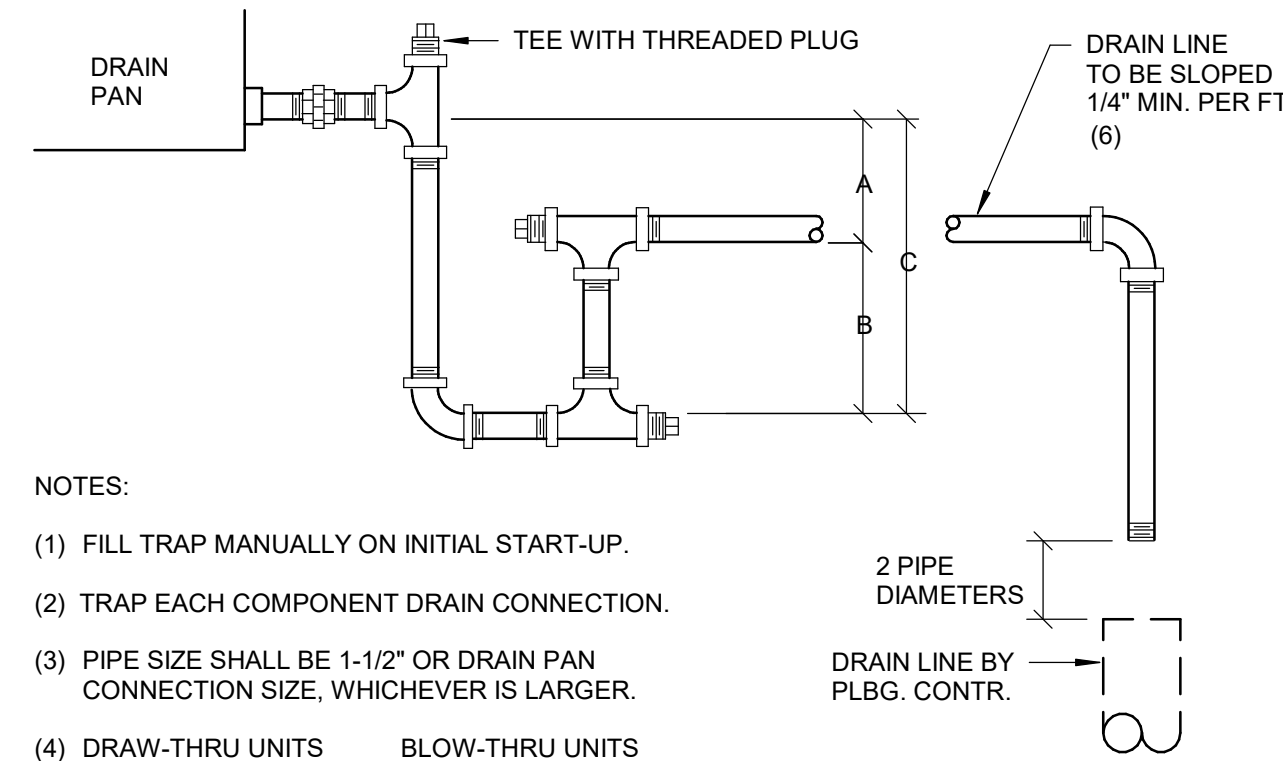

- NOTES:
- (1) FILL TRAP MANUALLY ON INITIAL START-UP.
 - (2) TRAP EACH COMPONENT DRAIN CONNECTION.
 - (3) PIPE SIZE SHALL BE 1-1/2" OR DRAIN PAN CONNECTION SIZE, WHICHEVER IS LARGER.
 - (4) DRAW-THRU UNITS
 - A = SP + 1"
 - B = 1/2 SP + 1/2"
 - C = 1-1/2 SP + 1-1/2"BLOW-THRU UNITS
 - A = 1/2"
 - B = SP + 1/2"
 - C = SP + 1"SP TO BE MAXIMUM STATIC PRESSURE (SP) ON DRAIN PAN INCLUDING MAXIMUM FILTER PRESSURE DROP AND PRESSURE DROP OF FUTURE COMPONENTS OF UNIT IF APPLICABLE.
 - (5) RAISE COIL SECTION OR ENTIRE AIR HANDLING UNIT WITH STRUCTURAL MEMBERS OR STANDS TO PROVIDE PROPER TRAP HEIGHT.
 - (6) SMALLER SLOPE MAY BE USED IF SUFFICIENT CLEARANCE IS NOT AVAILABLE, BUT NOT LESS THAN 1/8" PER FT.

3 COOLING COIL CONDENSATE DRAIN TRAP PIPING


SCALE: NOT TO SCALE

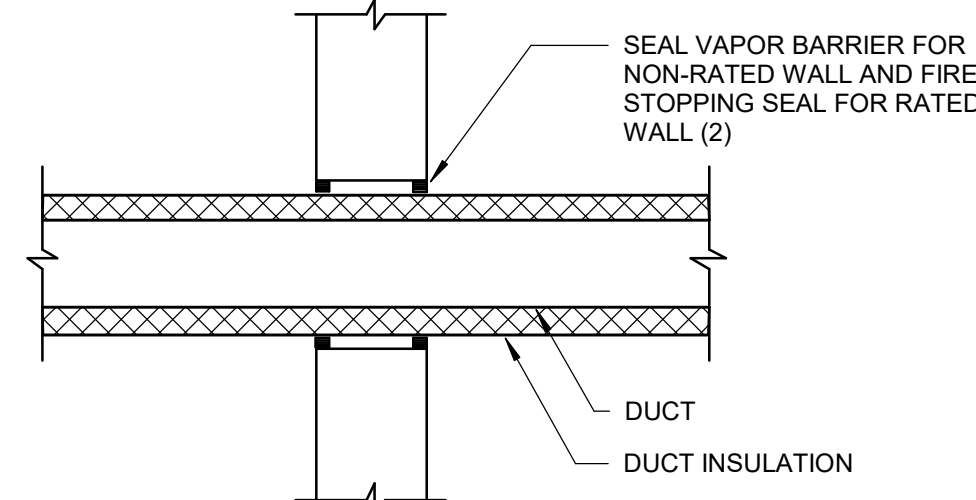

- NOTES:
- (1) THIS DETAIL APPLIES FOR INSULATED DUCTS THRU WALL WHERE FIRE DAMPER IS NOT REQUIRED.
 - (2) WHERE WALL IS FIRE RATED, COMBINATION OF SEALANT, BACKING MATERIAL AND INSULATION SHALL MEET THIS RATING. REFER TO SPECIFICATION SECTION 23 0000 FOR FIRE STOPPING SYSTEM MANUFACTURERS.

2 DUCT PENETRATION THRU INTERIOR WALL (INSULATED DUCTS)

SCALE: NOT TO SCALE

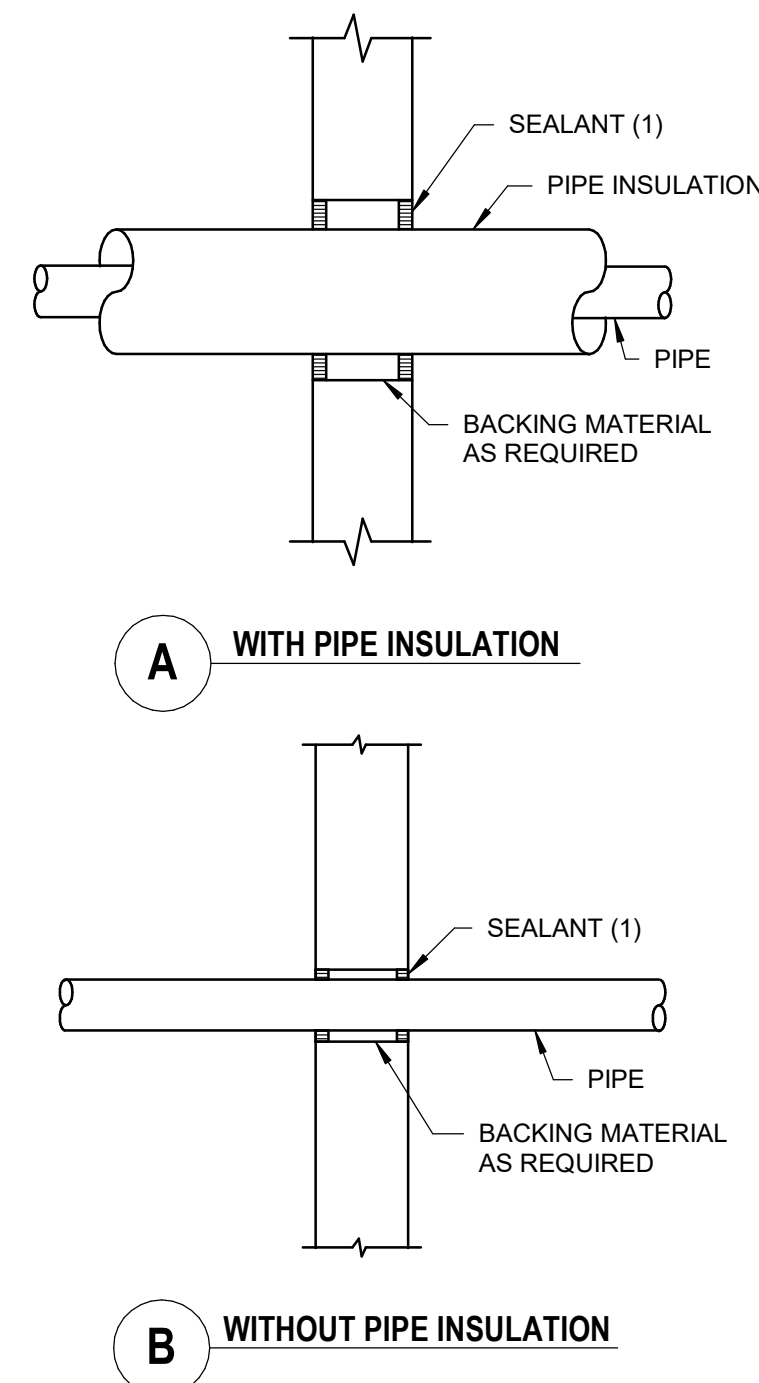

- NOTES:
- (1) SEALING PIPE PENETRATION IS REQUIRED FOR ANY INTERIOR WALL WHERE WALL IS FIRE RATED. APPLY FIRESTOPPING SYSTEM (COMBINATION OF SEALANT, BACKING MATERIAL AND INSULATION) MEETING THIS RATING. REFER TO SPECIFICATION SECTION 23 0000 FOR FIRESTOPPING SYSTEM.

1 PIPE THRU INTERIOR WALL

SCALE: NOT TO SCALE

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026
Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


**MECHANICAL
DETAILS**

AIRFLOW SUMMARY																																			
				IMC 2018												ASHRAE 62.1 MIN EXHAUST																			
ROOM #	ROOM NAME	ROOM TYPE	SERVED BY AIR HANDLER	OA PER PERSON	ZONE POP.	OA CFM	OA PER UNIT AREA	ZONE FLOOR AREA	OA CFM	BREATH. ZONE OA AIRFLOW	ZONE OUTDOOR AIRFLOW	ZONE PRIMARY AIRFLOW	PRIMARY OA FRACTION	EA PER UNIT AREA	TOILET FIXTURE COUNT	ZONE EXHAUST FLOW	MAX. COOL LOAD			MIN. VENT LOAD			REQUIRED	ACTUAL LOAD											
				Rp CFM/Persons	Pz # PEOPLE	Rp x Pz CFM	Ra CFM/SF	Az SF	Ra x Az CFM	Vbz CFM	Voz CFM	Vpz CFM	Zp %OA	CFM/SF	# FIXTURE	CFM	SUPPLY CFM	RETURN CFM	EXHAUST CFM	SUPPLY CFM	RETURN CFM	EXHAUST CFM	OSA CFM	SUPPLY CFM	RETURN CFM	EXHAUST CFM									
101	VESTIBULE	Corridor (General)	RTU-1	0.0	0	0	0.06	61	4	4	20	99	0.20	0		0	25	25	0	10	10	0	20	100	0	0									
102	RECEPTION	Reception Areas	RTU-2	5.0	1	5	0.06	120	7	13	65	325	0.20	0		0	225	225	0	70	70	0	65	240	240	0									
103	BREAKROOM	Break Room/Lounge	RTU-2	0.0	20	0	0.00	771	0	0	0	0	0.20	0		0	1,430	1,430	0	430	430	0	0	1,450	1,450	0									
105	OPEN OFFICE	Office - Open, cubicles	RTU-1	5.0	14	70	0.06	2619	157	228	1140	5658	0.20	0		0	940	940	0	285	285	0	1,140	980	980	0									
106	HUDDLE	Conference/Meeting	RTU-2	5.0	4	20	0.06	151	9	30	150	750	0.20	0		0	285	285	0	85	85	0	150	300	300	0									
107	OFFICE	Office - Enclosed, private	RTU-2	5.0	1	5	0.06	156	9	15	75	375	0.20	0		0	205	205	0	65	65	0	75	210	210	0									
108	OFFICE	Office - Enclosed, private	RTU-2	5.0	1	5	0.06	156	9	15	75	375	0.20	0		0	205	205	0	65	65	0	75	210	210	0									
109	OFFICE	Office - Enclosed, private	RTU-2	5.0	1	5	0.06	184	11	17	85	425	0.20	0		0	210	210	0	65	65	0	85	210	210	0									
110	CONFERENCE	Conference/Meeting	RTU-2	5.0	12	60	0.06	322	19	80	400	2000	0.20	0		0	850	850	0	255	255	0	400	900	900	0									
111	STORAGE	Storage (General)	RTU-1	0.0	0	0	0.12	211	25	26	130	645	0.20	0		0	10	10	0	5	5	0	130	100	0	0									
119	IDF/MDF	IDF Room	0	0.0	0	0	0.00	267	0	0	0	#N/A	#N/A	0		0	0	0	0	0	0	0	0	0	0	0									
121	WORKROOM	Workroom (General)	RTU-1	5.0	4	20	0.06	482	29	49	245	1216	0.20	0		0	285	285	0	85	85	0	245	300	300	0									
122	HALL	Corridor (General)	RTU-1	0.0	0	0	0.06	189	11	12	60	298	0.20	0		0	25	25	0	15	15	0	60	50	50	0									
123	JANITOR	Janitor/Trash/Recycling	RTU-1	0.0	0	0	0.00	54	0	0	0	0	0.20	0		0	55	55	0	55	55	0	0	0	0	50									
124	WOMEN'S RESTROOM	Toilet Room	RTU-1	0.0	0	0	0.00	187	0	0	0	0	0.20	50	3	150	150	0	210	150	0	210	0	150	0	210									
125	MEN'S RESTROOM	Toilet Room	RTU-1	0.0	0	0	0.00	228	0	0	0	0	0.20	50	4	200	200	0	280	200	0	280	0	200	0	280									
126	STORAGE	Storage (General)	RTU-1	0.0	0	0	0.12	202	24	25	125	620	0.20	0		0	135	135	0	40	40	0	125	150	0	0									
127	MOTHERS	Office - Enclosed, private	RTU-1	5.0	1	5	0.06	134	8	14	70	347	0.20	0		0	185	185	0	55	55	0	70	200	200	0									
131	RISER	Electrical Equipment Room (UPS)	0	0.0	0	0	0.00	321	0	0	0	#N/A	#N/A	0		0	0	0	0	0	0	0	0	0	0	0									
132	ELECTRICAL	Electrical Equipment Room	0	0.0	0	0	0.00	199	0	0	0	#N/A	#N/A	0		0	15	0	15	15	0	15	0	0	0	0									
133	ELECTRICAL	Electrical Equipment Room (UPS)	0	0.0	0	0	0.00	302	0	0	0	#N/A	#N/A	0		0	0	0	0	0	0	0	0	0	0	0									
135	PHARMACY	Warehouse	RTU-3 THRU RTU-9	0.0	20	0	0.06	11811	715	715	3575	17875	0.20	0		0	3,150	3,150	0	1,140	1,140	0	3,575	3,200	3,200	0									
137	SHIPPING & RECEIVING	Shipping/Receiving	RTU-10 & RTU-11	0.0	7	0	0.12	2335	280	281	1405	7025	0.20	0		0	890	890	0	440	440	0	1,405	1,000	1,000	0									
138	IDF	IDF Room	0	0.0	0	0	0.00	77	0	0	0	#N/A	#N/A	0		0	0	0	0	0	0	0	0	0	0	0									
139	RETURNS CAGE	Storage (General)	RTU-10 & RTU-11	0.0	0	0	0.12	146	18	18	90	450	0.20	0		0	5	5	0	5	5	0	90	0	0	0									
140	PHARMACY L2	Warehouse	RTU-3 THRU RTU-9	0.0	0	0	0.06	14719	883	884	4420	22100	0.20	0		0	4,315	4,315	0	1,285	1,285	0	4,420	4,350	4,350	0									
141	SHIPPING AND RECEIVING L2	Shipping/Receiving	RTU-10 & RTU-11	0.0	6	0	0.12	2576	309	310	1550	7750	0.20	0		0	1,110	1,110	0	465	465	0	1,550	1,150	1,150	0									
142	STORAGE	Workroom (General)	RTU-3 THRU RTU-9	0.0	3	0	0.12	521	63	63	315	1575	0.20	0		0	205	205	0	65	65	0	315	250	250	270									
143	PHARMACY L3	Warehouse	RTU-3 THRU RTU-9	0.0	0	0	0.06	14719	883	884	4420	22100	0.20	0		0	6,425	6,425	0	1,930	1,930	0	4,420	6,450	6,450	0									
144	SHIPPING AND RECEIVING L3	Shipping/Receiving	RTU-10 & RTU-11	0.0	6	0	0.12	2576	309	310	1550	7750	0.20	0		0	1,375	1,375	0	465	465	0	1,550	1,400	1,400	0									
145	FUTURE L2	Warehouse	0	0.0	0	0	0.06	22956	1377	1378	6890	#N/A	#N/A	0		0	1,725	0	1,725	1,725	0	1,725	6,890	0	0	0									
146	FUTURE L3	Warehouse	0	0.0	0	0	0.06	22956	1377	1378	6890	#N/A	#N/A	0		0	1,725	0	1,725	1,725	0	1,725	6,890	0	0	0									
23	COOLER	Cooler	0	#N/A	0	#N/A	#N/A	1192	#N/A	#N/A	#N/A	#N/A	#N/A	0		0	0	0	0	0	0	0	#N/A	0	0	0									
24	FREEZER	Freezer	0	#N/A	0	#N/A	#N/A	251	#N/A	#N/A	#N/A	#N/A	#N/A	0		0	0	0	0	0	0	0	#N/A	0	0	0									
36	FUTURE	Warehouse	0	0.0	0	0	0.06	16207	972	973	4865	#N/A	#N/A	0		0	1,220	0	1,220	1,220	0	1,220	4,865	0	0	0									

ROOFTOP UNITS																							
EQUIPMENT TAG	SERVICE	AIRFLOW	BHP	HP	FILTER	ESP ("WC)	EER	IEER	COOLING				HEATING				ELECTRICAL				REMARKS		
									EAT DB (F)	EAT WB (F)	LAT DB (F)	LAT WB (F)	TOTAL CAPACITY (BTUH)	AMBIENT TEMP (F)	EAT DB (F)	TOTAL CAPACITY (BTUH)	AMBIENT TEMP (F)	V	PHASE	HZ		MCA	
RTU-1	OFFICE	2100	0.91	2	MERV 8 & MERV 13	0.55	12.15	14.8	75	68	56	55.3	84500	90.3	50.5	27200	-2.6	460	3	60	19	1222	(1) (2) (3) (4) (5)
RTU-2	OFFICE	3500	2.63	3	MERV 8 & MERV 13	0.6	11.86	14.9	75	68	58.3	57	127600	90.3	53.1	170100	-2.6	460	3	60	25	1400	(1) (2) (3) (4) (5)
RTU-3	PHARMACY	2800	1.1	2	MERV 8 & MERV 13	0.6	10.9	14.99	75	68	47.5	46.9	171500	90.3	53.1	158000	-2.6	460	3	60	38	1891	(1) (2) (3) (4)
RTU-4	PHARMACY	2800	1.1	2	MERV 8 & MERV 13	0.6	10.9	14.99	75	68	47.5	46.9	171500	90.3	53.1	158000	-2.6	460	3	60	38	1891	(1) (2) (3) (4)
RTU-5	PHARMACY	2800	1.1	2	MERV 8 & MERV 13	0.6	10.9	14.99	75	68	47.5	46.9	171500	90.3	53.1	158000	-2.6	460	3	60	38	1891	(1) (2) (3) (4)
RTU-6	PHARMACY	2800	1.1	2	MERV 8 & MERV 13	0.6	10.9	14.99	75	68	47.5	46.9	171500	90.3	53.1	158000	-2.6	460	3	60	38	1891	(1) (2) (3) (4)
RTU-7	PHARMACY	2800	1.1	2	MERV 8 & MERV 13	0.6	10.9	14.99	75	68	47.5	46.9	171500	90.3	53.1	158000	-2.6	460	3	60	38	1891	(1) (2) (3) (4)
RTU-8	PHARMACY	2800	1.1	2	MERV 8 & MERV 13	0.6	10.9	14.99	75	68	47.5	46.9	171500	90.3	53.1	158000	-2.6	460	3	60	38	1891	(1) (2) (3) (4)
RTU-9	PHARMACY	2800	1.1	2	MERV 8 & MERV 13	0.6	10.9	14.99	75	68	47.5	46.9	171500	90.3	53.1	158000	-2.6	460	3	60	38	1891	(1) (2) (3) (4)
RTU-10	SHIPPING/RECEIVING	3200	2.16	3	MERV 8 & MERV 13	0.6	11.86	14.9	75	68	57	55.9	125800	90.3	53.1	170100	-2.6	460	3	60	25	1400	(1) (2) (3) (4)
RTU-11	SHIPPING/RECEIVING	3200	2.16	3	MERV 8 & MERV 13	0.6	11.86	14.9	75	68	57	55.9	125800	90.3	53.1	170100	-2.6	460	3	60	25	1400	(1) (2) (3) (4)

- NOTES:
1. PROVIDE ROOF CURB, CONTRACTOR TO FIELD VERIFY.
2. PROVIDE ECONOMIZER HOOD, CONTRACTOR TO FIELD VERIFY.
3. PROVIDE BAROMETRIC RELIEF VENTS IN UNIT.
4. PROVIDE VARIABLE CAPACITY COMPRESSOR.
5. PROVIDE DUCT SMOKE DETECTOR.

FANS																	
EQUIPMENT TAG	VENTILATION FAN TYPE	AREA / SERVICE	PERFORMANCE				PHYSICAL CHARACTERISTICS				ACCESSORIES				WEIGHT (LBS)	REMARKS	
			MIN/NORMAL OPERATION		MAX OPERATION		TYPE	DRIVE	DISCHARGE	WHEEL	DAMPER	VOLT	PH	SCCR			
			FLOW (CFM)	SP ("WG)	FLOW (CFM)	BHP											TYPE
EF-1	GENERAL EXH	RESTROOMS / JANITOR	540	1.00	540	0.2	1.0	SPUN	DIRECT	DOWNBLAST	CENTRIFUGAL	1,619	BACKDRAFT	115	1	5	54
EF-2	GENERAL EXH	PHARMACY STORAGE	270	1.00	270	0.12	1.0	SPUN	DIRECT	DOWNBLAST	CENTRIFUGAL	1,685	BACKDRAFT	115	1	5	54
EF-3	GENERAL EXH	ELECTRICAL ROOM	1100	1.00	1100	0.30	1.0	SPUN	DIRECT	DOWNBLAST	CENTRIFUGAL	1,477	BACKDRAFT	230	1	5	64

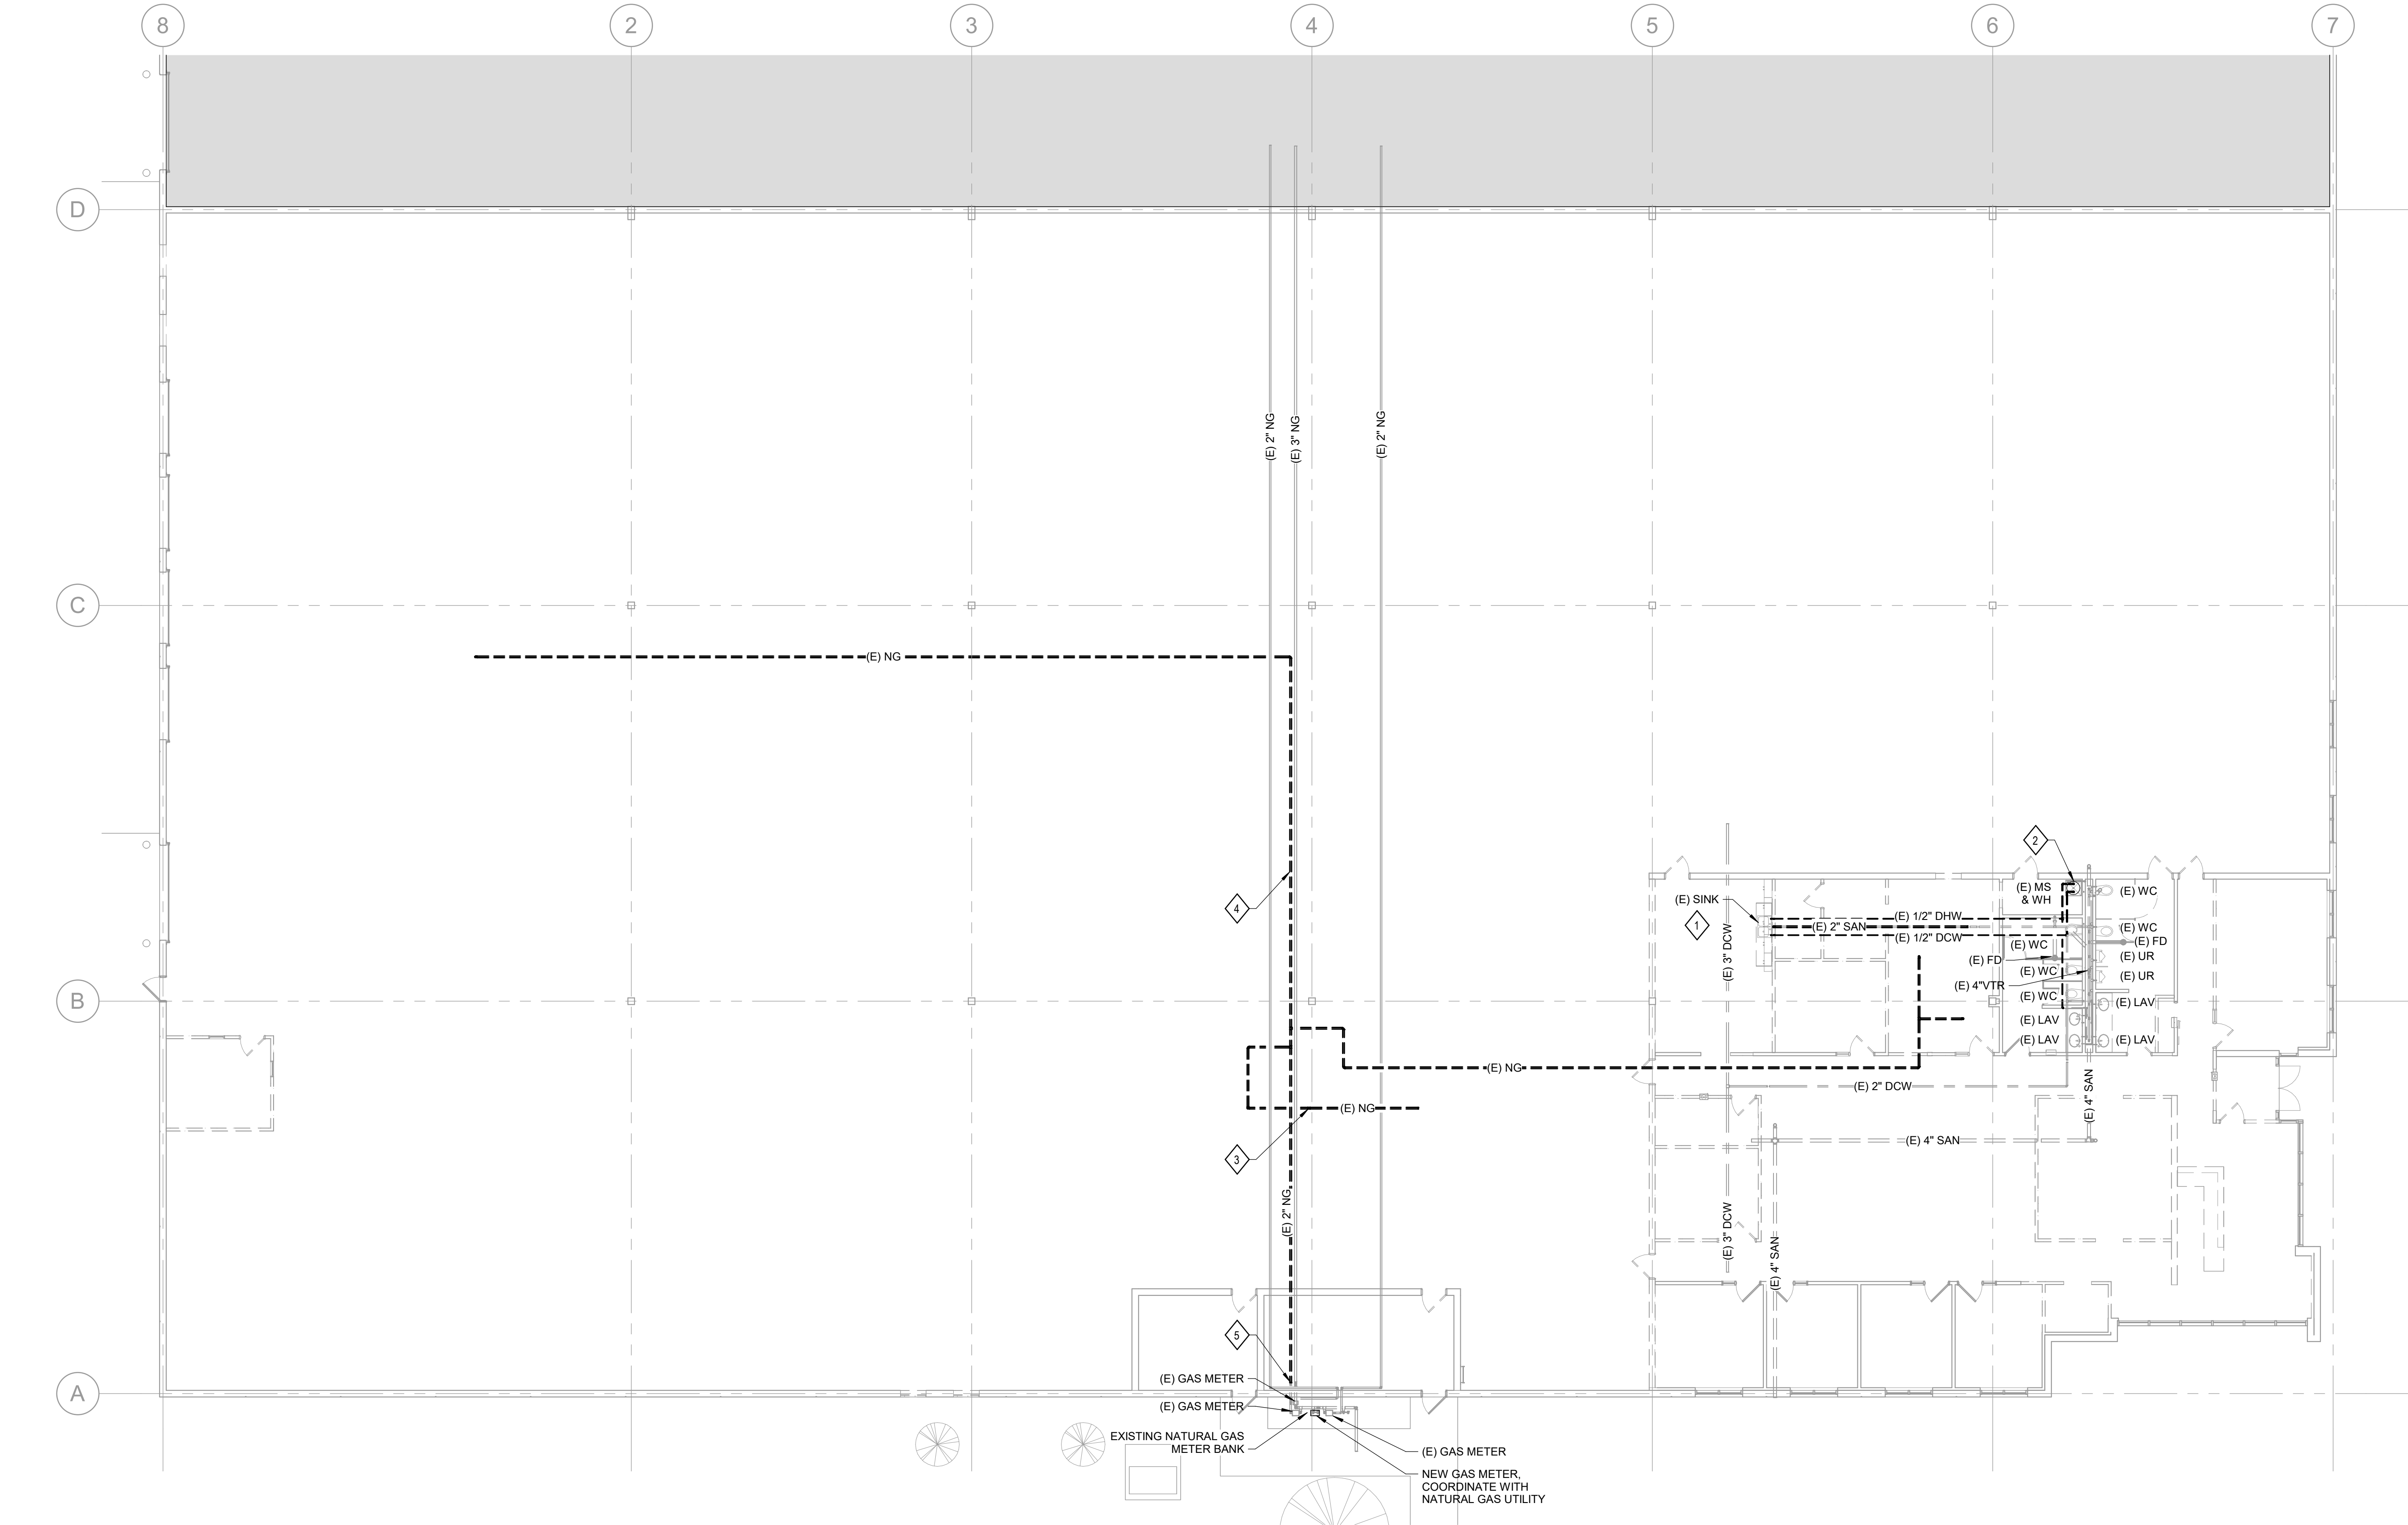

1 PLUMBING DEMOLITION PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

GENERAL NOTES

1. ALL PIPING IS AT OR ABOVE THE CEILING UNLESS OTHERWISE INDICATED.
2. ALL PIPING SHALL BE INSTALLED CONCEALED UNLESS OTHERWISE INDICATED.
3. COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO BEGINNING WORK.
4. COORDINATE ALL SHUT DOWN TIME WITH OWNER AND OTHER TRADES PRIOR TO COMMENCING WORK. DEPARTMENT MUST REMAIN OPERATIONAL DURING WORK.
5. EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
6. SEAL ALL WALL PENETRATIONS MADE ABANDONED BY PIPING REMOVAL DURING COURSE OF RENOVATIONS.
7. ALL WORK SHALL COMPLY WITH 2014 STATE OF ILLINOIS PLUMBING CODE AND 2021 STATE OF ILLINOIS ENERGY CONSERVATION CODE.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of Issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

1. REMOVE EXISTING PLUMBING FIXTURE AND ASSOCIATED PIPING AS SHOWN (BOLD/DASHED); REMOVE COLD AND HOT WATER PIPING BACK TO ACTIVE MAINS AND CAP. REMOVE SANITARY VENT PIPING BACK TO ACTIVE MAIN AND CAP. REMOVE SANITARY WASTE PIPING TO BELOW FINISH FLOOR AND CAP. REPAIR REMAINING SURFACES TO MATCH EXISTING.
2. REMOVE EXISTING WATER HEATER, PLATFORM AND ASSOCIATED DOMESTIC WATER LINES AS SHOWN (BOLD/DASHED). CAP UTILITIES FOR RECONNECTION UNDER NEW WORK.
3. REMOVE EXISTING NATURAL GAS PIPING DOWN TO EXISTING EXISTING UNIT HEATER.
4. REMOVE ALL NATURAL GAS PIPING SHOWN BOLD/DASHED.
5. CAP EXISTING NATURAL GAS PIPING.


**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000

DATE 04/24/2026


KEYPLAN

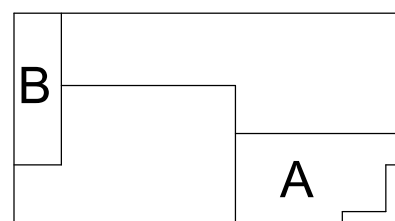

**PLUMBING
DEMOLITION PLAN
- LEVEL ONE**

PD02-01

4/24/2026 2:08:40 PM PD02-02 PLUMBING DEMOLITION PLAN - ROOF

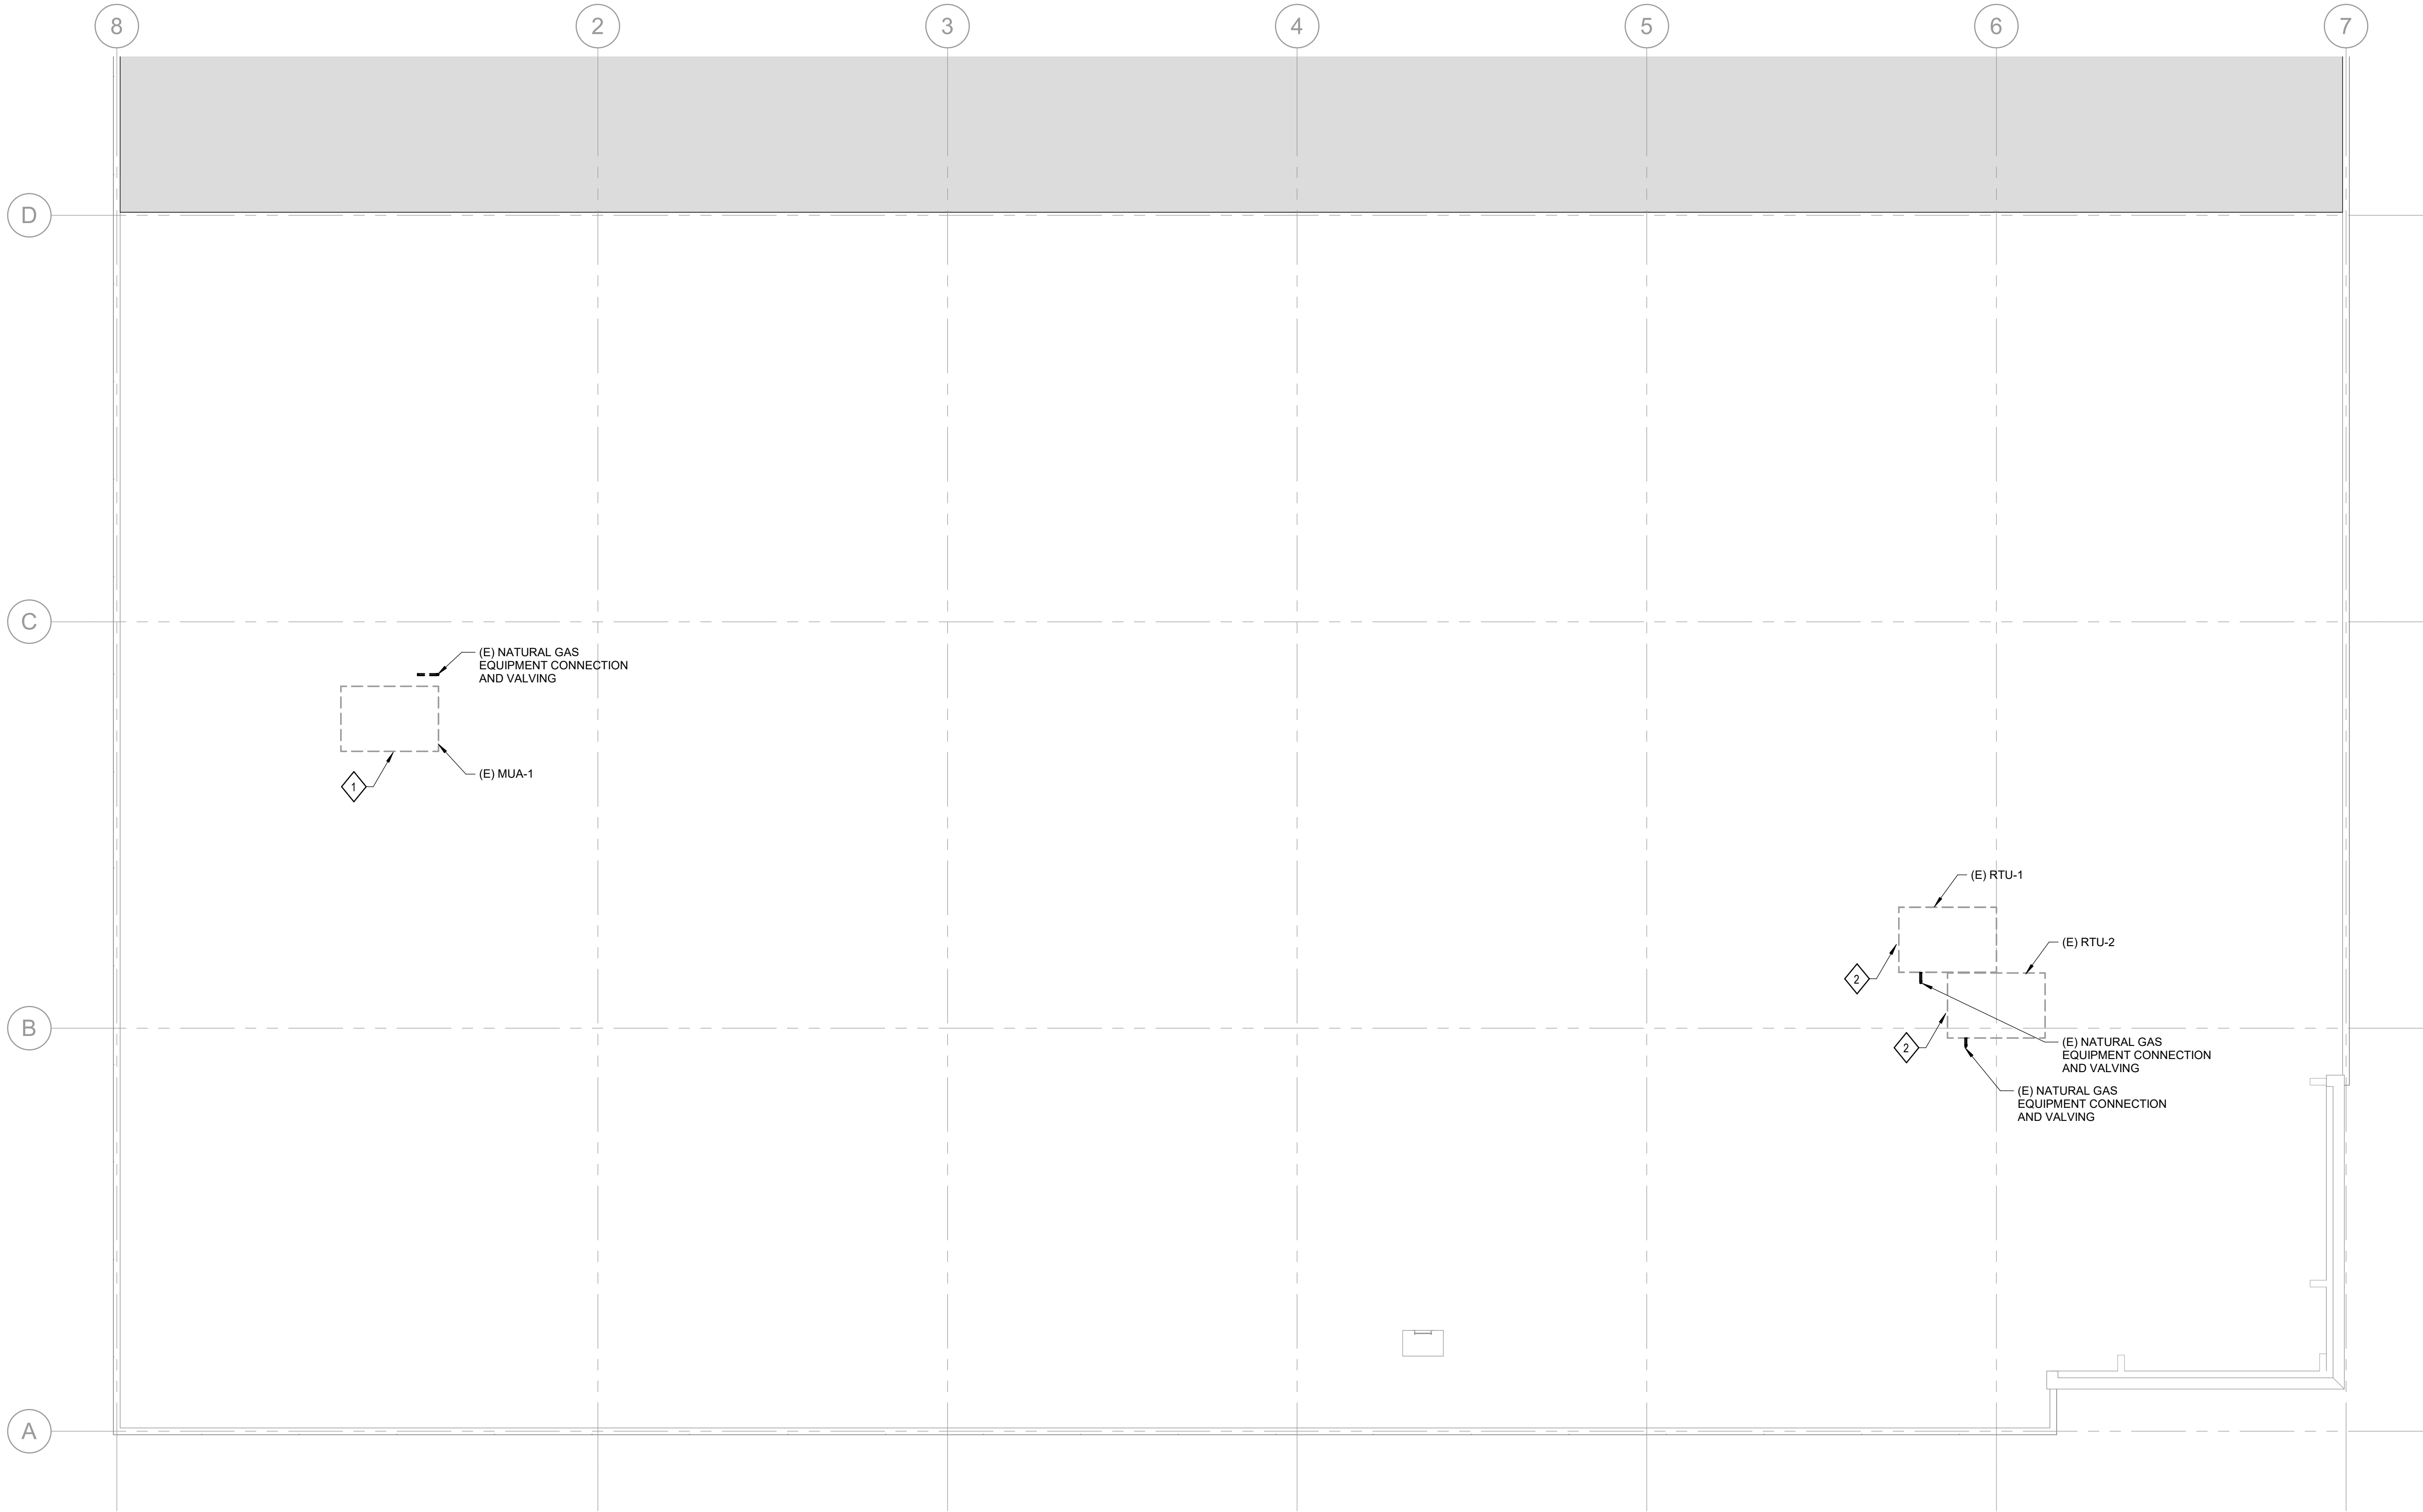

1 PLUMBING DEMOLITION PLAN - ROOF
SCALE: 3/32" = 1'-0"

GENERAL NOTES

1. ALL PIPING IS AT OR ABOVE THE CEILING UNLESS OTHERWISE INDICATED.
2. ALL PIPING SHALL BE INSTALLED CONCEALED UNLESS OTHERWISE INDICATED.
3. COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO BEGINNING WORK.
4. COORDINATE ALL SHUT DOWN TIME WITH OWNER AND OTHER TRADES PRIOR TO COMMENCING WORK. DEPARTMENT MUST REMAIN OPERATIONAL DURING WORK.
5. EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
6. SEAL ALL WALL PENETRATIONS MADE ABANDONED BY PIPING REMOVAL DURING COURSE OF RENOVATIONS.
7. ALL WORK SHALL COMPLY WITH 2014 STATE OF ILLINOIS PLUMBING CODE AND 2021 STATE OF ILLINOIS ENERGY CONSERVATION CODE.



CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270




Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

KEYNOTES

1. EXISTING MAKEUP AIR UNIT TO BE REMOVED PER MECHANICAL DEMOLITION PLANS. EXISTING NATURAL GAS PIPING AND VALVING TO BE REMOVED. REFER TO SHEET PD02-02 FOR CONTINUATION OF DEMOLITION. EXISTING ROOF PENETRATION TO BE SEALED PER LANDLORD'S ROOFING CONTRACTOR TO MAINTAIN WARRANTY. COORDINATION BY GENERAL CONTRACTOR WILL BE REQUIRED.
2. EXISTING ROOF TOP UNIT TO BE REMOVED PER MECHANICAL DEMOLITION PLANS. EXISTING NATURAL GAS PIPING AND VALVING TO BE REMOVED. REFER TO SHEET PD02-02 FOR CONTINUATION OF DEMOLITION. EXISTING ROOF PENETRATION TO BE SEALED PER LANDLORD'S ROOFING CONTRACTOR TO MAINTAIN WARRANTY. COORDINATION BY GENERAL CONTRACTOR WILL BE REQUIRED.

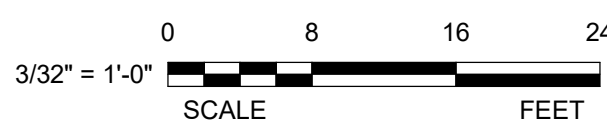

EVERNORTH -
ELGIN PHARMACY


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

PLUMBING
DEMOLITION PLAN
- ROOF

PD02-02

1 PLUMBING PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

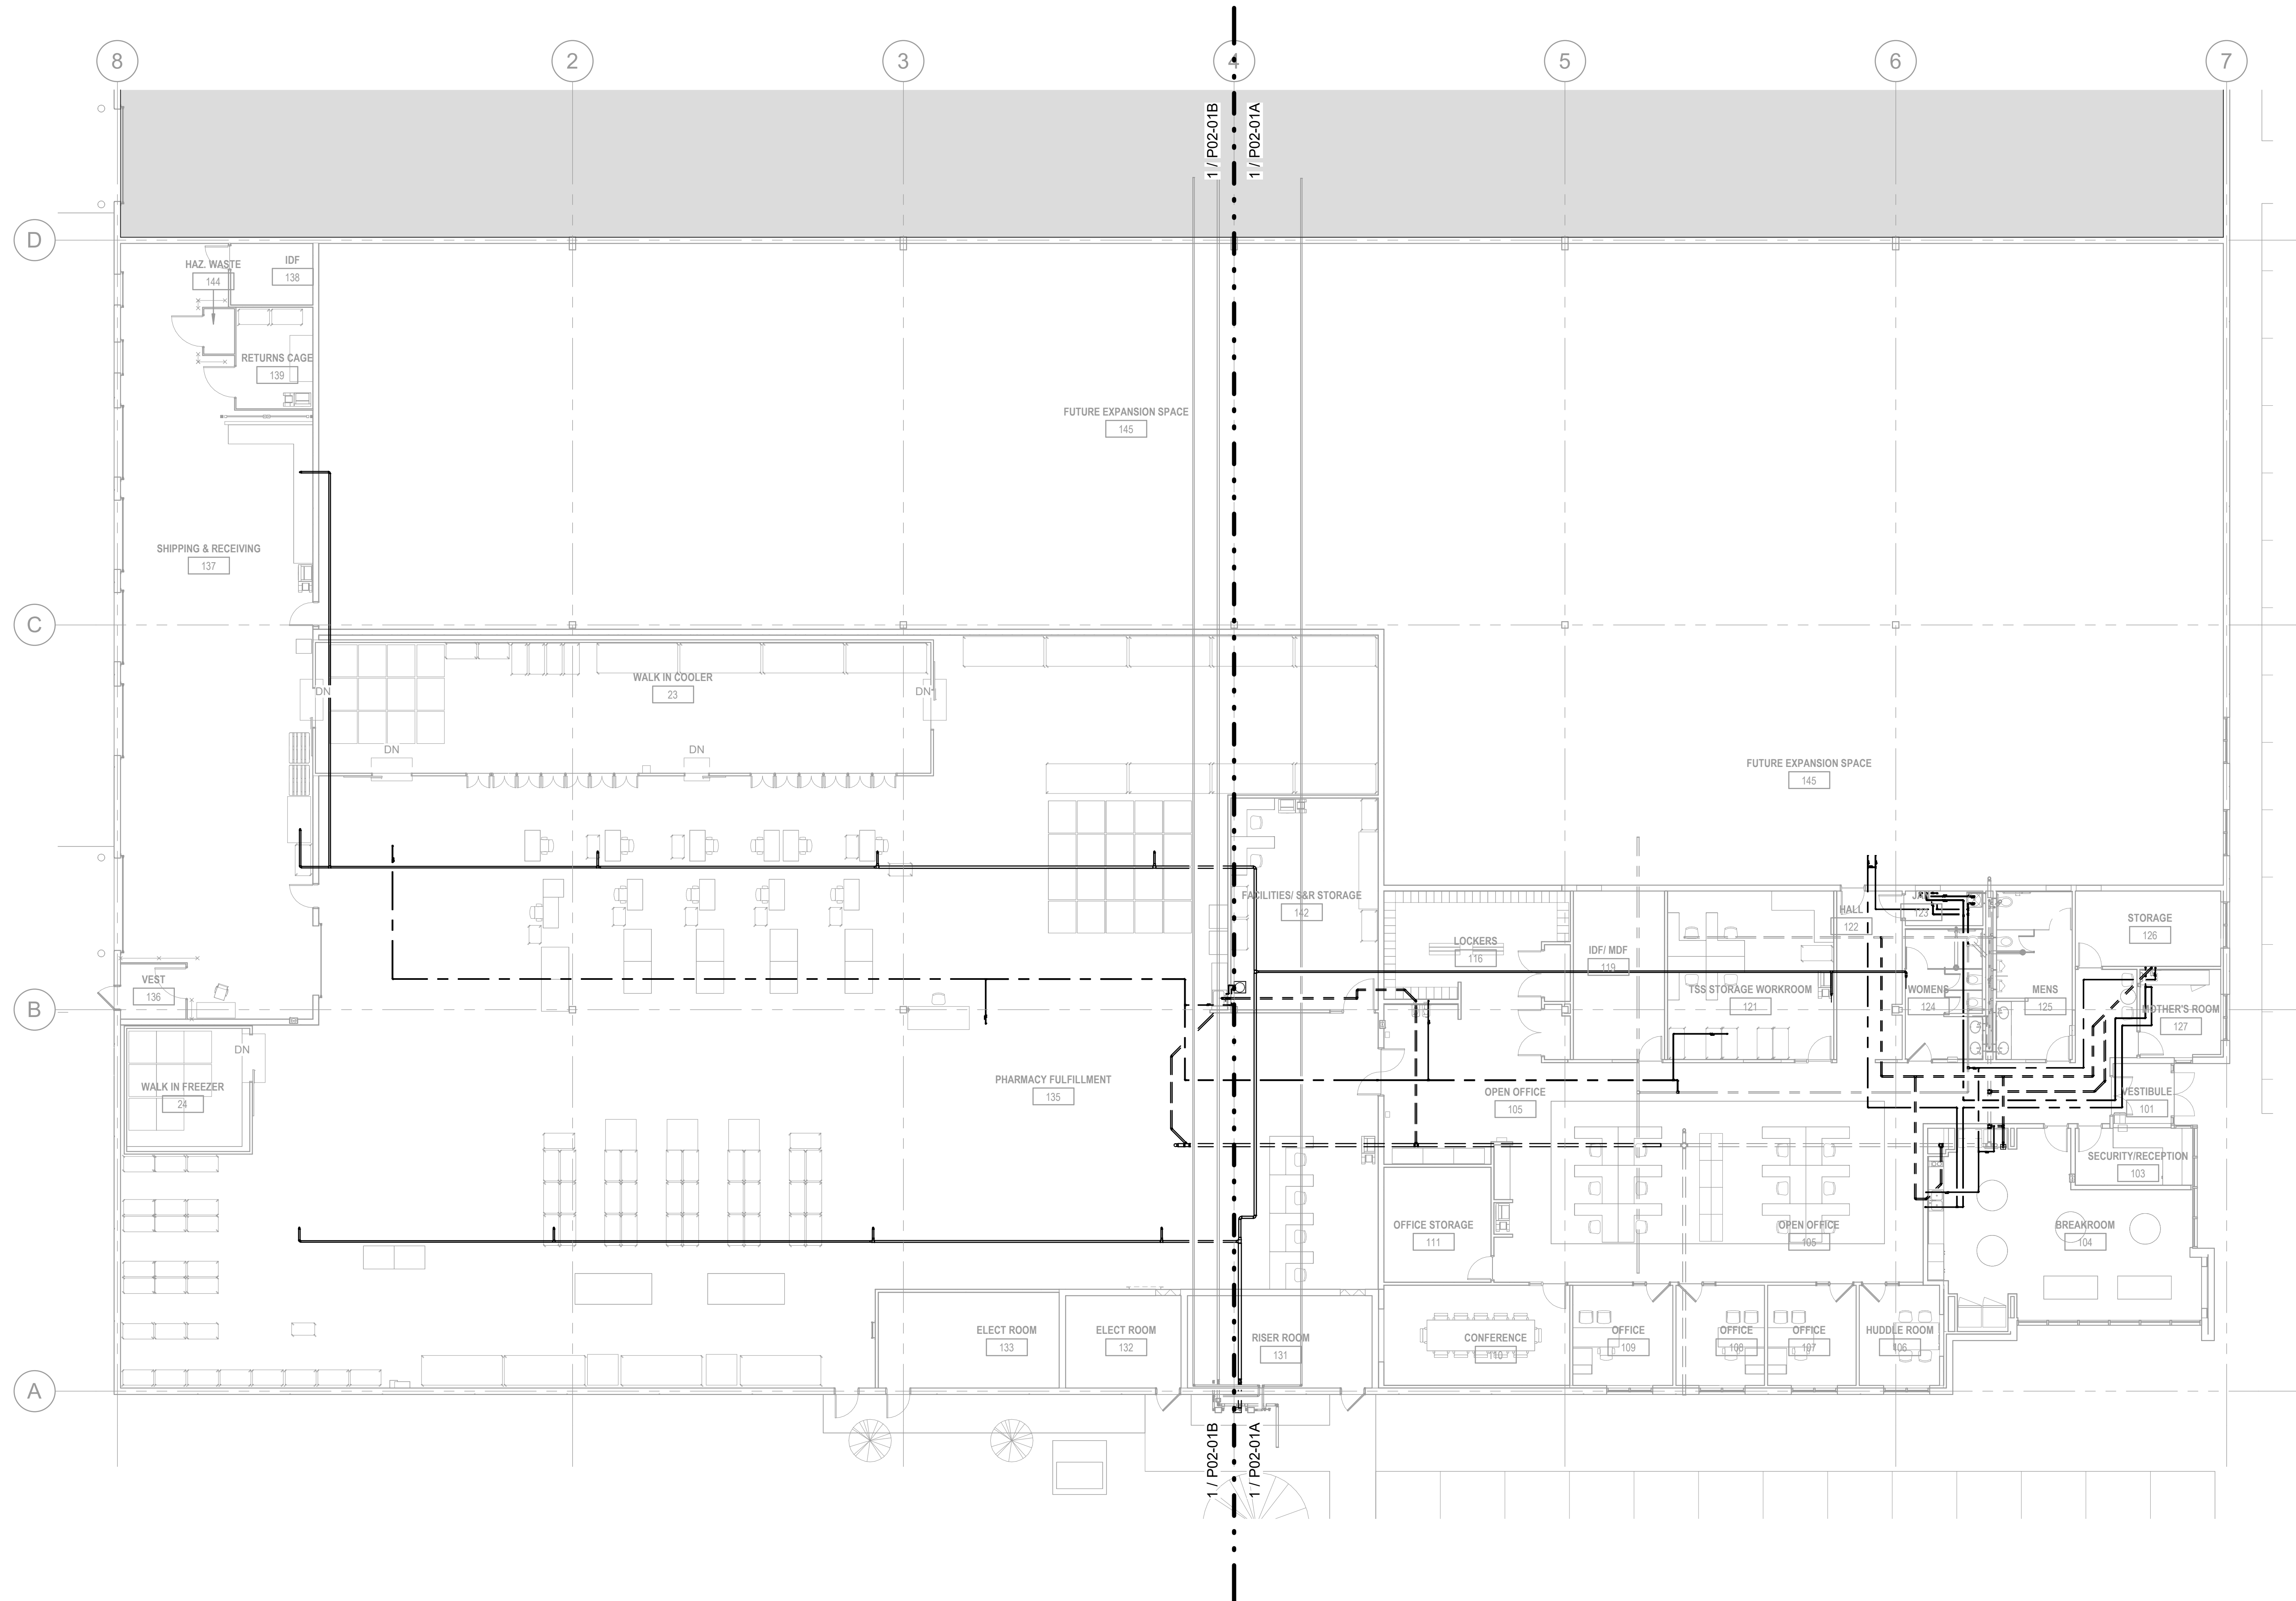

GENERAL NOTES

1. ALL PIPING IS AT OR ABOVE THE CEILING UNLESS OTHERWISE INDICATED.
2. ALL PIPING SHALL BE INSTALLED CONCEALED UNLESS OTHERWISE INDICATED.
3. COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO BEGINNING WORK.
4. COORDINATE ALL SHUT DOWN TIME WITH OWNER AND OTHER TRADES PRIOR TO COMMENCING WORK. DEPARTMENT MUST REMAIN OPERATIONAL DURING WORK.
5. EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
6. COORDINATE ALL PIPE ROUTING AND PIPE ELEVATIONS WITH OTHER TRADES IN ADVANCE OF INSTALLATION.
7. ALL VALVES TO BE INSTALLED ARE TO BE ACCESSIBLE.
8. FURNISH AND INSTALL SHOCK ARRESTORS IN COLD WATER LINES AT CONNECTIONS TO FLUSH VALVES.
9. DIELECTRIC UNIONS REQUIRED AT CONNECTIONS BETWEEN ALL DISSIMILAR METALS.
10. CONTRACTOR WHEN MAKING FINAL CONNECTIONS TO EQUIPMENT AND PLUMBING FIXTURES SHALL FURNISH CUTOFFS, TRAPS, STOPS, FAUCETS, ELBOWS, VACUUM BREAKERS, INSULATION, ETC.
11. ALL WORK SHALL COMPLY WITH 2014 STATE OF ILLINOIS PLUMBING CODE AND 2021 STATE OF ILLINOIS ENERGY CONSERVATION CODE.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

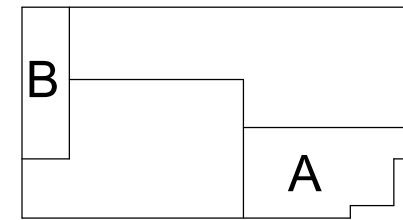

PLUMBING PLAN -
LEVEL ONE

P02-01

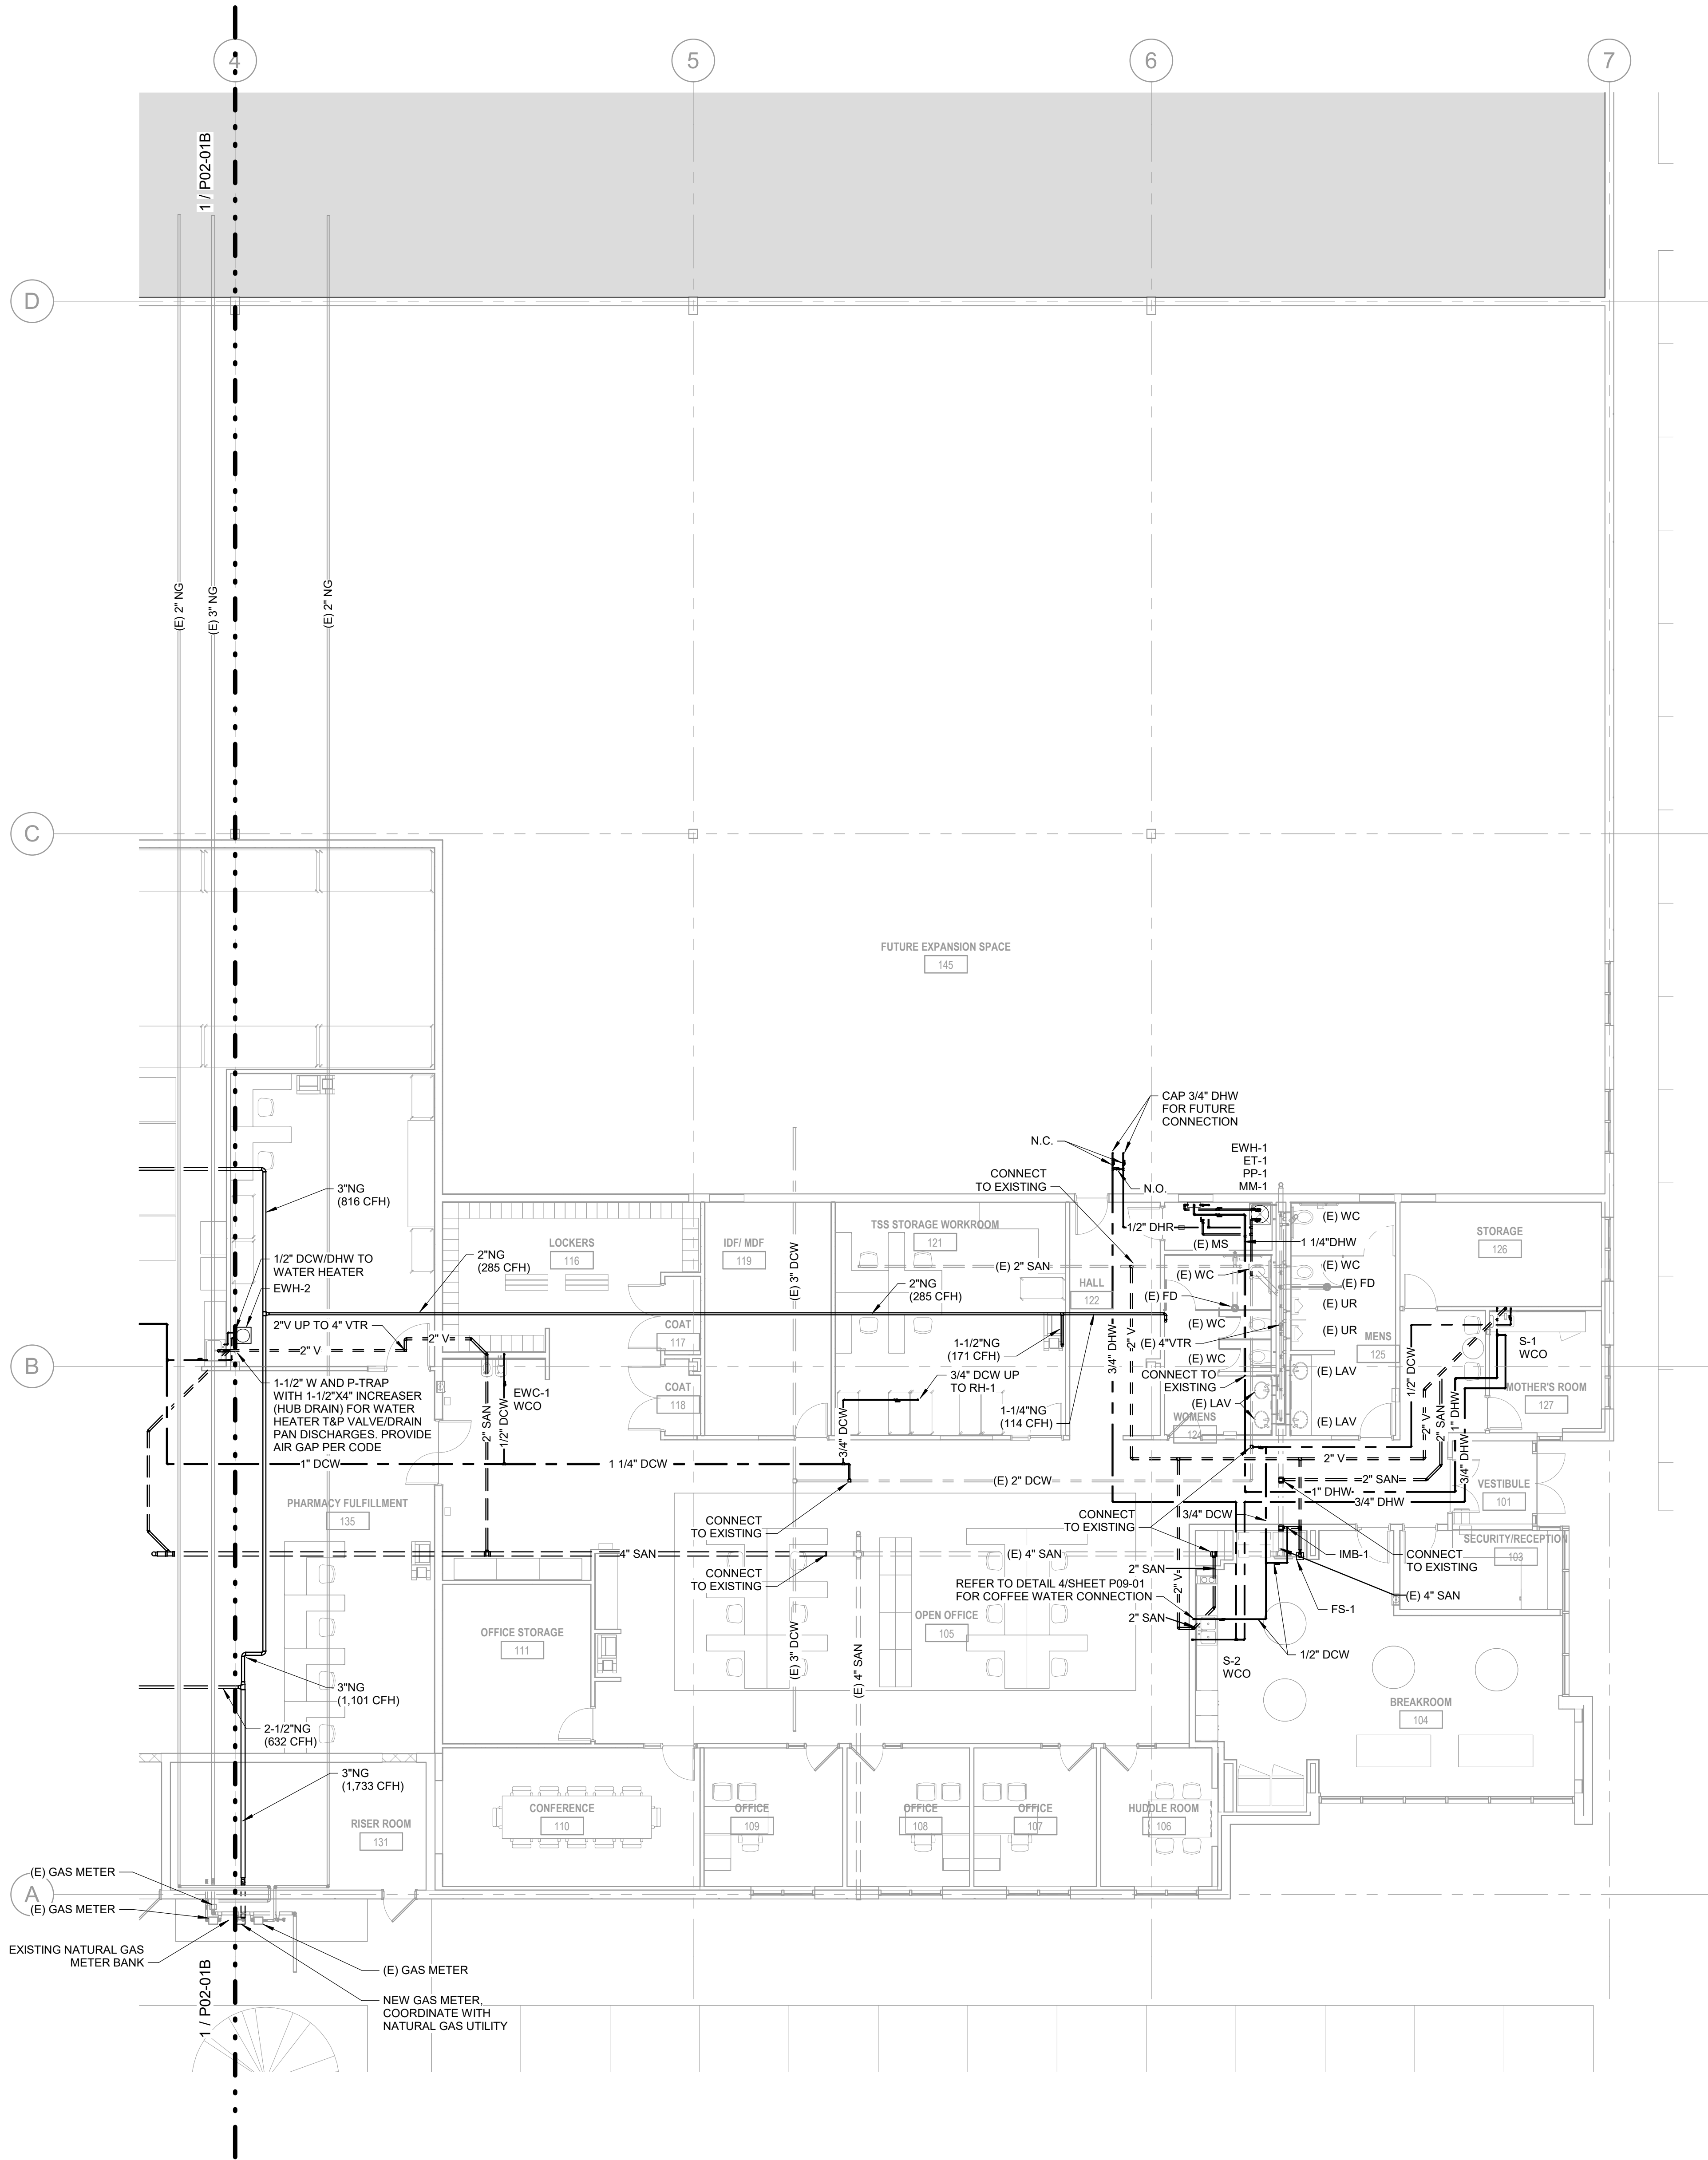

1 PLUMBING PLAN - LEVEL ONE - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. ALL PIPING IS AT OR ABOVE THE CEILING UNLESS OTHERWISE INDICATED.
2. ALL PIPING SHALL BE INSTALLED CONCEALED UNLESS OTHERWISE INDICATED.
3. COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO BEGINNING WORK.
4. COORDINATE ALL SHUT DOWN TIME WITH OWNER AND OTHER TRADES PRIOR TO COMMENCING WORK. DEPARTMENT MUST REMAIN OPERATIONAL DURING WORK.
5. EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
6. COORDINATE ALL PIPE ROUTING AND PIPE ELEVATIONS WITH OTHER TRADES IN ADVANCE OF INSTALLATION.
7. ALL VALVES TO BE INSTALLED ARE TO BE ACCESSIBLE.
8. FURNISH AND INSTALL SHOCK ARRESTORS IN COLD WATER LINES AT CONNECTIONS TO FLUSH VALVES.
9. DIELECTRIC UNIONS REQUIRED AT CONNECTIONS BETWEEN ALL DISSIMILAR METALS.
10. CONTRACTOR WHEN MAKING FINAL CONNECTIONS TO EQUIPMENT AND PLUMBING FIXTURES SHALL FURNISH CUTOFFS, TRAPS, STOPS, FAUCETS, ELBOWS, VACUUM BREAKERS, INSULATION, ETC.
11. ALL WORK SHALL COMPLY WITH 2014 STATE OF ILLINOIS PLUMBING CODE AND 2021 STATE OF ILLINOIS ENERGY CONSERVATION CODE.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

Issue Date


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD, SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

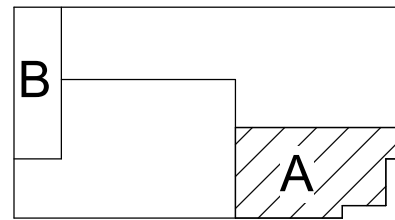

PLUMBING PLAN -
LEVEL ONE -
SEGMENT A

P02-01A

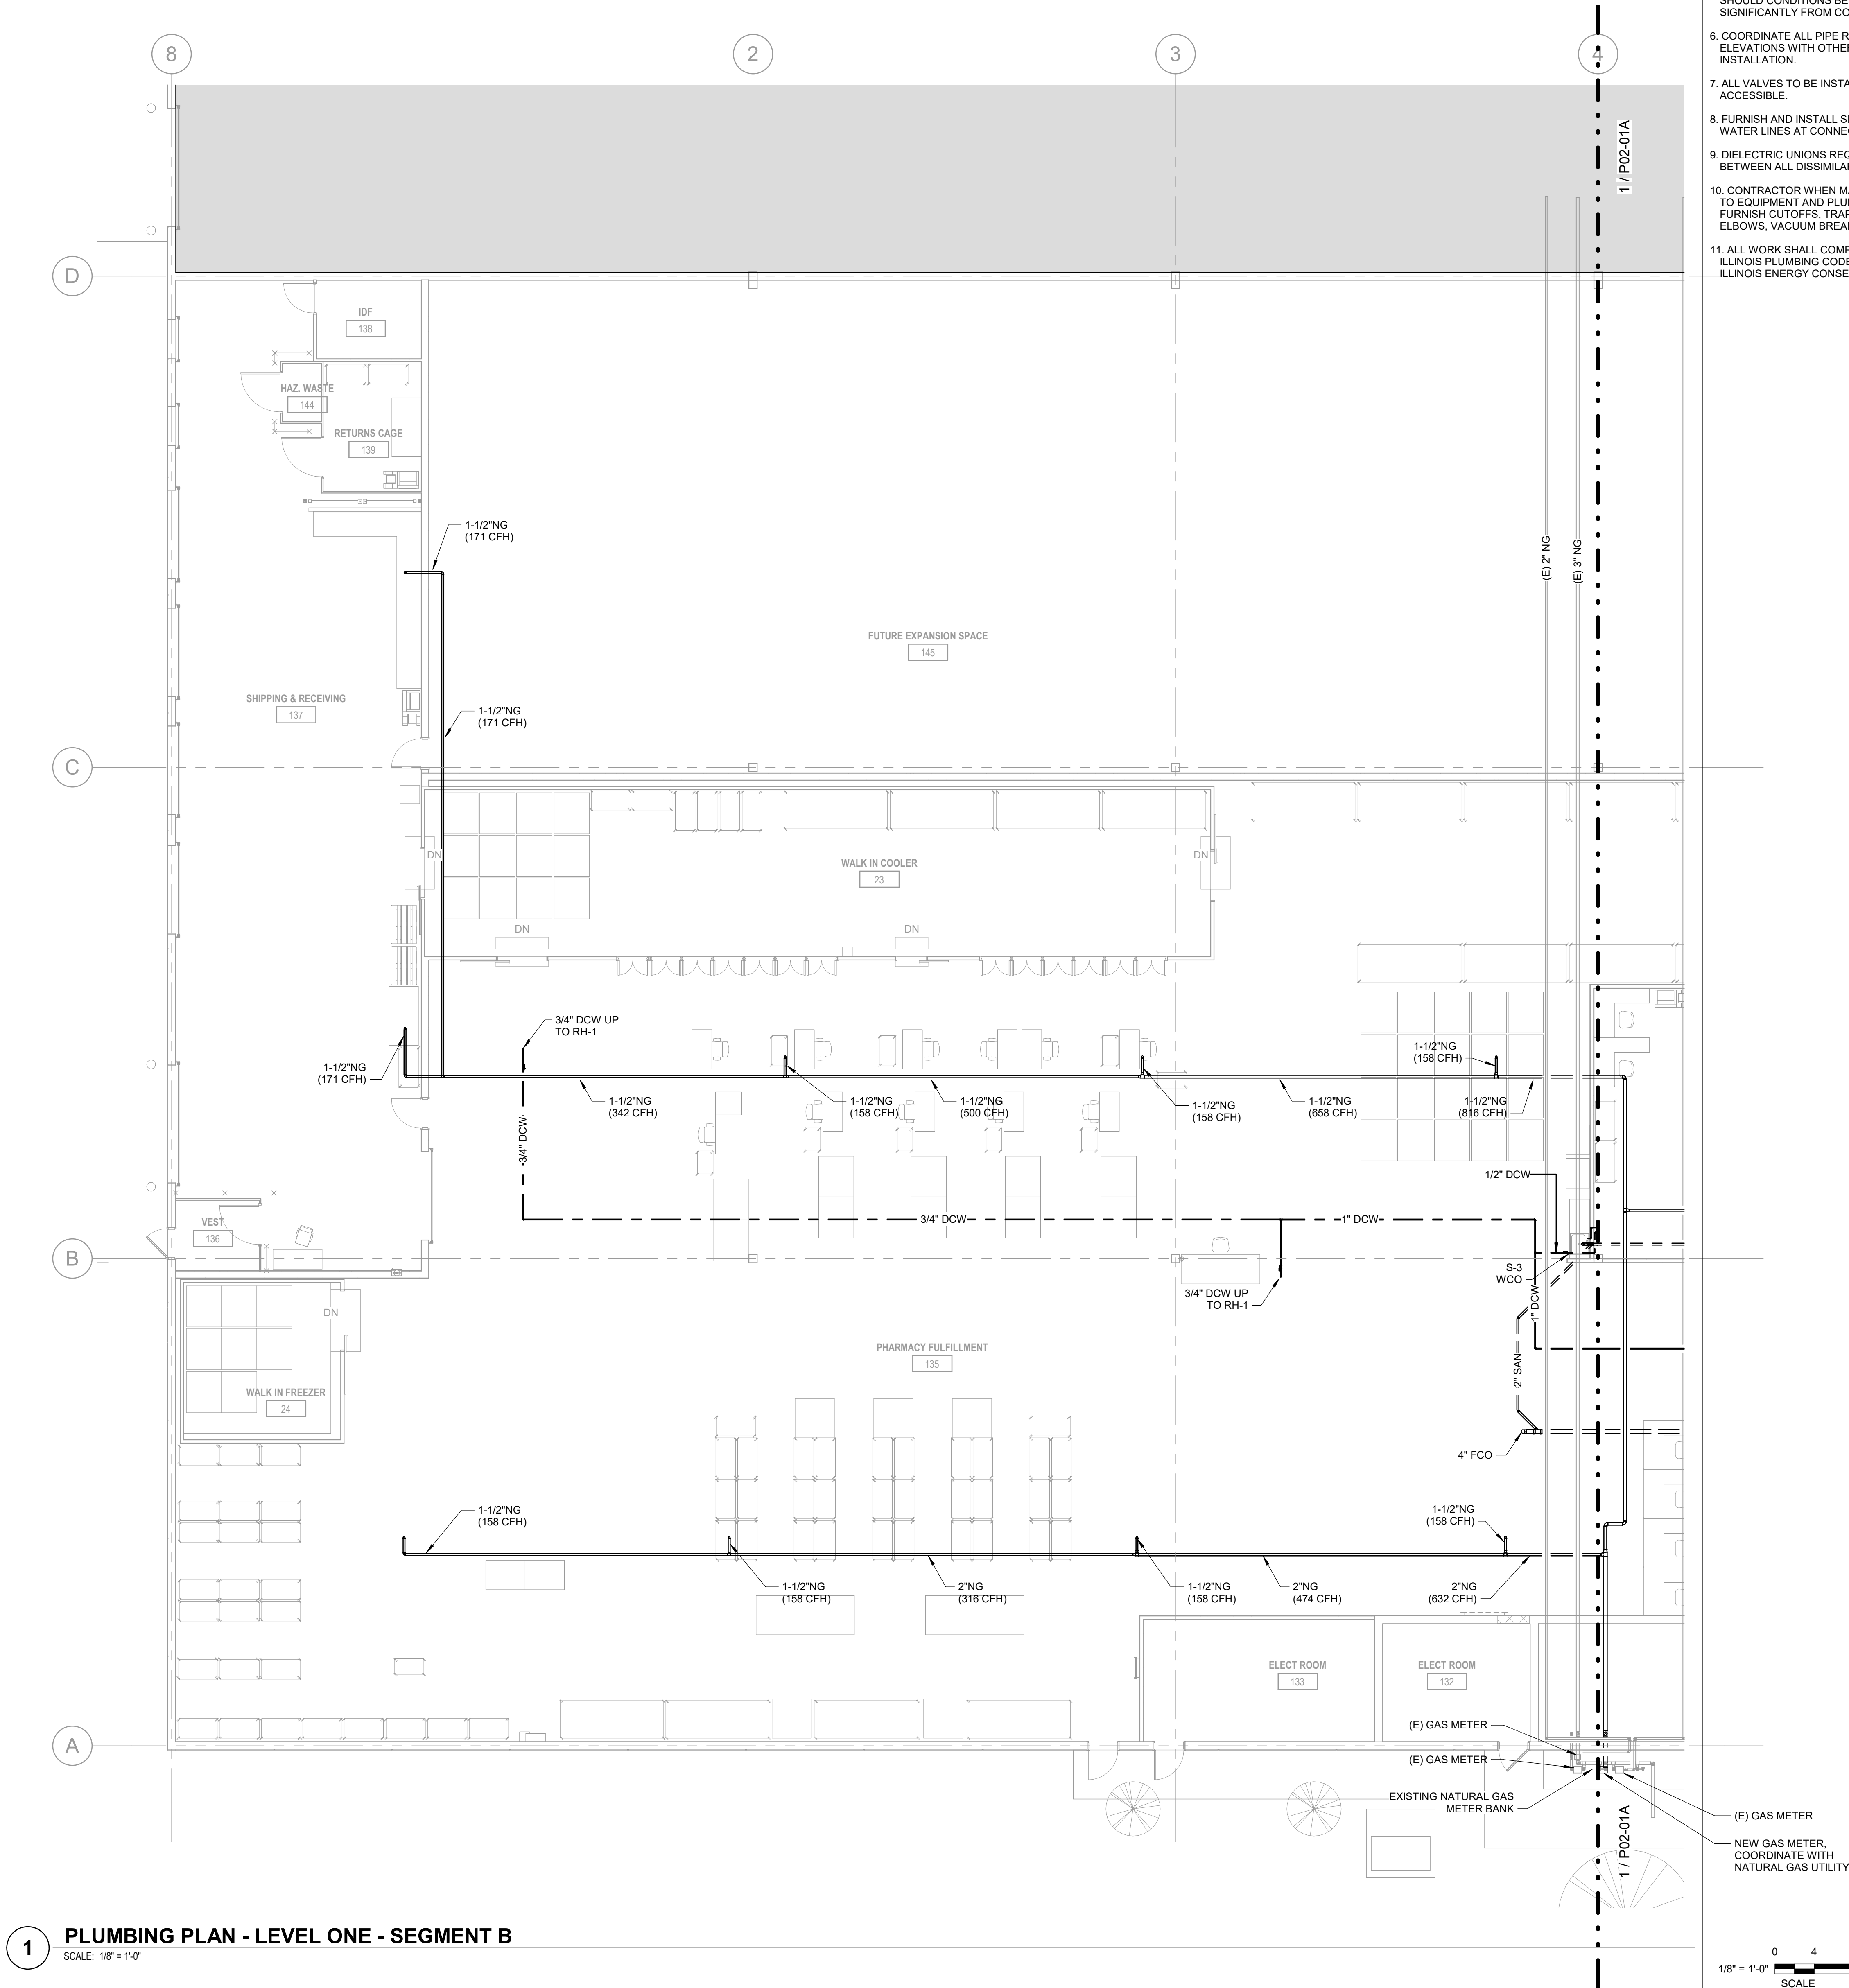

GENERAL NOTES

1. ALL PIPING IS AT OR ABOVE THE CEILING UNLESS OTHERWISE INDICATED.
2. ALL PIPING SHALL BE INSTALLED CONCEALED UNLESS OTHERWISE INDICATED.
3. COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO BEGINNING WORK.
4. COORDINATE ALL SHUT DOWN TIME WITH OWNER AND OTHER TRADES PRIOR TO COMMENCING WORK. DEPARTMENT MUST REMAIN OPERATIONAL DURING WORK.
5. EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
6. COORDINATE ALL PIPE ROUTING AND PIPE ELEVATIONS WITH OTHER TRADES IN ADVANCE OF INSTALLATION.
7. ALL VALVES TO BE INSTALLED ARE TO BE ACCESSIBLE.
8. FURNISH AND INSTALL SHOCK ARRESTORS IN COLD WATER LINES AT CONNECTIONS TO FLUSH VALVES.
9. DIELECTRIC UNIONS REQUIRED AT CONNECTIONS BETWEEN ALL DISSIMILAR METALS.
10. CONTRACTOR WHEN MAKING FINAL CONNECTIONS TO EQUIPMENT AND PLUMBING FIXTURES SHALL FURNISH CUTOFFS, TRAPS, STOPS, FAUCETS, ELBOWS, VACUUM BREAKERS, INSULATION, ETC.
11. ALL WORK SHALL COMPLY WITH 2014 STATE OF ILLINOIS PLUMBING CODE AND 2021 STATE OF ILLINOIS ENERGY CONSERVATION CODE.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

DATE OF ISSUE: 04/24/2026
ISSUE DATE

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

DATE OF ISSUE: 04/24/2026
ISSUE DATE

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.


THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

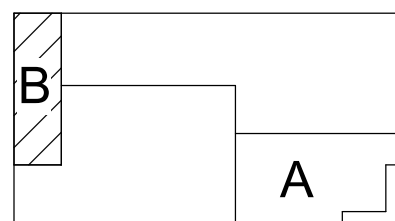

**PLUMBING PLAN -
LEVEL ONE -
SEGMENT B**

P02-01B

4/24/2026 2:08:46 PM P02-02 PLUMBING PLAN - ROOF

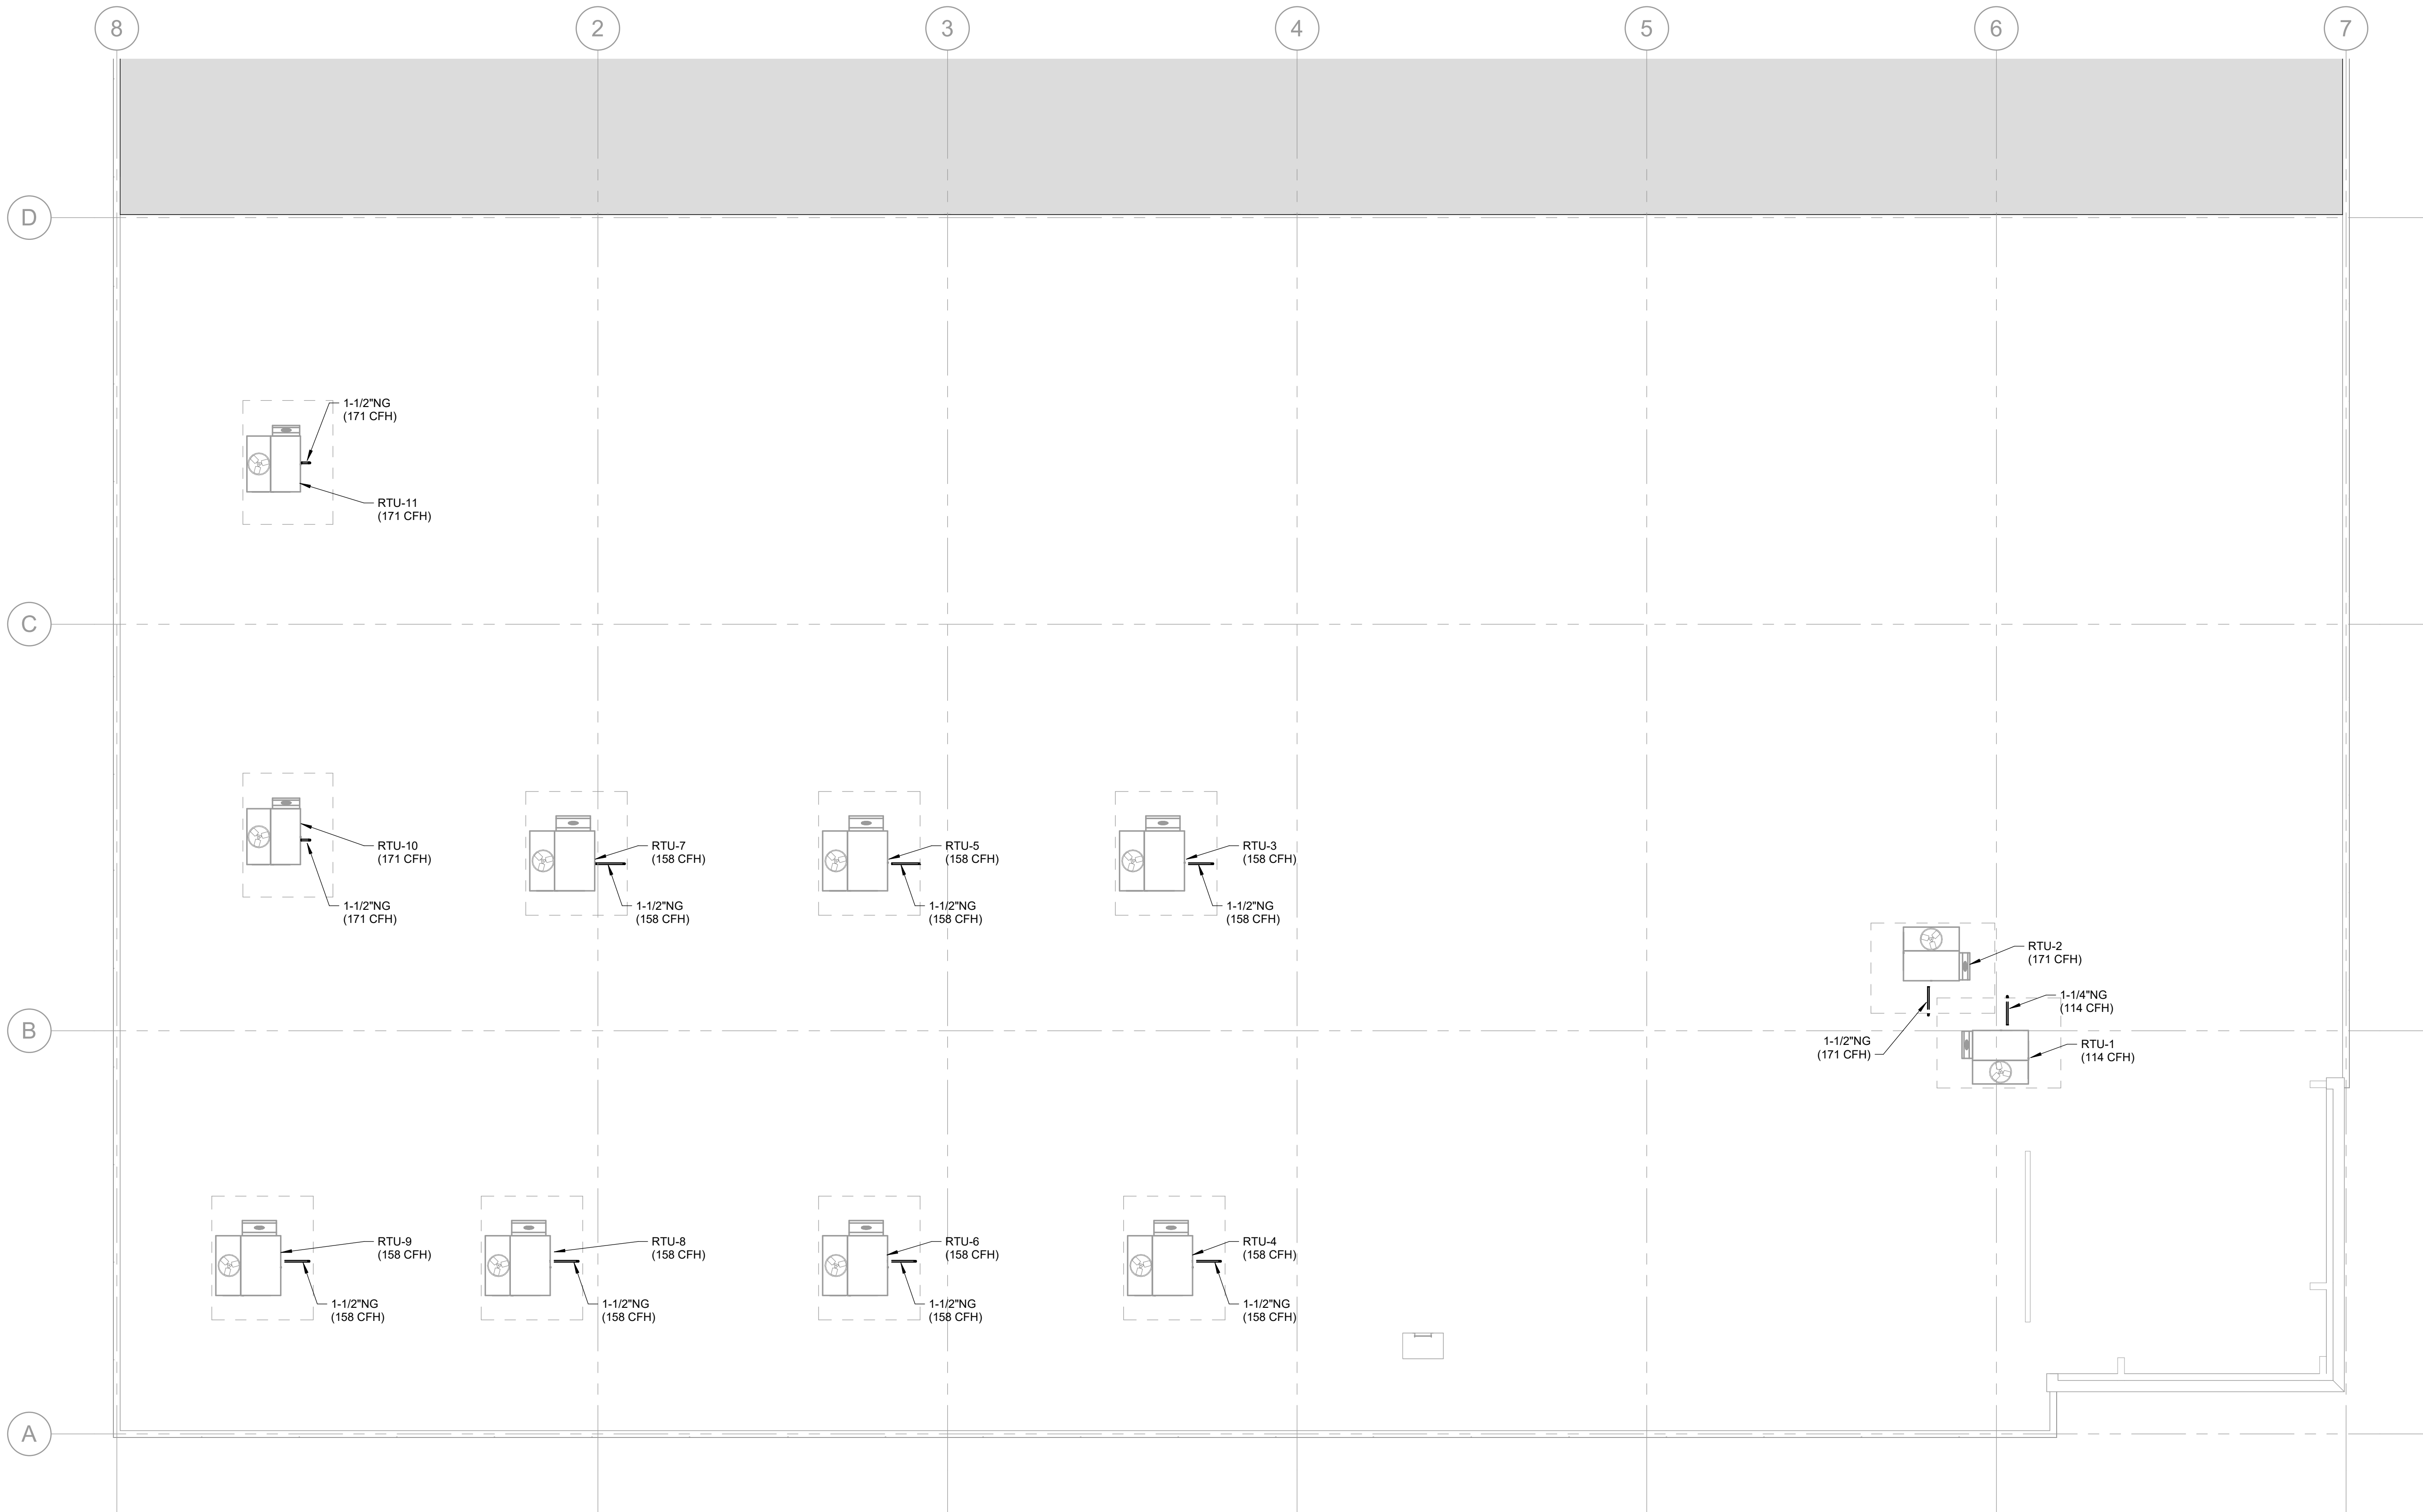

1 PLUMBING PLAN - ROOF
SCALE: 3/32" = 1'-0"

GENERAL NOTES

1. ALL PIPING IS AT OR ABOVE THE CEILING UNLESS OTHERWISE INDICATED.
2. ALL PIPING SHALL BE INSTALLED CONCEALED UNLESS OTHERWISE INDICATED.
3. COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO BEGINNING WORK.
4. COORDINATE ALL SHUT DOWN TIME WITH OWNER AND OTHER TRADES PRIOR TO COMMENCING WORK. DEPARTMENT MUST REMAIN OPERATIONAL DURING WORK.
5. EXISTING CONDITIONS ARE BASED ON EXISTING PLANS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE INDICATED. CONTRACTOR TO FIELD VERIFY IN ADVANCE THE LOCATION AND CONDITION OF THOSE EXISTING SYSTEMS SHOWN TO BE MODIFIED OR REMOVED. CONTRACTOR TO NOTIFY ENGINEER SHOULD CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM CONSTRUCTION DOCUMENTS.
6. COORDINATE ALL PIPE ROUTING AND PIPE ELEVATIONS WITH OTHER TRADES IN ADVANCE OF INSTALLATION.
7. ALL VALVES TO BE INSTALLED ARE TO BE ACCESSIBLE.
8. FURNISH AND INSTALL SHOCK ARRESTORS IN COLD WATER LINES AT CONNECTIONS TO FLUSH VALVES.
9. DIELECTRIC UNIONS REQUIRED AT CONNECTIONS BETWEEN ALL DISSIMILAR METALS.
10. CONTRACTOR WHEN MAKING FINAL CONNECTIONS TO EQUIPMENT AND PLUMBING FIXTURES SHALL FURNISH CUTOFFS, TRAPS, STOPS, FAUCETS, ELBOWS, VACUUM BREAKERS, INSULATION, ETC.
11. ALL WORK SHALL COMPLY WITH 2014 STATE OF ILLINOIS PLUMBING CODE AND 2021 STATE OF ILLINOIS ENERGY CONSERVATION CODE.



CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-862-1270



Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



Date of issue: 04/24/2026

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.


EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

PLUMBING PLAN -
ROOF


P02-02

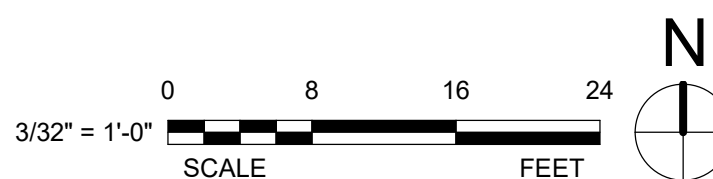

4/24/2026 2:08:46 PM P07-01 PLUMBING RISER DIAGRAM

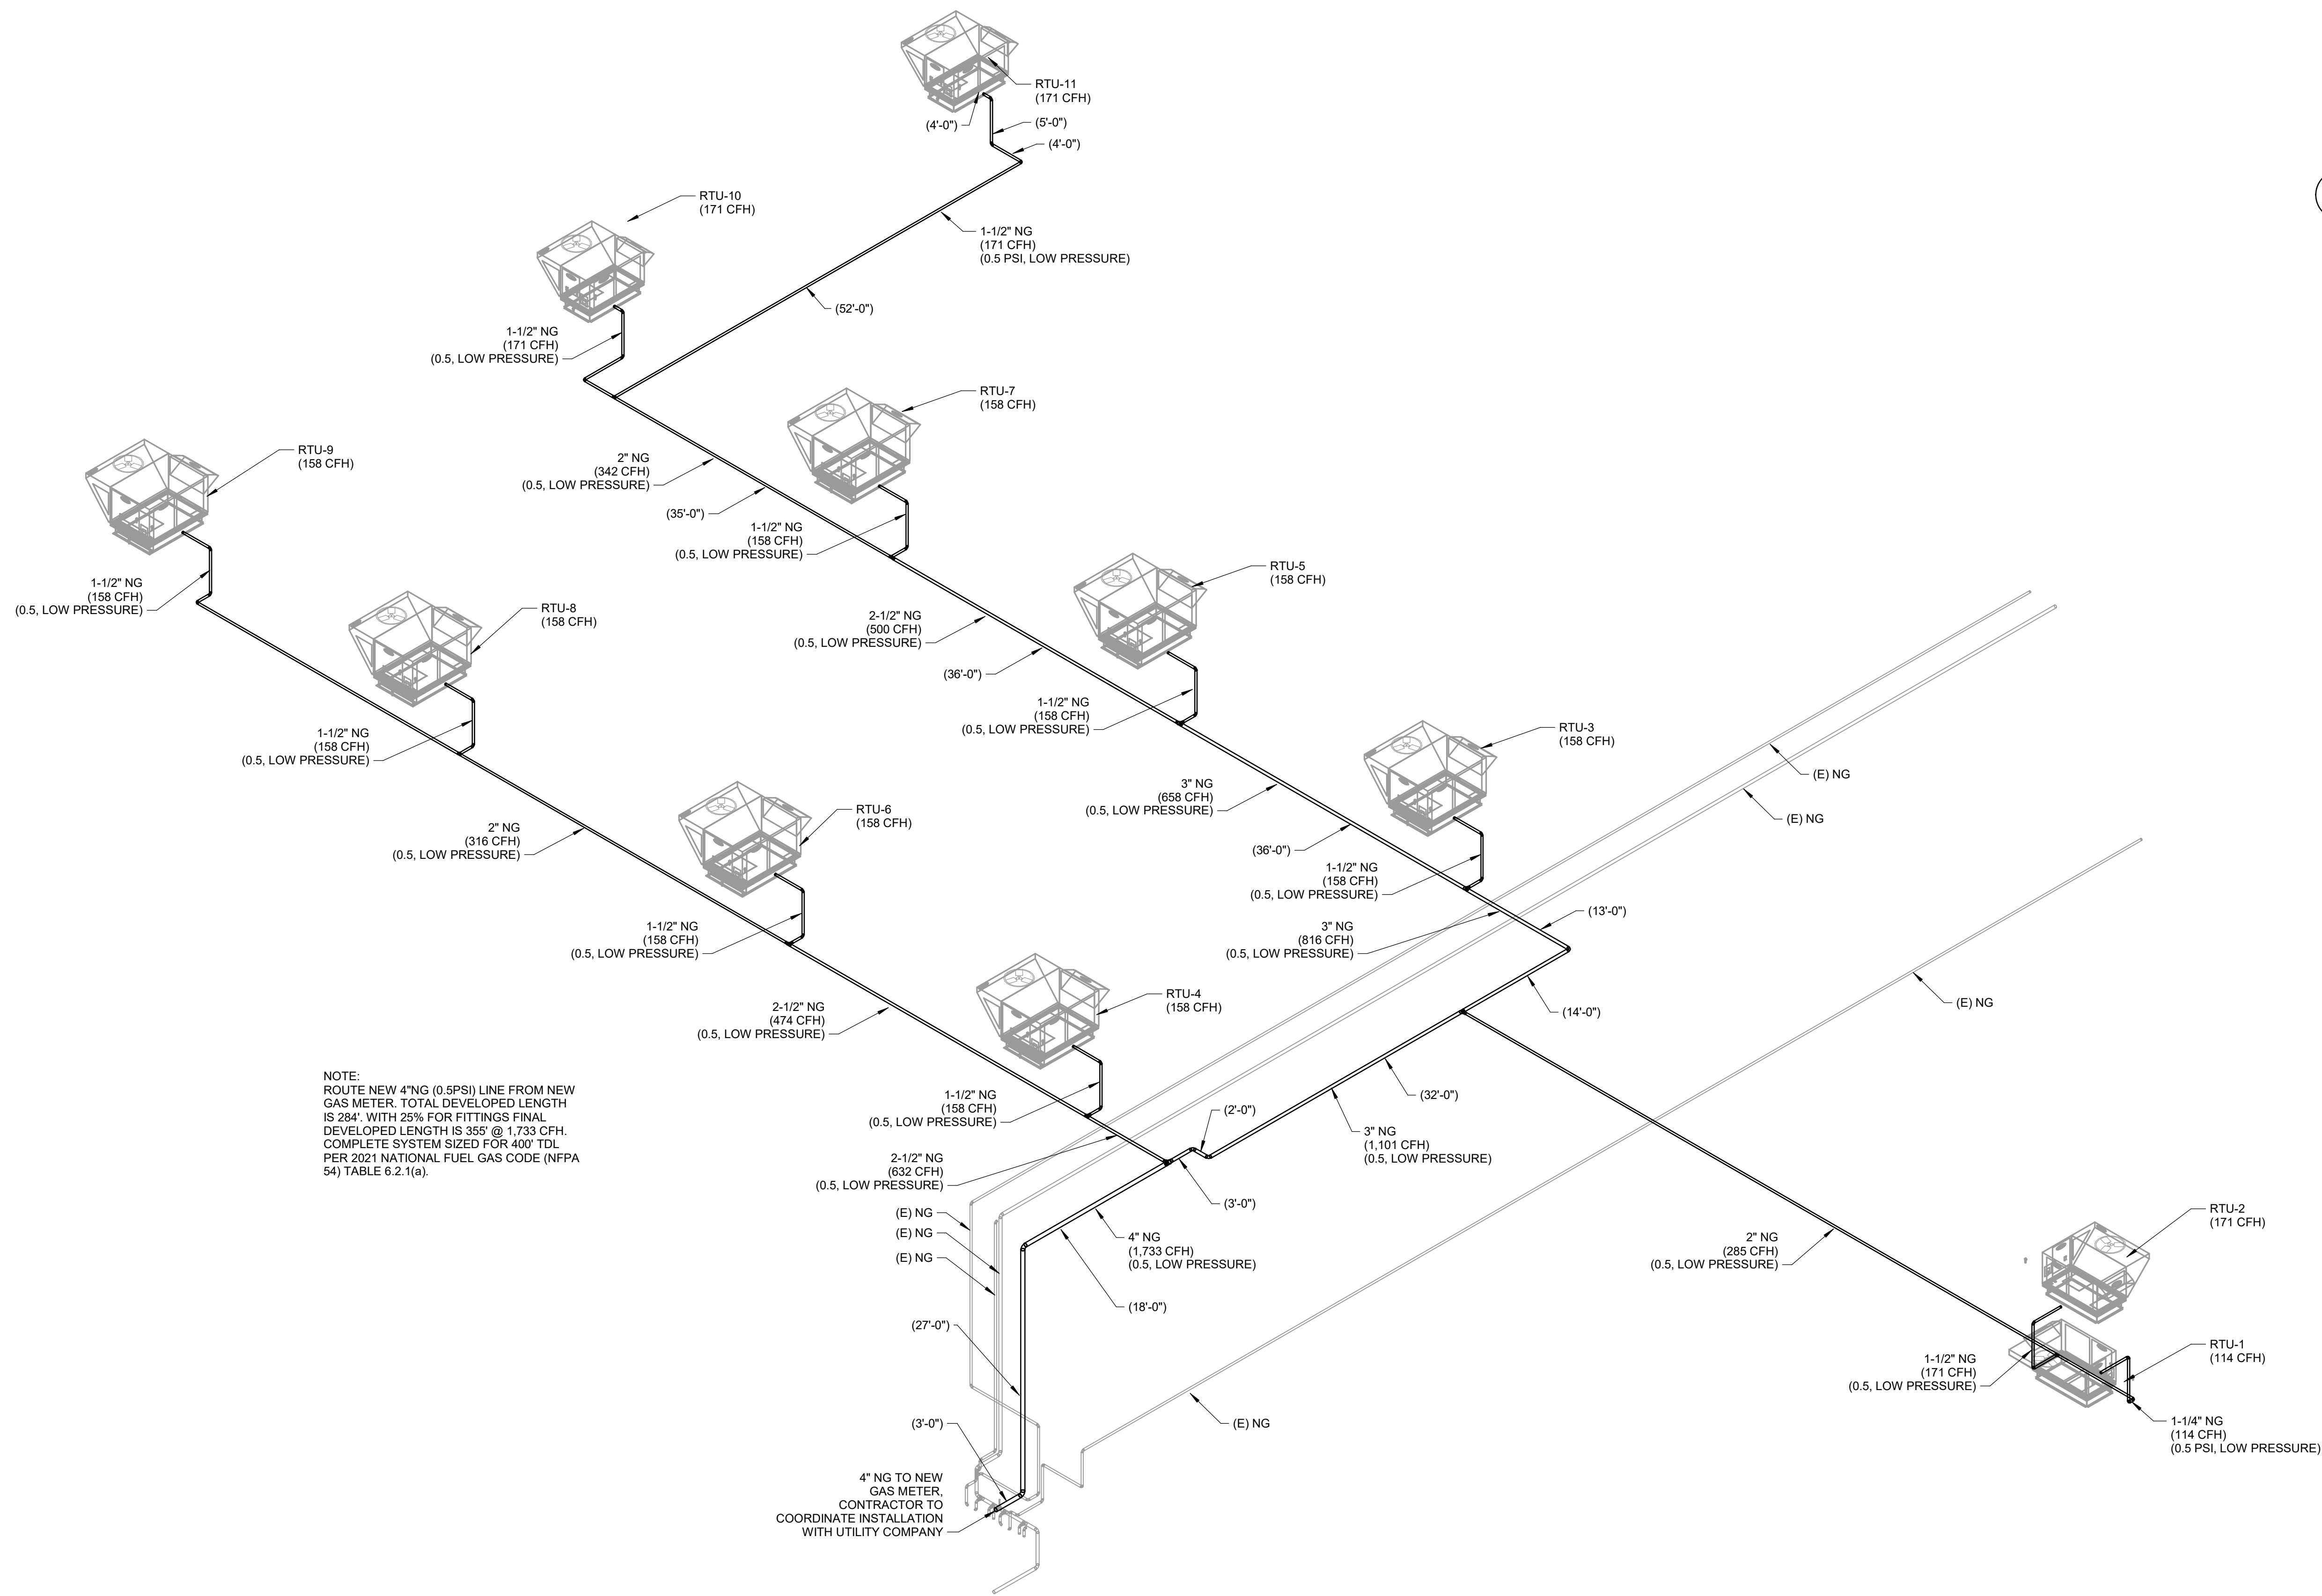

1 NATURAL GAS RISER DIAGRAM
SCALE: NOT TO SCALE

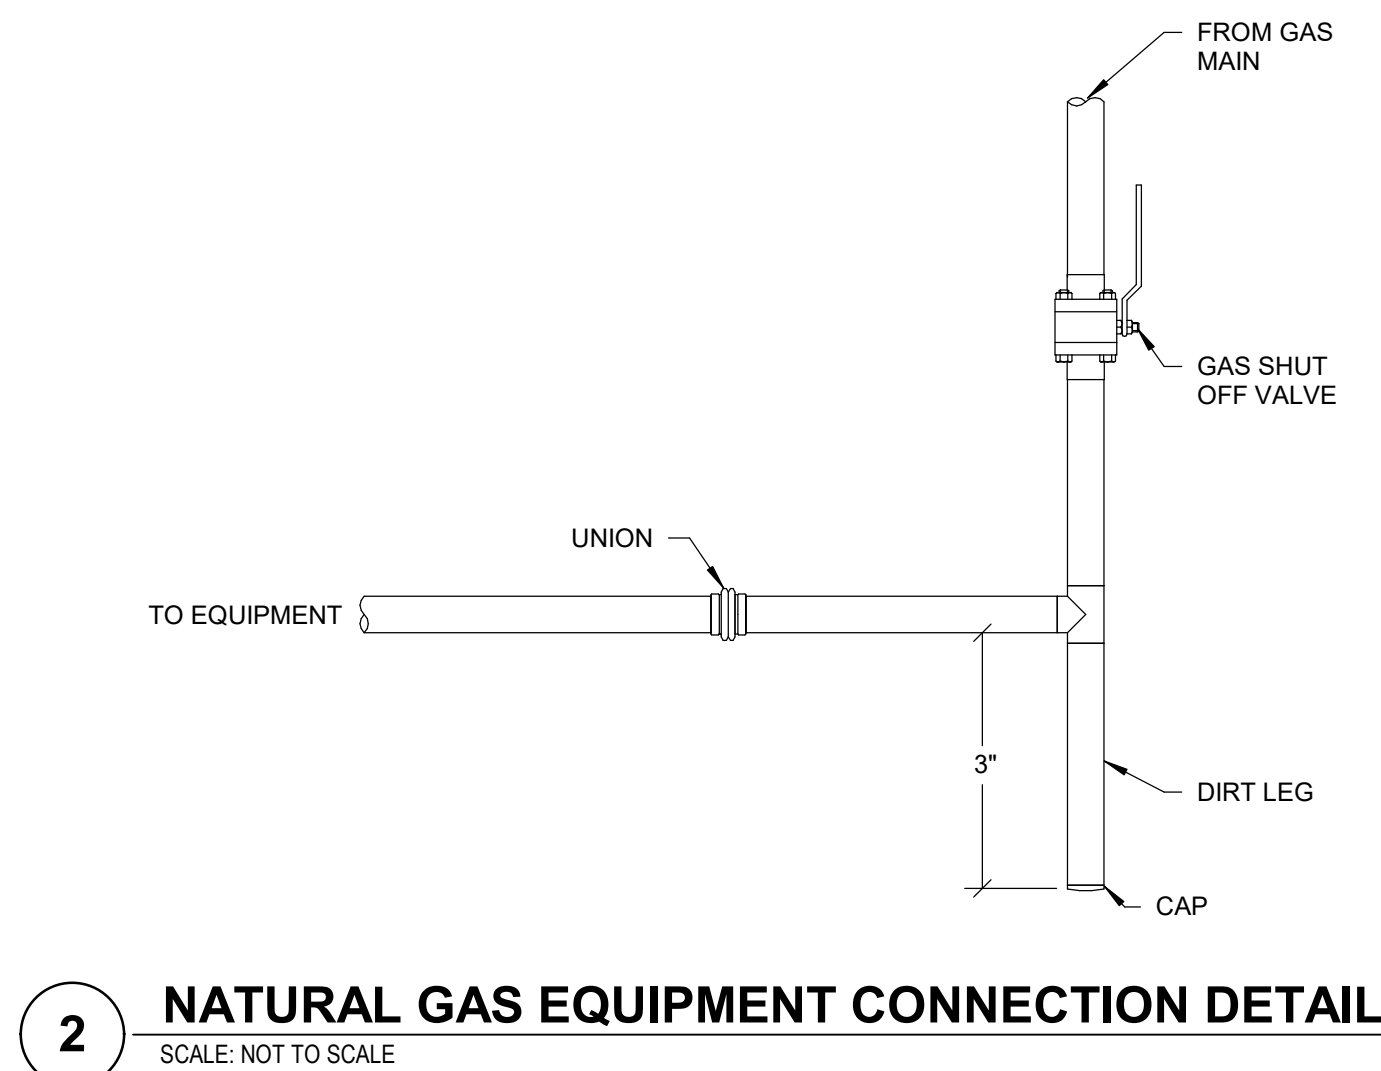

Date of Issue: 04/24/2026
Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD., SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

PLUMBING RISER
DIAGRAM

PLUMBING FIXTURE SCHEDULE

TAG	FIXTURE	WASTE (IN.)	SANITARY (IN.)	VENT (IN.)	COLD WATER (IN.)	HOT WATER (IN.)	FURNISH BY	LOCATION	REMARKS	MANUFACTURER/MODEL #
EW-C-1	ELECTRIC WATER COOLER	2"	-	2"	1/2"	-	CFCI	OPEN OFFICE	BILEVEL DRINKING FOUNTAIN WITH BOTTLE FILLER, INTEGRAL CHILLER AND FILTER	ELKAY #LZST1LBSLK
S-1	SINK	2"	-	2"	1/2"	1/2"	CFCI	MOTHERS ROOM	DROP IN STAINLESS STEEL, 9-1/2" L-TYPE SWING SPOUT, GRID STRAINER, 1.5 GPM OUTLET	ELKAY #LRAD252160 CHICAGO # 786-E35VPCABCP
S-2	SINK	2"	-	2"	1/2"	1/2"	CFCI	BREAK ROOM	DROP IN STAINLESS STEEL, DOUBLE COMPARTMENT, 9-1/2" L-TYPE SWING SPOUT, GRID STRAINER, 1.5 GPM OUTLET	ELKAY #LRAD332155 CHICAGO # 201-AE35-317XABCP
S-3	SINK	2"	-	2"	1/2"	1/2"	CFCI	PHARMACY FULFILLMENT	DROP IN STAINLESS STEEL, 5-1/4" GOOSENECK, GRID STRAINER, 1.5 GPM LAMINAR FLOW OUTLET WITH INTEGRAL SINGLE ACTION EMERGENCY EYEWASH	ELKAY #LRAD191960 SPEARMAN # SEF-1800-CAJLF-TW

NOTE: SEE PROJECT SPECIFICATIONS (22 4000) FOR PLUMBING FIXTURE ACCESSORIES (P-TRAP, SUPPLIES, ETC.)

ELECTRIC WATER HEATER SCHEDULE

TAG	LOCATION	GALLONS	# HEATING ELEMENT	TOTAL KW	RECOVERY 100' RISE (GPH)	MANUFACTURER & REMARKS
EW-H-1	SEE FLOOR PLANS	30	2	6	24	AO SMITH DEL-30
EW-H-2	SEE FLOOR PLANS	6	1	1.5	6	AO SMITH DEL-6

NOTES: PROVIDE AMTROL ST-5V-C EXPANSION TANK FOR EWH-1 & EWH-2 (ET-1)

THERMOSTATIC MIXING VALVE

TAG	LOCATION	MIN. FLOW (GPM)	DESIGN FLOW (GPM)	MAX. PRESSURE DROP (PSI) @ PEAK FLOW	MANUFACTURER & REMARKS
MV-1	JANITORS CLOSET	0.5	15	20	POWERS LFMM430. ENSURE PIPING FOLLOWS THE MANUFACTURER'S CONTINUOUS RECIRCULATION PIPING DIAGRAMS TO ALLOW FOR MINIMUM ACTIVATION FLOW RATE OF 0.5 GPM. PER DETAIL 1 & 4, SHEET P09.1 (SET POINT: 120°)

PUMP SCHEDULE

TAG	LOCATION	GPM	HEAD (FT. WC)	HP	RPM	ELECTRICAL	REMARKS
PP-1	MECH	2	12	1/40	2800	120v/60Hz/1 PH	BELL AND GOSSETT # NBF-10S-LW. WET ROTOR TYPE INLINE PUMP WITH MOTOR. LEAD FREE BRONZE BODY WITH UNION CONNECTIONS. PROVIDE WITH HONEYWELL #L600EC SURFACE MOUNTED AQUASTAT WITH SINGLE POLE DOUBLE THROW SWITCH FOR CIRCULATOR CONTROL AND ADJUSTABLE DIFFERENTIAL. SET TO 10°F. HOT WATER RETURN TEMPERATURE SHALL NOT EXCEED 104°F AT THE COLD WATER CONNECTION POINTS.

PLUMBING SPECIALTIES SCHEDULE

TAG	DESCRIPTION	LOCATION	BODY	STRAINER	MANUFACTURER & REMARKS
FS-1	FLOOR SINK	SEE DRAWINGS	CAST IRON	NICKEL BRONZE	JAY R SMITH # 3100Y-12
IMB-1	ICE MACHINE BOX	SEE DRAWINGS	-	-	GUY GRAY # MB1HAAB
RH-1	NON-FREEZE ROOF HYDRANT	SEE DRAWINGS	-	-	WOODFORD # SRH-MS
WCO	WALL CLEANOUT	SEE DRAWINGS	CAST IRON	-	JAY R SMITH # 4555

PIPE SIZING

PIPE SIZE	COLD WATER				HOT WATER		
	FLUSH TANK WSFU	FLUSH VALVE WSFU	VELOCITY FEET/SEC	GPM	FLUSH TANK WSFU	VELOCITY FEET/SEC	GPM
1/2"	1.6	N/A	3.1	2.4	*	*	*
3/4"	6.9	N/A	3.9	6.3	*	*	*
1"	16	N/A	4.7	12.5	*	*	*
1-1/4"	32	4	5.4	22.0	19.75	5	19.5
1 1/2"	59.6	15.8	5.9	35.0	44.3	5	27.5
2"	214	116	7.5	72.0	120	5	48
2-1/2"	478	360	8	119.3	245	5	74
3"	748	700	8	170.0	407.9	5	106.5
4"	1746	1746	8	299	847	5	186.0
6"	10300	10300	8	1170.0	4849	5	641.0


NOTES:
1. PER WATER CALCULATIONS AS APPLIED TO 2018 IPC BASED ON 5 PSI/100' PRESSURE LOSS.

FIXTURE UNIT CALCULATION

FIXTURE TYPE	QTY	D.F.U.		HOT		COLD		COMBINED		TOTAL		TOTAL		TOTAL	
		D.F.U.	(EA)	D.F.U.	(EA)	D.F.U.	(EA)	D.F.U.	(EA)	D.F.U.	(EA)	D.F.U.	(EA)	D.F.U.	(EA)
NEW DRINKING FOUNTAIN	2	0.5	1.0	0.00	0.25	0.25	0	0.50	0.50	0	0.50	0.50	0	0.50	0.50
NEW SINK	3	2.0	6.0	1.50	1.50	2.00	4.5	4.5	6.0	0	6.0	6.0	0	6.0	6.0
EXISTING LAVATORY	4	1.0	4.0	1.00	1.00	2.00	4	4	6.0	0	6.0	6.0	0	6.0	6.0
NEW ICE MACHINE	1	1.0	1.0	0.00	1.00	1.00	0	1	1.0	0	1.0	1.0	0	1.0	1.0
NEW COFFEE MAKER	1	0.0	0.0	0.00	0.5	0.5	0	0.50	0.50	0	0.50	0.50	0	0.50	0.50
EXISTING SERVICE SINK (MOP BASIN)	1	3.0	3.0	2.00	2.00	3.00	2	2	3.0	0	3.0	3.0	0	3.0	3.0
EXISTING URINAL	2	2.0	4.0	0.00	5.00	5.00	0	10	10.0	0	10.0	10.0	0	10.0	10.0
EXISTING WATER CLOSET (1.28 GPF FLUSH VALVE)	5	8.0	40.0	0.00	10.00	10.00	0	50	50.0	0	50.0	50.0	0	50.0	50.0
TOTAL UNITS	19		59.0					10.5	72.5	79					

Domestic Water System: 79 FU (Flush Valve) = 62.0 GPM per Illinois Administrative Code.


Sanitary Waste System: 59 FU = 29.5 GPM.

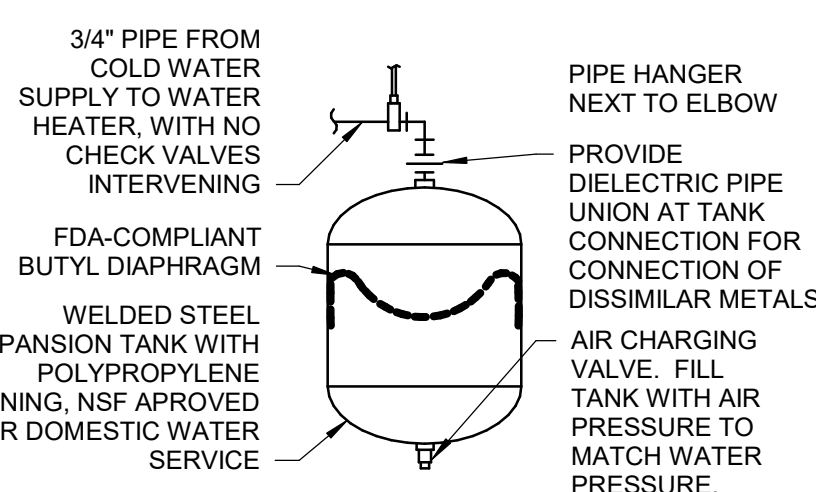

PIPING ARRANGEMENT SHOWN IS SCHEMATIC. ADJUST TO SUIT FIELD CONDITIONS. FOLLOW MANUFACTURER'S INSTRUCTIONS FOR INSTALLATION PROCEDURE. VERIFY PROPER OPERATION WHEN INSTALLED. PROVIDE SEISMIC STRAP OR BRACING WHEN REQUIRED BY LOCAL AUTHORITIES.


Expansion Tank Detail

SCALE: NOT TO SCALE

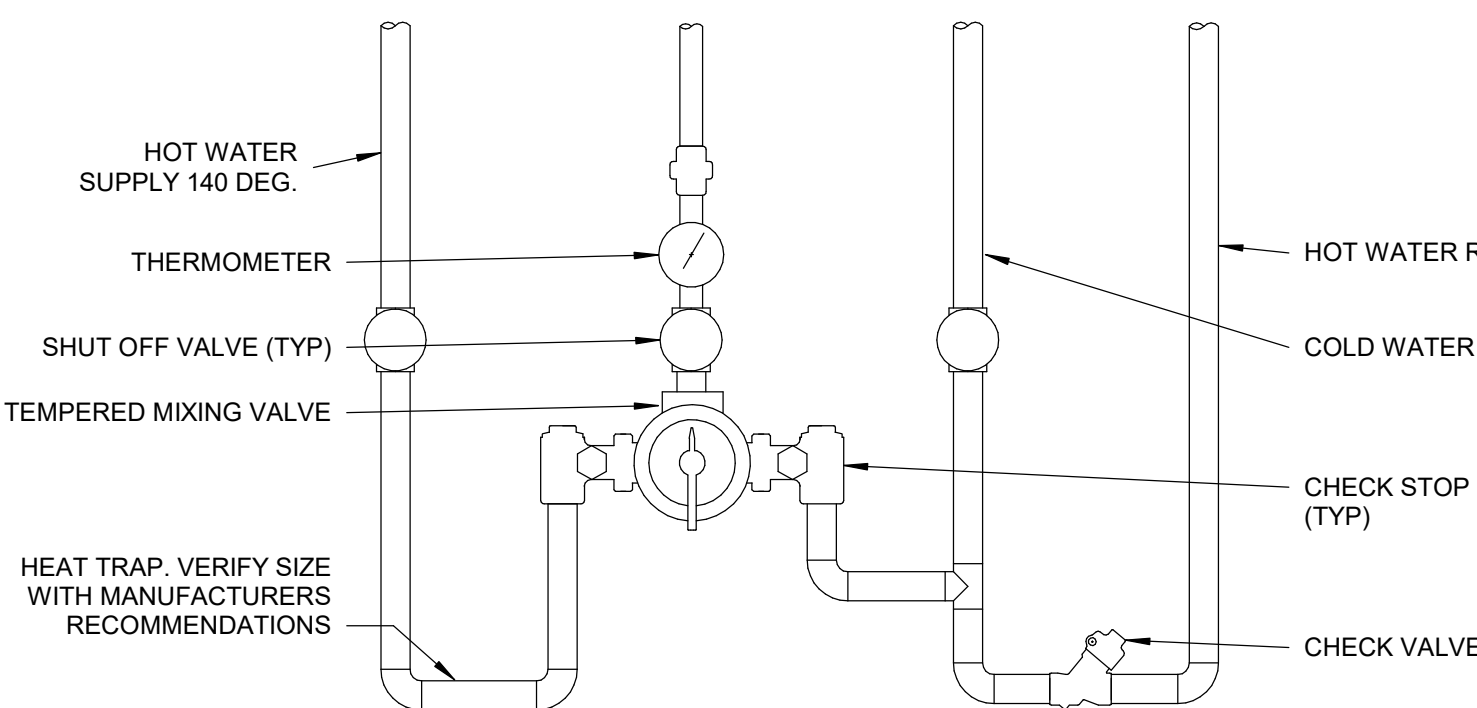


MASTER MIXING VALVE DETAIL

SCALE: NOT TO SCALE

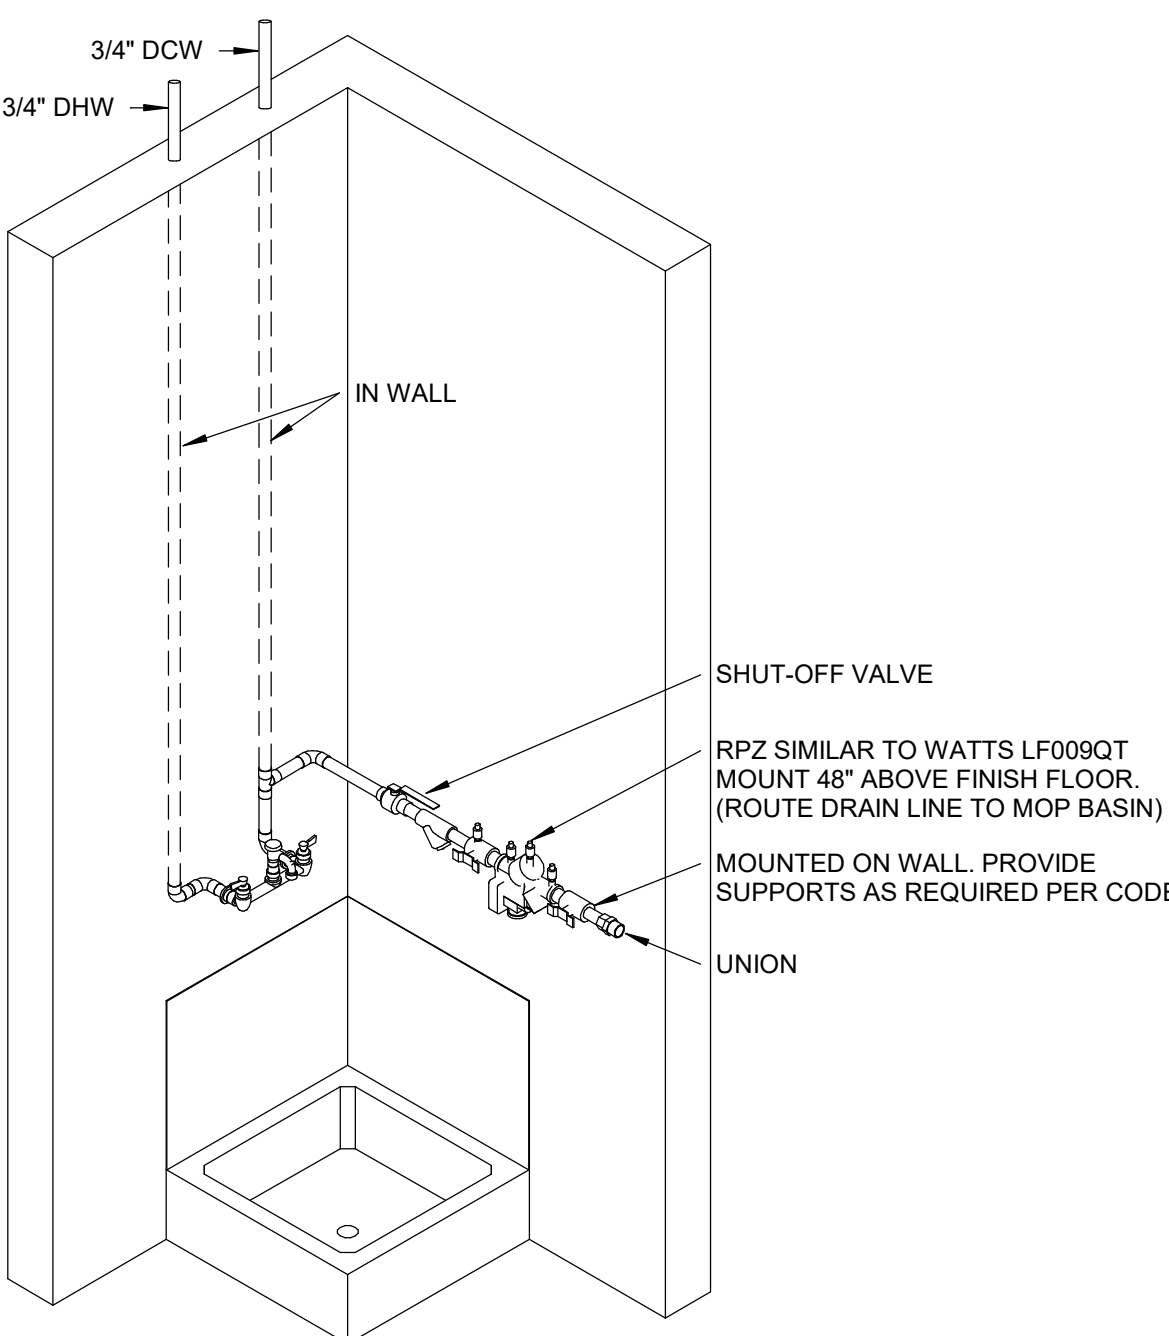


MOP SINK WITH CHEMICAL DISPENSER CONNECTION DETAIL

SCALE: NOT TO SCALE

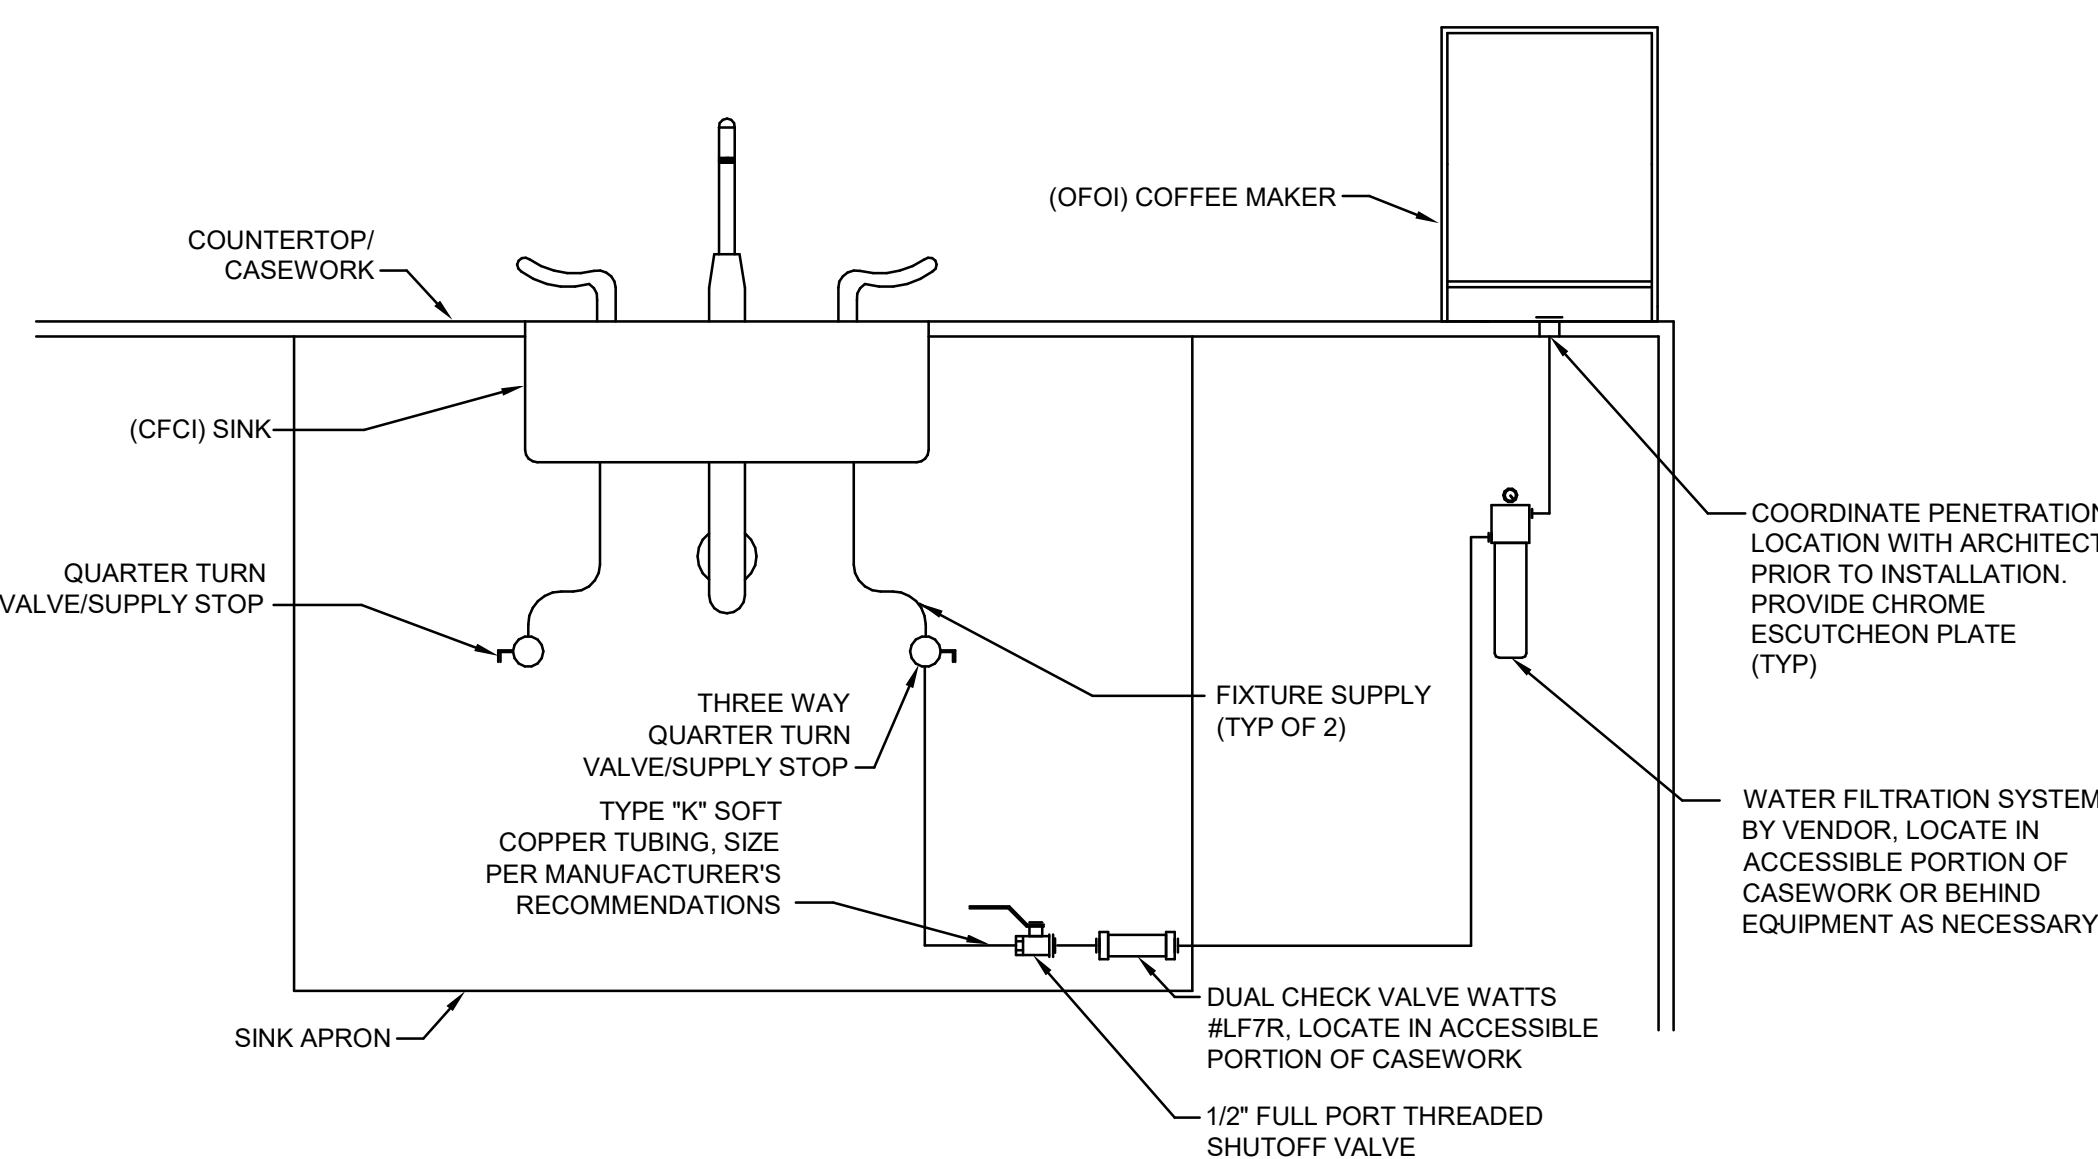


OFCI EQUIPMENT CONNECTION DETAIL

SCALE: NOT TO SCALE

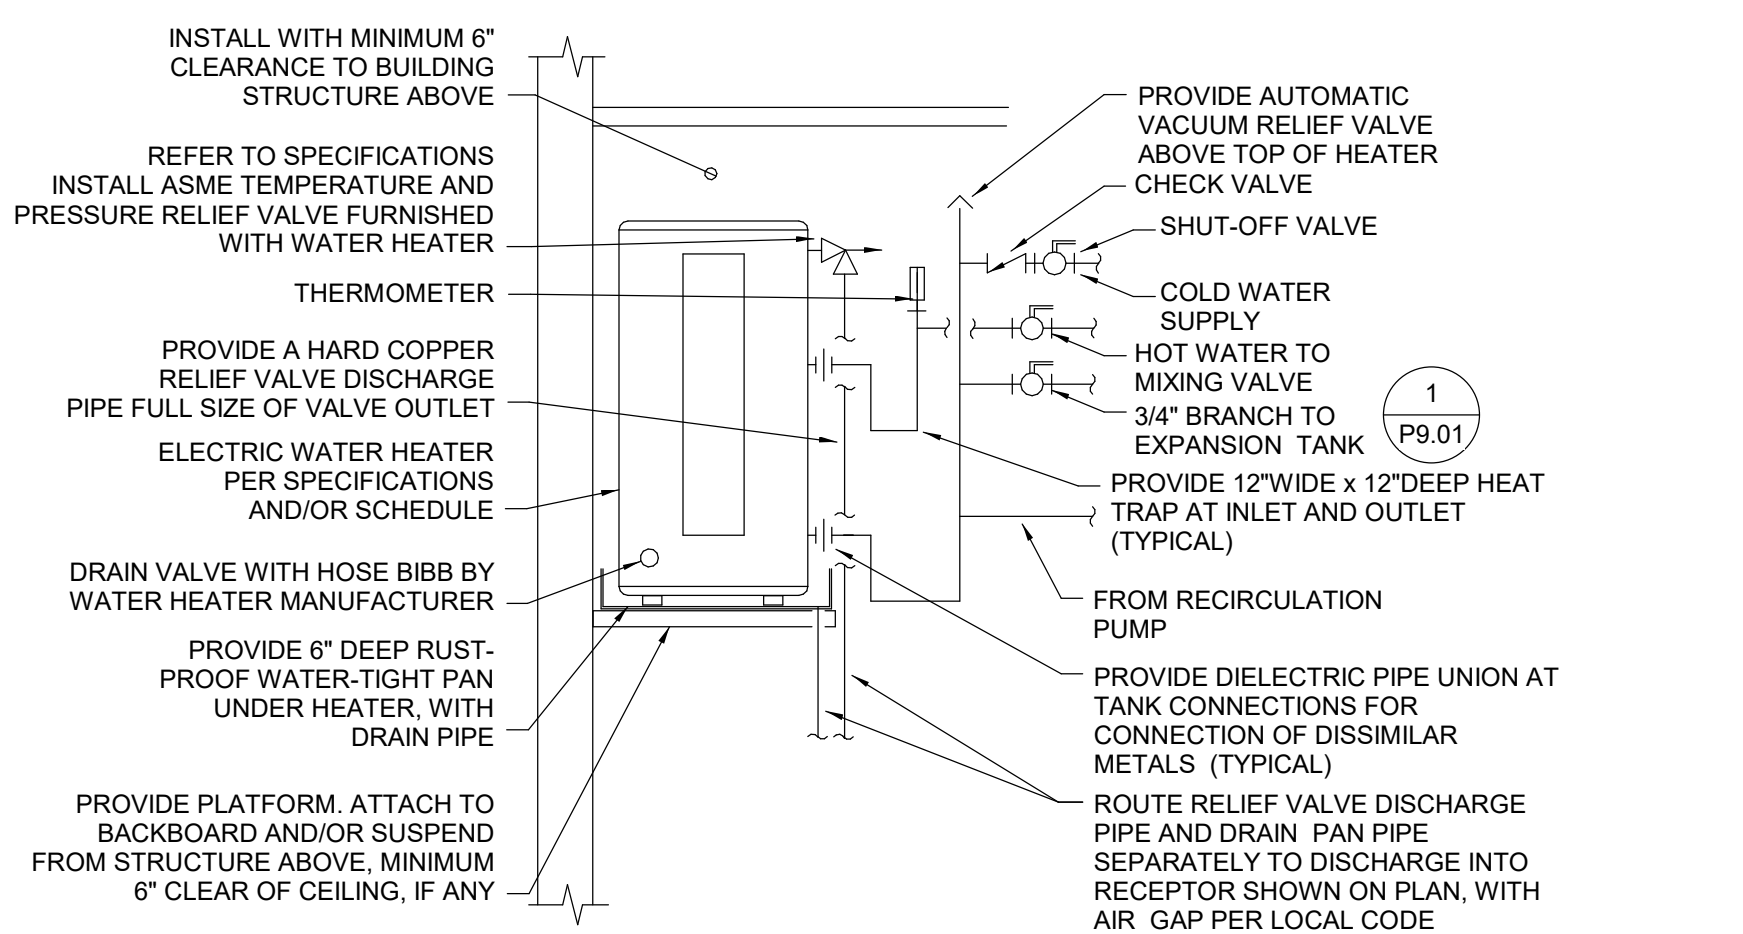

PLATFORM MOUNTED WATER HEATER DETAIL


SCALE: NOT TO SCALE

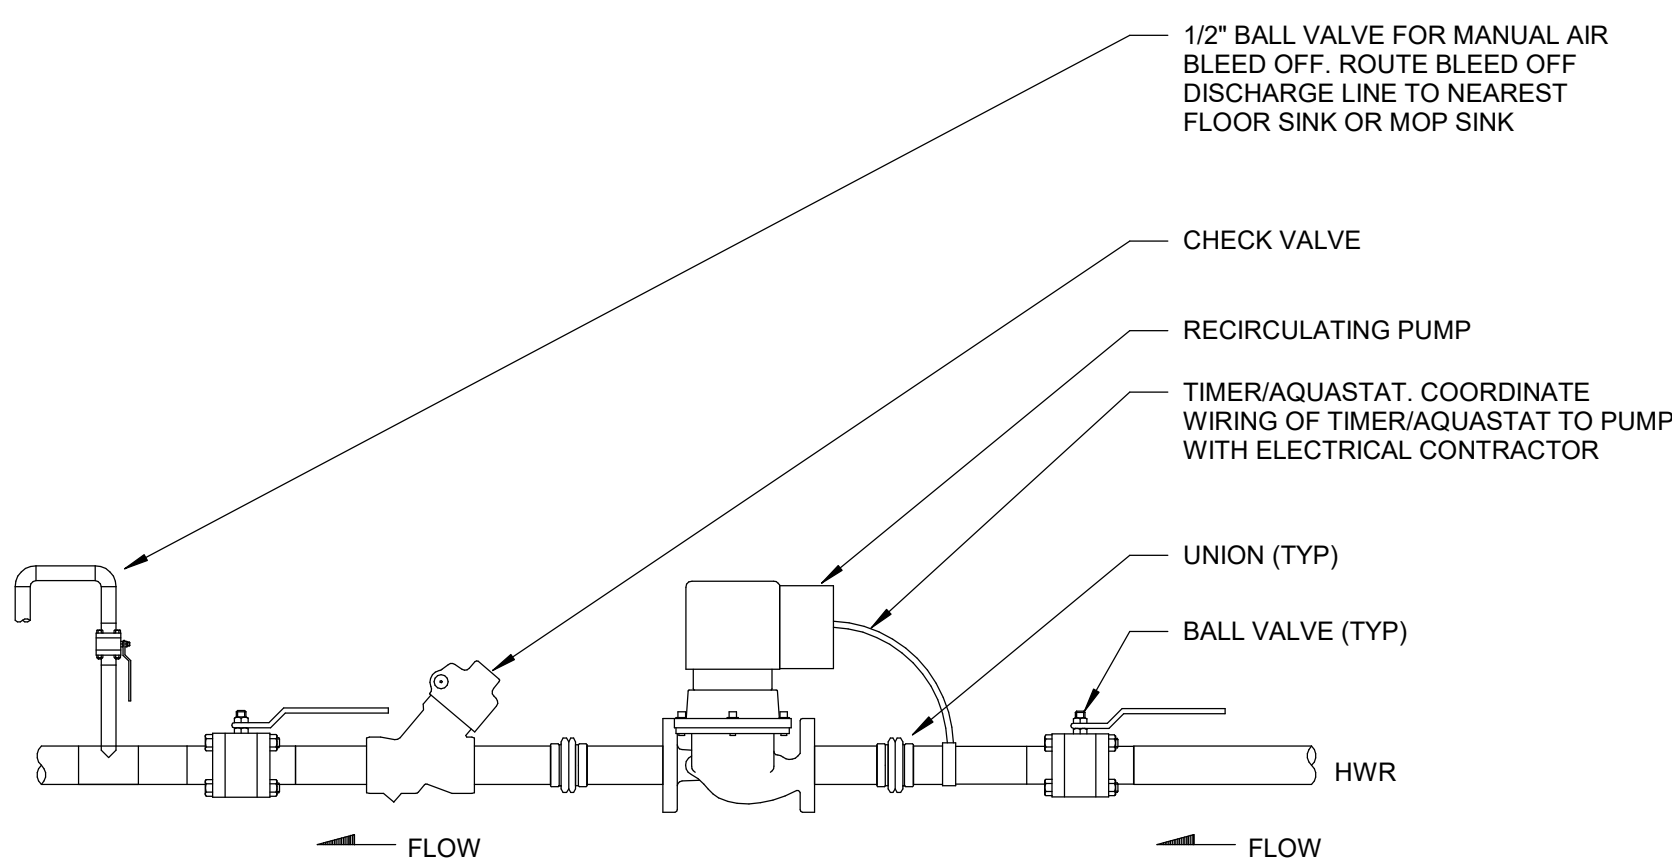

NOTE:
SUPPORT PUMP INDEPENDENT OF PIPING


RECIRCULATION PUMP DETAIL

SCALE: NOT TO SCALE

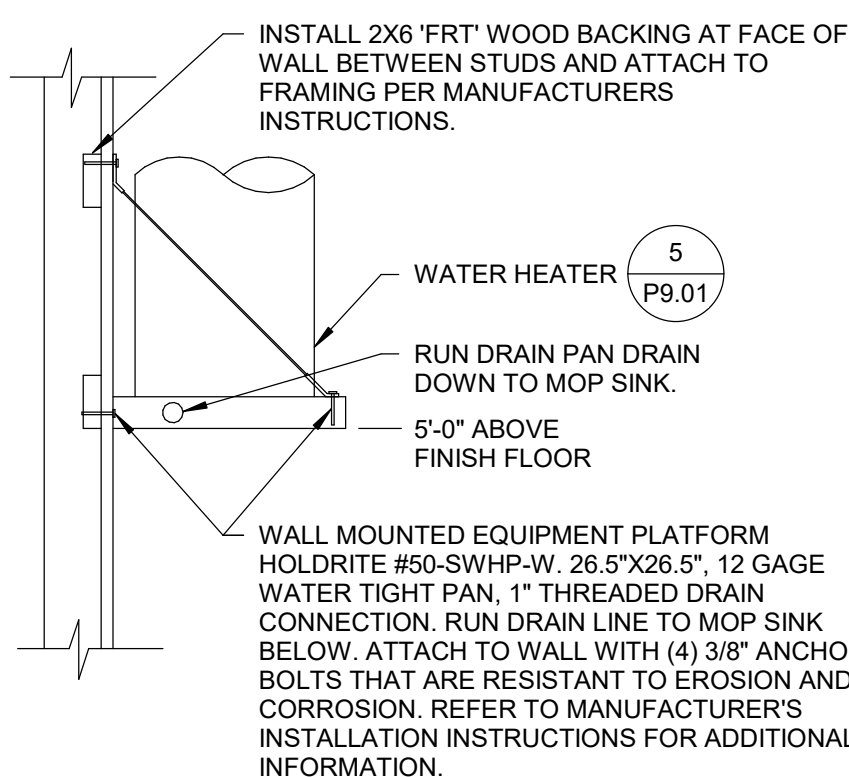

Water Heater Support Detail


SCALE: NOT TO SCALE

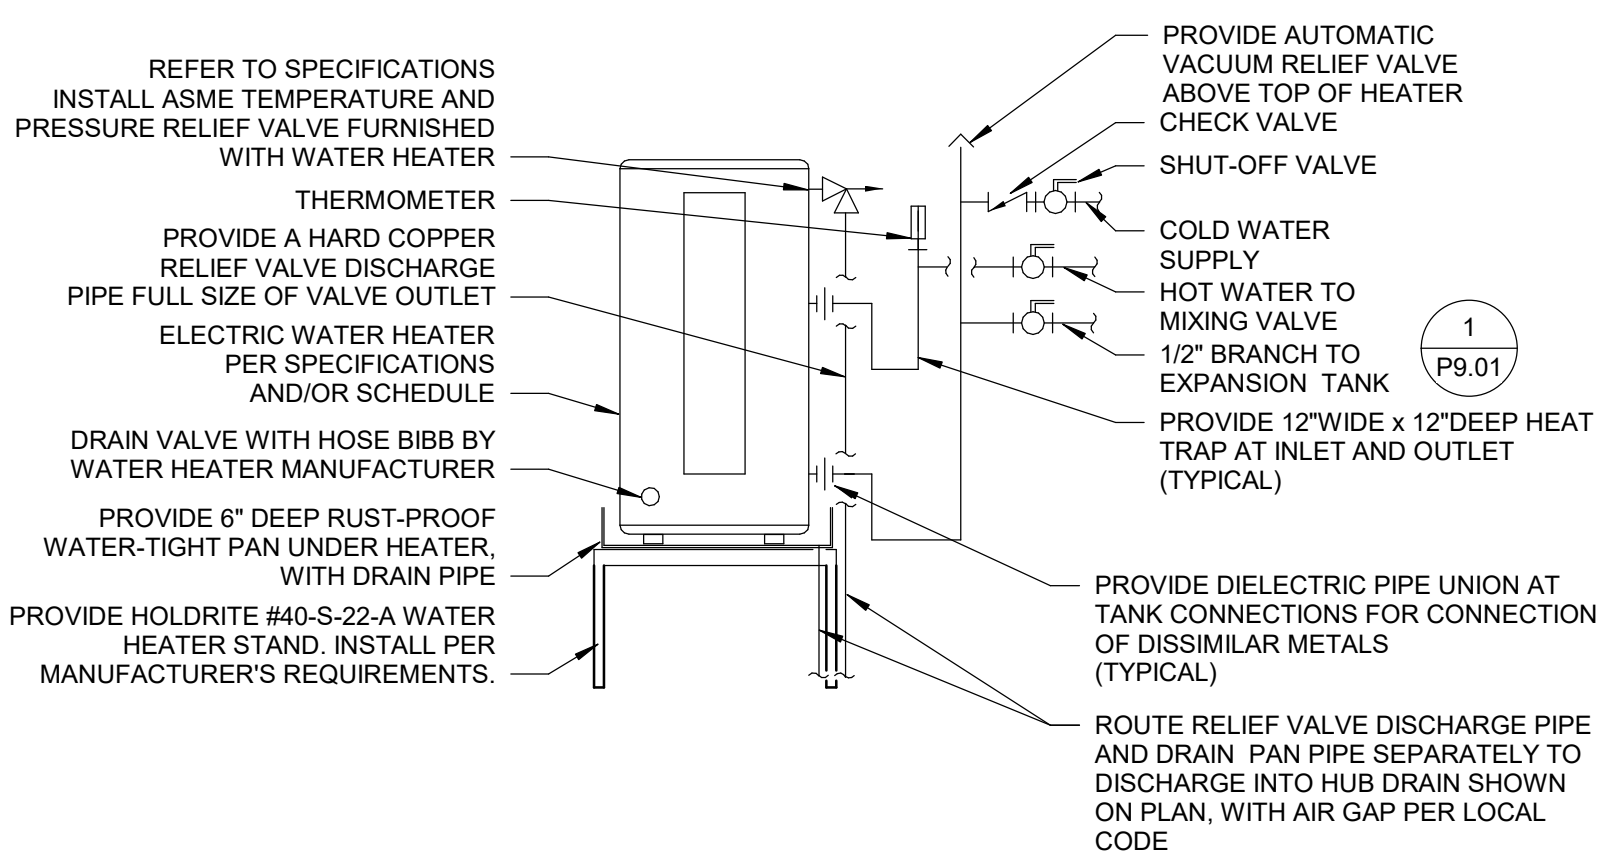

STAND MOUNTED WATER HEATER DETAIL

SCALE: NOT TO SCALE

4/24/2026 2:32:07 PM ED02-01 LIGHTING DEMOLITION PLAN - LEVEL ONE

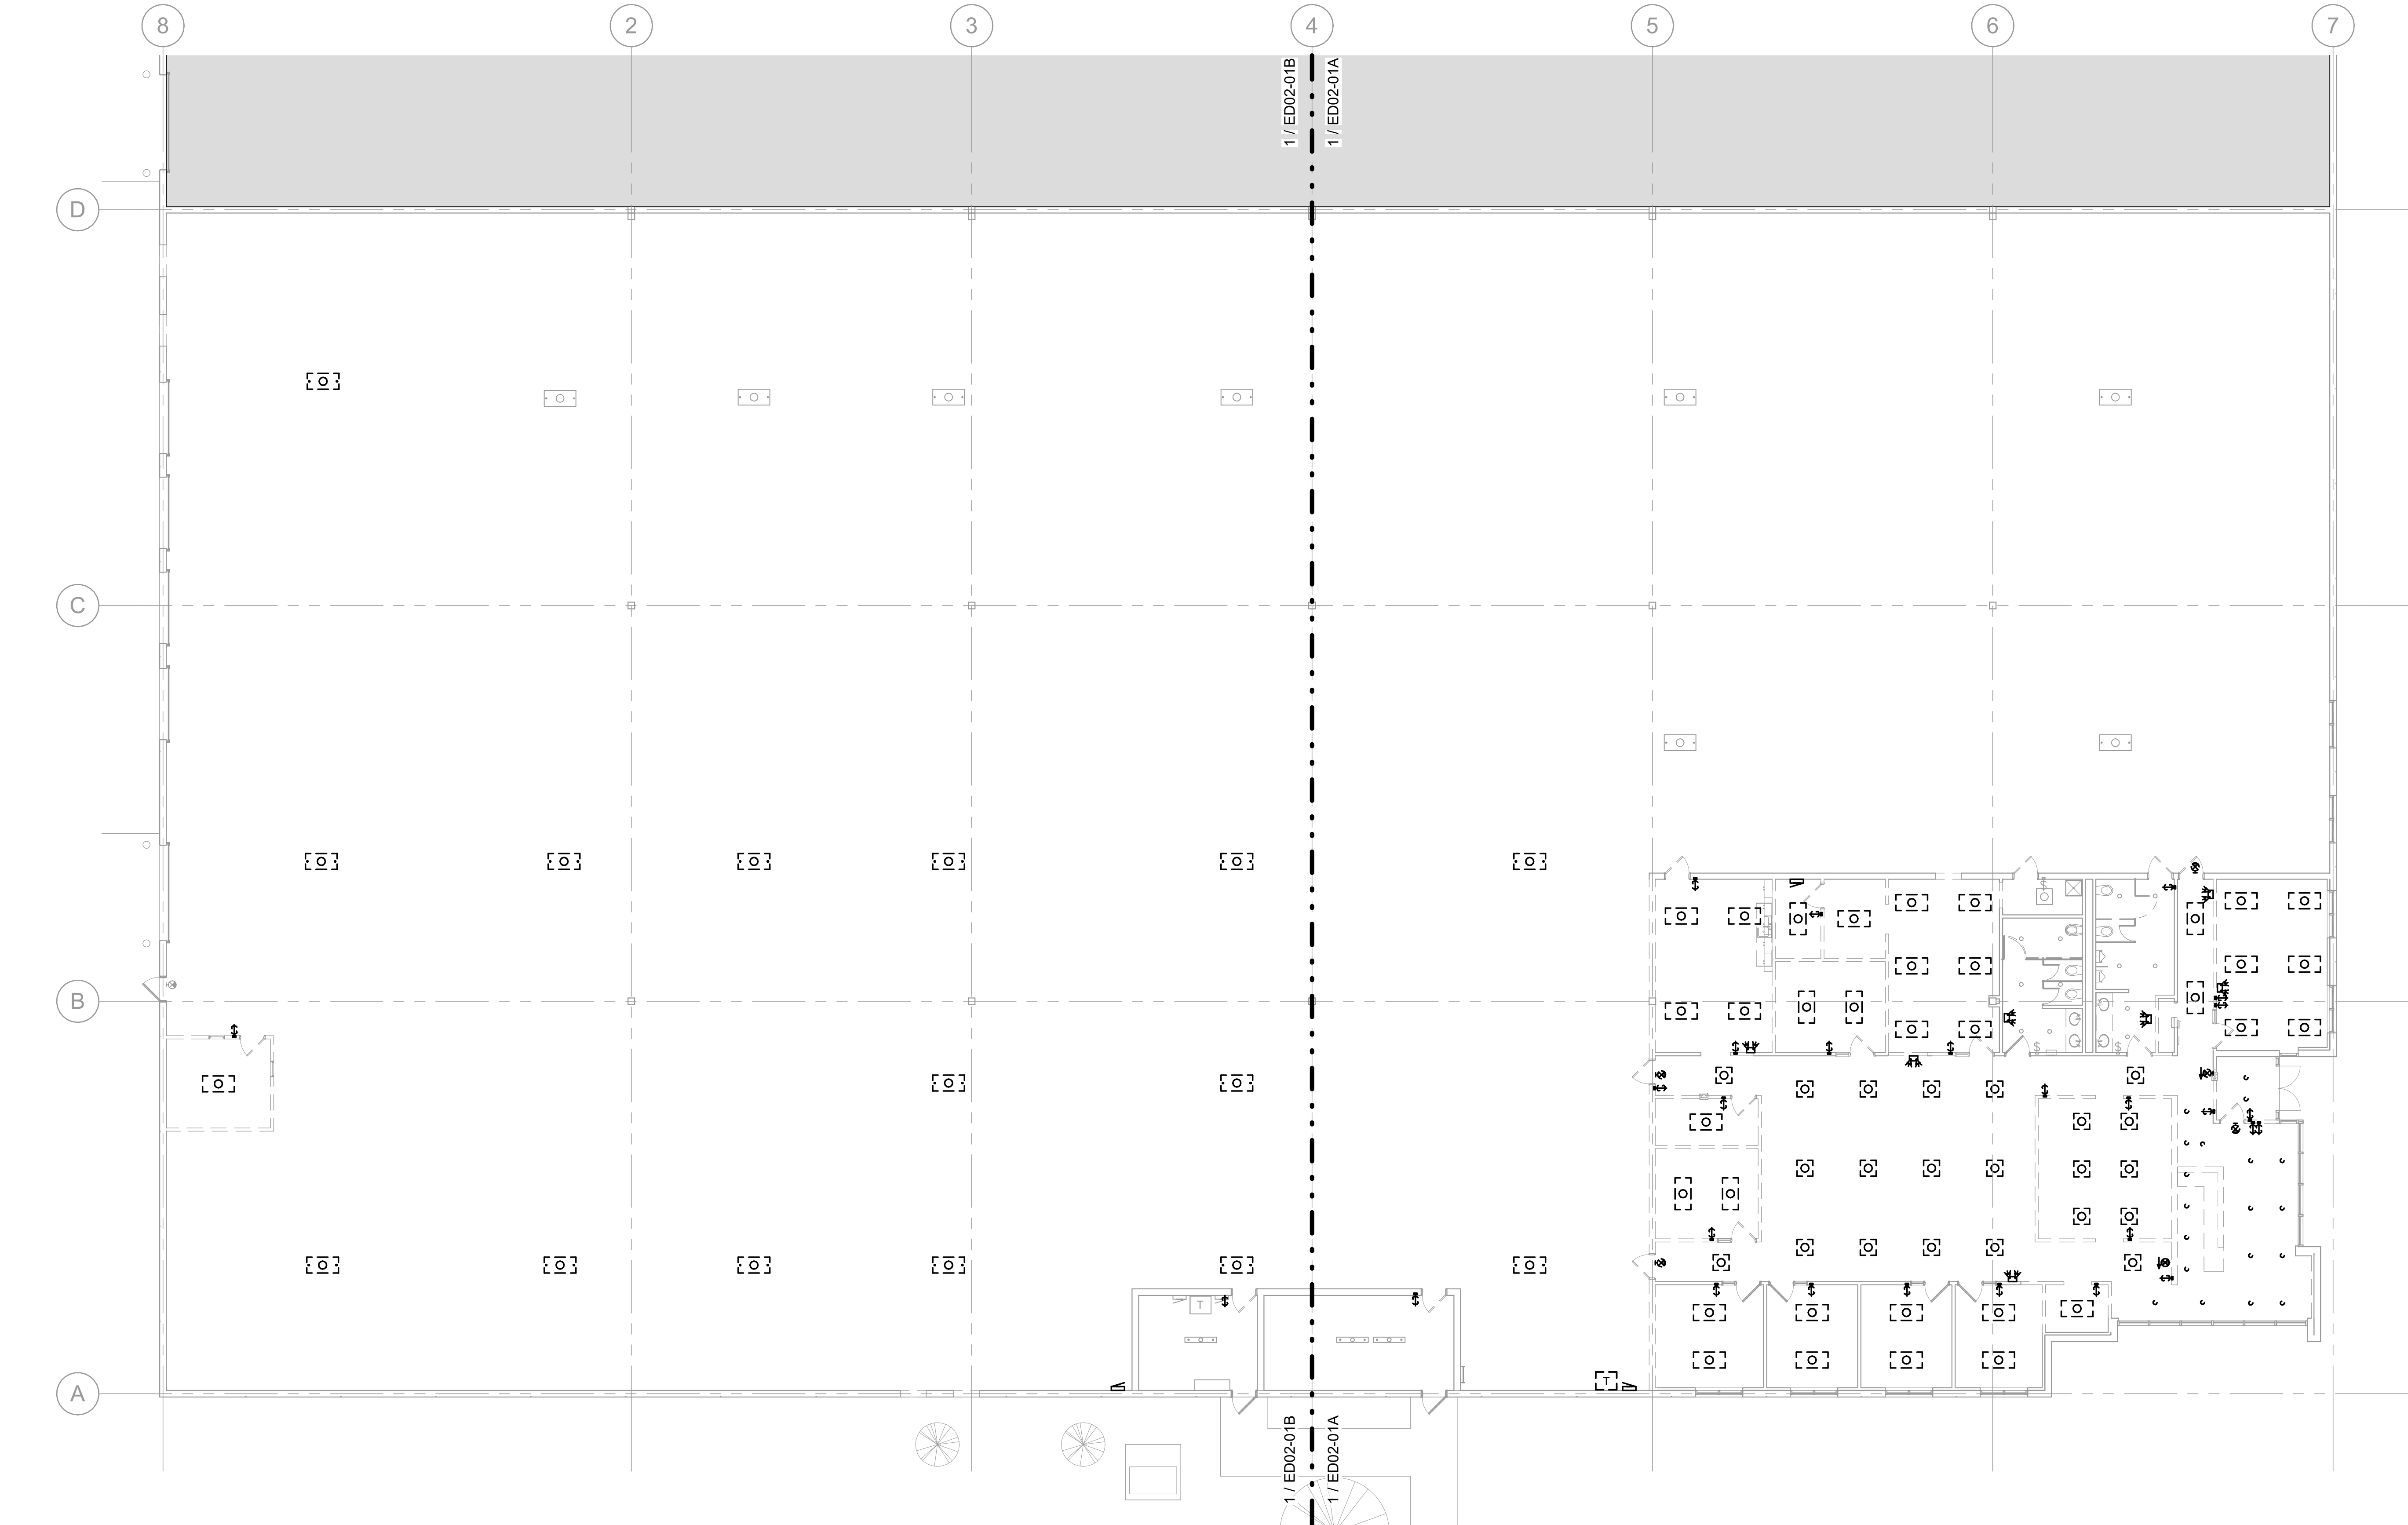

1 LIGHTING DEMOLITION PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

GENERAL NOTES

- A. EXISTING CONDITIONS ARE BASED ON EXISTING RECORD DRAWINGS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE SHOWN ON DEMOLITION PLANS. NOTIFY ENGINEER OF RECORD SHOULD ANY CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM THESE CONSTRUCTION DOCUMENTS.
- B. EXISTING RACEWAY, WIRE, CABLE, SUPPORTS, HANGERS, AND OTHER ELECTRICAL INSTALLATIONS WHICH ARE TO BE REMOVED, SHALL BE COMPLETELY REMOVED BACK TO THE FIRST DEVICE OR EQUIPMENT. DEVICES WHICH ARE TO BE REMOVED SHALL BE STORED OR DISCARDED AS DIRECTED BY THE GENERAL CONTRACTOR. IF THERE ARE NO OTHER DEVICES ON THE CIRCUIT, LABEL ASSOCIATED CIRCUIT BREAKER AS "SPARE".
- C. MAINTAIN POWER TO CIRCUIT(S) ADJACENT TO THE CONSTRUCTION AREA. THIS SHALL INCLUDE ANY CIRCUIT(S) PASSING THROUGH THE CONSTRUCTION AREA OR CIRCUIT(S) BEING POWERED FROM PANELBOARDS WITHIN THE CONSTRUCTION AREA. EXTEND AND RELOCATE AFFECTED BRANCH CIRCUITS AS REQUIRED TO MAINTAIN SERVICE AND TO AVOID INTERFERENCE WITH THE NEW WORK. NOTIFY GENERAL CONTRACTOR SHOULD IT BE NECESSARY TO INTERRUPT POWER TO AREAS ADJACENT TO THE CONSTRUCTION AREA.
- D. TEMPORARY SHUTDOWNS OF ADJACENT SPACES SHALL BE SCHEDULED WITH THE OWNER (2) TWO WEEKS IN ADVANCE AS TO NOT INTERFERE WITH NORMAL OPERATIONS AT NO ADDITIONAL COST.
- E. EXISTING ELECTRICAL FIXTURES ARE EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- F. FURNISH LABOR, MATERIALS, AND EQUIPMENT REQUIRED TO COMPLETE DEMOLITION OF EQUIPMENT AS SPECIFIED OR INDICATED. DISCONNECT, REMOVE, AND RELOCATE ITEMS AS REQUIRED TO FACILITATE THE NEW CONSTRUCTION.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



4/24/2026 EXP:11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.


KEYNOTES

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

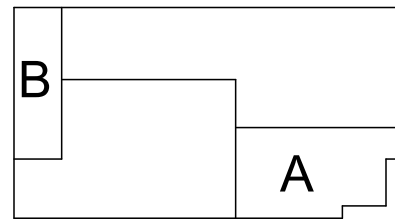

**LIGHTING
DEMOLITION PLAN
- LEVEL ONE**

ED02-01

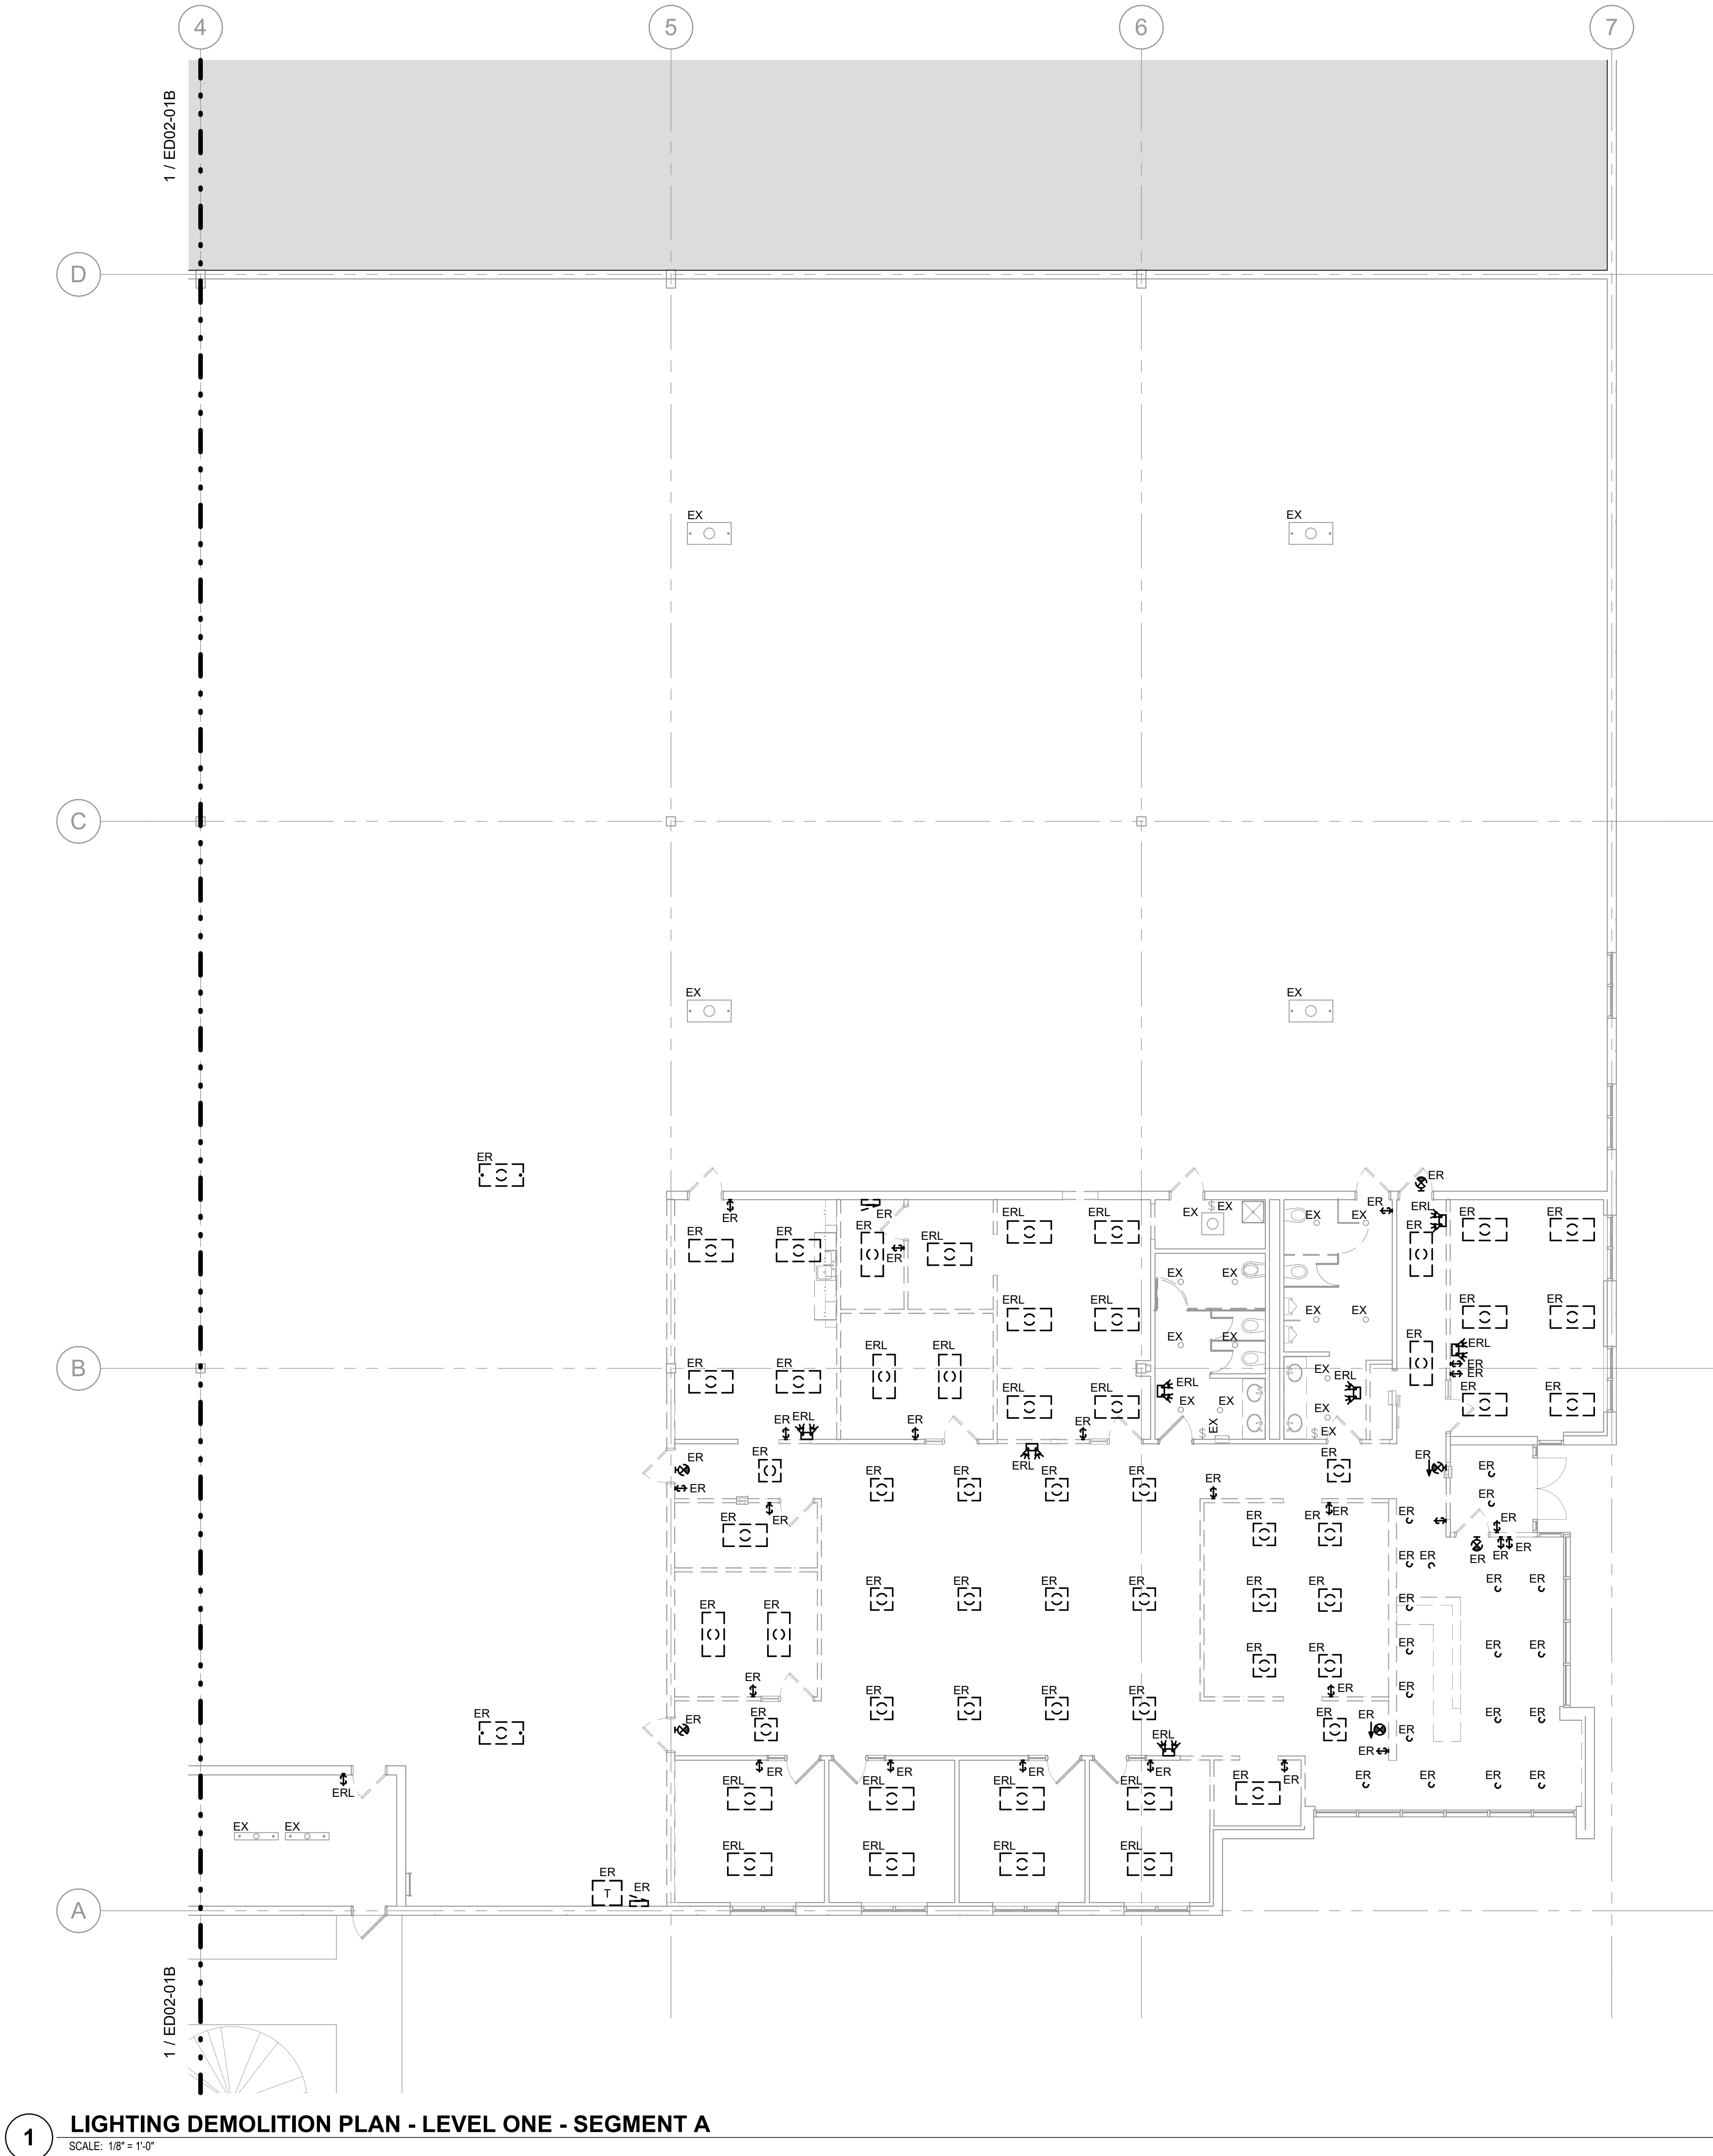

1 LIGHTING DEMOLITION PLAN - LEVEL ONE - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- A. EXISTING CONDITIONS ARE BASED ON EXISTING RECORD DRAWINGS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE SHOWN ON DEMOLITION PLANS. NOTIFY ENGINEER OF RECORD SHOULD ANY CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM THESE CONSTRUCTION DOCUMENTS.
- B. EXISTING RACEWAY, WIRE, CABLE, SUPPORTS, HANGERS, AND OTHER ELECTRICAL INSTALLATIONS WHICH ARE TO BE REMOVED, SHALL BE COMPLETELY REMOVED BACK TO THE FIRST DEVICE OR EQUIPMENT. DEVICES WHICH ARE TO BE REMOVED SHALL BE STORED OR DISCARDED AS DIRECTED BY THE GENERAL CONTRACTOR. IF THERE ARE NO OTHER DEVICES ON THE CIRCUIT, LABEL ASSOCIATED CIRCUIT BREAKER AS "SPARE".
- C. MAINTAIN POWER TO CIRCUIT(S) ADJACENT TO THE CONSTRUCTION AREA. THIS SHALL INCLUDE ANY CIRCUIT(S) PASSING THROUGH THE CONSTRUCTION AREA OR CIRCUIT(S) BEING POWERED FROM PANELBOARDS WITHIN THE CONSTRUCTION AREA. EXTEND AND RELOCATE AFFECTED BRANCH CIRCUITS AS REQUIRED TO MAINTAIN SERVICE AND TO AVOID INTERFERENCE WITH THE NEW WORK. NOTIFY GENERAL CONTRACTOR SHOULD IT BE NECESSARY TO INTERRUPT POWER TO AREAS ADJACENT TO THE CONSTRUCTION AREA.
- D. TEMPORARY SHUTDOWNS OF ADJACENT SPACES SHALL BE SCHEDULED WITH THE OWNER (2) TWO WEEKS IN ADVANCE AS TO NOT INTERFERE WITH NORMAL OPERATIONS AT NO ADDITIONAL COST.
- E. EXISTING ELECTRICAL FIXTURES ARE EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- F. FURNISH LABOR, MATERIALS, AND EQUIPMENT REQUIRED TO COMPLETE DEMOLITION OF EQUIPMENT AS SPECIFIED OR INDICATED. DISCONNECT, REMOVE, AND RELOCATE ITEMS AS REQUIRED TO FACILITATE THE NEW CONSTRUCTION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

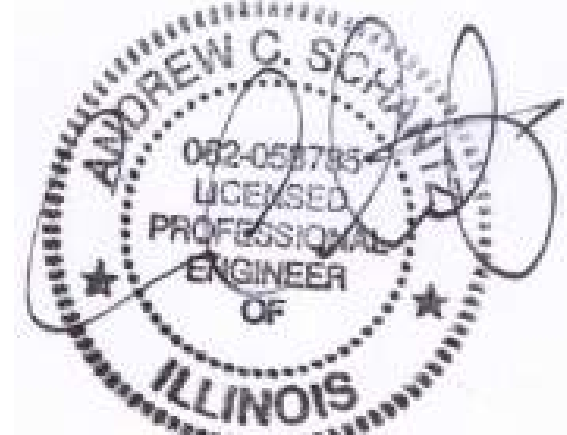

4/24/2026 EXP:11/30/2027

Date of issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000

DATE 04/24/2026


KEYPLAN

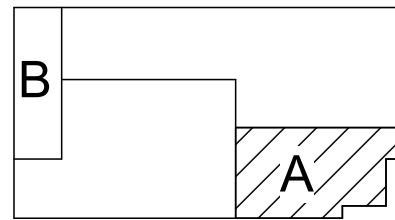

**LIGHTING
DEMOLITION PLAN
- LEVEL ONE -
SEGMENT A**

ED02-01A

4/24/2026 2:32:09 PM ED02-01B LIGHTING DEMOLITION PLAN - LEVEL ONE - SEGMENT B

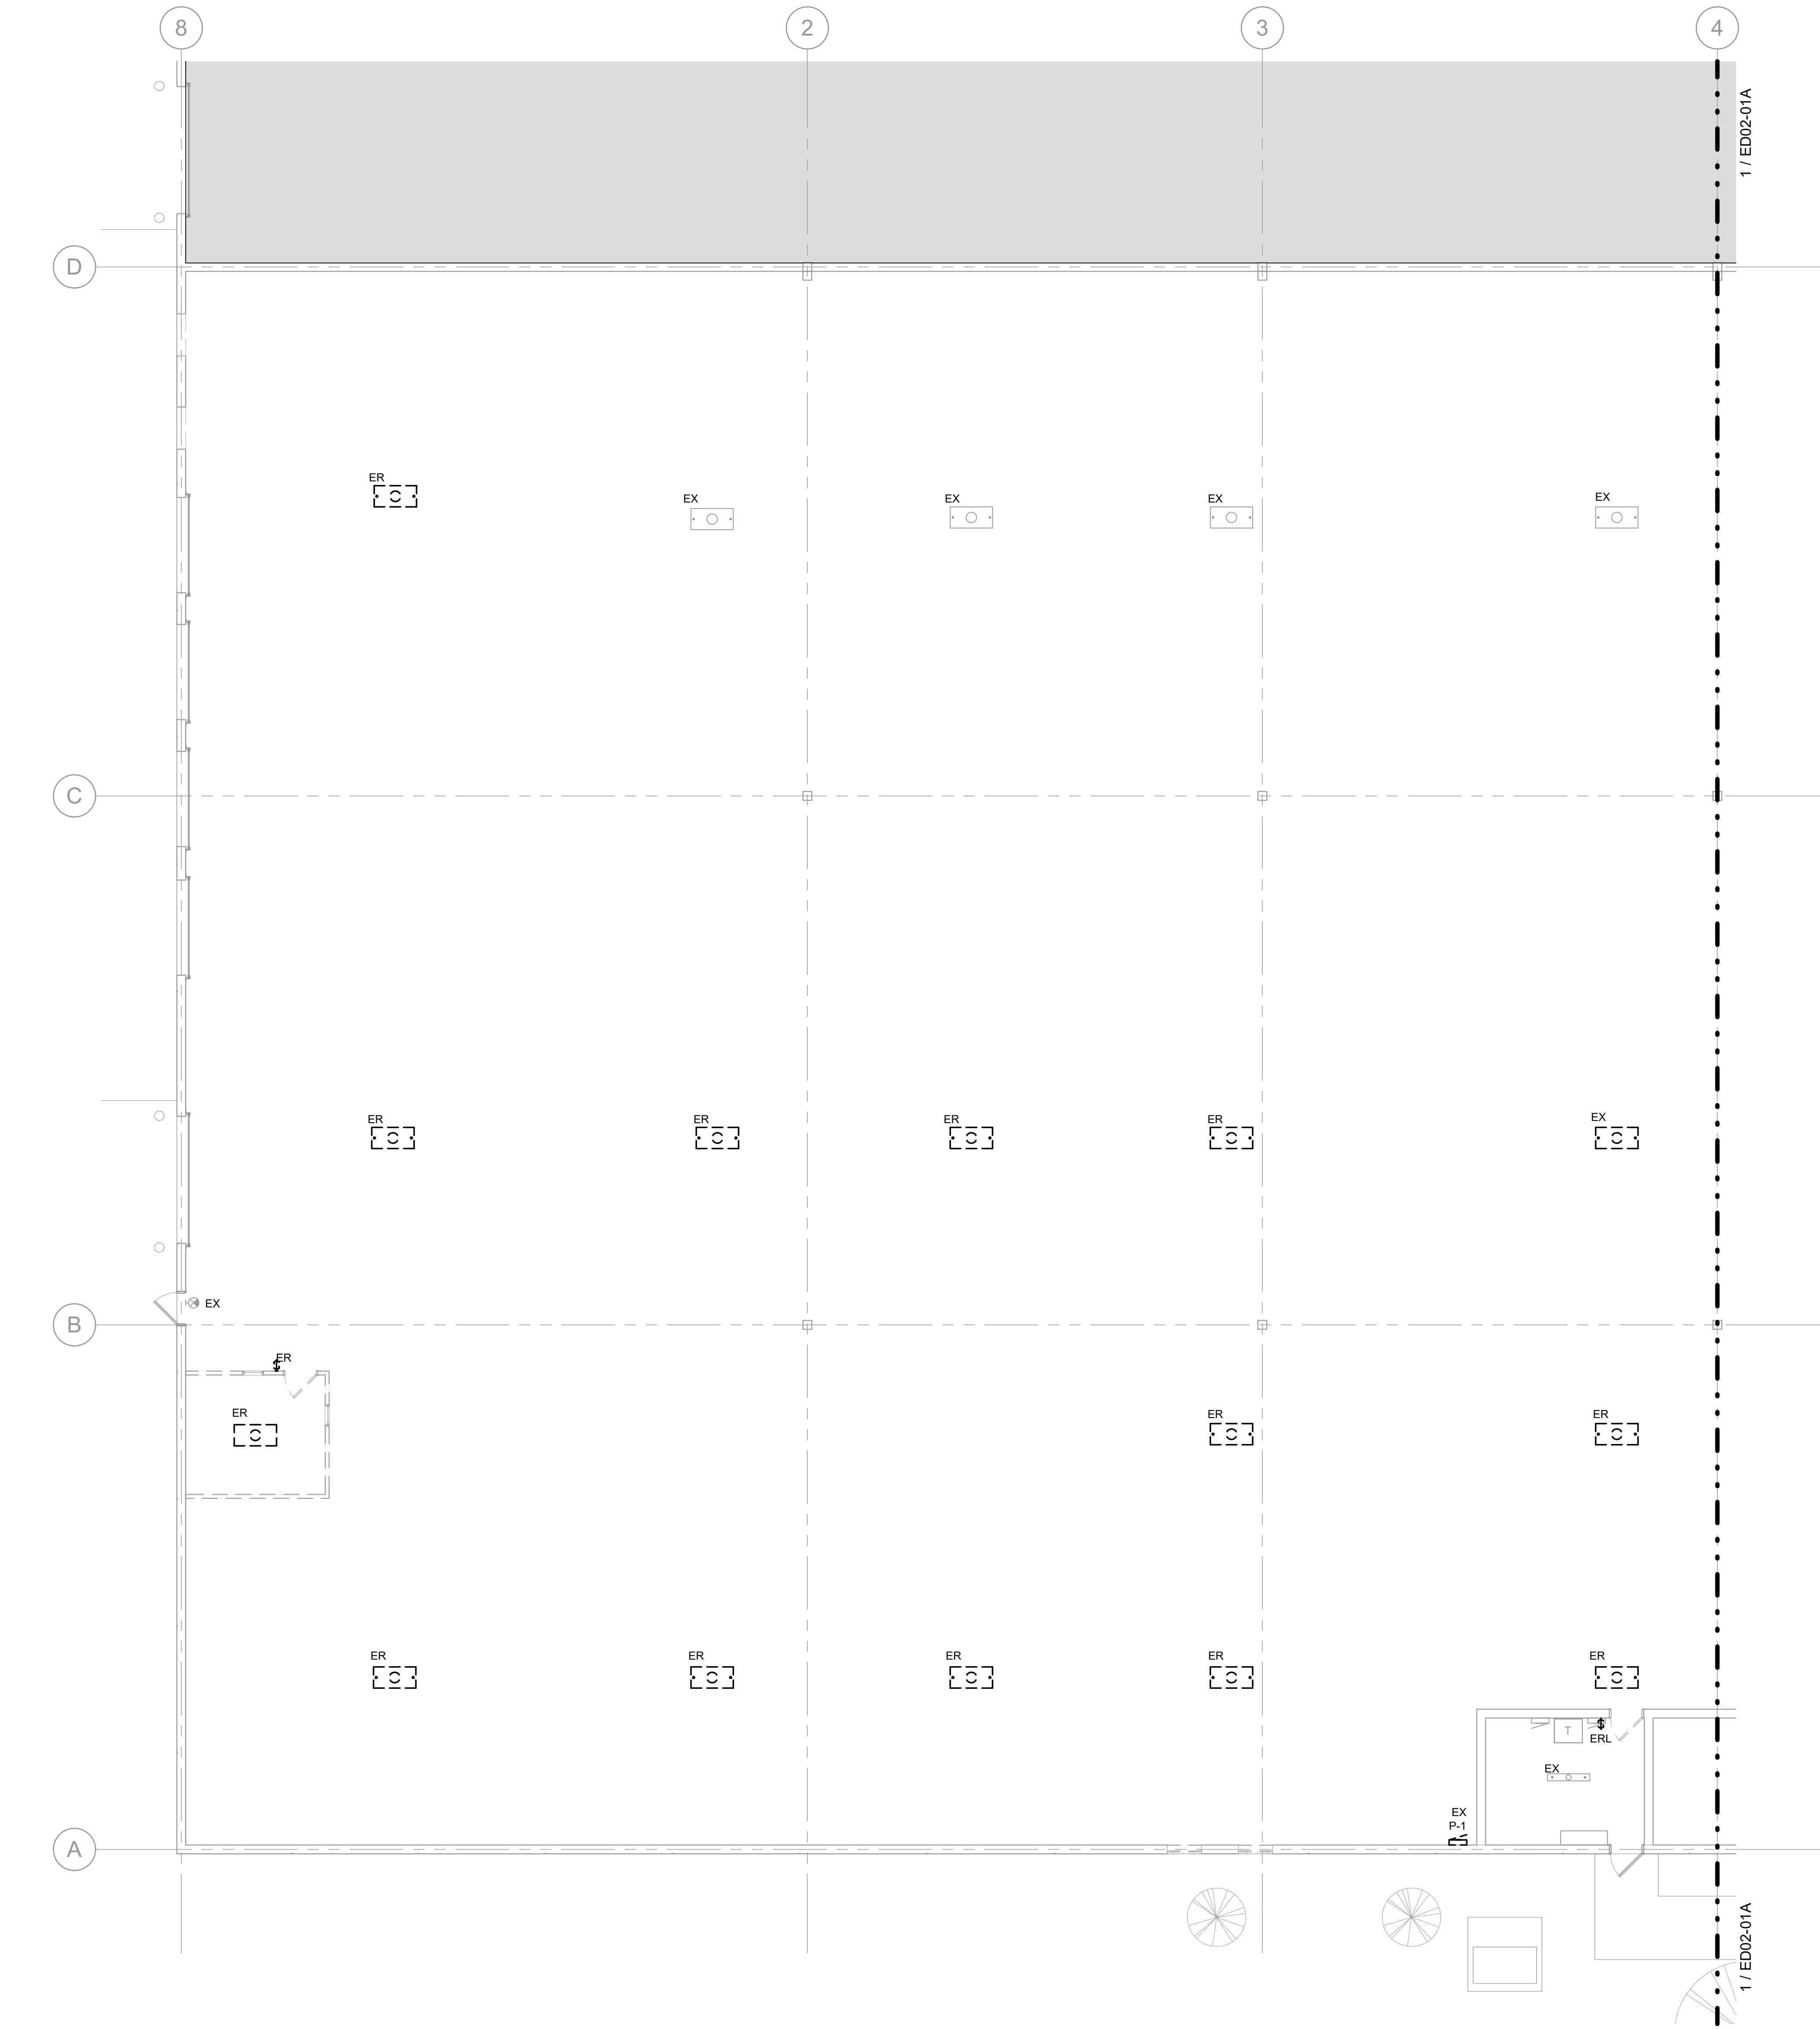

1 LIGHTING DEMOLITION PLAN - LEVEL ONE - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- A. EXISTING CONDITIONS ARE BASED ON EXISTING RECORD DRAWINGS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE SHOWN ON DEMOLITION PLANS. NOTIFY ENGINEER OF RECORD SHOULD ANY CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM THESE CONSTRUCTION DOCUMENTS.
- B. EXISTING RACEWAY, WIRE, CABLE, SUPPORTS, HANGERS, AND OTHER ELECTRICAL INSTALLATIONS WHICH ARE TO BE REMOVED, SHALL BE COMPLETELY REMOVED BACK TO THE FIRST DEVICE OR EQUIPMENT. DEVICES WHICH ARE TO BE REMOVED SHALL BE STORED OR DISCARDED AS DIRECTED BY THE GENERAL CONTRACTOR. IF THERE ARE NO OTHER DEVICES ON THE CIRCUIT, LABEL ASSOCIATED CIRCUIT BREAKER AS "SPARE".
- C. MAINTAIN POWER TO CIRCUIT(S) ADJACENT TO THE CONSTRUCTION AREA. THIS SHALL INCLUDE ANY CIRCUIT(S) PASSING THROUGH THE CONSTRUCTION AREA OR CIRCUIT(S) BEING POWERED FROM PANELBOARDS WITHIN THE CONSTRUCTION AREA. EXTEND AND RELOCATE AFFECTED BRANCH CIRCUITS AS REQUIRED TO MAINTAIN SERVICE AND TO AVOID INTERFERENCE WITH THE NEW WORK. NOTIFY GENERAL CONTRACTOR SHOULD IT BE NECESSARY TO INTERRUPT POWER TO AREAS ADJACENT TO THE CONSTRUCTION AREA.
- D. TEMPORARY SHUTDOWNS OF ADJACENT SPACES SHALL BE SCHEDULED WITH THE OWNER (2) TWO WEEKS IN ADVANCE AS TO NOT INTERFERE WITH NORMAL OPERATIONS AT NO ADDITIONAL COST.
- E. EXISTING ELECTRICAL FIXTURES ARE EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- F. FURNISH LABOR, MATERIALS, AND EQUIPMENT REQUIRED TO COMPLETE DEMOLITION OF EQUIPMENT AS SPECIFIED OR INDICATED. DISCONNECT, REMOVE, AND RELOCATE ITEMS AS REQUIRED TO FACILITATE THE NEW CONSTRUCTION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

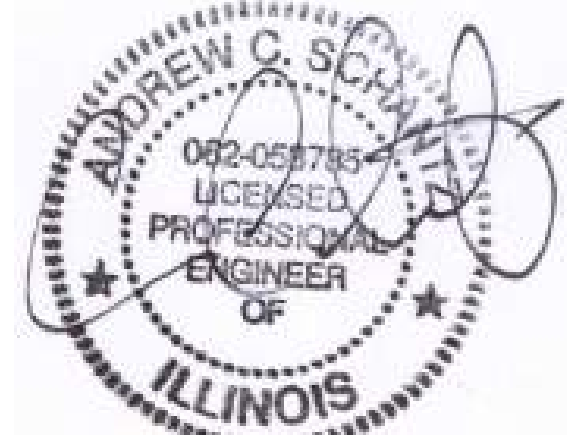

4/24/2026 EXP:11/30/2027

Date of issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN




**LIGHTING
DEMOLITION PLAN
- LEVEL ONE -
SEGMENT B**

ED02-01B

4/24/2026 2:32:10 PM ED03-01 POWER DEMOLITION PLAN - LEVEL ONE

1 POWER DEMOLITION PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

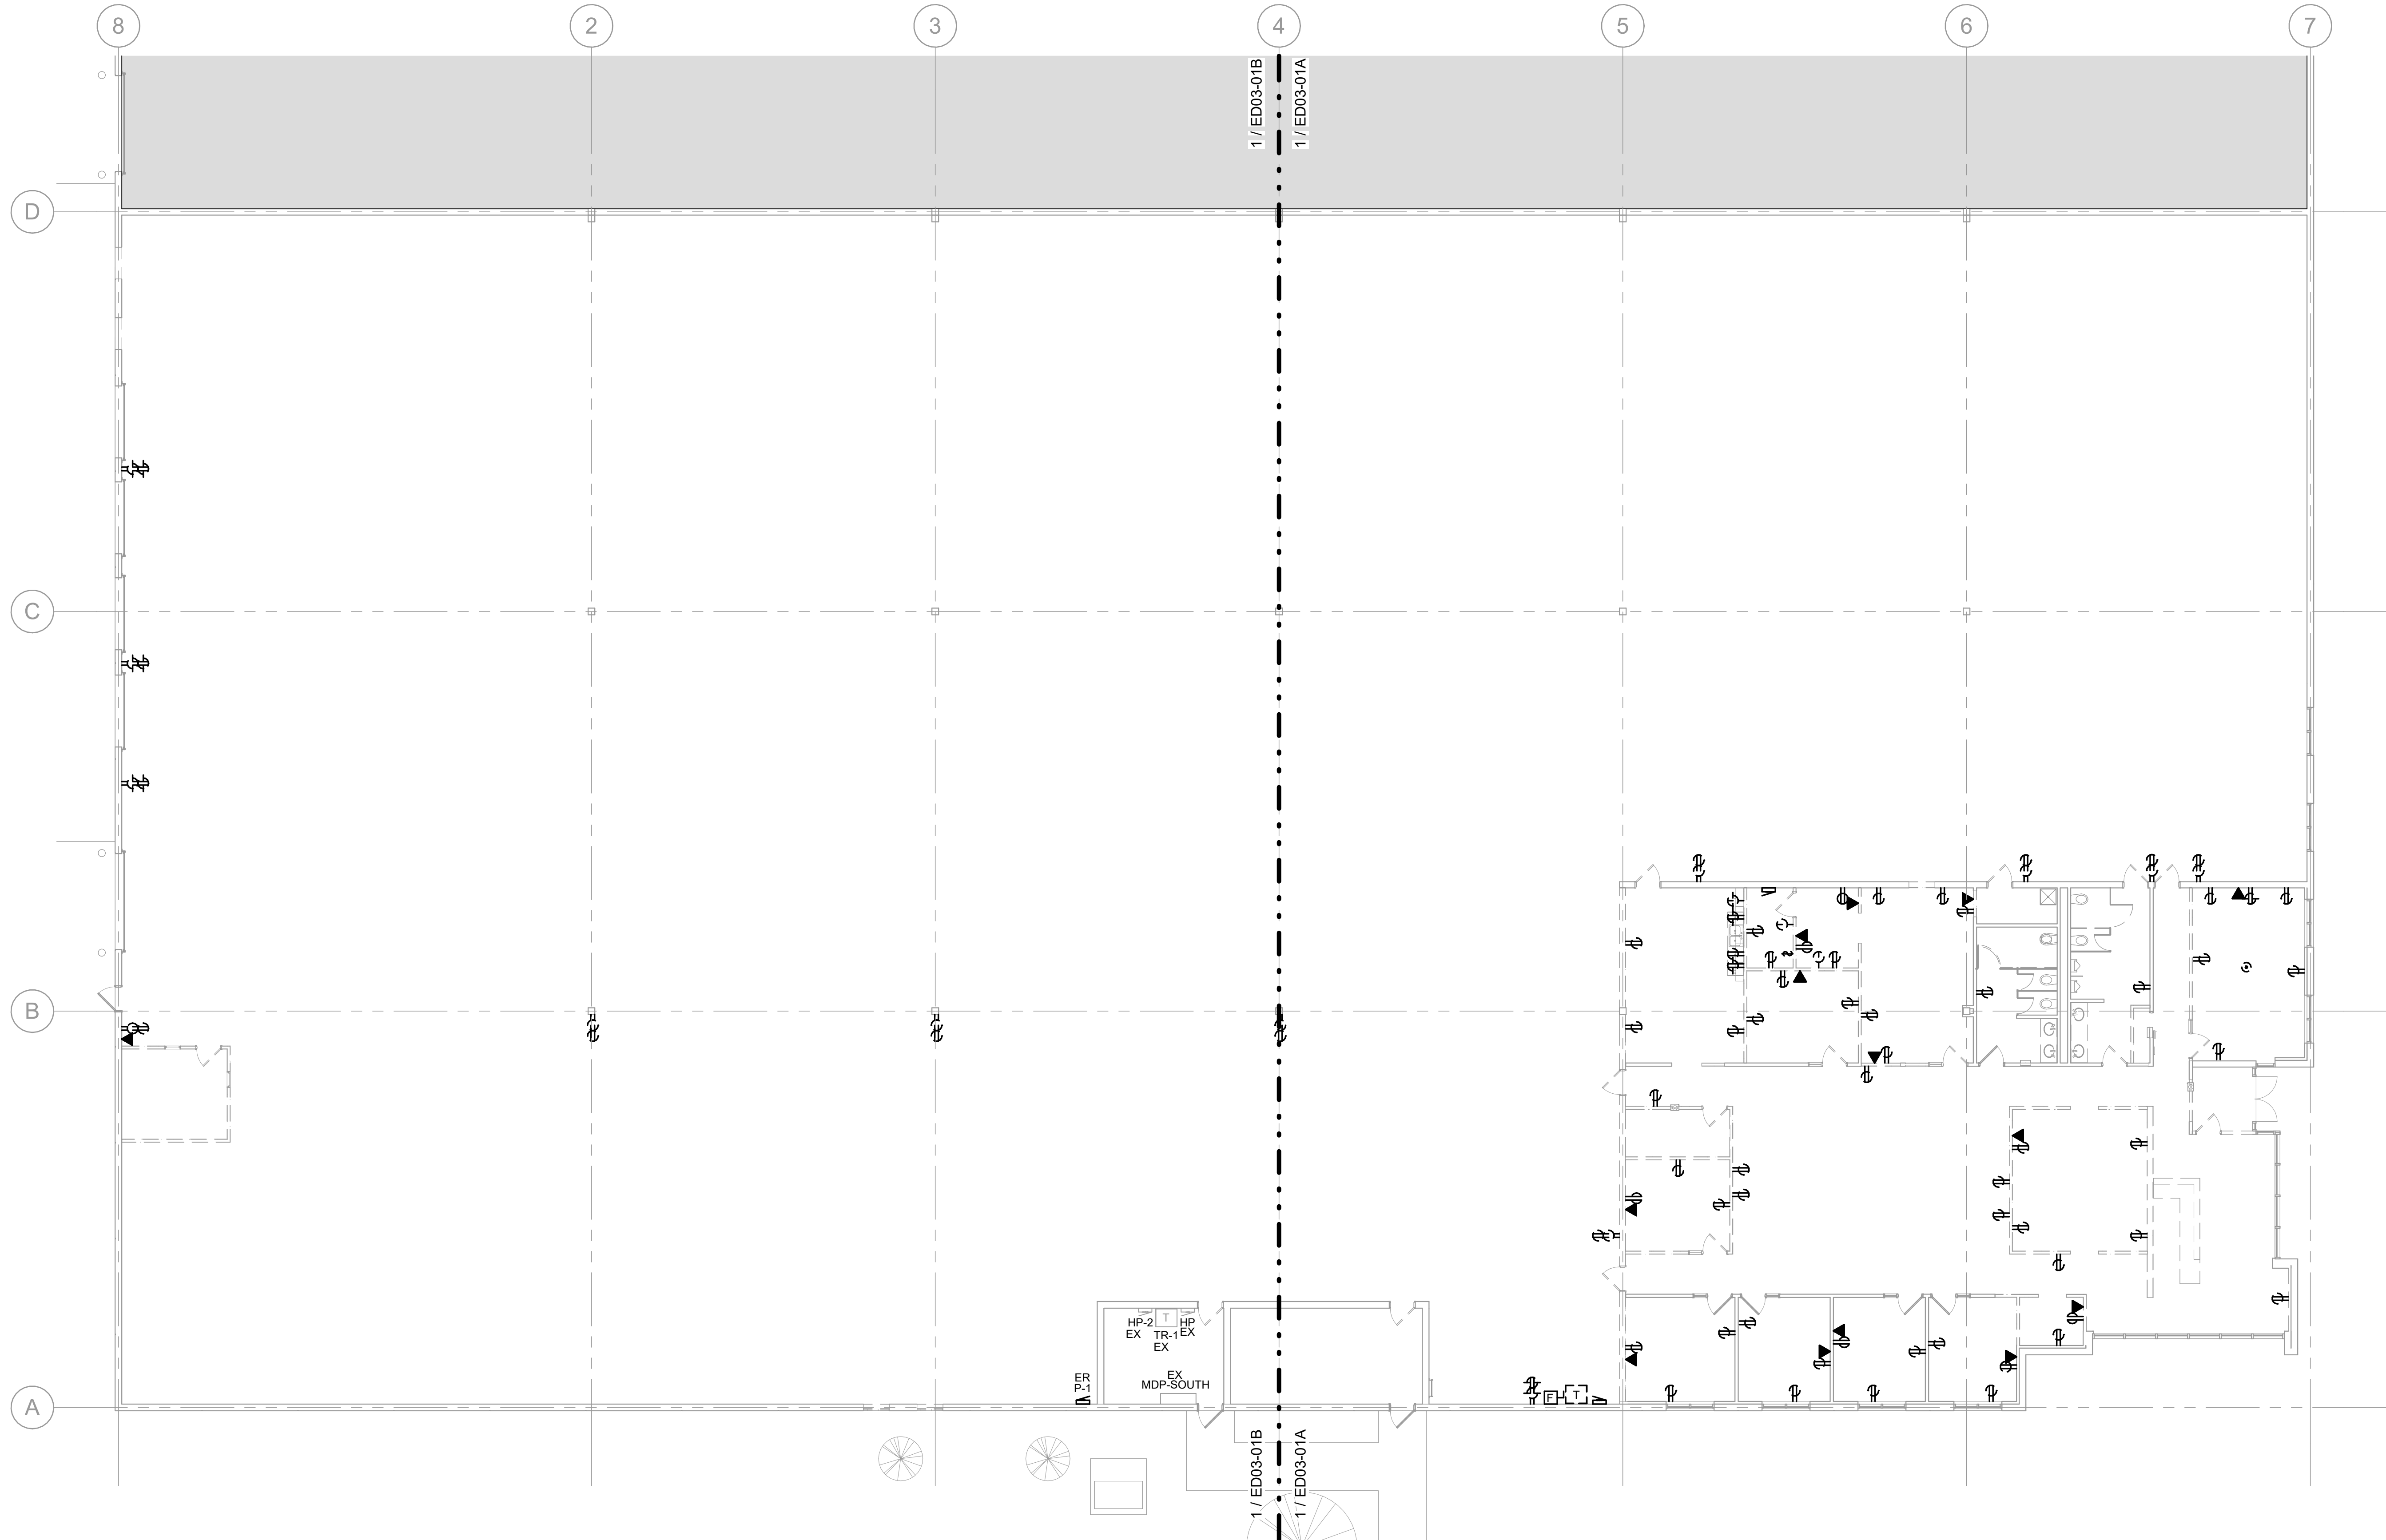

GENERAL NOTES

- A. EXISTING CONDITIONS ARE BASED ON EXISTING RECORD DRAWINGS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE SHOWN ON DEMOLITION PLANS. NOTIFY ENGINEER OF RECORD SHOULD ANY CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM THESE CONSTRUCTION DOCUMENTS.
- B. EXISTING RACEWAY, WIRE, CABLE, SUPPORTS, HANGERS, AND OTHER ELECTRICAL INSTALLATIONS WHICH ARE TO BE REMOVED, SHALL BE COMPLETELY REMOVED BACK TO THE FIRST DEVICE OR EQUIPMENT. DEVICES WHICH ARE TO BE REMOVED SHALL BE STORED OR DISCARDED AS DIRECTED BY THE GENERAL CONTRACTOR. IF THERE ARE NO OTHER DEVICES ON THE CIRCUIT, LABEL ASSOCIATED CIRCUIT BREAKER AS 'SPARE'.
- C. MAINTAIN POWER TO CIRCUIT(S) ADJACENT TO THE CONSTRUCTION AREA. THIS SHALL INCLUDE ANY CIRCUIT(S) PASSING THROUGH THE CONSTRUCTION AREA OR CIRCUIT(S) BEING POWERED FROM PANELBOARDS WITHIN THE CONSTRUCTION AREA. EXTEND AND RELOCATE AFFECTED BRANCH CIRCUITS AS REQUIRED TO MAINTAIN SERVICE AND TO AVOID INTERFERENCE WITH THE NEW WORK. NOTIFY GENERAL CONTRACTOR SHOULD IT BE NECESSARY TO INTERRUPT POWER TO AREAS ADJACENT TO THE CONSTRUCTION AREA.
- D. TEMPORARY SHUTDOWNS OF ADJACENT SPACES SHALL BE SCHEDULED WITH THE OWNER (2) TWO WEEKS IN ADVANCE AS TO NOT INTERFERE WITH NORMAL OPERATIONS AT NO ADDITIONAL COST.
- E. EXISTING ELECTRICAL FIXTURES ARE EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- F. FURNISH LABOR, MATERIALS, AND EQUIPMENT REQUIRED TO COMPLETE DEMOLITION OF EQUIPMENT AS SPECIFIED OR INDICATED. DISCONNECT, REMOVE, AND RELOCATE ITEMS AS REQUIRED TO FACILITATE THE NEW CONSTRUCTION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

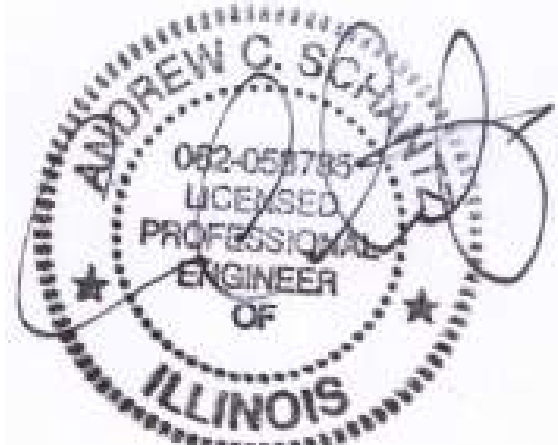

4/24/2026 EXP:11/30/2027

Date of issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000

DATE 04/24/2026


KEYPLAN

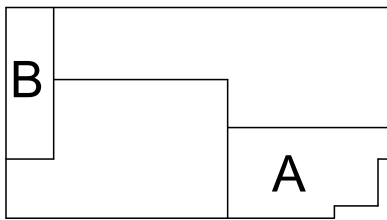

**POWER
DEMOLITION PLAN
- LEVEL ONE**

ED03-01



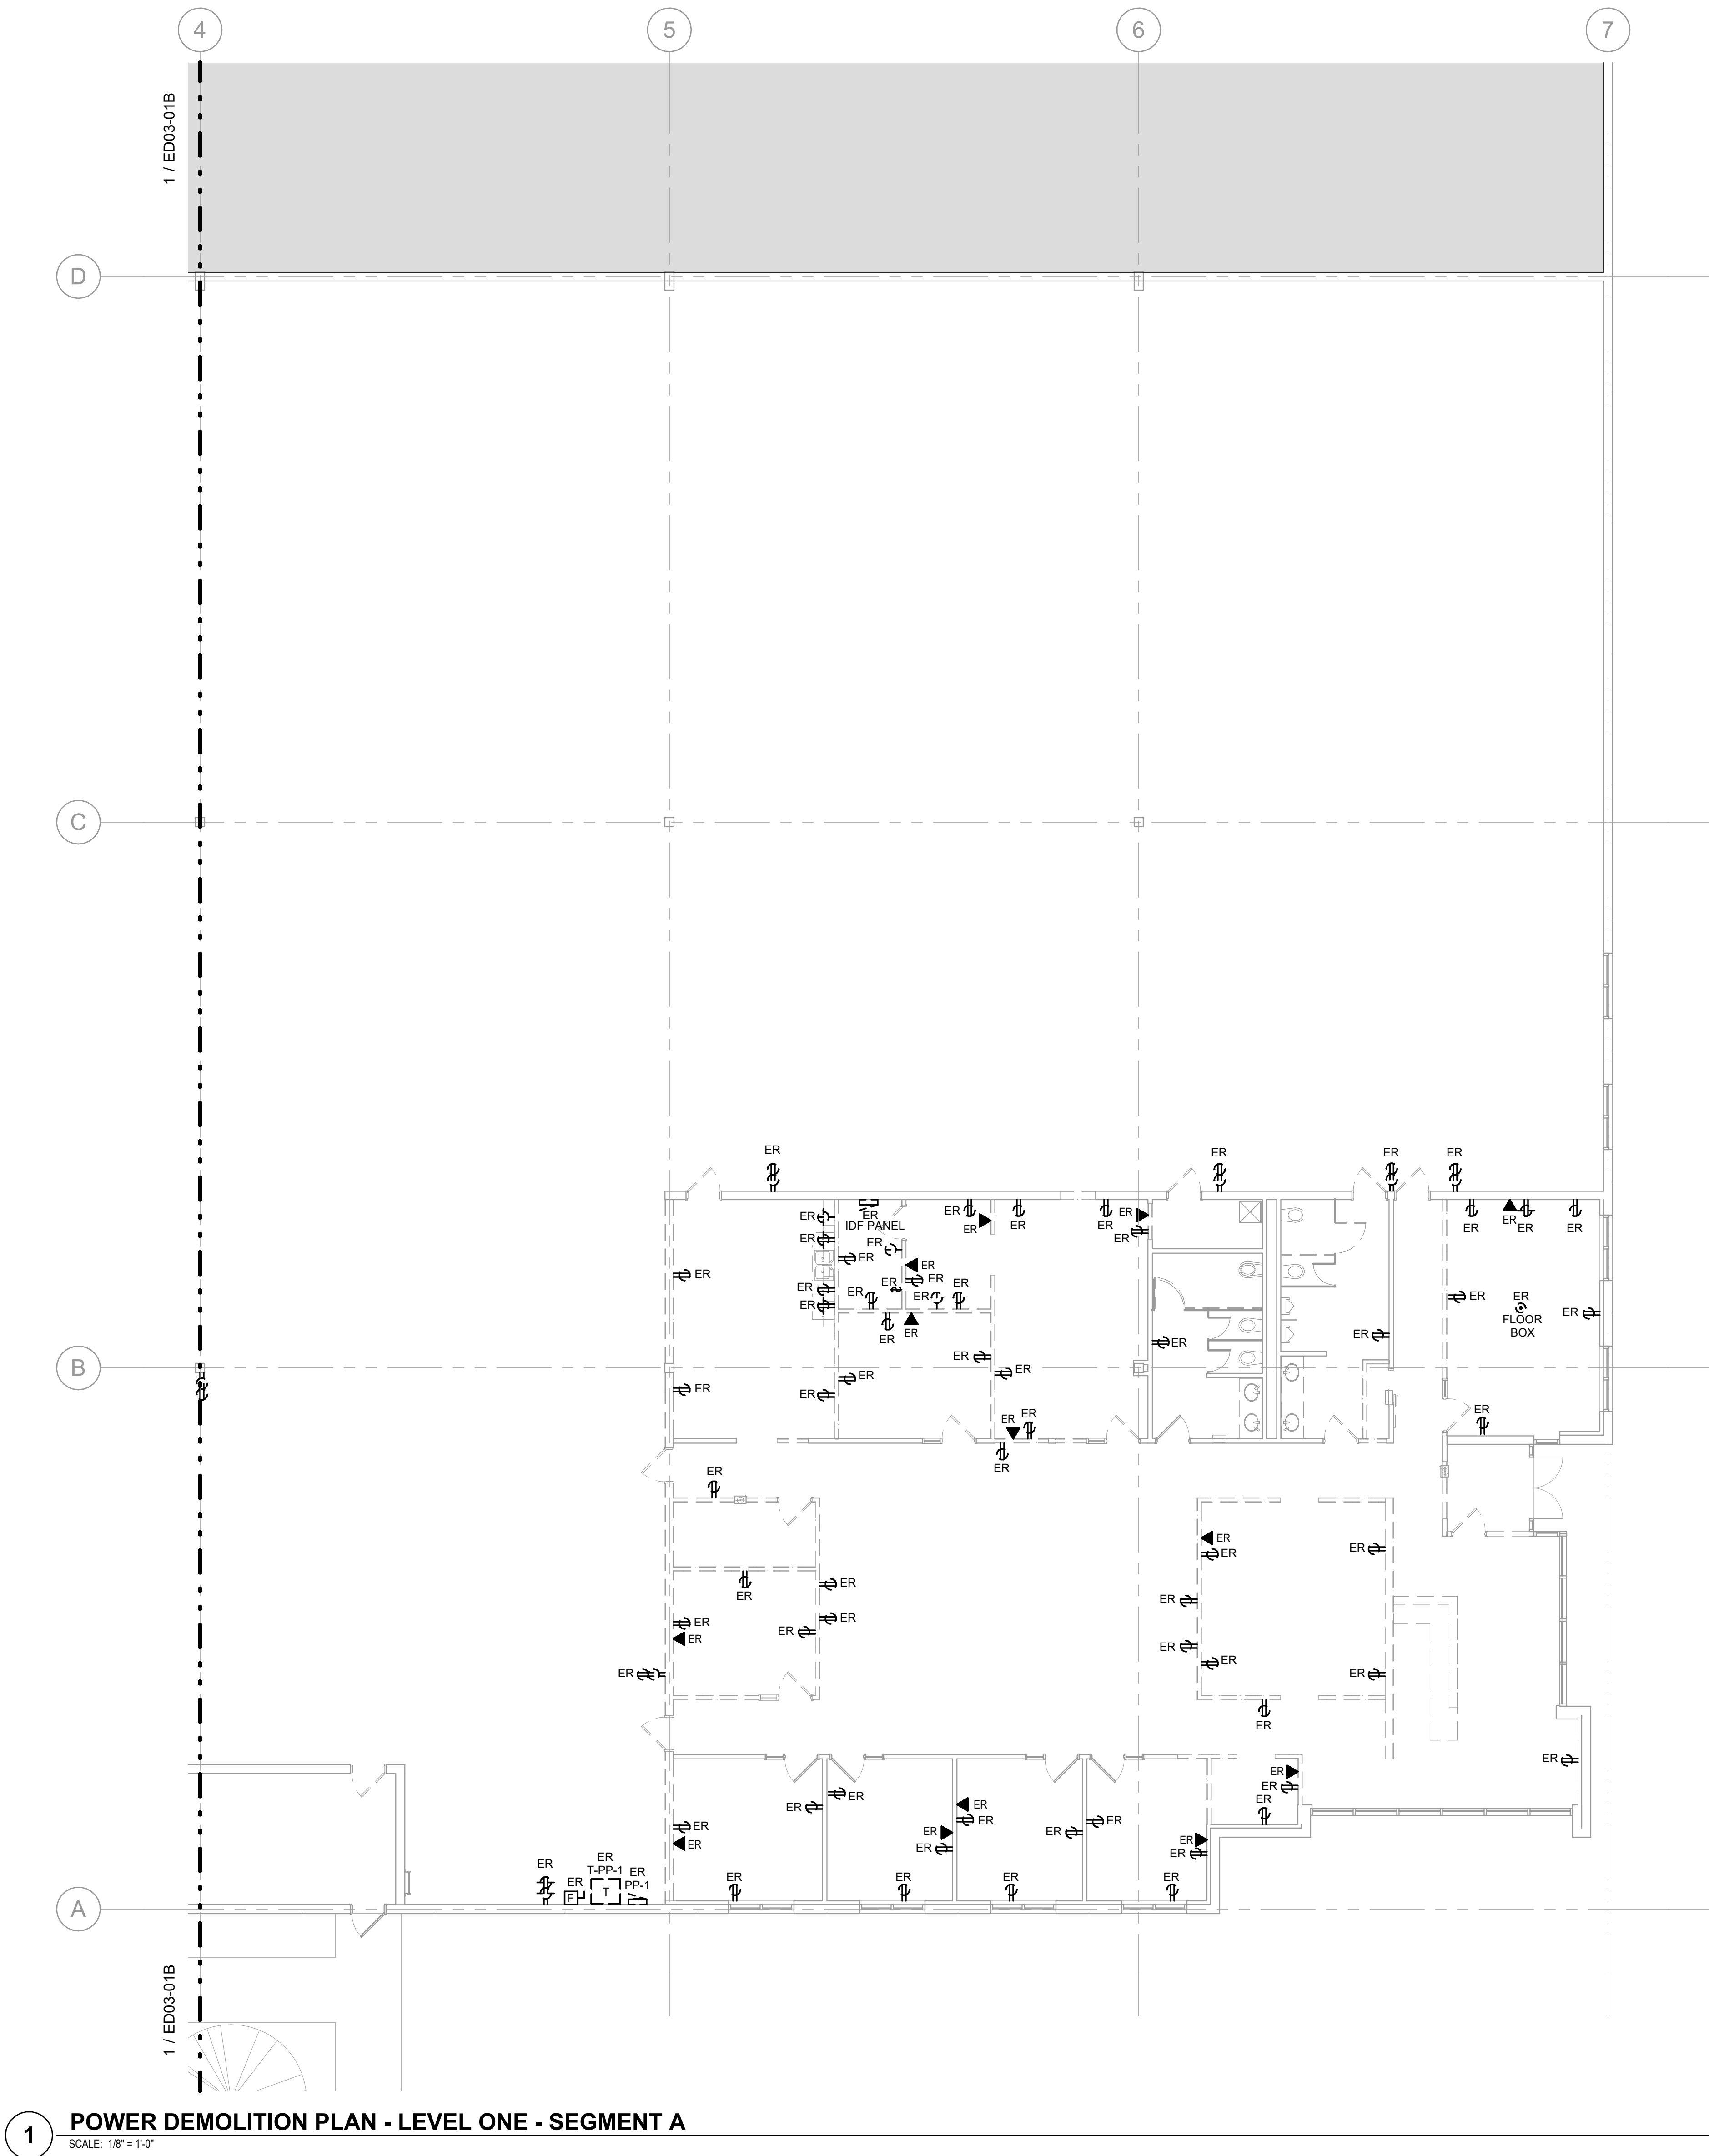

GENERAL NOTES

- A. EXISTING CONDITIONS ARE BASED ON EXISTING RECORD DRAWINGS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE SHOWN ON DEMOLITION PLANS. NOTIFY ENGINEER OF RECORD SHOULD ANY CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM THESE CONSTRUCTION DOCUMENTS.
- B. EXISTING RACEWAY, WIRE, CABLE, SUPPORTS, HANGERS, AND OTHER ELECTRICAL INSTALLATIONS WHICH ARE TO BE REMOVED, SHALL BE COMPLETELY REMOVED BACK TO THE FIRST DEVICE OR EQUIPMENT. DEVICES WHICH ARE TO BE REMOVED SHALL BE STORED OR DISCARDED AS DIRECTED BY THE GENERAL CONTRACTOR. IF THERE ARE NO OTHER DEVICES ON THE CIRCUIT, LABEL ASSOCIATED CIRCUIT BREAKER AS "SPARE".
- C. MAINTAIN POWER TO CIRCUIT(S) ADJACENT TO THE CONSTRUCTION AREA. THIS SHALL INCLUDE ANY CIRCUIT(S) PASSING THROUGH THE CONSTRUCTION AREA OR CIRCUIT(S) BEING POWERED FROM PANELBOARDS WITHIN THE CONSTRUCTION AREA. EXTEND AND RELOCATE AFFECTED BRANCH CIRCUITS AS REQUIRED TO MAINTAIN SERVICE AND TO AVOID INTERFERENCE WITH THE NEW WORK. NOTIFY GENERAL CONTRACTOR SHOULD IT BE NECESSARY TO INTERRUPT POWER TO AREAS ADJACENT TO THE CONSTRUCTION AREA.
- D. TEMPORARY SHUTDOWNS OF ADJACENT SPACES SHALL BE SCHEDULED WITH THE OWNER (2) TWO WEEKS IN ADVANCE AS TO NOT INTERFERE WITH NORMAL OPERATIONS AT NO ADDITIONAL COST.
- E. EXISTING ELECTRICAL FIXTURES ARE EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- F. FURNISH LABOR, MATERIALS, AND EQUIPMENT REQUIRED TO COMPLETE DEMOLITION OF EQUIPMENT AS SPECIFIED OR INDICATED. DISCONNECT, REMOVE, AND RELOCATE ITEMS AS REQUIRED TO FACILITATE THE NEW CONSTRUCTION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

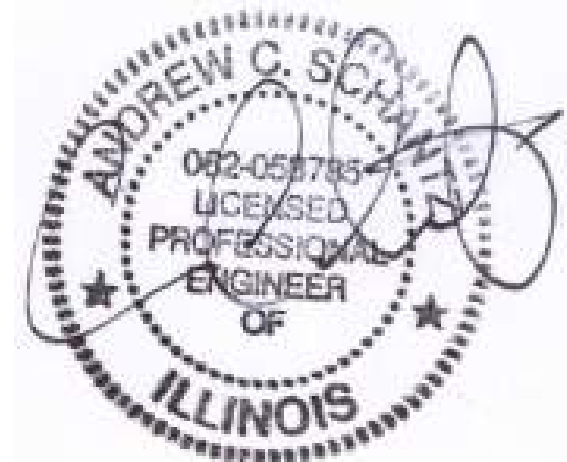

4/24/2026 EXP:11/30/2027

Date of issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.


KEYNOTES

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

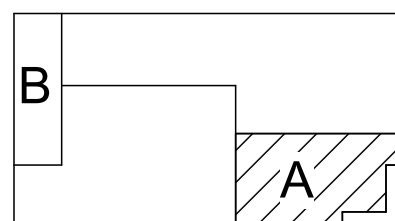

**POWER
DEMOLITION PLAN
- LEVEL ONE -
SEGMENT A**

ED03-01A

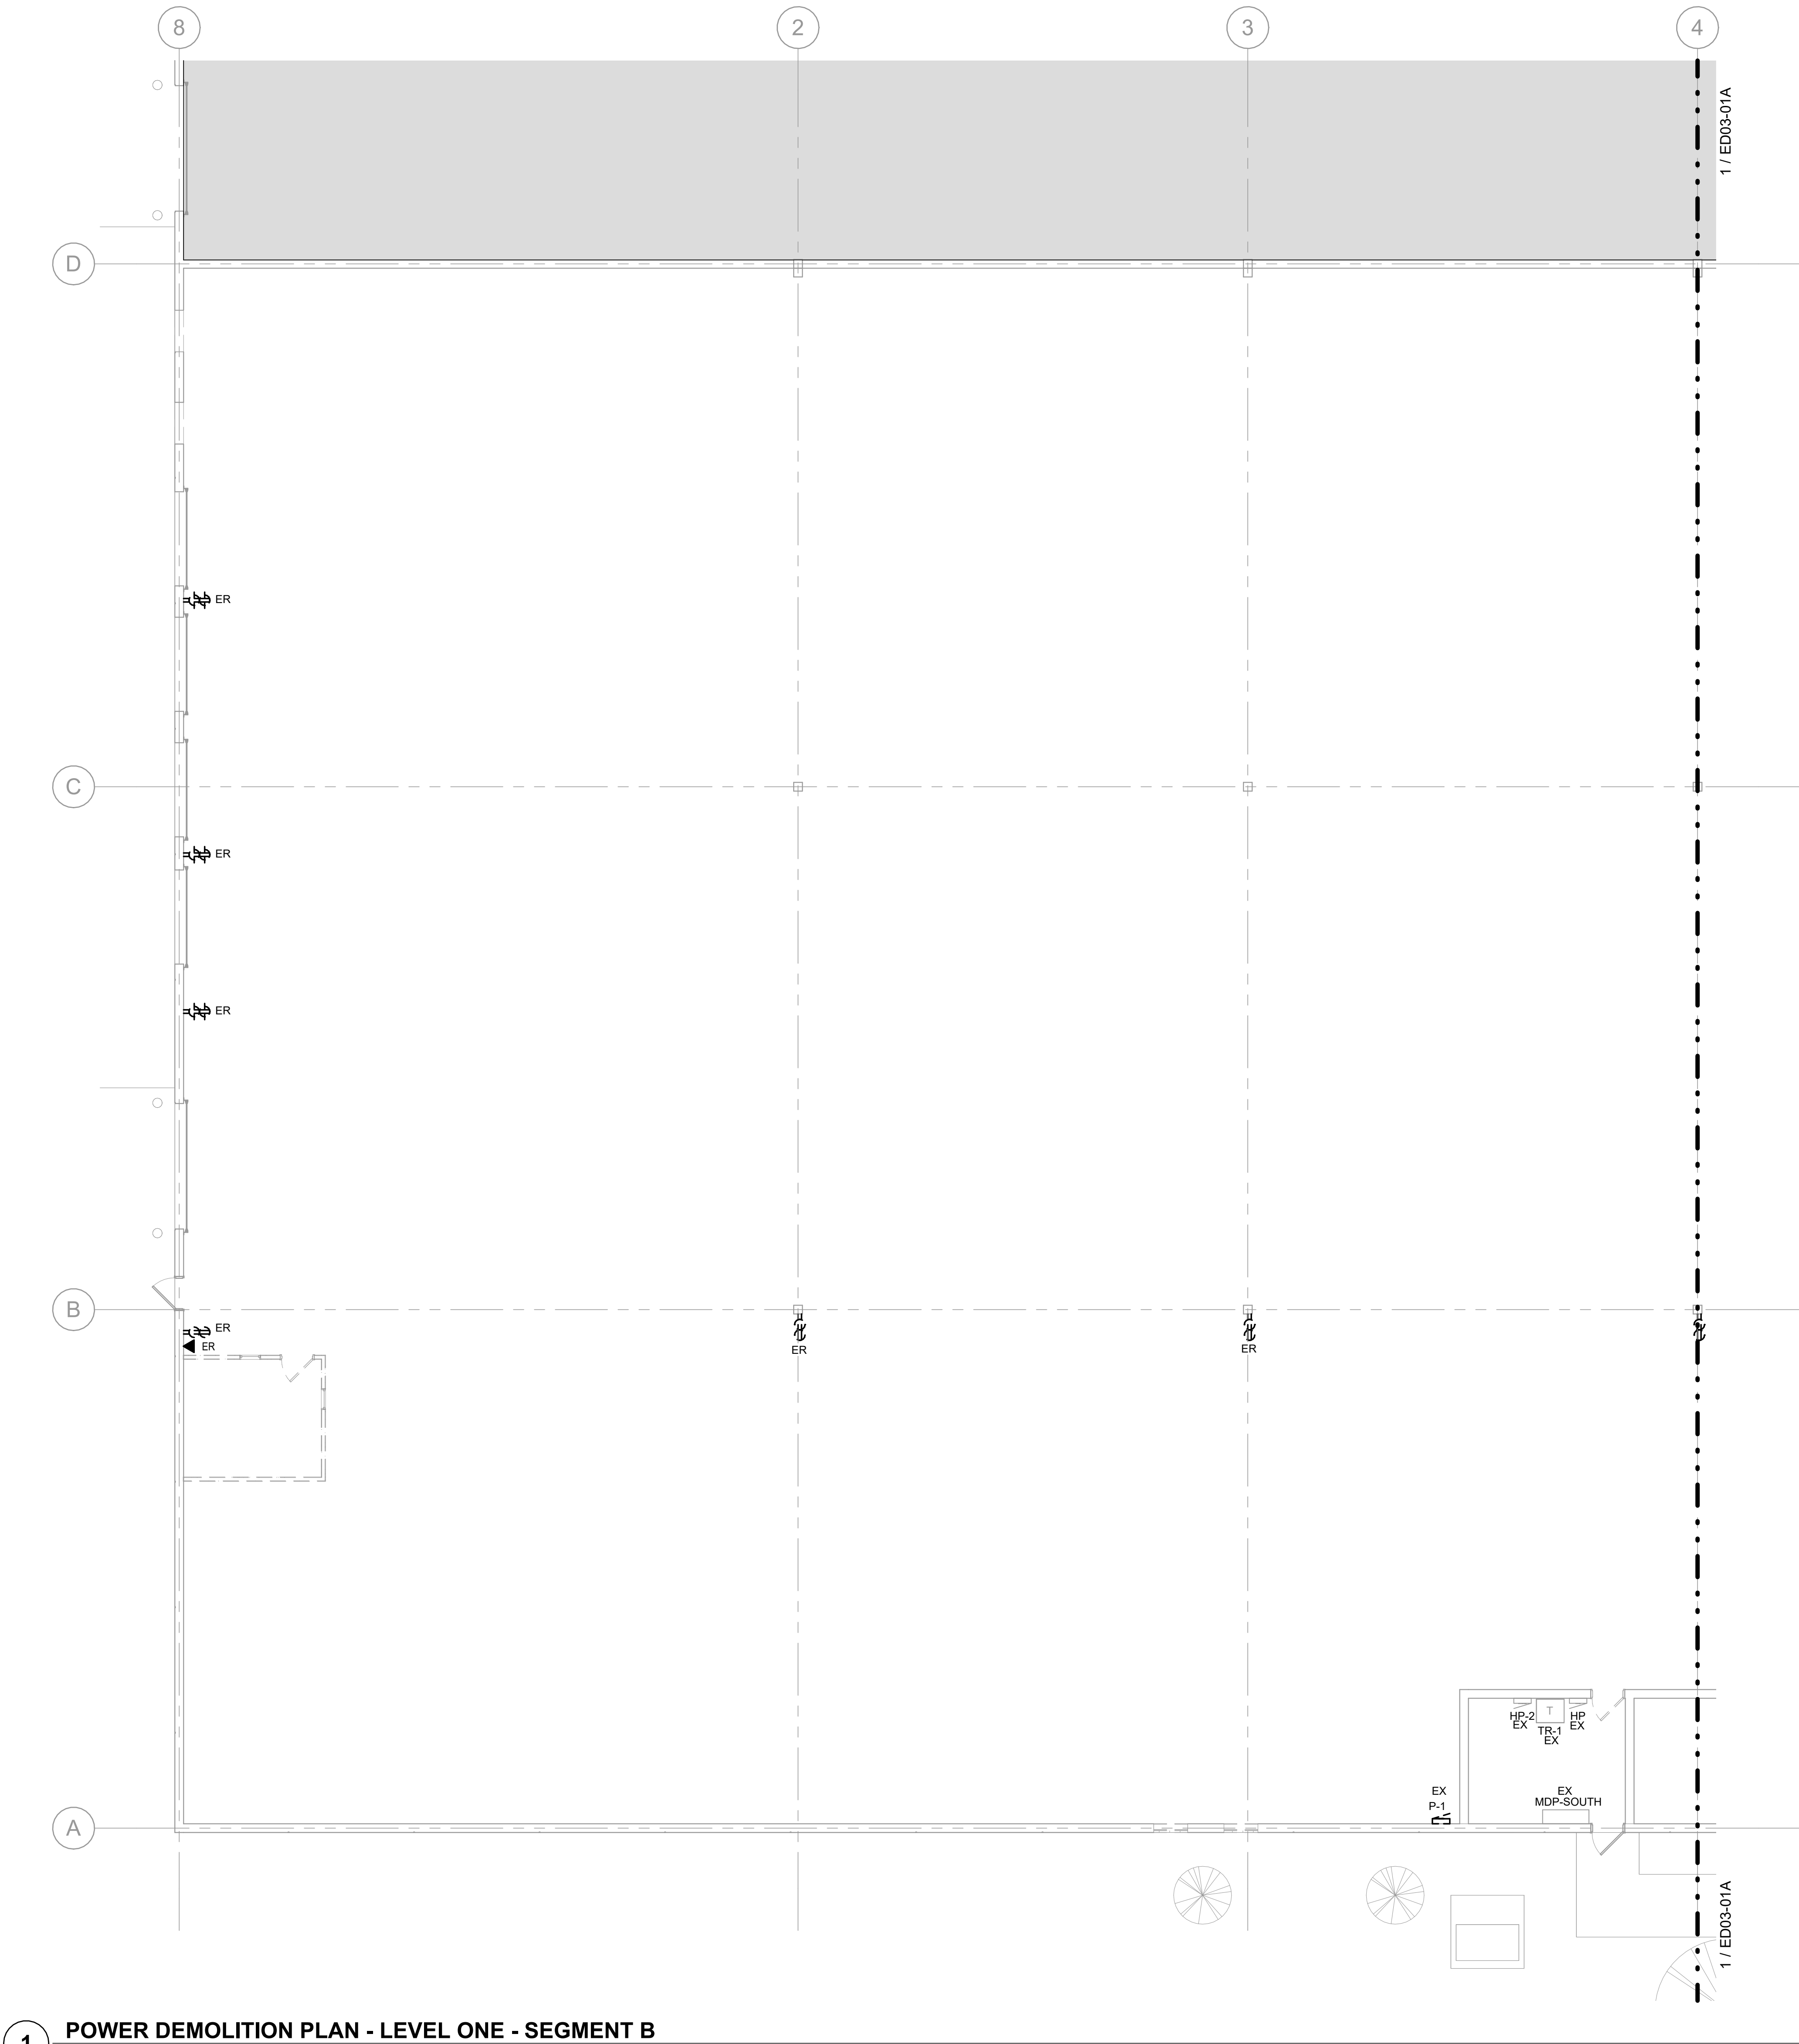

1 POWER DEMOLITION PLAN - LEVEL ONE - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- A. EXISTING CONDITIONS ARE BASED ON EXISTING RECORD DRAWINGS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE SHOWN ON DEMOLITION PLANS. NOTIFY ENGINEER OF RECORD SHOULD ANY CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM THESE CONSTRUCTION DOCUMENTS.
- B. EXISTING RACEWAY, WIRE, CABLE, SUPPORTS, HANGERS, AND OTHER ELECTRICAL INSTALLATIONS WHICH ARE TO BE REMOVED, SHALL BE COMPLETELY REMOVED BACK TO THE FIRST DEVICE OR EQUIPMENT. DEVICES WHICH ARE TO BE REMOVED SHALL BE STORED OR DISCARDED AS DIRECTED BY THE GENERAL CONTRACTOR. IF THERE ARE NO OTHER DEVICES ON THE CIRCUIT, LABEL ASSOCIATED CIRCUIT BREAKER AS 'SPARE'.
- C. MAINTAIN POWER TO CIRCUIT(S) ADJACENT TO THE CONSTRUCTION AREA. THIS SHALL INCLUDE ANY CIRCUIT(S) PASSING THROUGH THE CONSTRUCTION AREA OR CIRCUIT(S) BEING POWERED FROM PANELBOARDS WITHIN THE CONSTRUCTION AREA. EXTEND AND RELOCATE AFFECTED BRANCH CIRCUITS AS REQUIRED TO MAINTAIN SERVICE AND TO AVOID INTERFERENCE WITH THE NEW WORK. NOTIFY GENERAL CONTRACTOR SHOULD IT BE NECESSARY TO INTERRUPT POWER TO AREAS ADJACENT TO THE CONSTRUCTION AREA.
- D. TEMPORARY SHUTDOWNS OF ADJACENT SPACES SHALL BE SCHEDULED WITH THE OWNER (2) TWO WEEKS IN ADVANCE AS TO NOT INTERFERE WITH NORMAL OPERATIONS AT NO ADDITIONAL COST.
- E. EXISTING ELECTRICAL FIXTURES ARE EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- F. FURNISH LABOR, MATERIALS, AND EQUIPMENT REQUIRED TO COMPLETE DEMOLITION OF EQUIPMENT AS SPECIFIED OR INDICATED. DISCONNECT, REMOVE, AND RELOCATE ITEMS AS REQUIRED TO FACILITATE THE NEW CONSTRUCTION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

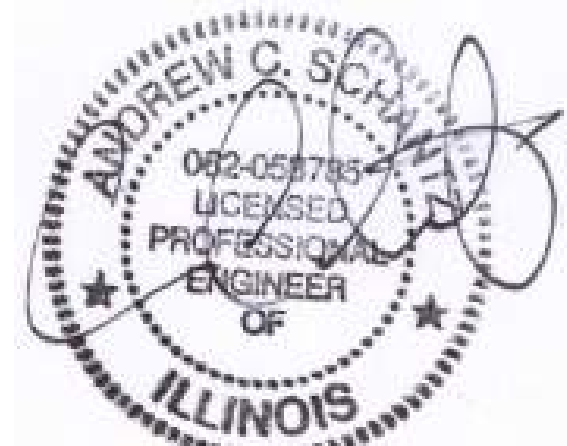

4/24/2026 EXP:11/30/2027

Date of issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.


KEYNOTES

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

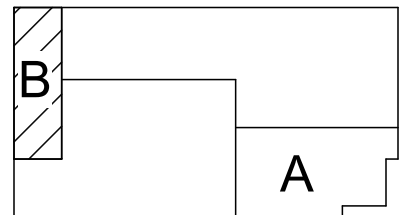


**POWER
DEMOLITION PLAN
- LEVEL ONE -
SEGMENT B**

0 4 8 16
1/8" = 1'-0"
SCALE FEET



ED03-01B

4/24/2026 2:32:12 PM ED03-02 POWER DEMOLITION PLAN - ROOF

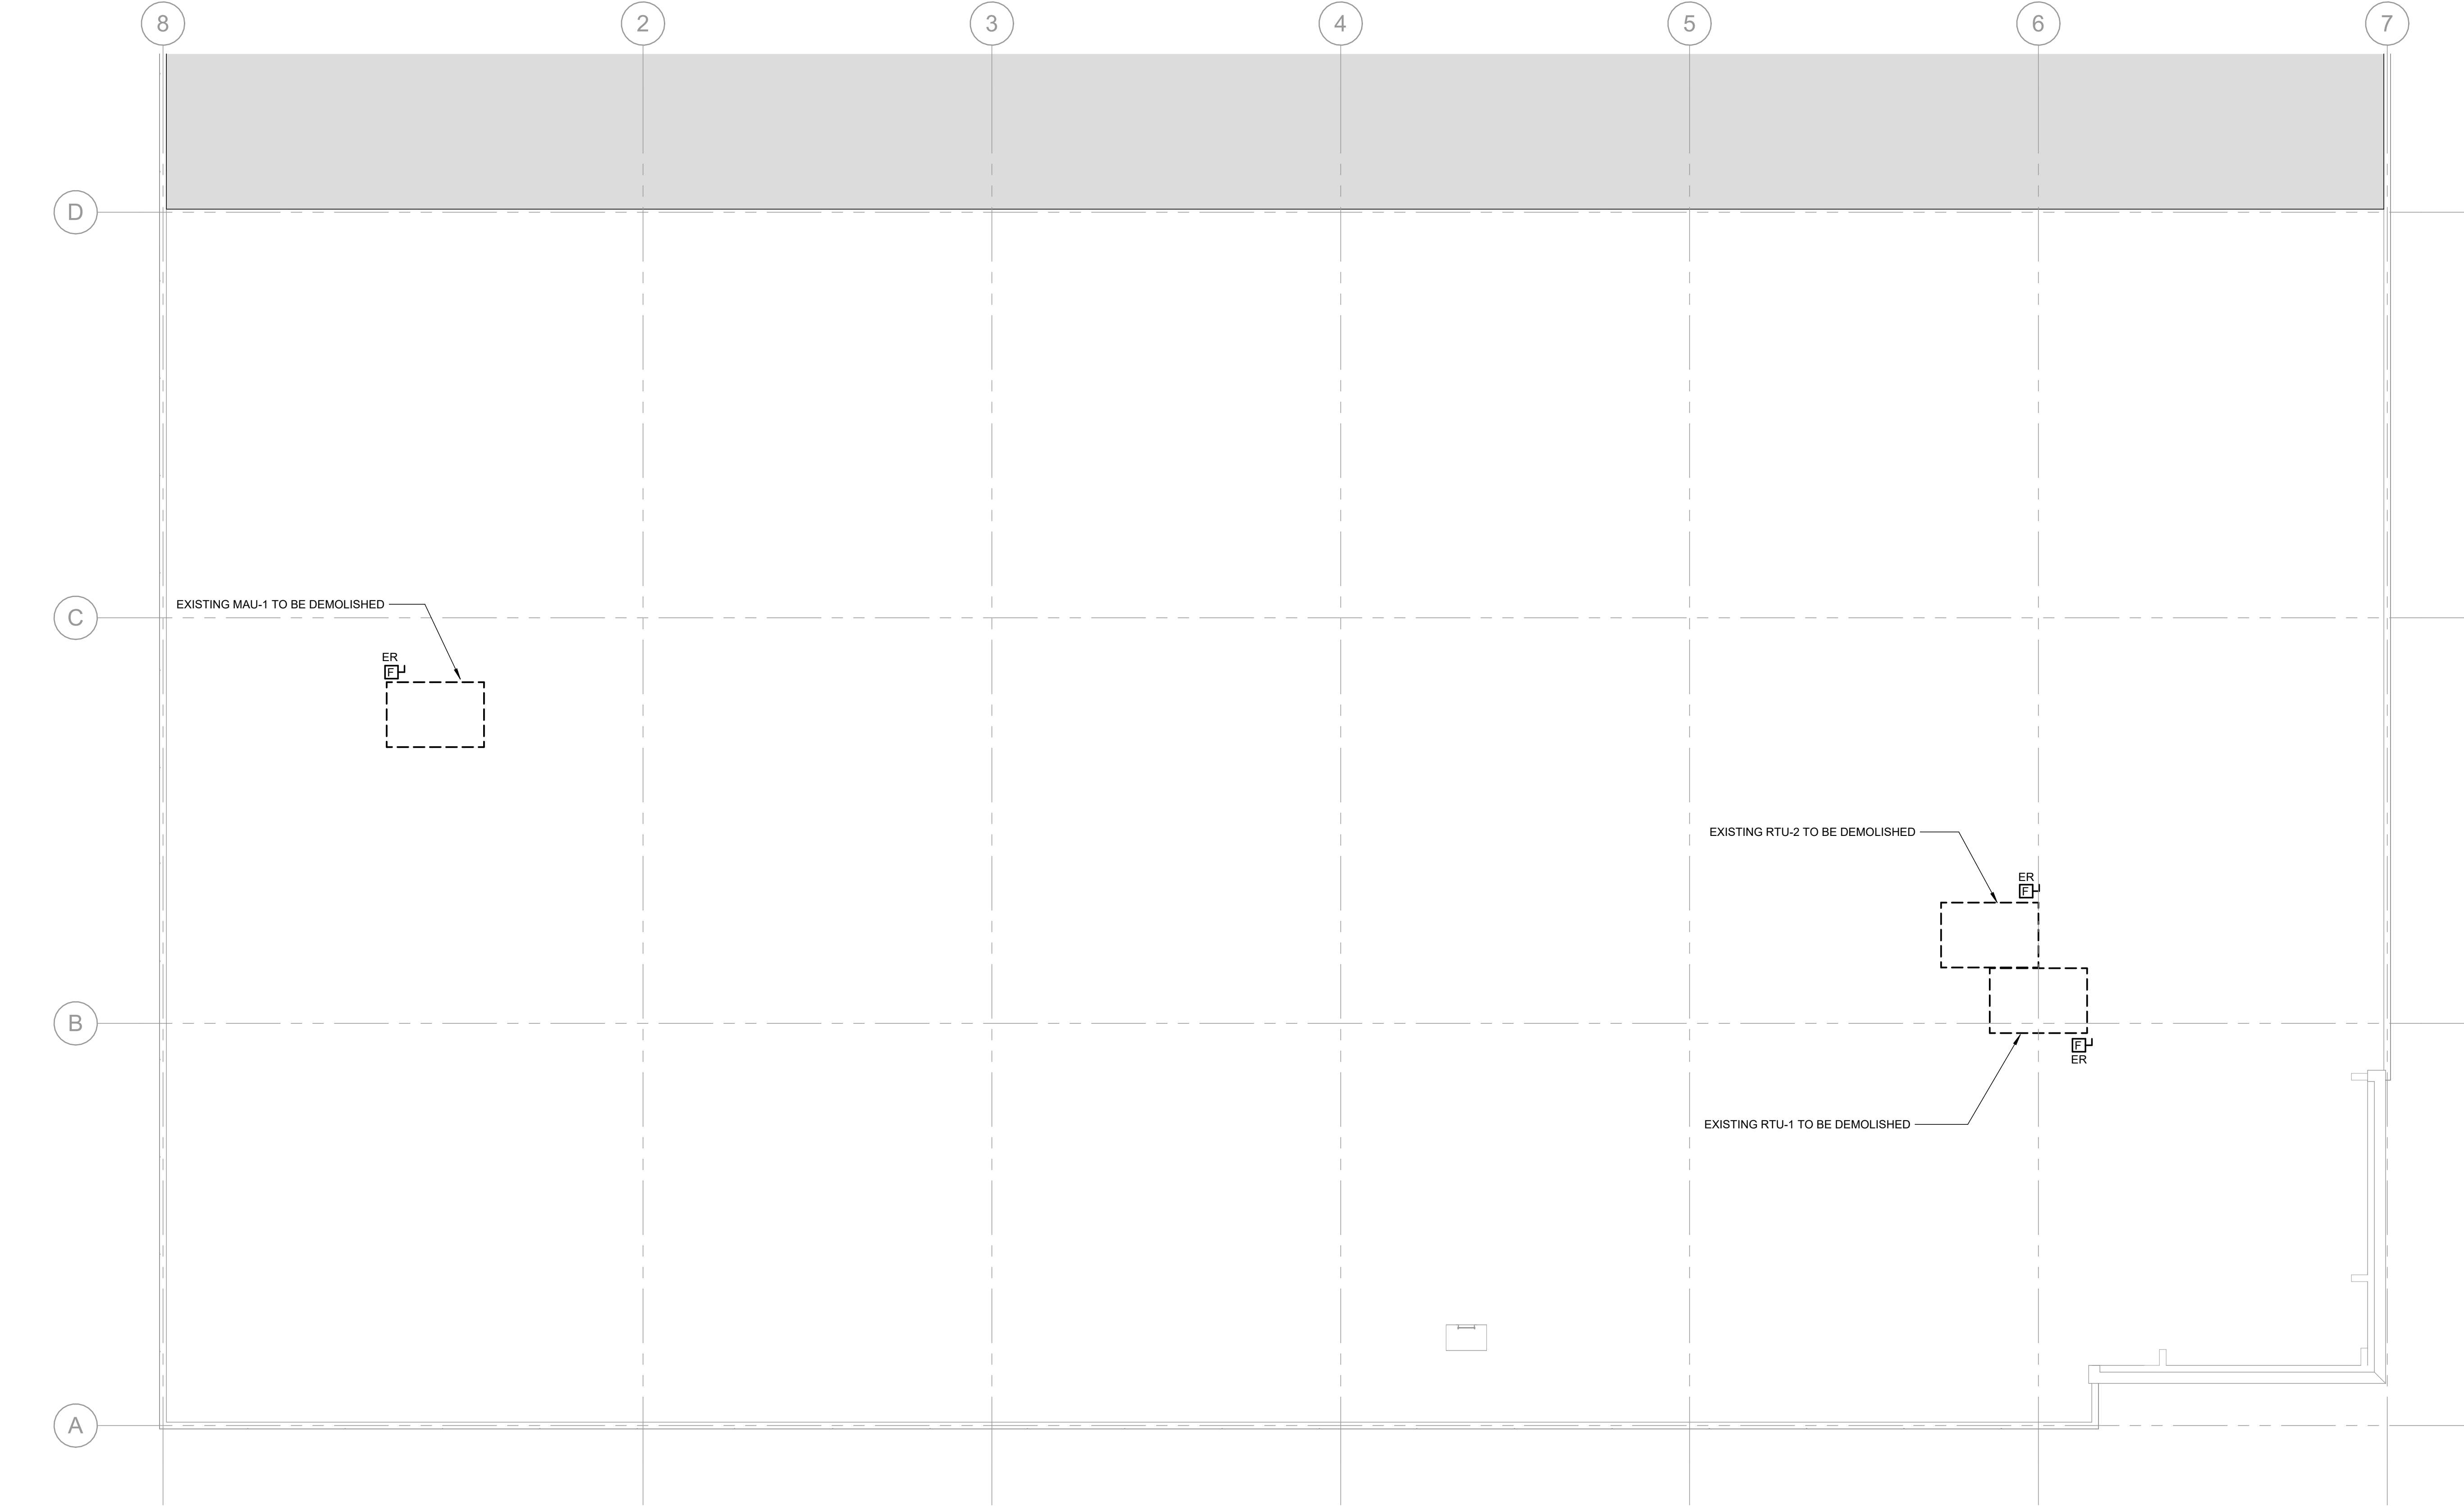

GENERAL NOTES

- A. EXISTING CONDITIONS ARE BASED ON EXISTING RECORD DRAWINGS AND FIELD VERIFICATION WHERE FEASIBLE. ACTUAL CONDITIONS MAY DIFFER FROM THOSE SHOWN ON DEMOLITION PLANS. NOTIFY ENGINEER OF RECORD SHOULD ANY CONDITIONS BE FOUND TO DIFFER SIGNIFICANTLY FROM THESE CONSTRUCTION DOCUMENTS.
- B. EXISTING RACEWAY, WIRE, CABLE, SUPPORTS, HANGERS, AND OTHER ELECTRICAL INSTALLATIONS WHICH ARE TO BE REMOVED, SHALL BE COMPLETELY REMOVED BACK TO THE FIRST DEVICE OR EQUIPMENT. DEVICES WHICH ARE TO BE REMOVED SHALL BE STORED OR DISCARDED AS DIRECTED BY THE GENERAL CONTRACTOR. IF THERE ARE NO OTHER DEVICES ON THE CIRCUIT, LABEL ASSOCIATED CIRCUIT BREAKER AS "SPARE".
- C. MAINTAIN POWER TO CIRCUIT(S) ADJACENT TO THE CONSTRUCTION AREA. THIS SHALL INCLUDE ANY CIRCUIT(S) PASSING THROUGH THE CONSTRUCTION AREA OR CIRCUIT(S) BEING POWERED FROM PANELBOARDS WITHIN THE CONSTRUCTION AREA. EXTEND AND RELOCATE AFFECTED BRANCH CIRCUITS AS REQUIRED TO MAINTAIN SERVICE AND TO AVOID INTERFERENCE WITH THE NEW WORK. NOTIFY GENERAL CONTRACTOR SHOULD IT BE NECESSARY TO INTERRUPT POWER TO AREAS ADJACENT TO THE CONSTRUCTION AREA.
- D. TEMPORARY SHUTDOWNS OF ADJACENT SPACES SHALL BE SCHEDULED WITH THE OWNER (2) TWO WEEKS IN ADVANCE AS TO NOT INTERFERE WITH NORMAL OPERATIONS AT NO ADDITIONAL COST.
- E. EXISTING ELECTRICAL FIXTURES ARE EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- F. FURNISH LABOR, MATERIALS, AND EQUIPMENT REQUIRED TO COMPLETE DEMOLITION OF EQUIPMENT AS SPECIFIED OR INDICATED. DISCONNECT, REMOVE, AND RELOCATE ITEMS AS REQUIRED TO FACILITATE THE NEW CONSTRUCTION.

EVERNORTHTM
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated EngineersTM

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

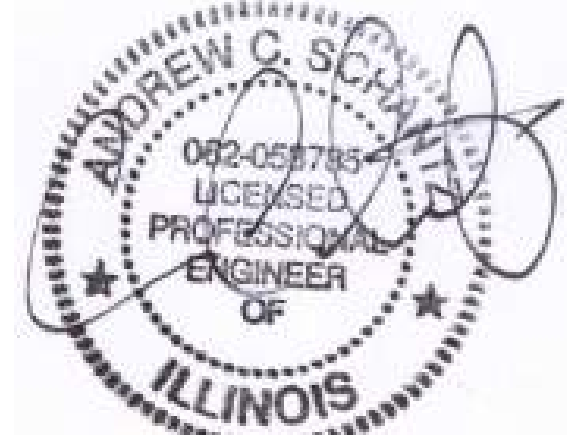

4/24/2026 EXP:11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.


KEYNOTES

EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

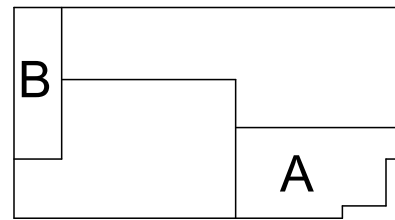


POWER
DEMOLITION PLAN
- ROOF

ED03-02

4/24/2026 2:32:14 PM E02-01 LIGHTING PLAN - LEVEL ONE

1 LIGHTING PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

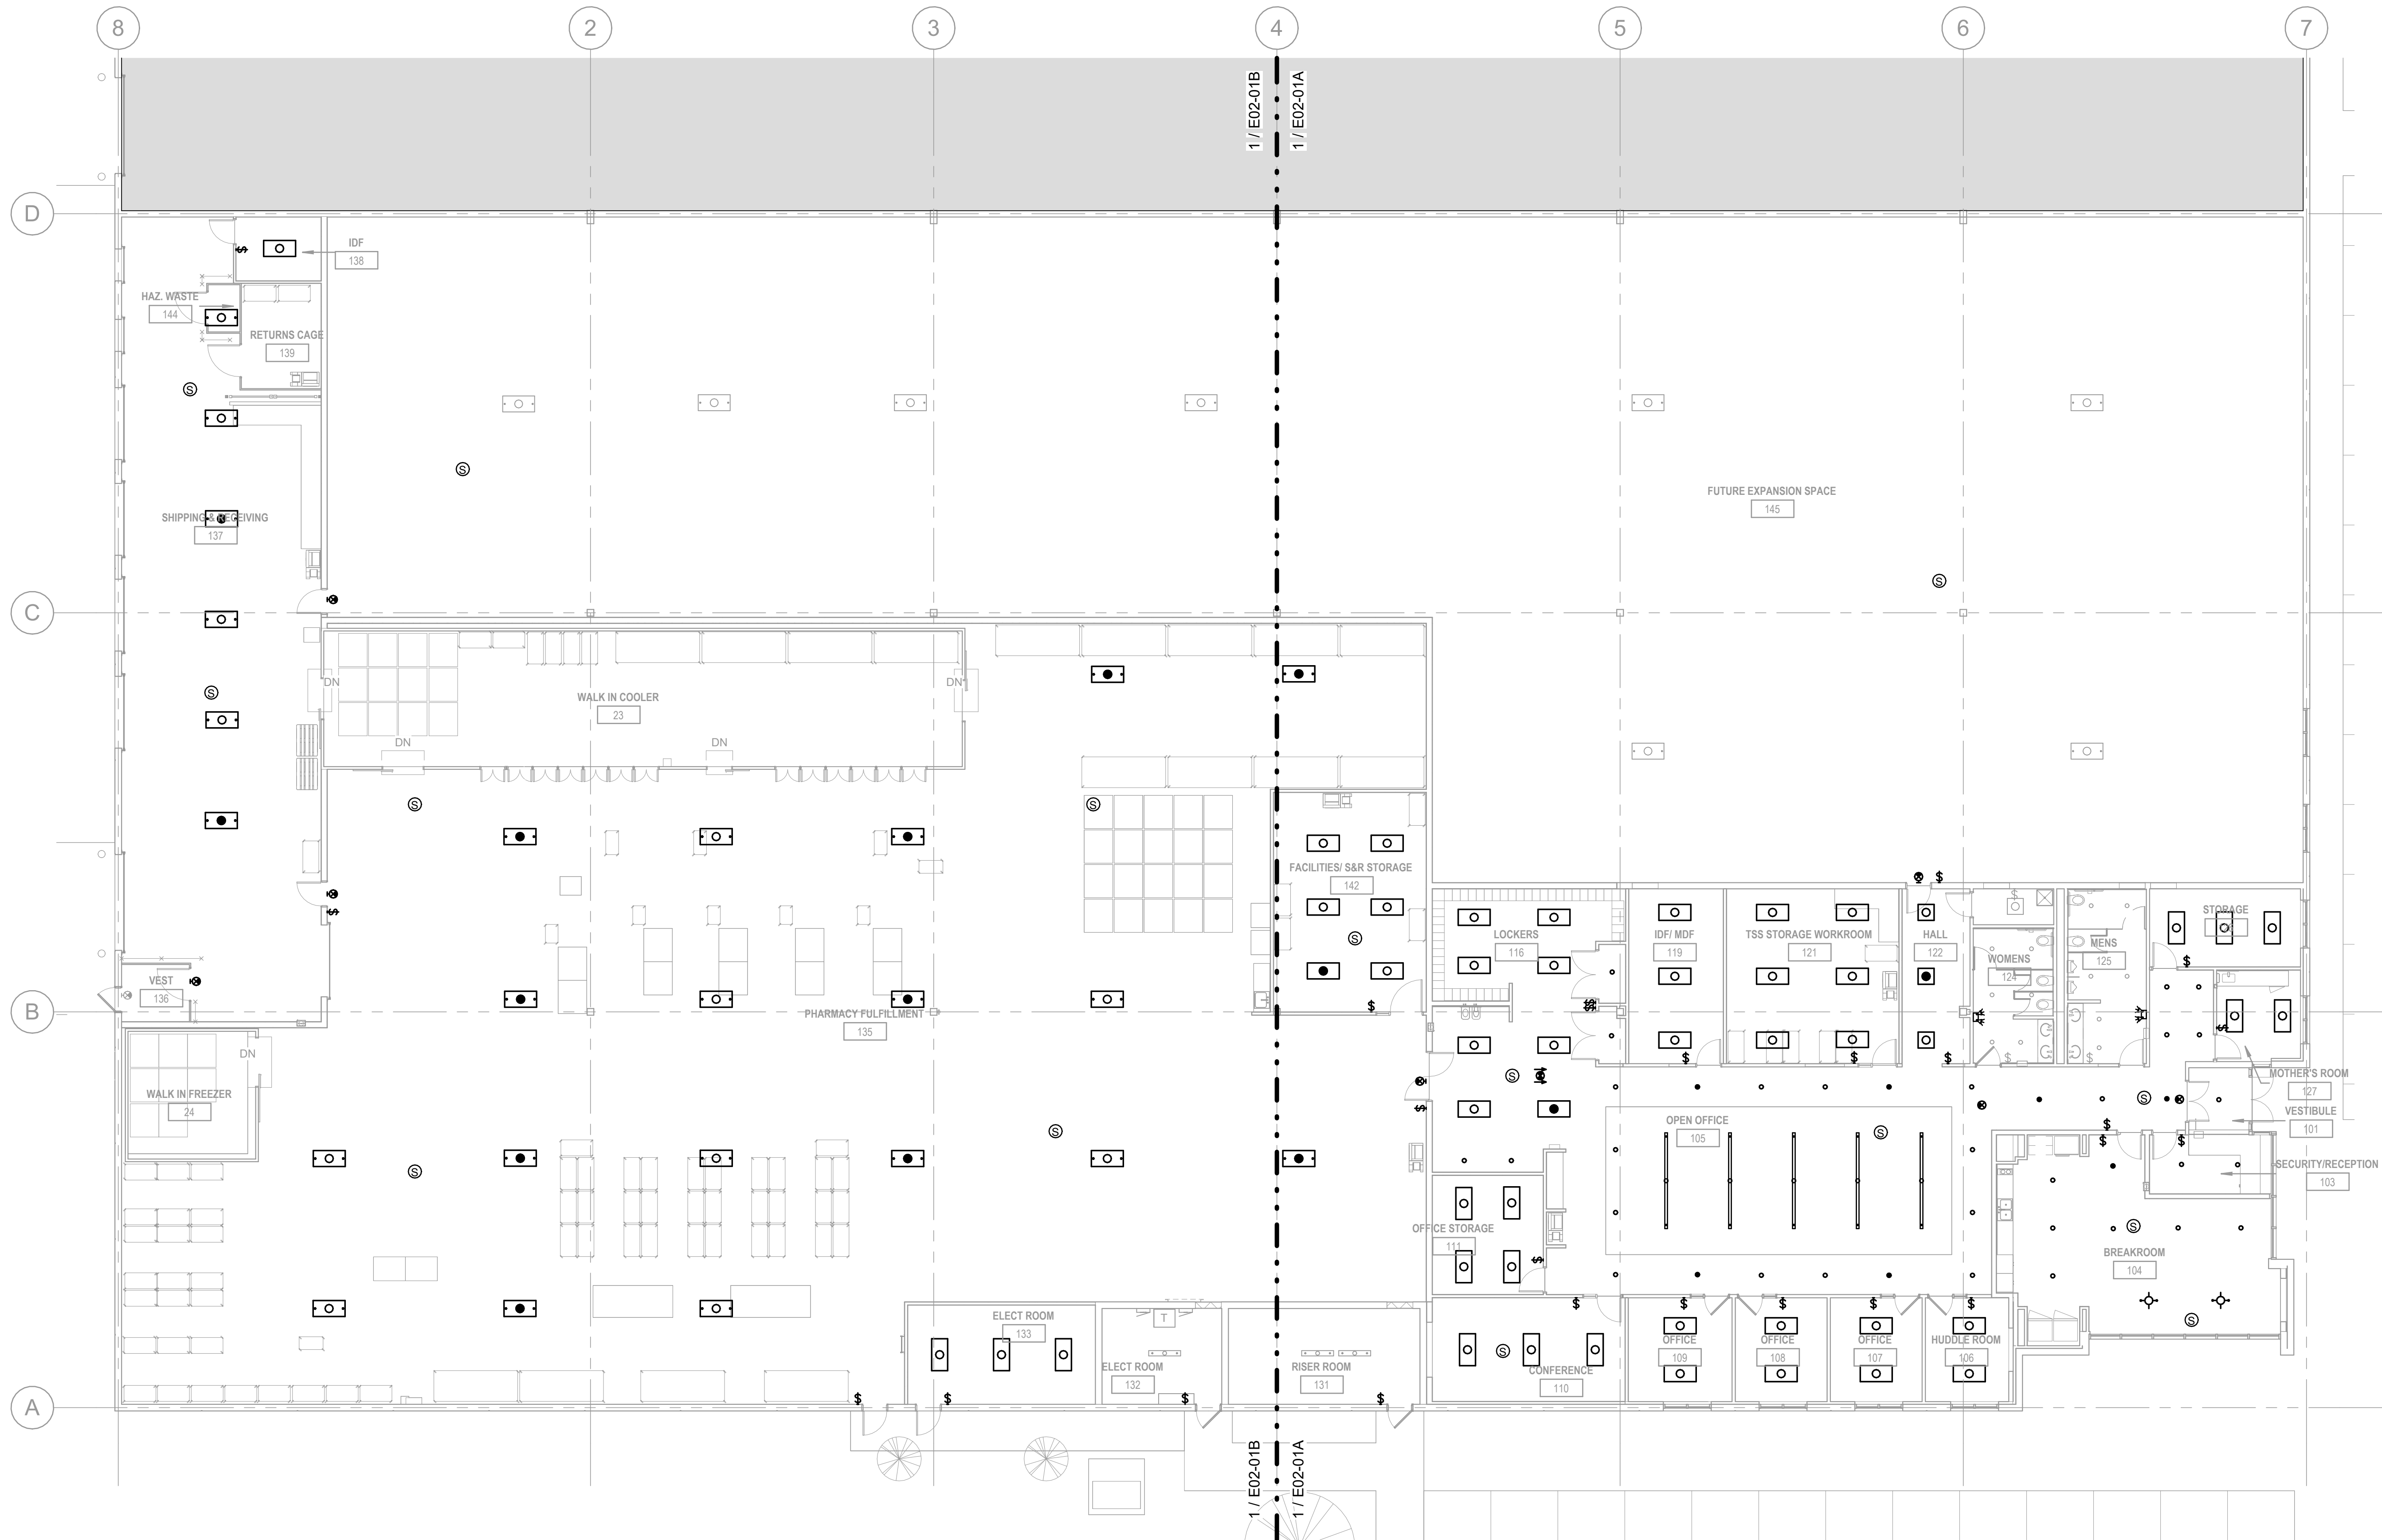

GENERAL NOTES

1. LIGHT FIXTURES SHOWN FOR QUANTITY AND ROUGH PROXIMITY WITHIN SPACES. REFER TO ARCHITECTURAL PLANS FOR EXACT PLACEMENT AND DIMENSIONS.
2. OCCUPANCY/VACANCY SENSOR LOCATIONS ARE PROVIDED TO SHOW DESIGN INTENT. FINAL QUANTITY AND LOCATIONS SHALL BE DETERMINED BY VENDOR/MANUFACTURER TO IMPROVE COVERAGE AS NEEDED AND AVOID NUISANCE ACTIVATION DUE TO ADJACENT DIFFUSERS AND GLAZING.
3. REFER TO LIGHT FIXTURE SCHEDULE FOR ADDITIONAL INFORMATION ABOUT FIXTURE TYPES AND INSTALLATION REQUIREMENTS.
4. LIGHTING CONTROL DEVICES AND THERMOSTAT CONTROL TO BE INSTALLED AT THE SAME HEIGHT. REFER TO ARCHITECTURAL DRAWINGS FOR EXACT ELEVATION.
5. COMBINE MULTIPLE SWITCHES UNDER THE SAME MULTI-GANG SWITCH COVER PLATE.
6. WALL MOUNTED EXIT LIGHTS SHOWN ABOVE DOORS SHALL BE CENTERED AND 1'-0" ABOVE DOOR FRAME TO BOTTOM OF EXIT LIGHT.
7. REFER TO EXXX SERIES OF DRAWINGS FOR LUMINAIRE SCHEDULE.
8. REFER TO EXXX SERIES OF DRAWINGS FOR LIGHTING CONTROL SCHEDULES.

EVERNORTH
HEALTH SERVICES

CORGAN

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT



4/24/2026 EXP: 11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.


KEYNOTES

**EVERNORTH -
ELGIN PHARMACY**


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

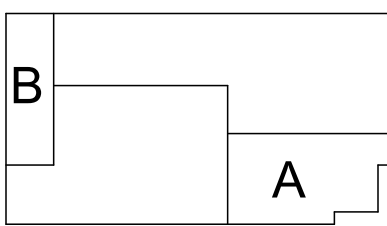

**LIGHTING PLAN -
LEVEL ONE**

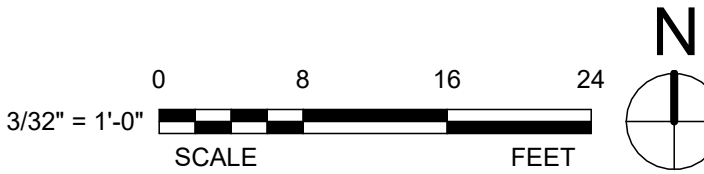

E02-01

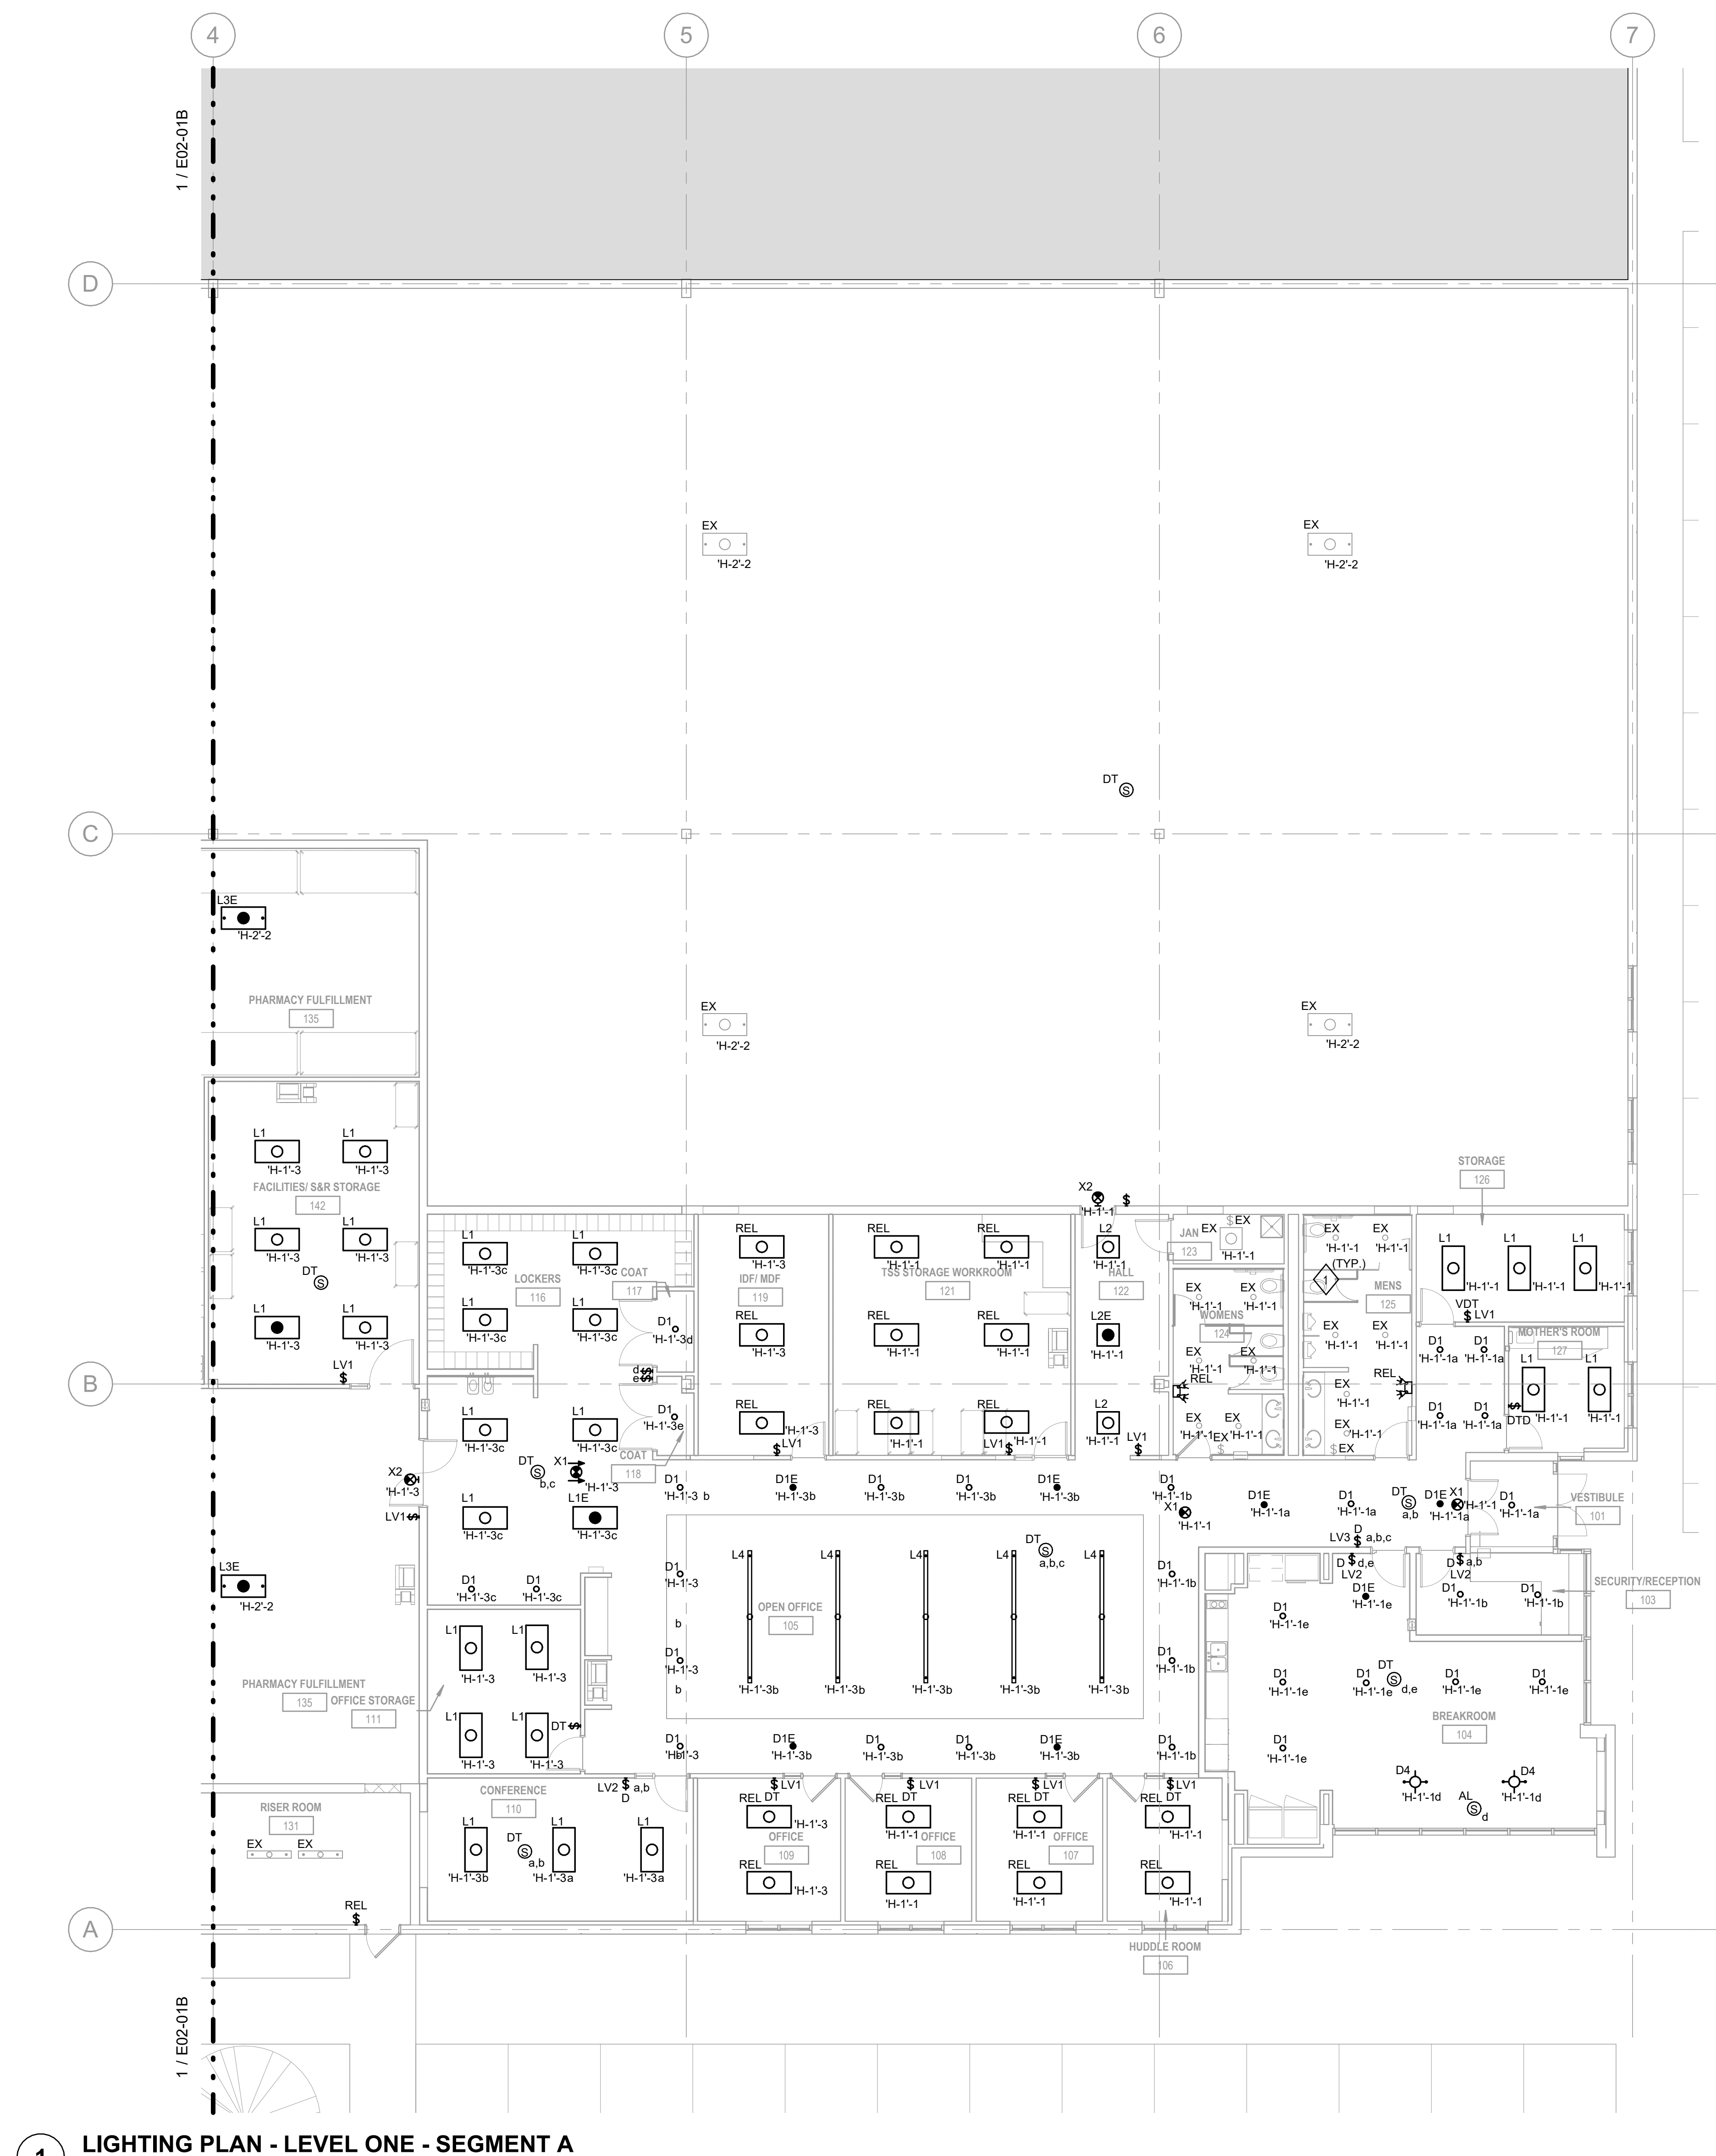

GENERAL NOTES

1. LIGHT FIXTURES SHOWN FOR QUANTITY AND ROUGH PROXIMITY WITHIN SPACES. REFER TO ARCHITECTURAL PLANS FOR EXACT PLACEMENT AND DIMENSIONS.
2. OCCUPANCY/VACANCY SENSOR LOCATIONS ARE PROVIDED TO SHOW DESIGN INTENT. FINAL QUANTITY AND LOCATIONS SHALL BE DETERMINED BY THE MANUFACTURER. PROVIDE IMPROVE COVERAGE AS NEEDED AND AVOID UNUSUAL ACTIVATION DUE TO ADJACENT DISRUPTORS AND GLAZING.
3. REFER TO LIGHT FIXTURE SCHEDULE FOR ADDITIONAL INFORMATION ABOUT FIXTURE TYPES AND INSTALLATION REQUIREMENTS.
4. LIGHTING CONTROL DEVICES AND THERMOSTAT CONTROL TO BE INSTALLED AT THE SAME HEIGHT. REFER TO ARCHITECTURAL DRAWINGS FOR EXACT ELEVATION.
5. COMBINE MULTIPLE SWITCHES UNDER THE SAME MULTI-GANG SWITCH COVER PLATE.
6. WALL MOUNTED EXIT LIGHTS SHOWN ABOVE DOORS SHALL BE CENTERED AND 1'-0" ABOVE DOOR FRAME TO BOTTOM OF EXIT LIGHT.
7. REFER TO EXXX SERIES OF DRAWINGS FOR LUMINAIRE SCHEDULE.
8. REFER TO EXXX SERIES OF DRAWINGS FOR LIGHTING CONTROL SCHEDULES.

EVERNORTH
HEALTH SERVICES

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

△	ISSUANCES
---	-----------

04/24/2026	ISSUE FOR PERMIT
------------	------------------



4/24/2026 EXP:11/30/2027

Date of issue

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

- 1 CONNECT EXISTING FIXTURES TO NEW 480/277V
PANELBOARDS. CIRCUIT AS INDICATED.


EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB	26136.0000
-----	------------

DATE	04/24/2026
------	------------


KEYPLAN

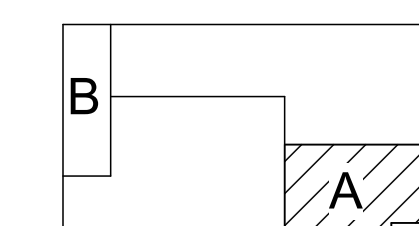

LIGHTING PLAN - LEVEL ONE - SEGMENT A

E02-01A



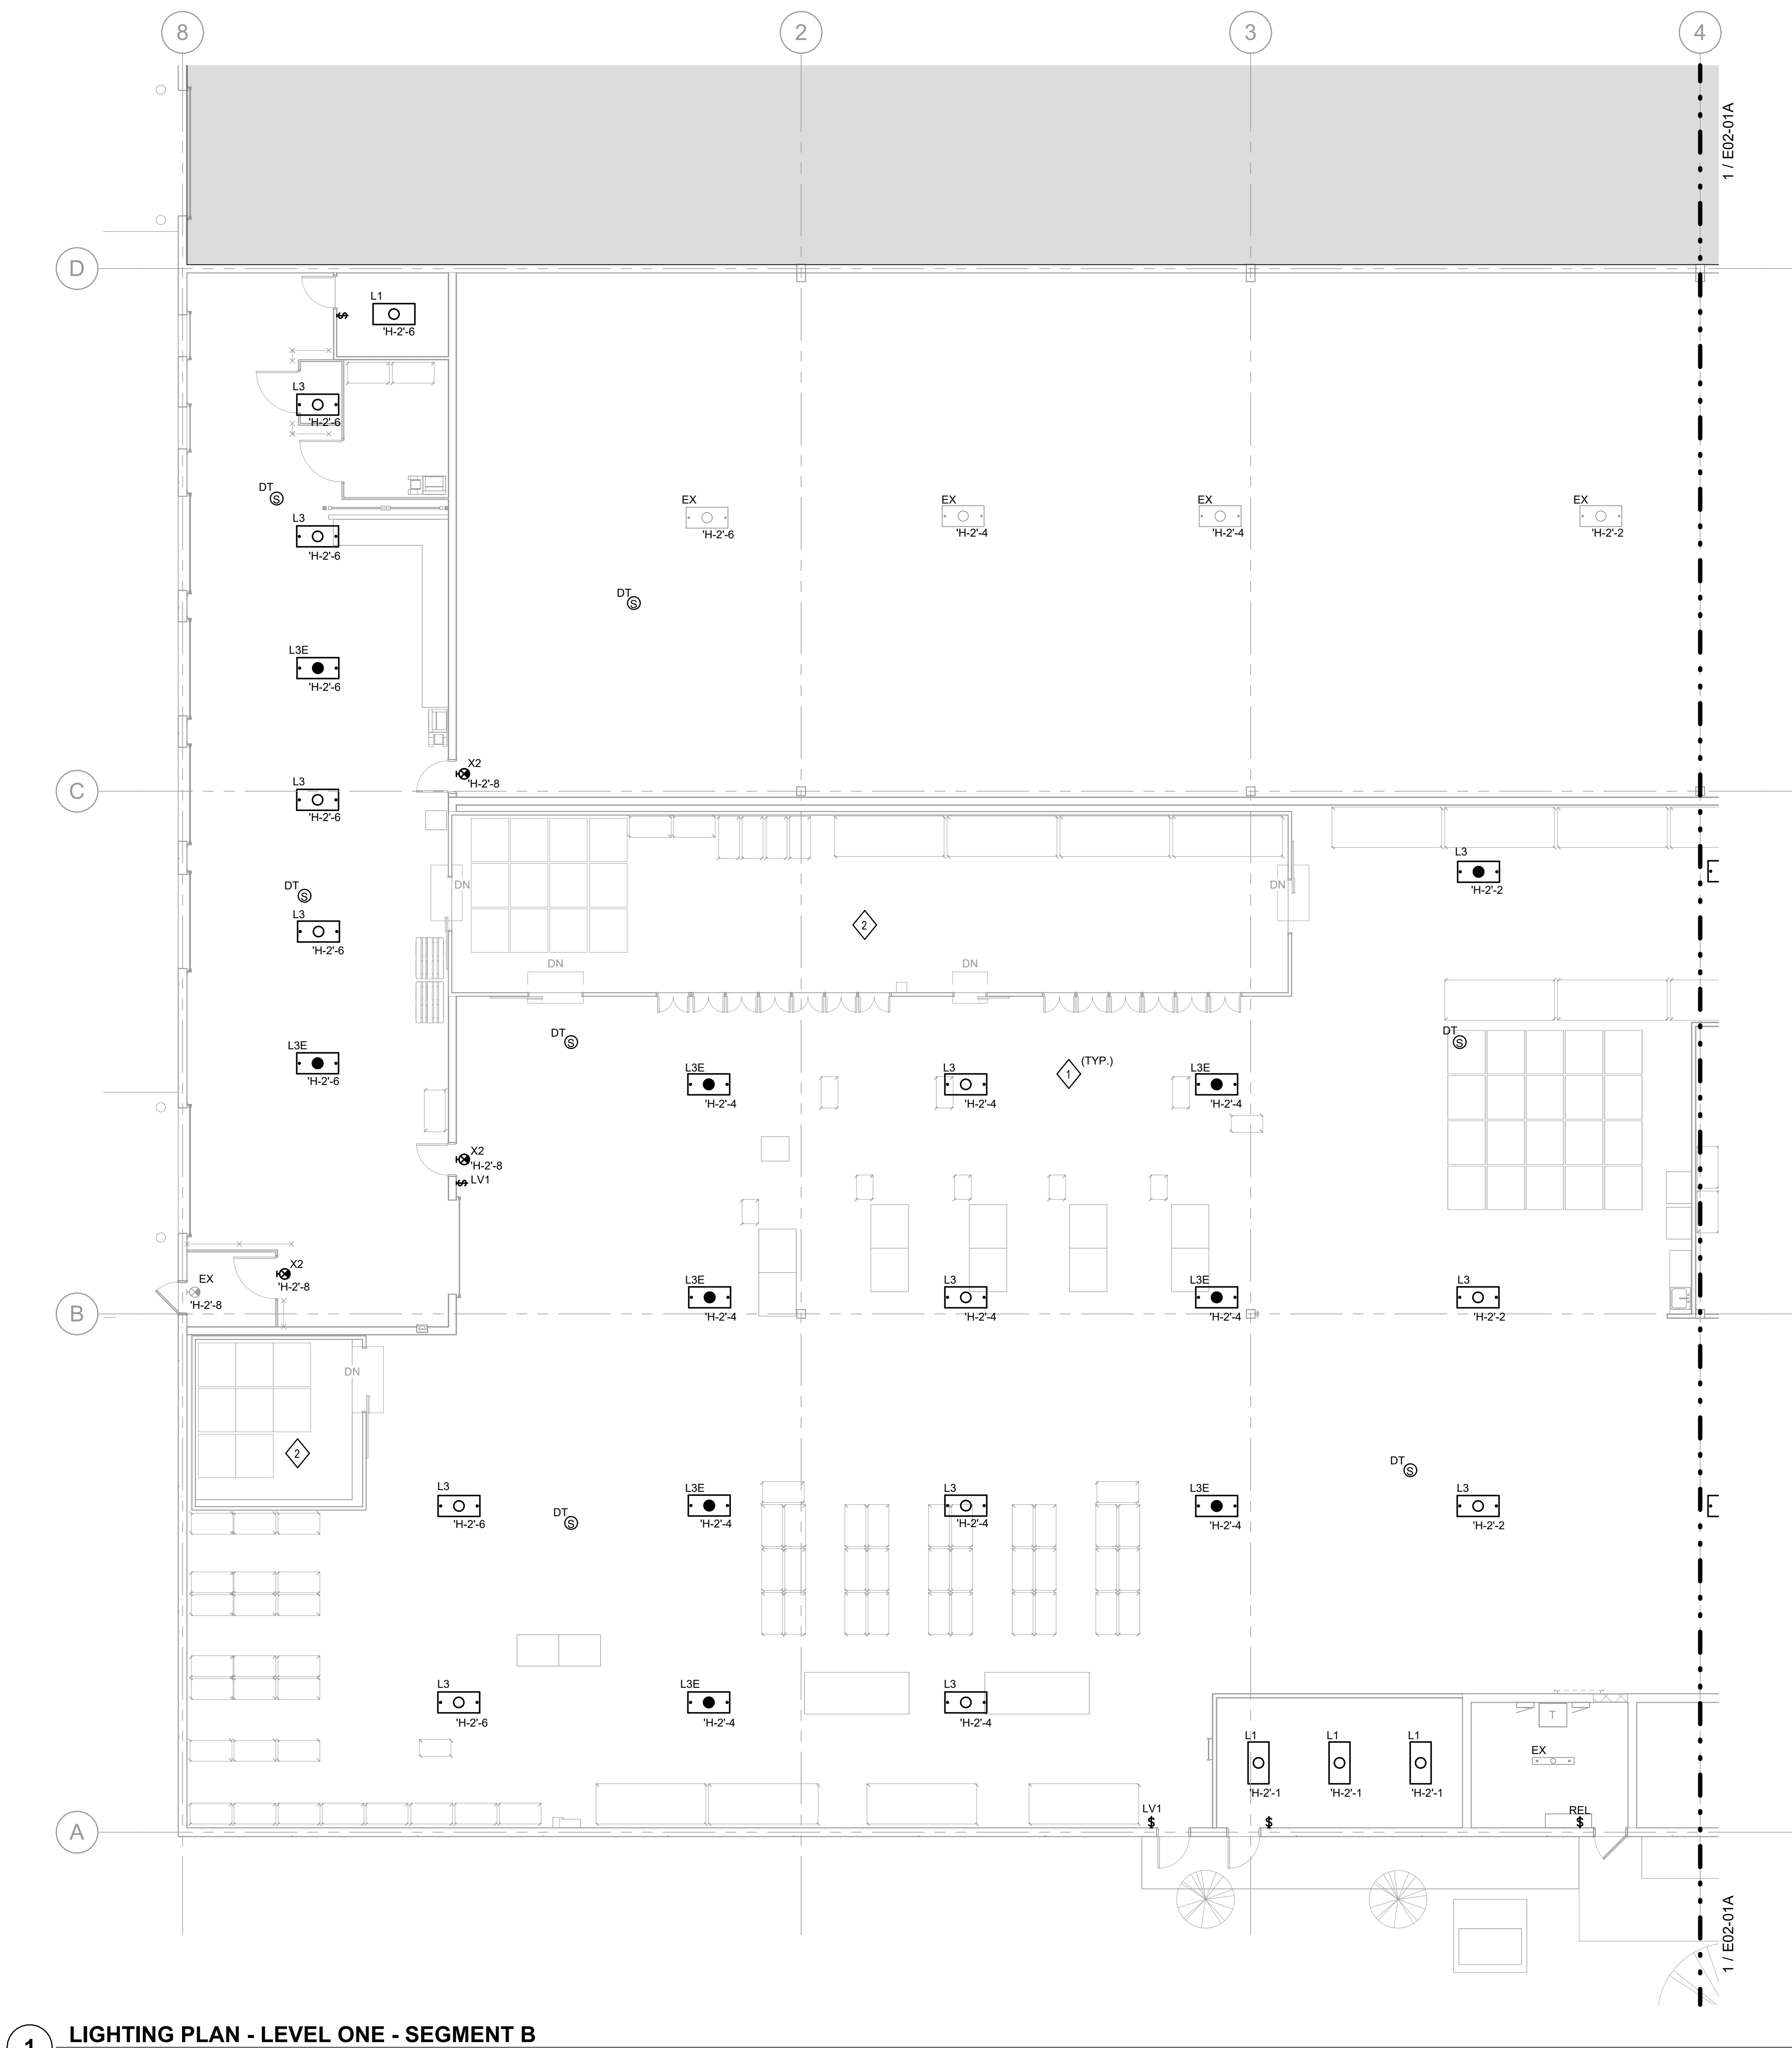

GENERAL NOTES

1. LIGHT FIXTURES SHOWN FOR QUANTITY AND ROUGH PROXIMITY WITHIN SPACES. REFER TO ARCHITECTURAL PLANS FOR EXACT PLACEMENT AND DIMENSIONS.
2. OCCUPANCY/VACANCY SENSOR LOCATIONS ARE PROVIDED TO SHOW DESIGN INTENT. FINAL QUANTITY AND LOCATIONS SHALL BE DETERMINED BY THE FURNISHING CONTRACTOR. PROVIDE COVERAGE AS NEEDED AND AVOID NUISANCE ACTIVATION DUE TO ADJACENT DIFFUSERS AND GLAZING.
3. REFER TO LIGHT FIXTURE SCHEDULE FOR ADDITIONAL INFORMATION ABOUT FIXTURE TYPES AND INSTALLATION REQUIREMENTS.
4. LIGHTING CONTROL DEVICES AND THERMOSTAT CONTROLS SHALL BE INSTALLED AT THE SAME HEIGHT AS REFERRED TO ARCHITECTURAL DRAWINGS FOR EXACT ELEVATION.
5. COMBINE MULTIPLE SWITCHES UNDER THE SAME MULTI-GANG SWITCH COVER PLATE.
6. WALL MOUNTED EXIT LIGHTS SHOWN ABOVE DOORS SHALL BE CENTERED AND 1'-0" ABOVE DOOR FRAME TO BOTTOM OF DOOR FRAME LOCATIONS.
7. REFER TO EXXX SERIES OF DRAWINGS FOR LUMINAIRE SCHEDULE.
8. REFER TO EXXX SERIES OF DRAWINGS FOR LIGHTING CONTROL SCHEDULES.

EVERNORTH
HEALTH SERVICES

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270



Affiliated Engineers®

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

△	ISSUANCES
---	-----------

04/24/2026	ISSUE FOR PERMIT
------------	------------------



4/24/2026 EXP:11/30/2027

Date of issue

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

- 1 CONNECT EXISTING FIXTURES IN SPACE TO NEW PANELBOARD 'H-2'. CIRCUIT AS INDICATED.
- 2 COODINATE LIGHTING AND POWER CONNECTION REQUIREMENTS WITH EQUIPMENT MANUFACTURER PRIOR TO INSTALLATION.


EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB	26136.0000
-----	------------


DATE 04/24/2026

KEYPLAN

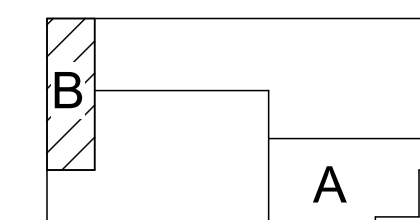


LIGHTING PLAN -
LEVEL ONE -
SEGMENT B

E02-01B

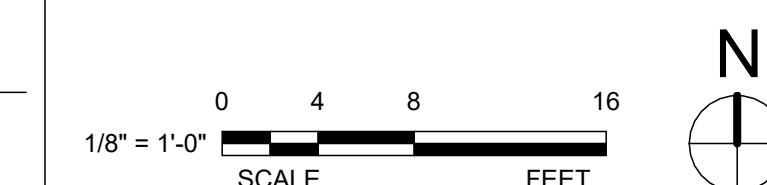

4/24/2026 2:32:19 PM E03-01 POWER PLAN - LEVEL ONE

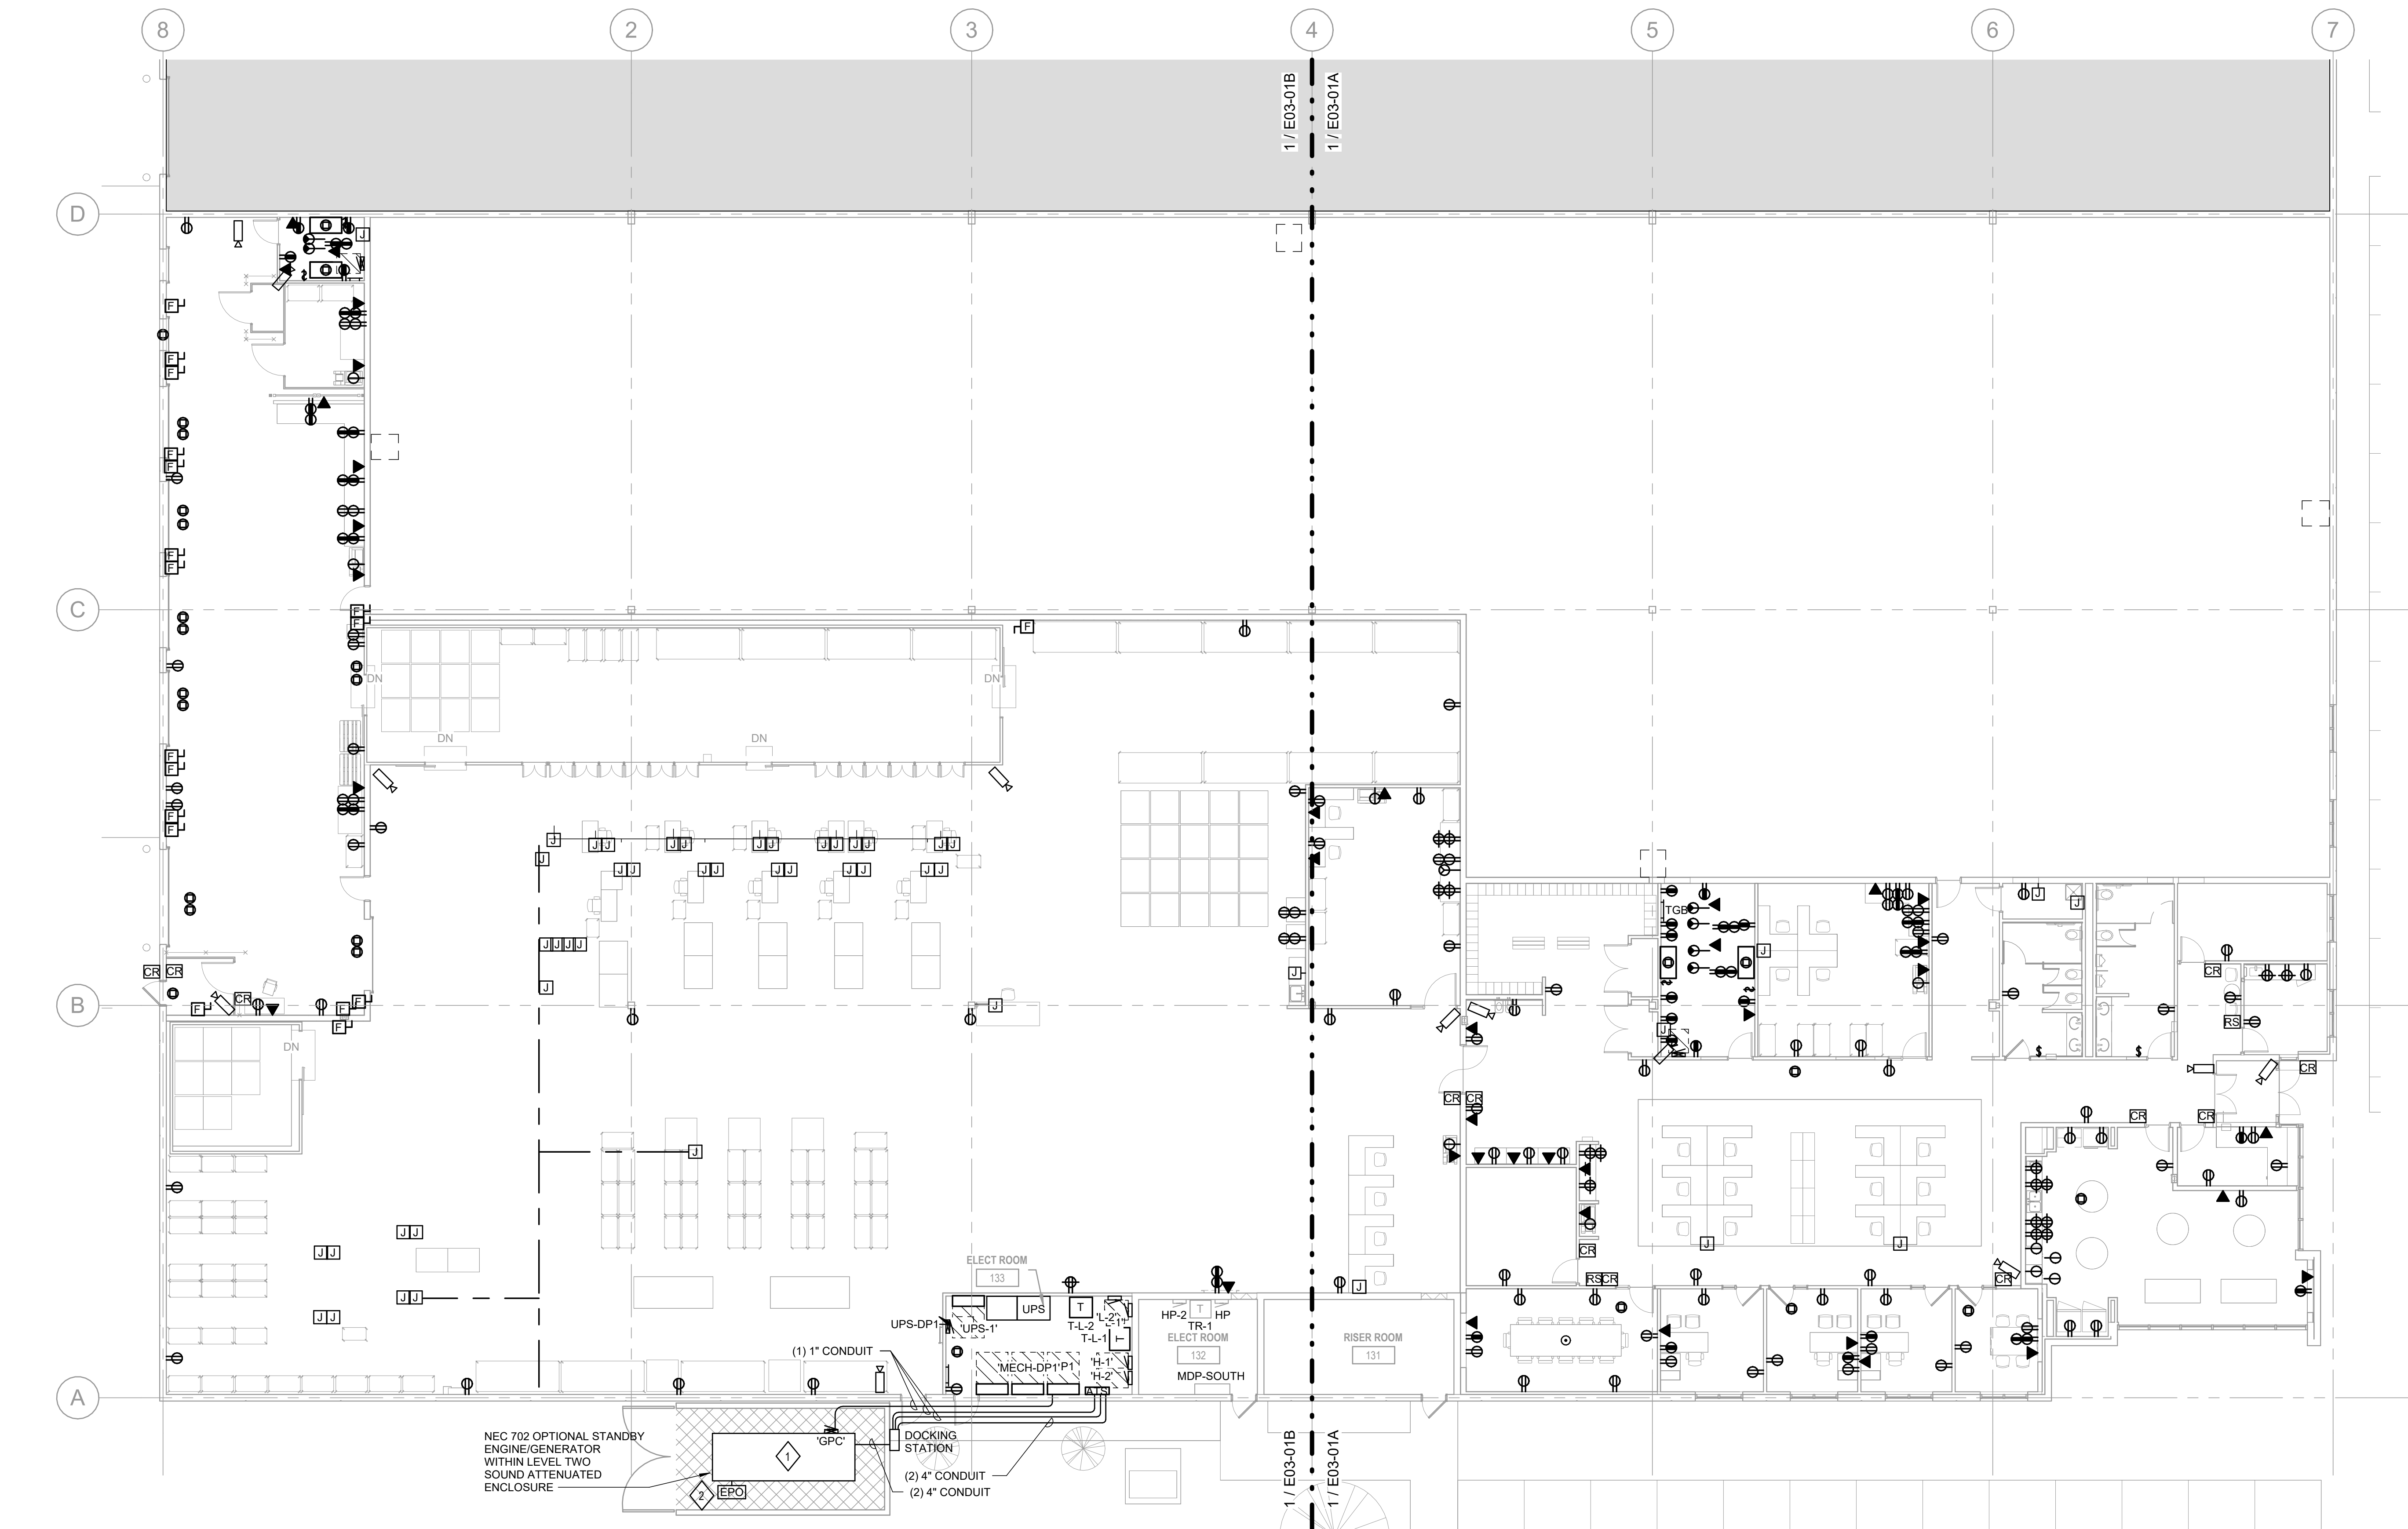

1 POWER PLAN - LEVEL ONE
SCALE: 3/32" = 1'-0"

GENERAL NOTES

- ELECTRICAL EQUIPMENT IS EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- NO PIPING, DUCTS, OR EQUIPMENT FOREIGN TO ELECTRICAL EQUIPMENT PERMITTED TO BE LOCATED WITHIN DEDICATED SPACE ABOVE ELECTRICAL EQUIPMENT.
- SIZE FUSES FOR MECHANICAL EQUIPMENT PROVIDED BY OTHERS PER EQUIPMENT MANUFACTURER'S RECOMMENDATIONS.
- REFER TO FLOOR PLANS FOR LOCATIONS OF DISTRIBUTION EQUIPMENT, TRANSFORMERS, AND PANELBOARDS.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

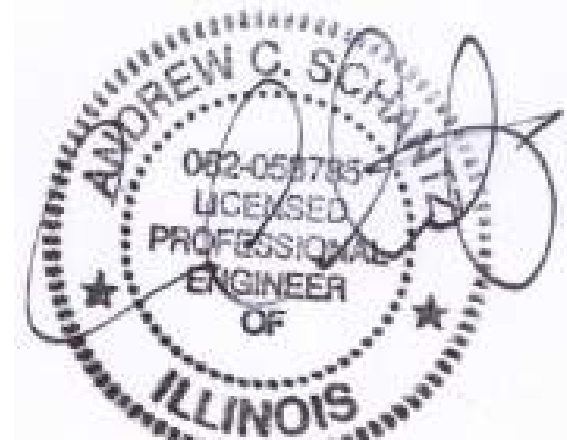

4/24/2026 EXP: 11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


- COORDINATE EXACT LOCATION AND SCREEN WALL OF NEW ENGINE/GENERATOR WITH OWNER AND BUILDING ASSOCIATION PRIOR TO INSTALLATION.
- PROVIDE EMERGENCY POWER OFF BUTTON AT ENGINE/GENERATOR ENCLOSURE EXTERIOR.

**EVERNORTH -
ELGIN PHARMACY**


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

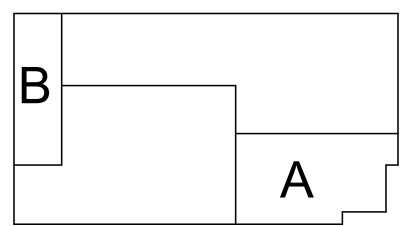

**POWER PLAN -
LEVEL ONE**

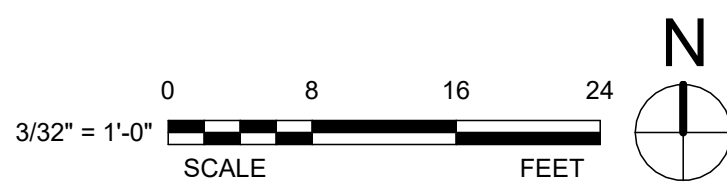

E03-01

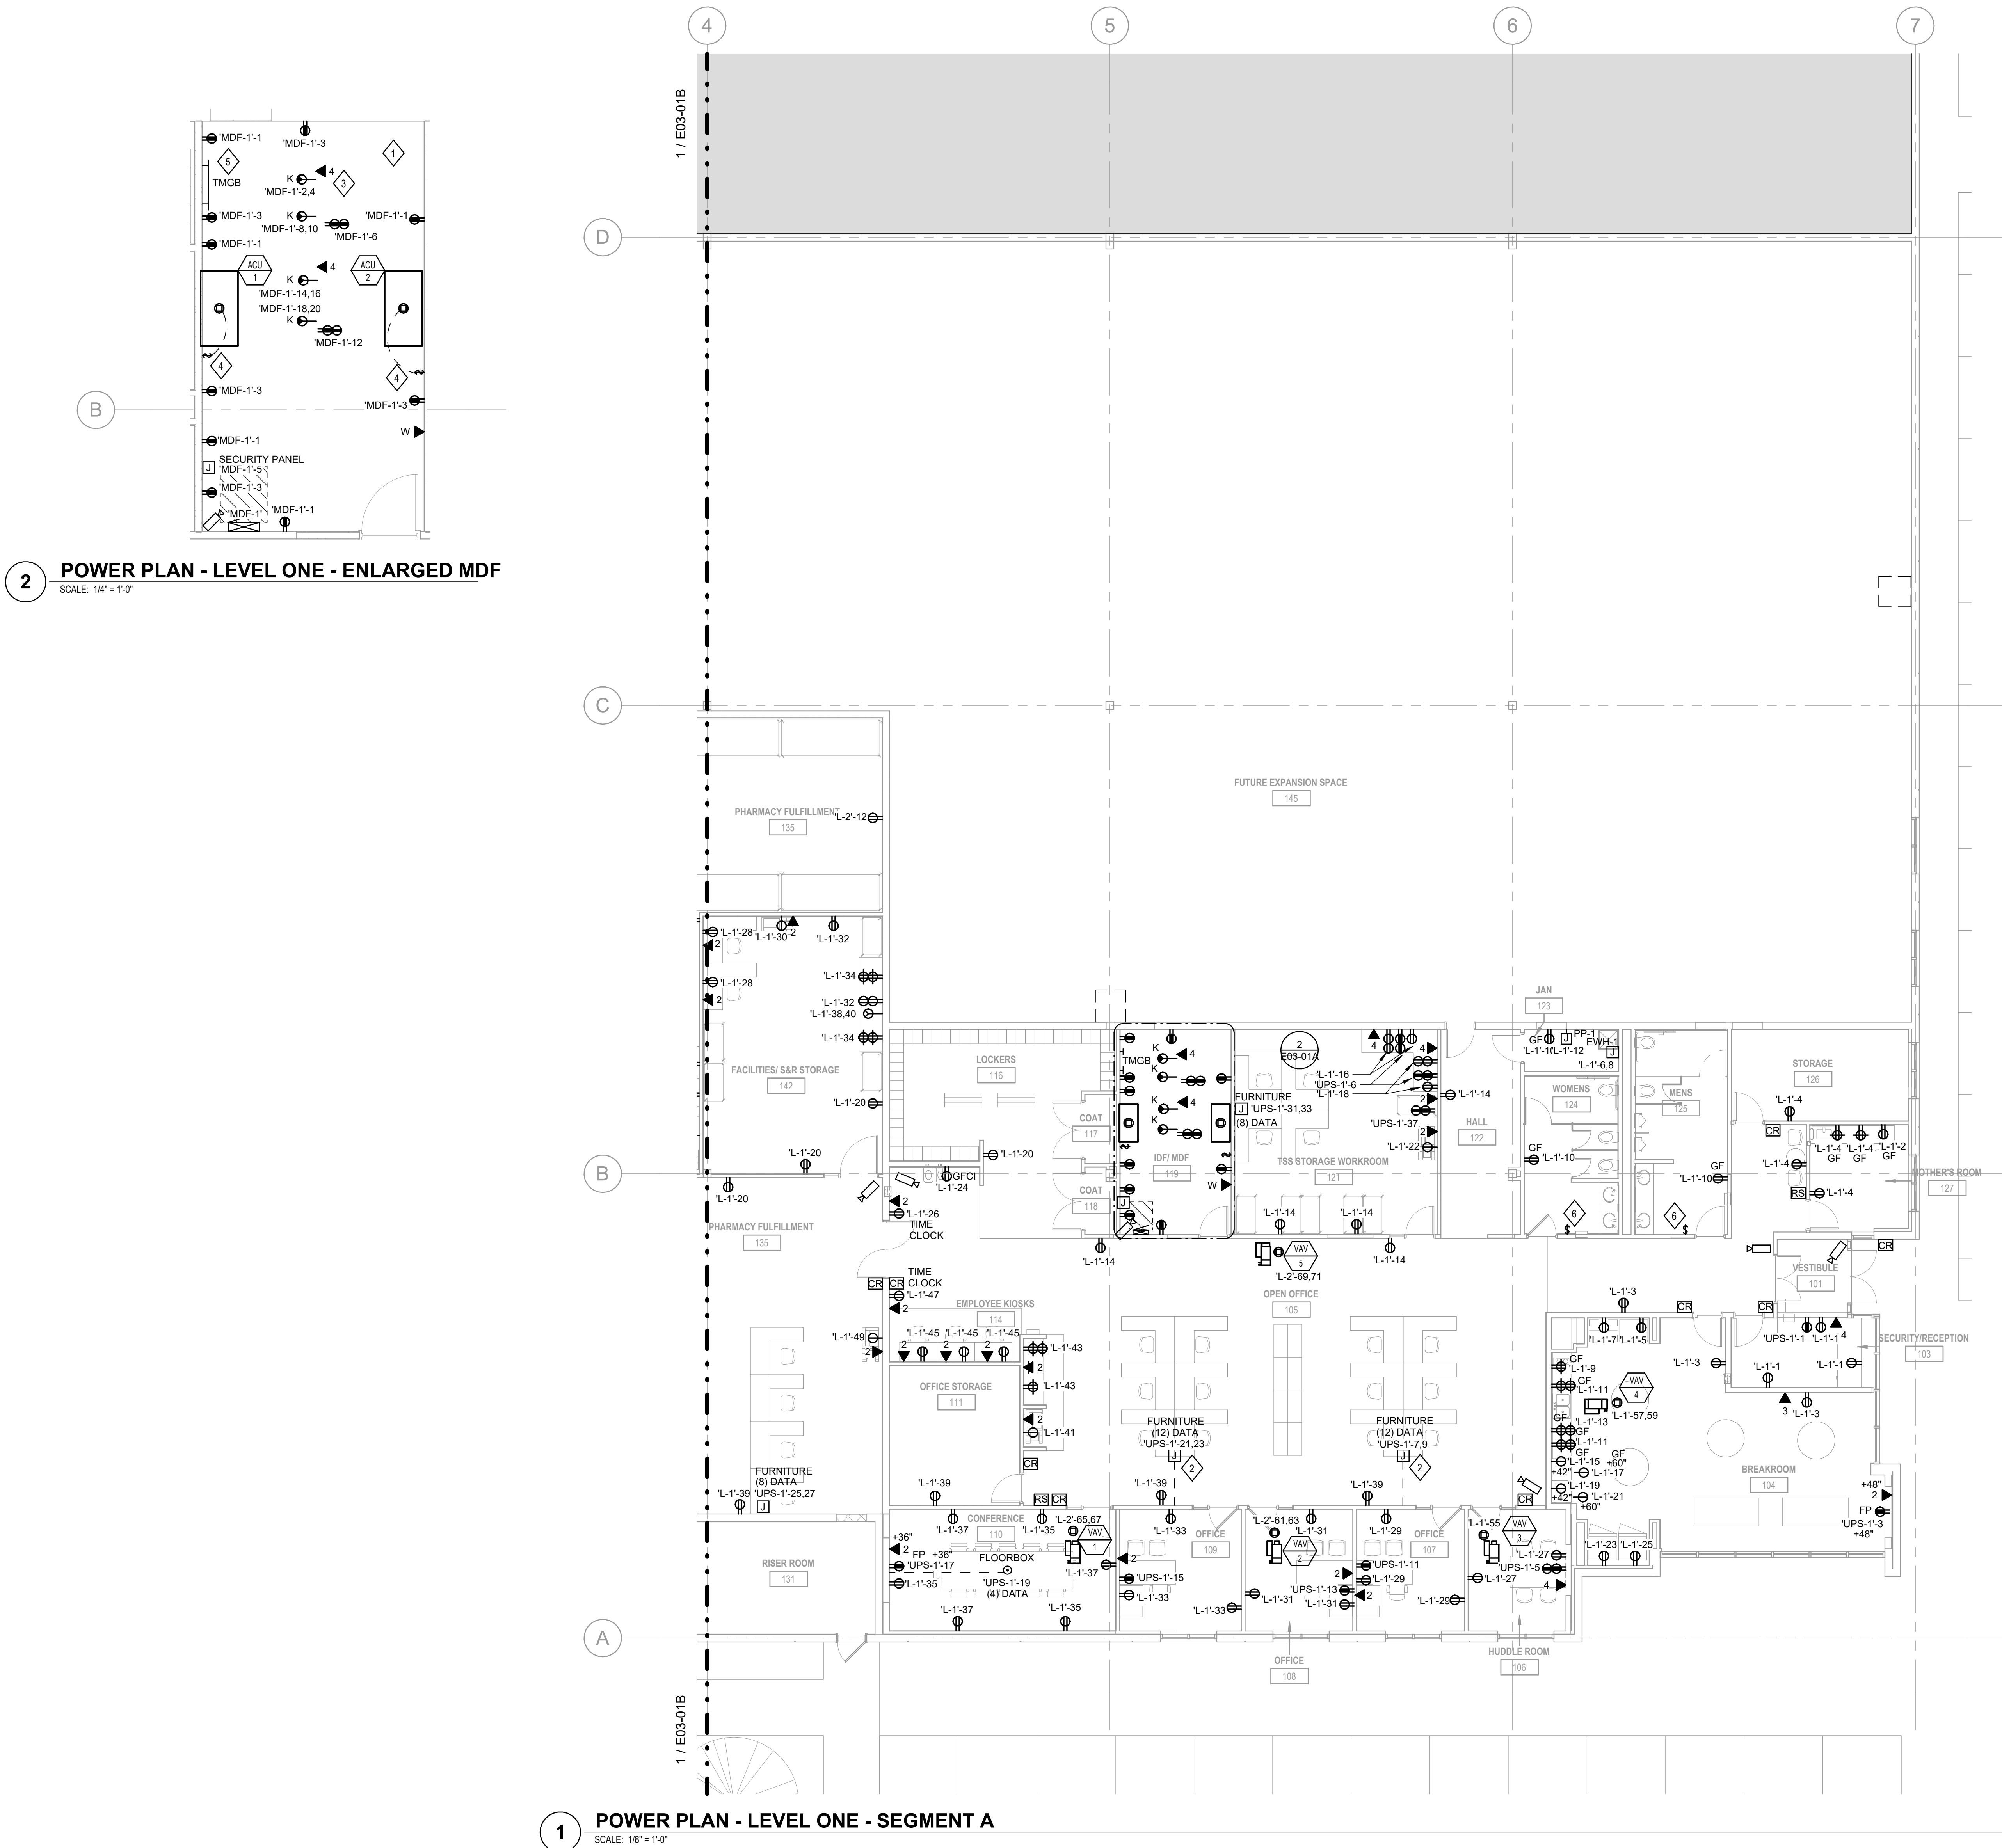

2 POWER PLAN - LEVEL ONE - ENLARGED MDF
SCALE: 1/4" = 1'-0"

1 POWER PLAN - LEVEL ONE - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- ELECTRICAL EQUIPMENT IS EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- NO PIPING, DUCTS, OR EQUIPMENT FOREIGN TO ELECTRICAL EQUIPMENT PERMITTED TO BE LOCATED WITHIN DEDICATED SPACE ABOVE ELECTRICAL EQUIPMENT.
- SIZE FUSES FOR MECHANICAL EQUIPMENT PROVIDED BY OTHERS PER EQUIPMENT MANUFACTURER'S RECOMMENDATIONS.
- REFER TO FLOOR PLANS FOR LOCATIONS OF DISTRIBUTION EQUIPMENT, TRANSFORMERS, AND PANELBOARDS.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

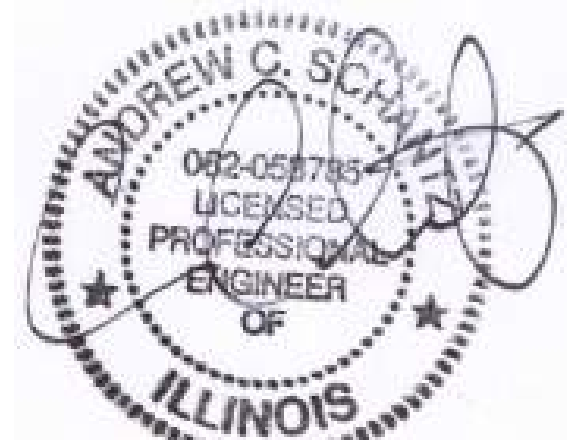

4/24/2026 EXP:11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


- PROVIDE 2" CONDUIT PATHWAY TO ROOF FOR CONNECTION TO CELLULAR NETWORK.
- UTILIZE UNDER-CARPET RACEWAY OF 'LEGRAND' MAKE OR APPROVED EQUIVALENT TO ROUTE PHYSICALLY SEPARATED 120V CONDUCTORS AND LOW VOLTAGE CABLING FOR CONNECTION TO WORKSTATION FURNITURE.
- POWER OUTLETS ARE TO BE MOUNTED ON UNISTRUT ABOVE RACK LOCATION. COORDINATE EXACT LOCATION OF POWER OUTLETS AND ORIENTATION WITH ACCORDO IT PRIOR TO ROUGH-IN.
- PROVIDE THERMAL TOGGLE DISCONNECT AT INDOOR SPLIT UNIT. REFER TO EQUIPMENT WIRING SCHEDULE FOR ADDITIONAL INFORMATION.
- PROVIDE #4/0 GROUND CONDUCTOR FROM NEW TELECOMMUNICATIONS MAIN GROUNDING BUSBAR TO EXISTING GROUND BAR AT SERVICE ENTRANCE.
- PROVIDE MOTOR RATED SWITCH FOR CONNECTION TO EXHAUST FANS LOCATED IN RESTROOM.

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

KEYPLAN

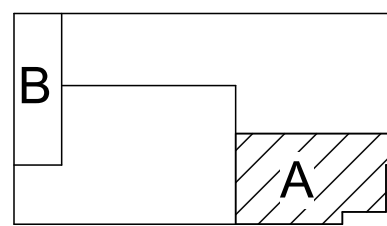


**POWER PLAN -
LEVEL ONE -
SEGMENT A**

E03-01A

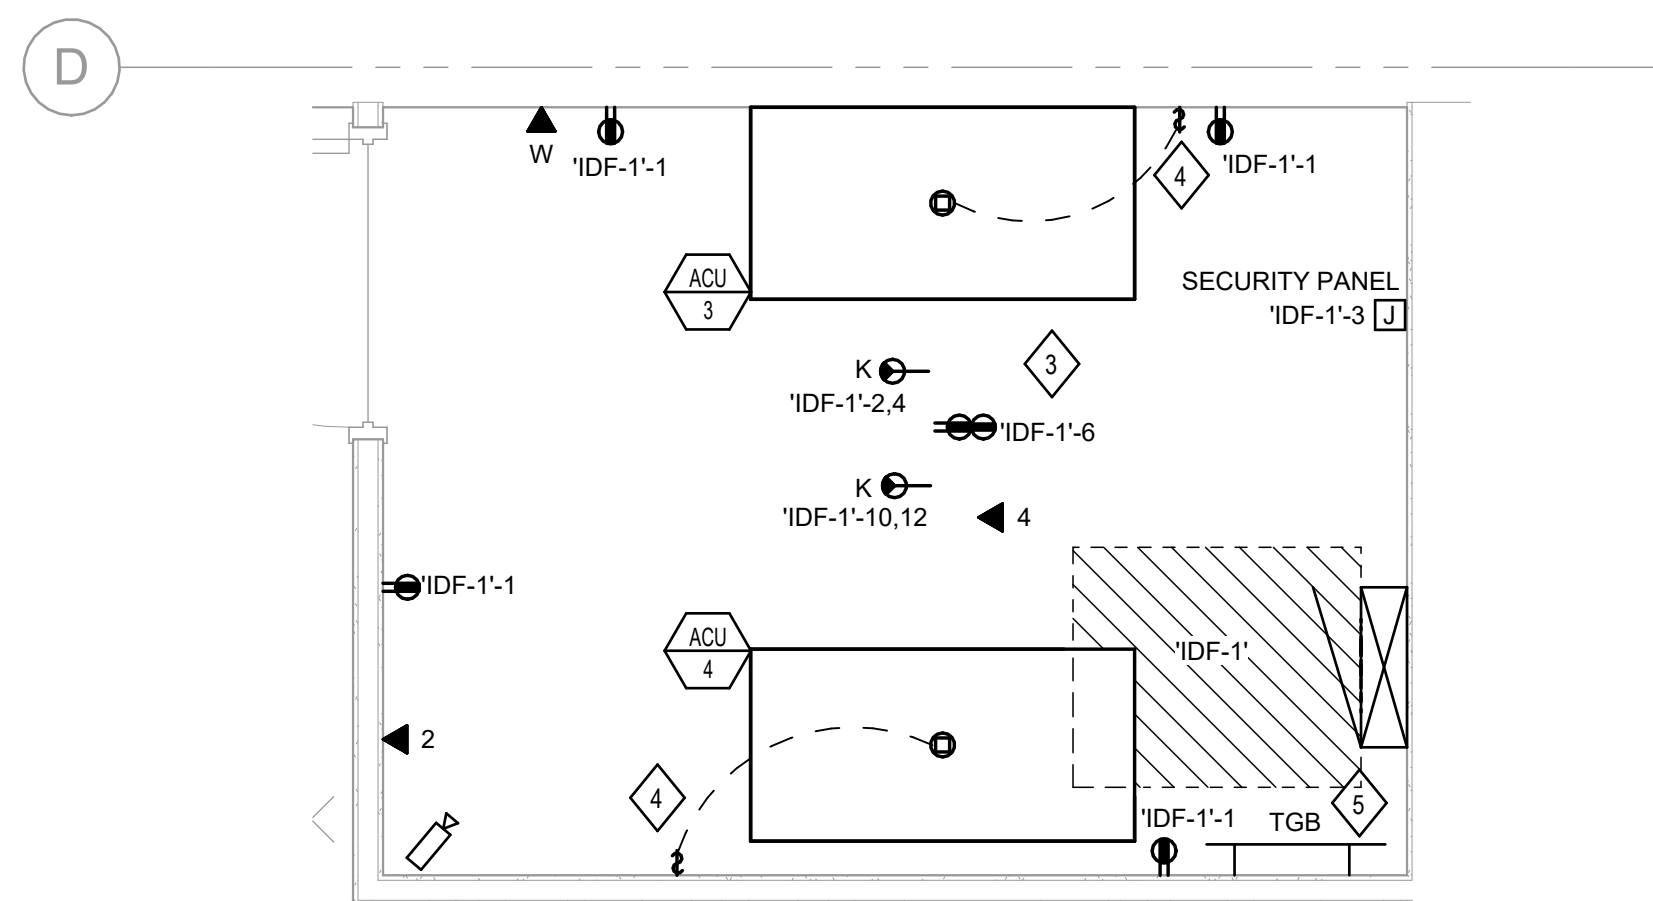

2 POWER PLAN - LEVEL ONE - SEGMENT B - SHIPPING & RECEIVING IDF
SCALE: 1/2" = 1'-0"

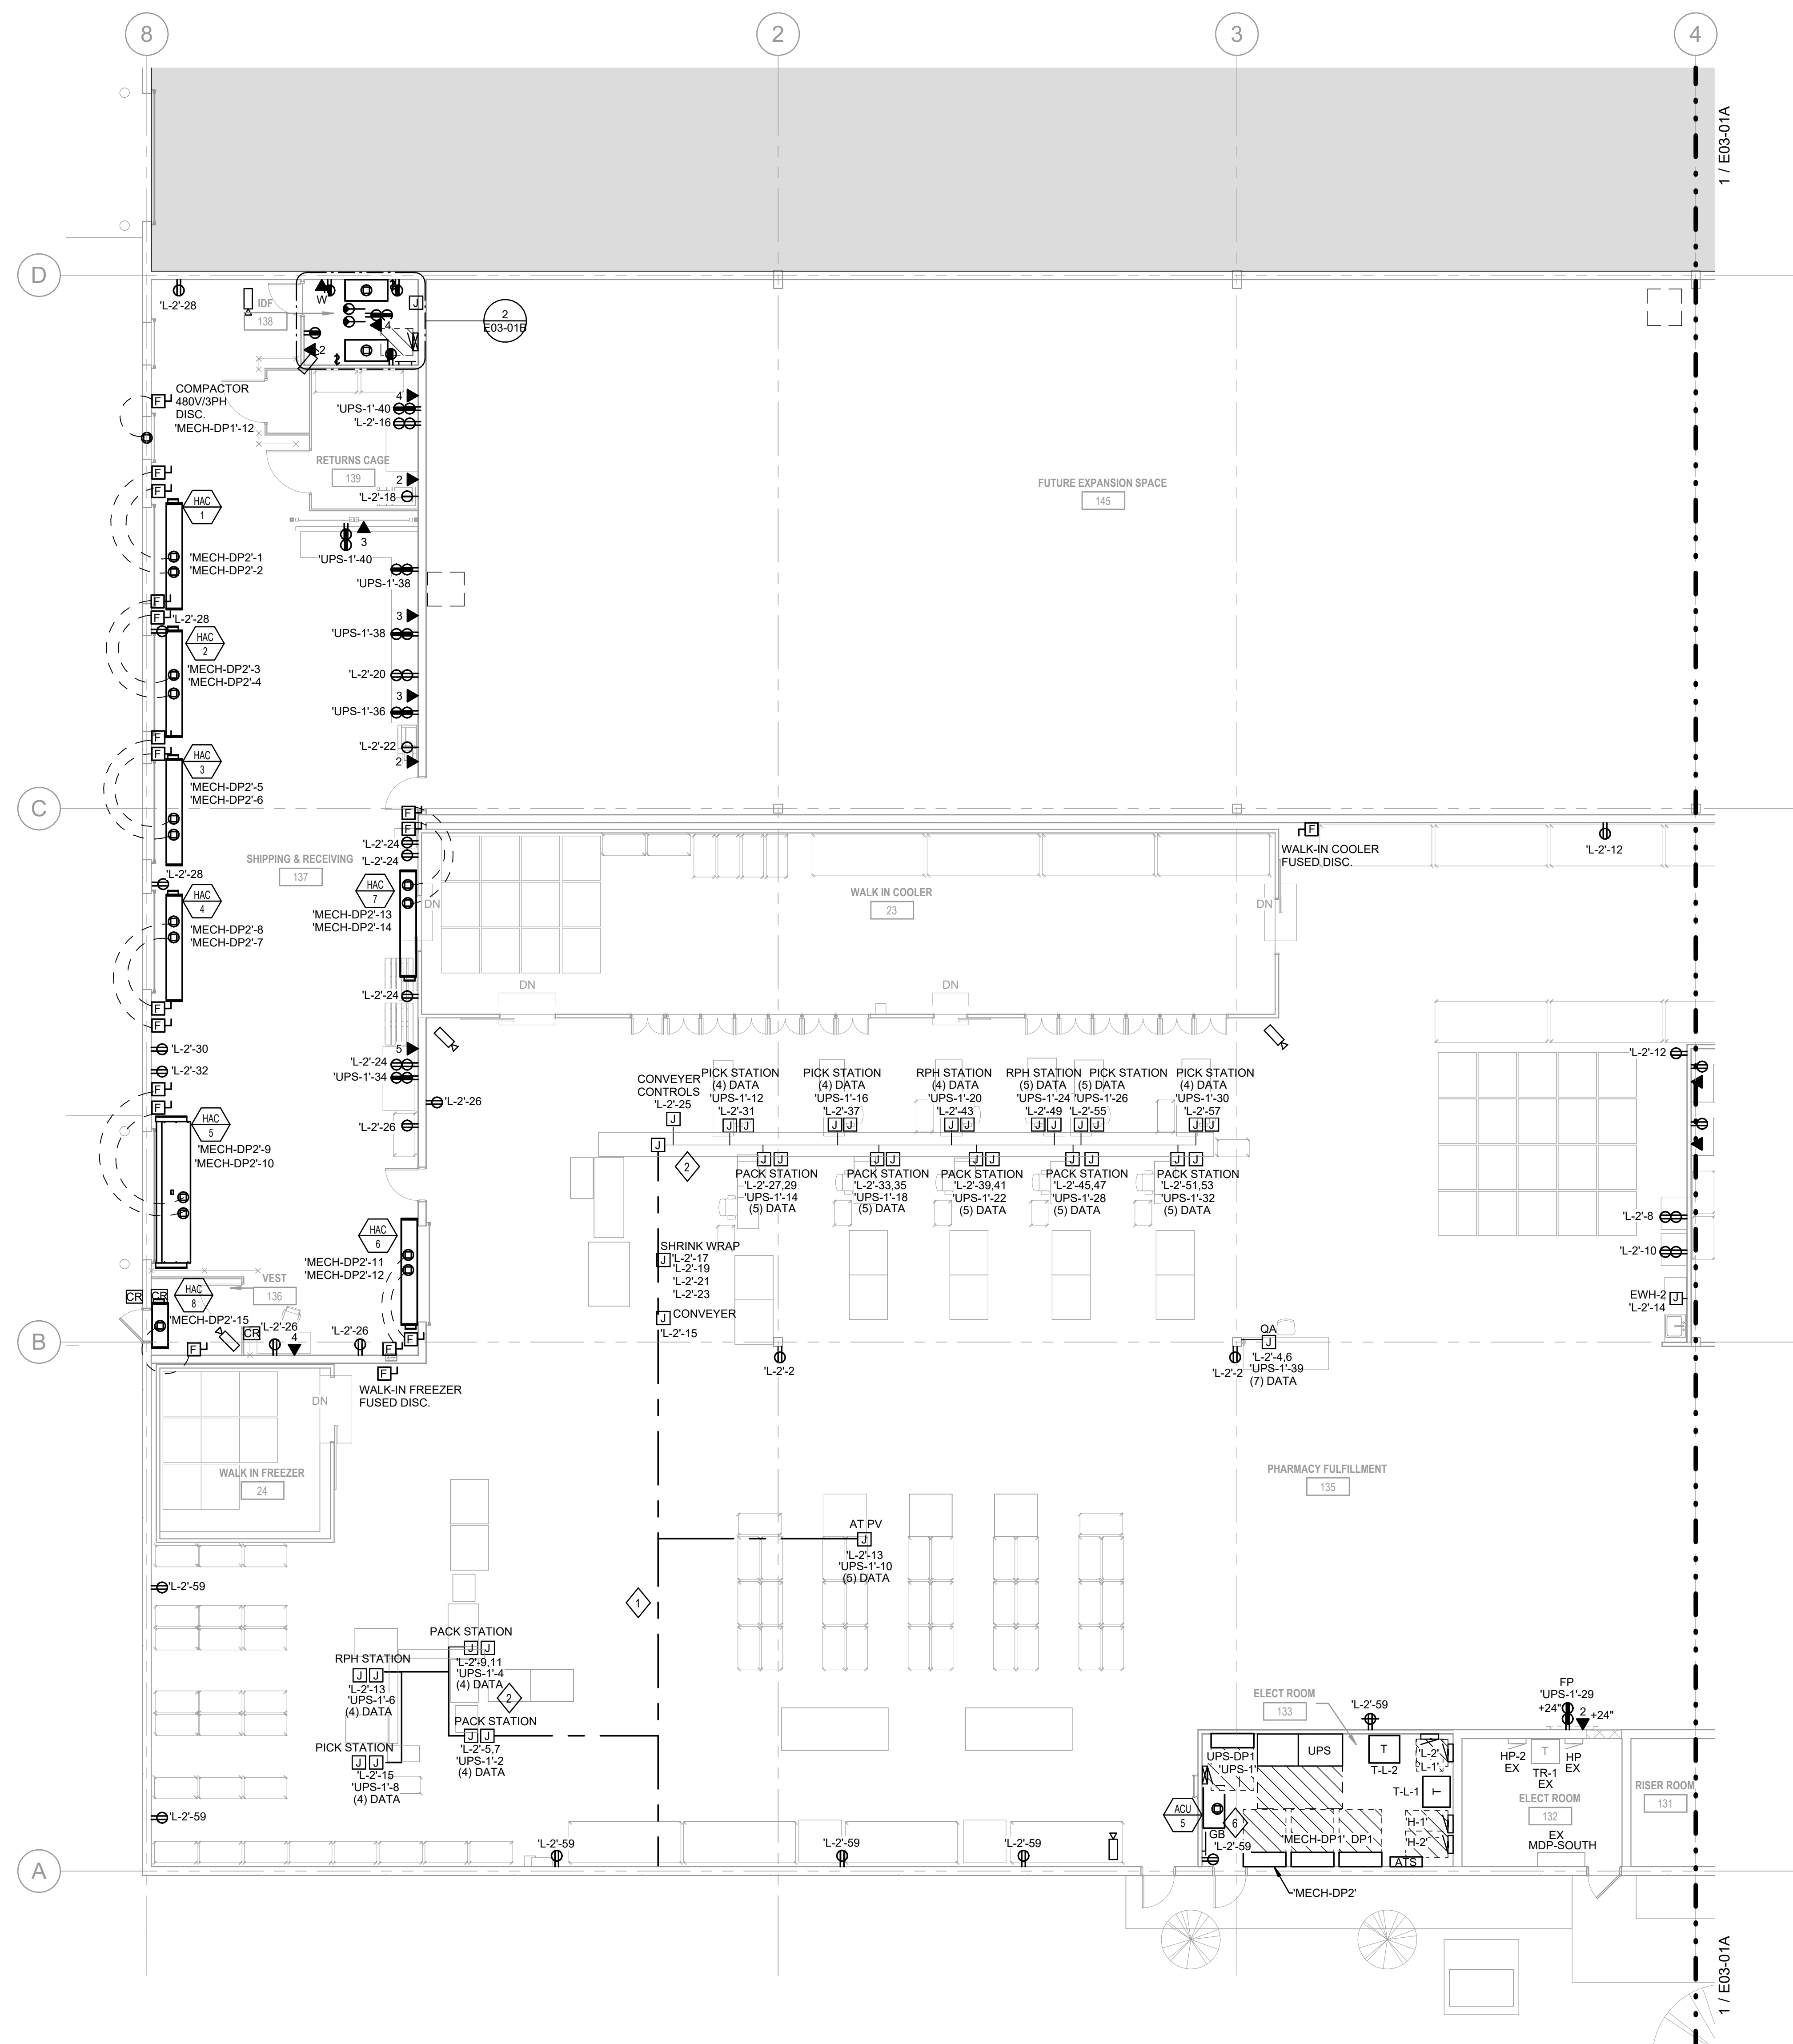

1 POWER PLAN - LEVEL ONE - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- A. ELECTRICAL EQUIPMENT IS EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- B. NO PIPING, DUCTS, OR EQUIPMENT FOREIGN TO ELECTRICAL EQUIPMENT PERMITTED TO BE LOCATED WITHIN DEDICATED SPACE ABOVE ELECTRICAL EQUIPMENT.
- C. SIZE FUSES FOR MECHANICAL EQUIPMENT PROVIDED BY OTHERS PER EQUIPMENT MANUFACTURER'S RECOMMENDATIONS.
- D. REFER TO FLOOR PLANS FOR LOCATIONS OF DISTRIBUTION EQUIPMENT, TRANSFORMERS, AND PANELBOARDS.

EVERNORTH
HEALTH SERVICES

CORGAN ■

CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270



**Affiliated
Engineers**

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

△	ISSUANCES
---	-----------

04/24/2026	ISSUE FOR PERMIT
------------	------------------



4/24/2026 EXP:11/30/2027

Date of issue

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS NOTED OTHERWISE. ALL RIGHTS ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

1. INSTALL RECESSED DUCTWORK OF LEGRAND WALKERDURC MAKE OR APPROVED EQUIVALENT AS INDICATED ON PLANS TO PROVIDE CONNECTION TO EQUIPMENT WITHIN PHARMACY FILLMENT SPACE. UTILIZE A BARRIER TO ENSURE PHYSICAL SEPARATION BETWEEN 120V CONDUCTOR AND LOW VOLTAGE CABLEING.
2. END RECESSED DUCT PATH AT CONVEYOR BELT. SOLID LINE INDICATES WIRE BASKET RUN BELOW CONVEYOR BELT TO PROVIDE POWER AND DATA CONNECTION TO WORKSTATIONS. ENSURE PHYSICAL SEPARATION BETWEEN 120V CONDUCTOR AND LOW VOLTAGE CABLEING.
3. POWER OUTLETS ARE TO BE MOUNTED ON WALLS ABOVE RECEPTION COUNTER. COORDINATE EXACT LOCATION OF POWER OUTLETS AND ORIENTATION WITH ACCRECO IT PRIOR TO ROUGH-IN.
4. PROVIDE THERMAL TOGGLE DISCONNECT AT INDOOR SPLIT UNIT. REFER TO EQUIPMENT WIRING SCHEDULE FOR ADDITIONAL INFORMATION.
5. PROVIDE #4/0 GROUND CONDUCTOR FROM NEW TELECOMMUNICATIONS GROUNDING BUSBAR TO NEW TELECOMMUNICATIONS MAIN GROUNDING BUSBAR IN MDF ROOM.
6. PROVIDE #4/0 GROUND CONDUCTOR FROM NEW GROUNDING BUSBAR TO EXISTING MAIN GROUNDING BAR AT SERVICE ENTRANCE.


EVERNORTH -
ELGIN PHARMACY

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

IOB	26136.0000
-----	------------

DATE 04/24/2026

KEYPLAN

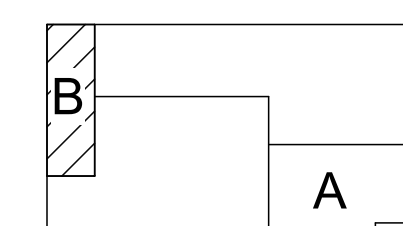


POWER PLAN -
LEVEL ONE -
SEGMENT B

E03-01B



4/24/2026 2:32:24 PM E03-02 POWER PLAN - ROOF

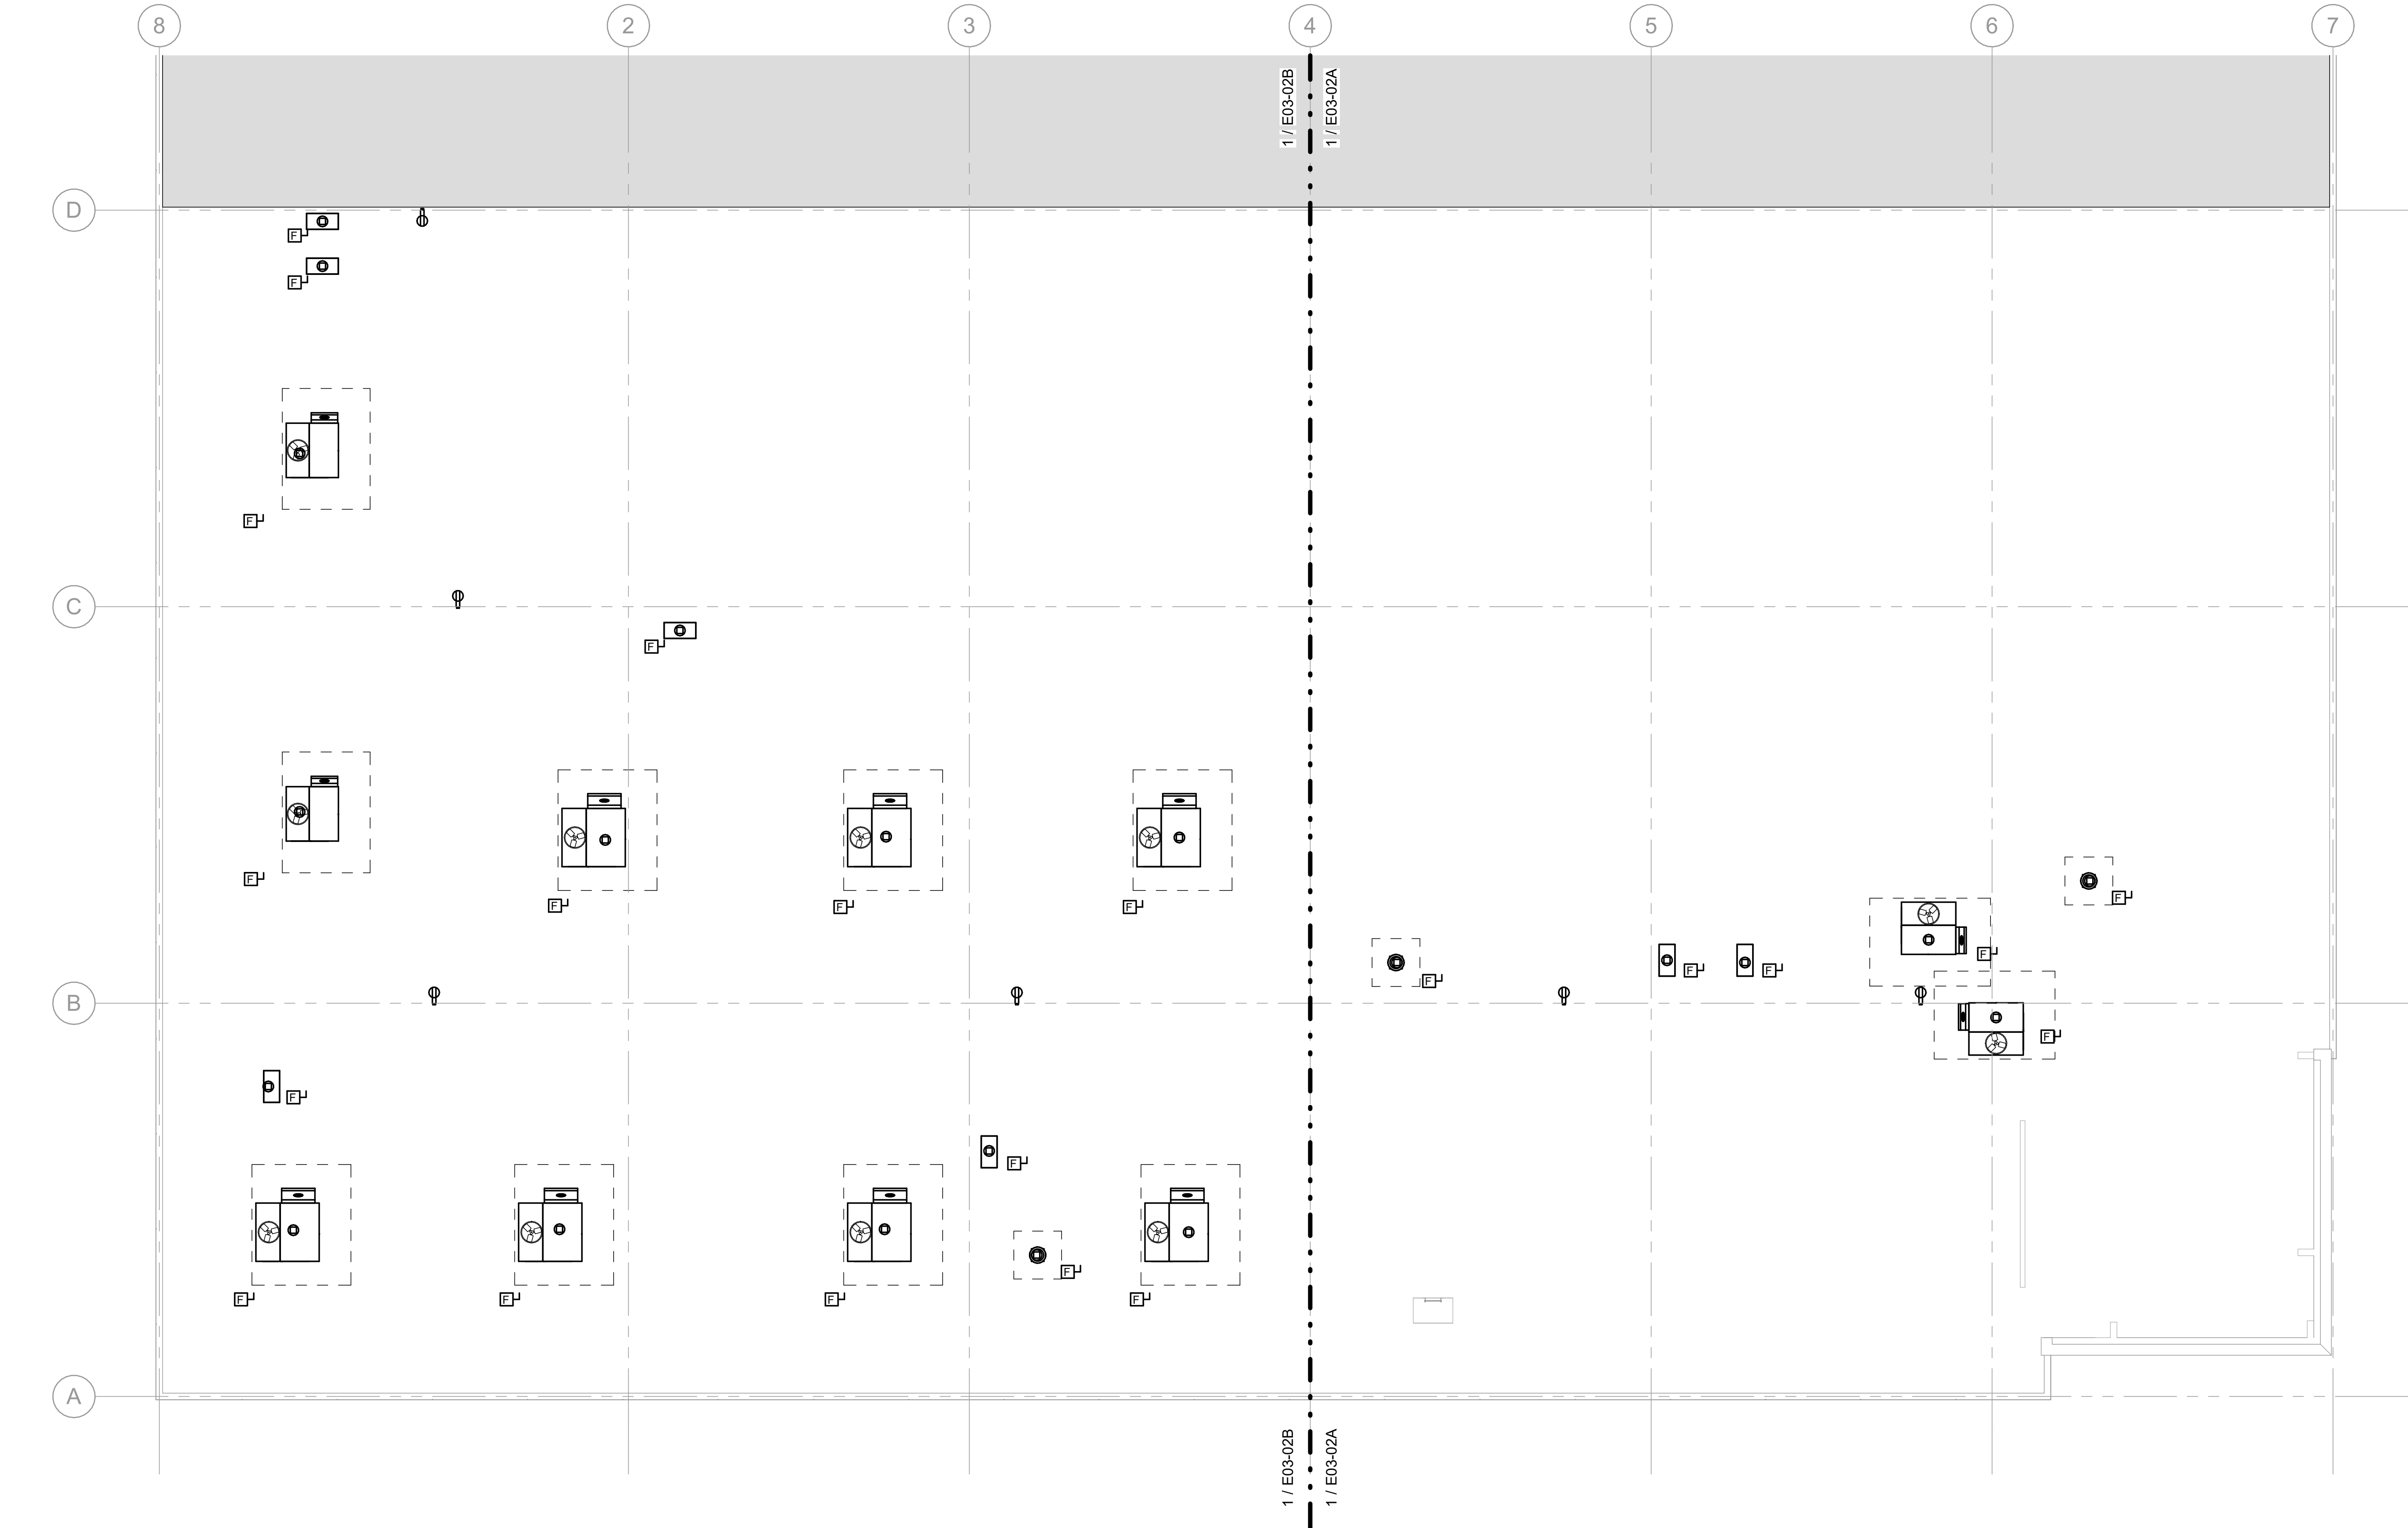

1 POWER PLAN - ROOF
SCALE: 3/32" = 1'-0"

GENERAL NOTES

1. PROVIDE WEATHERPROOF MAINTENANCE RECEPTACLE WITHIN 25' OF HEATING, AIR-CONDITIONING AND REFRIGERATION EQUIPMENT.
2. VERIFY EXACT LOCATION OF ALL MECHANICAL AND PLUMBING EQUIPMENT PROVIDED BY OTHER TRADES PRIOR TO ROUGH IN.
3. COORDINATE INSTALLATION AND WIRING REQUIREMENTS, INCLUDING EXACT LOCATION OF POINT OF CONNECTION, WITH THE EQUIPMENT SUPPLIER SHOP DRAWINGS PRIOR TO ROUGH IN.
4. PROVIDE 3/4" C. FROM EACH EQUIPMENT CONTROL PANEL TO INTERIOR CABLE TRAY OR ACCESSIBLE INTERIOR LOCATION FOR BAS INTEGRATION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

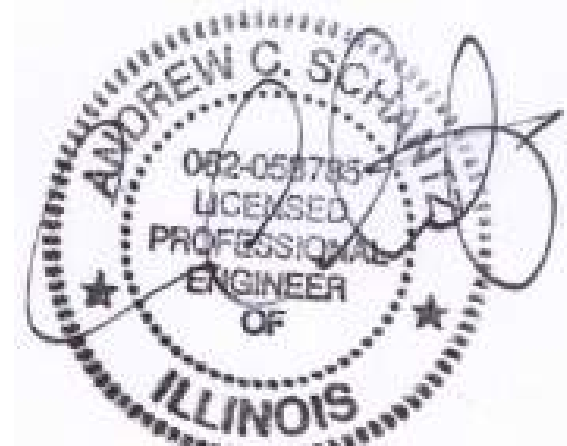

4/24/2026 EXP:11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.


KEYNOTES

**EVERNORTH -
ELGIN PHARMACY**


300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026

KEYPLAN

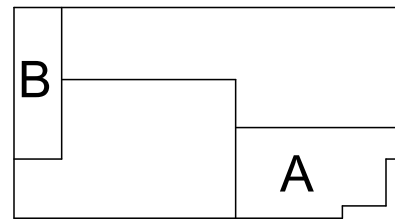


**POWER PLAN -
ROOF**

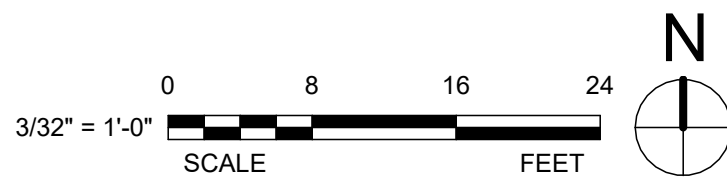

E03-02

4/24/2026 2:32:24 PM E03-02A POWER PLAN - ROOF - SEGMENT A

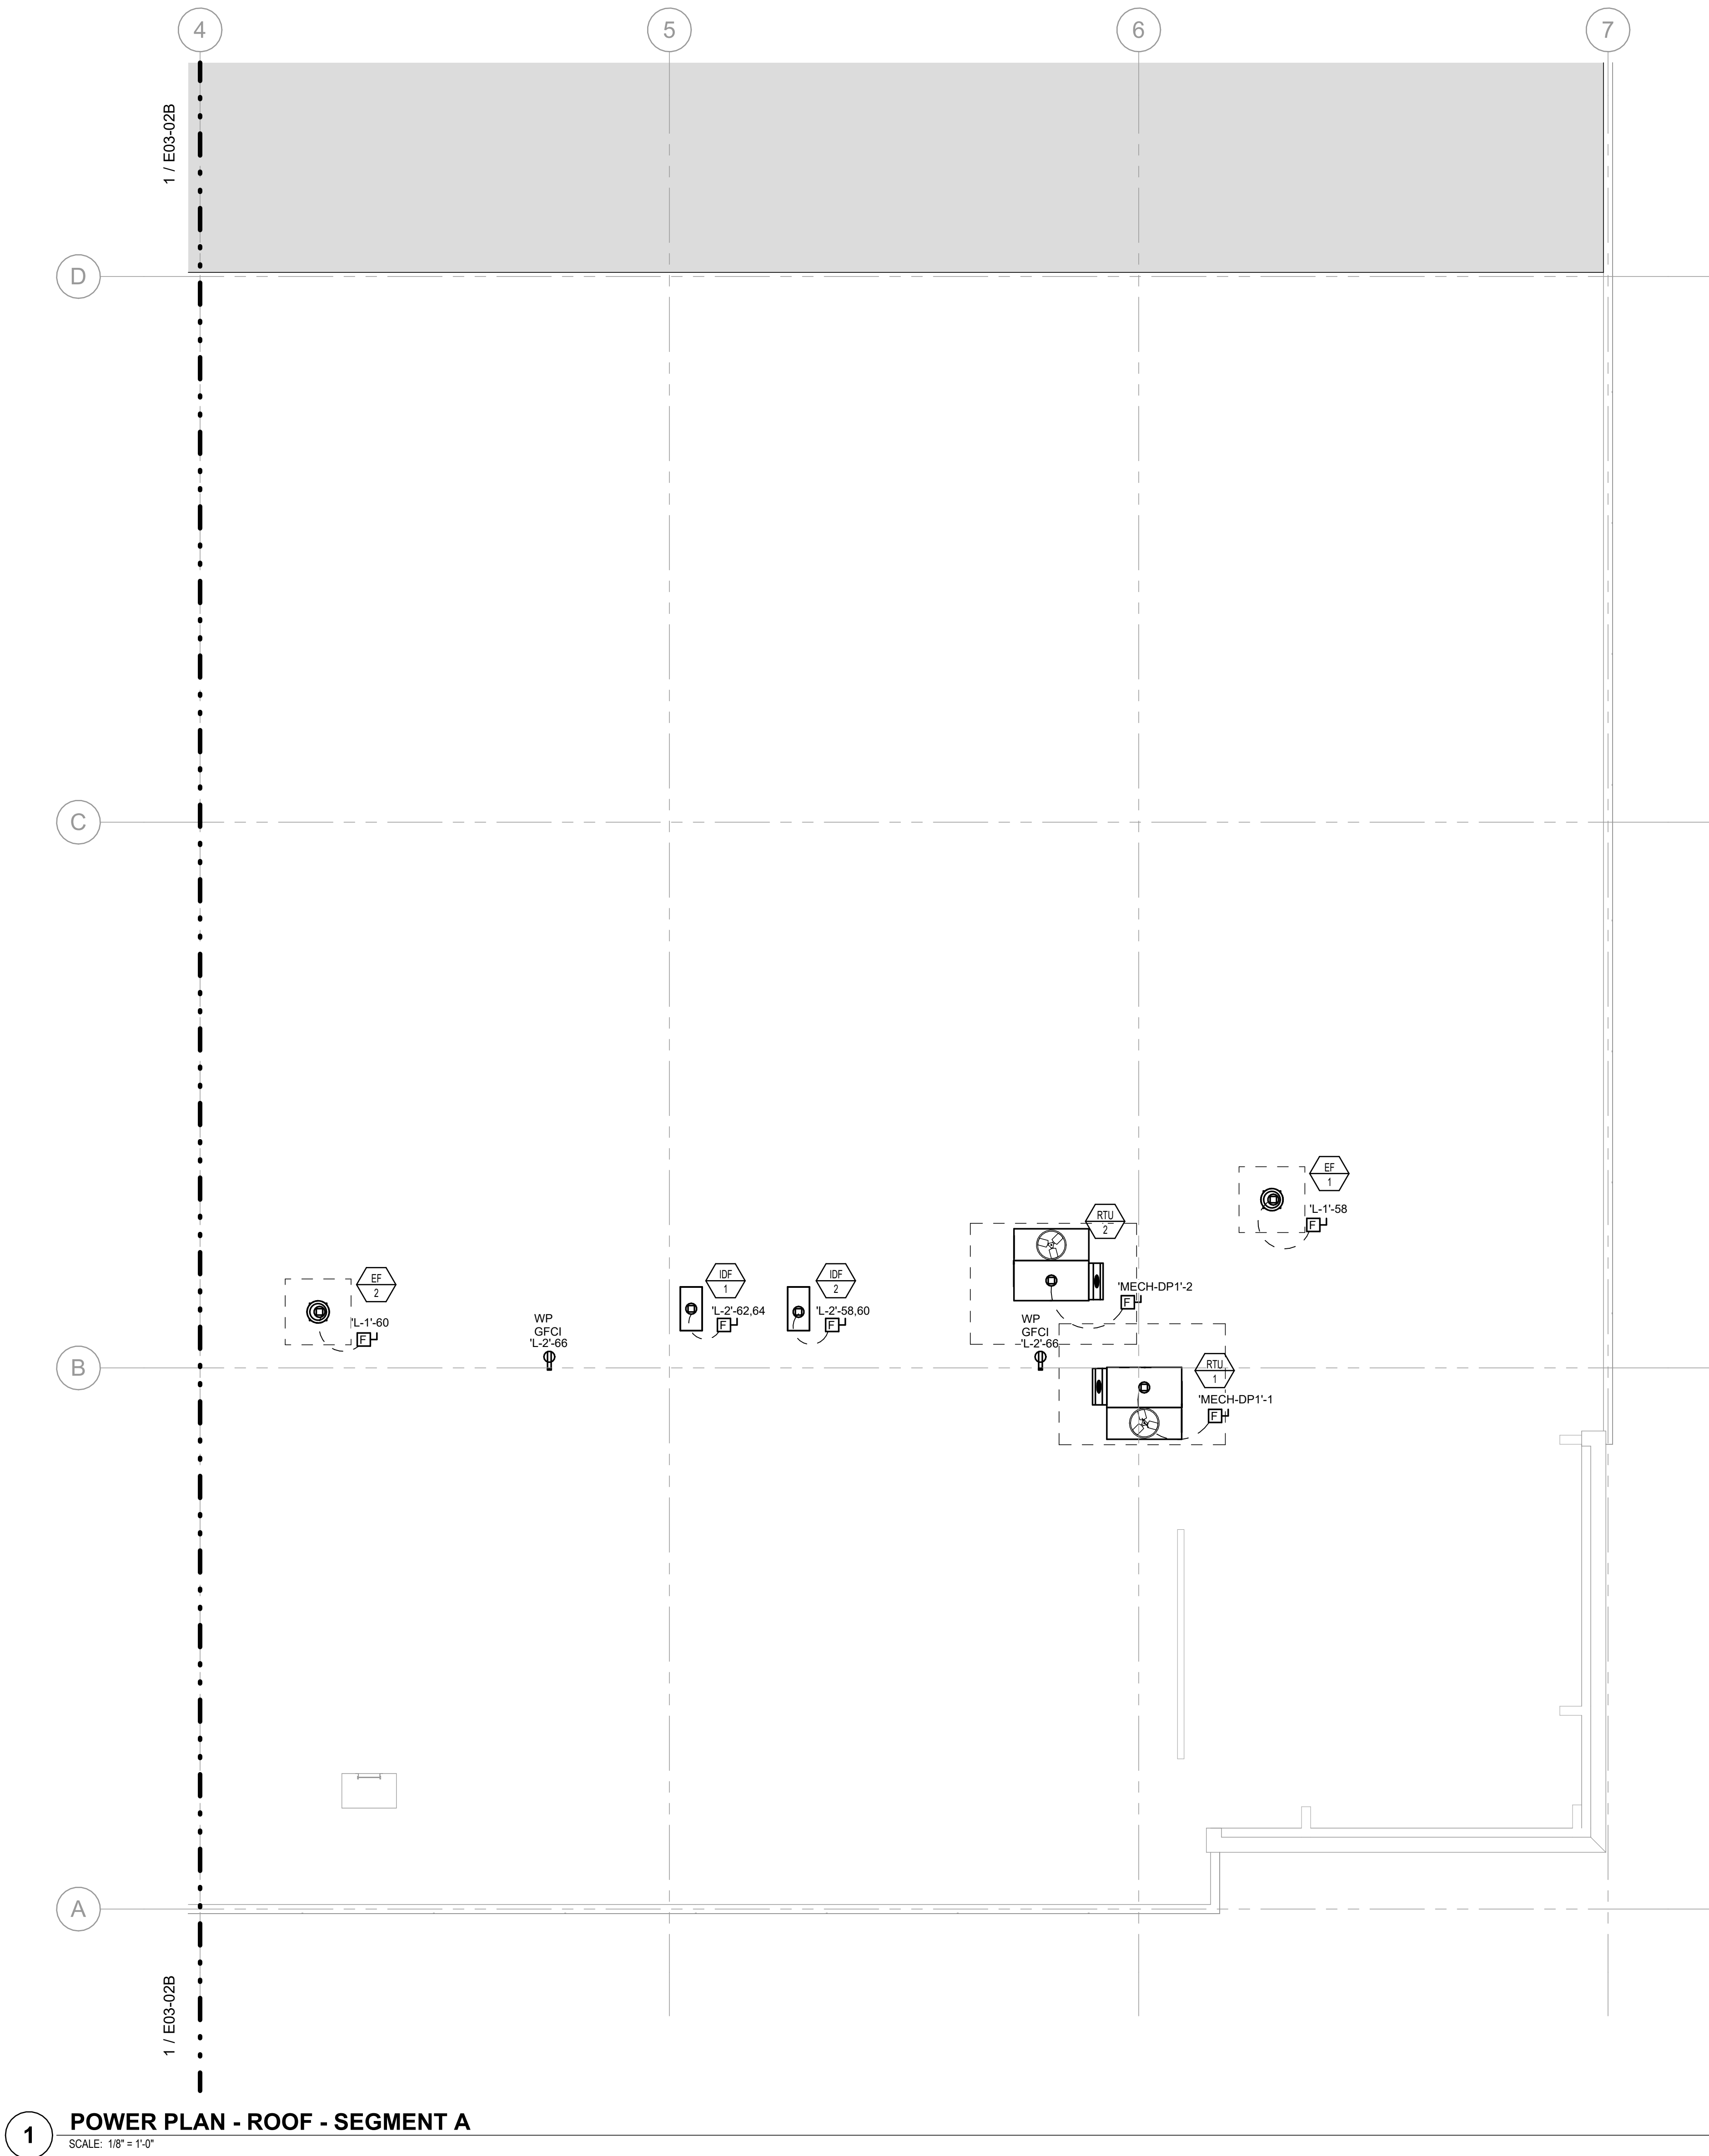

1 POWER PLAN - ROOF - SEGMENT A
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. PROVIDE WEATHERPROOF MAINTENANCE RECEPTACLE WITHIN 25' OF HEATING, AIR-CONDITIONING AND REFRIGERATION EQUIPMENT.
2. VERIFY EXACT LOCATION OF ALL MECHANICAL AND PLUMBING EQUIPMENT PROVIDED BY OTHER TRADES PRIOR TO ROUGH IN.
3. COORDINATE INSTALLATION AND WIRING REQUIREMENTS, INCLUDING EXACT LOCATION OF POINT OF CONNECTION, WITH THE EQUIPMENT SUPPLIER SHOP DRAWINGS PRIOR TO ROUGH IN.
4. PROVIDE 3/4" C. FROM EACH EQUIPMENT CONTROL PANEL TO INTERIOR CABLE TRAY OR ACCESSIBLE INTERIOR LOCATION FOR BAS INTEGRATION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

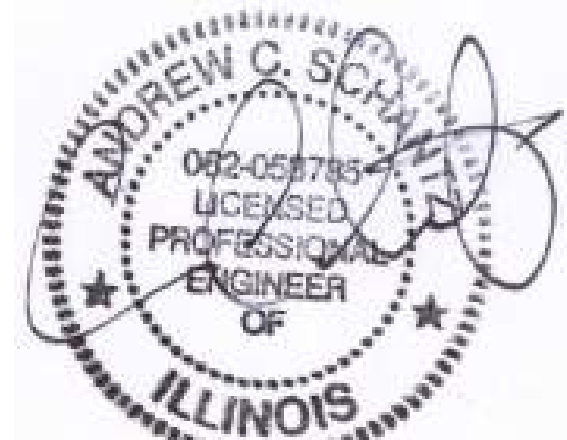

4/24/2026 EXP:11/30/2027

Date of issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.


KEYNOTES

**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000
DATE 04/24/2026


KEYPLAN

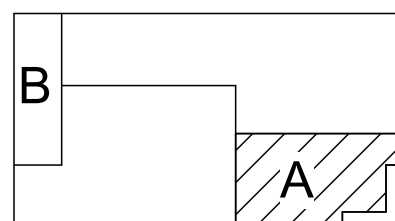

**POWER PLAN -
ROOF - SEGMENT
A**

E03-02A

4/24/2026 2:32:25 PM E03-02B POWER PLAN - ROOF - SEGMENT B

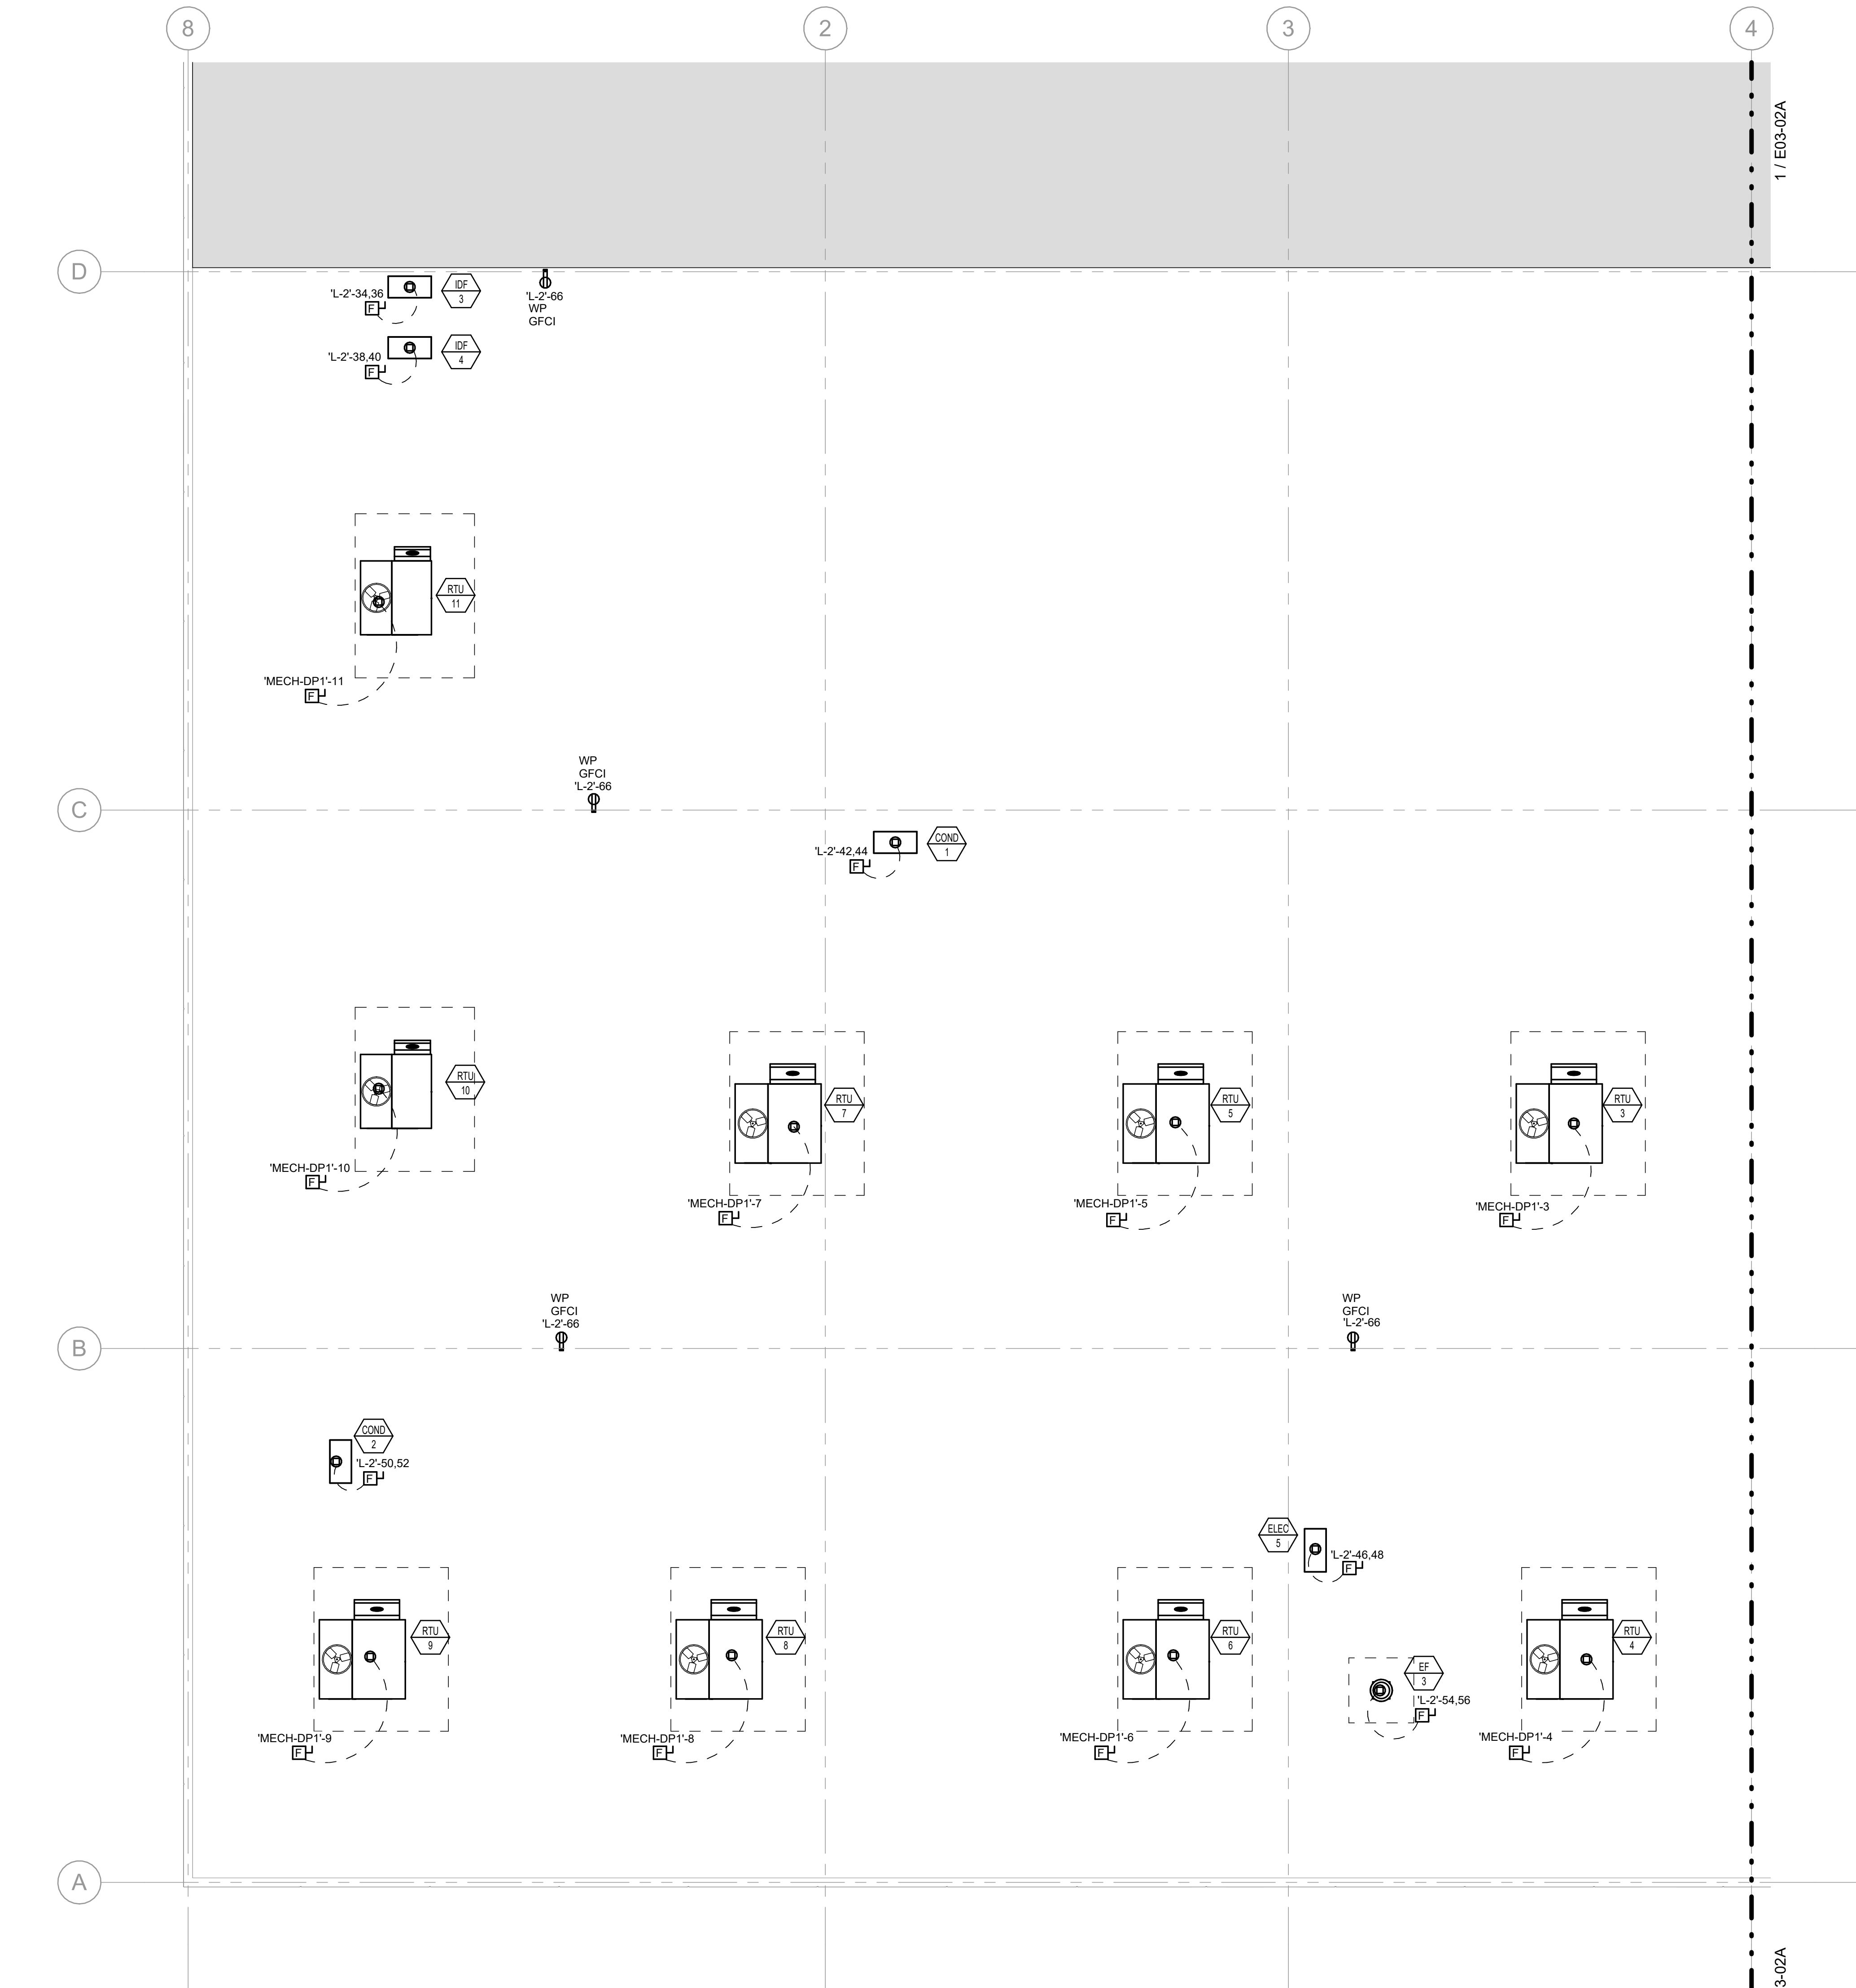

1 POWER PLAN - ROOF - SEGMENT B
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. PROVIDE WEATHERPROOF MAINTENANCE RECEPTACLE WITHIN 25' OF HEATING, AIR-CONDITIONING AND REFRIGERATION EQUIPMENT.
2. VERIFY EXACT LOCATION OF ALL MECHANICAL AND PLUMBING EQUIPMENT PROVIDED BY OTHER TRADES PRIOR TO ROUGH IN.
3. COORDINATE INSTALLATION AND WIRING REQUIREMENTS, INCLUDING EXACT LOCATION OF POINT OF CONNECTION, WITH THE EQUIPMENT SUPPLIER SHOP DRAWINGS PRIOR TO ROUGH IN.
4. PROVIDE 3/4" C. FROM EACH EQUIPMENT CONTROL PANEL TO INTERIOR CABLE TRAY OR ACCESSIBLE INTERIOR LOCATION FOR BAS INTEGRATION.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated
Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

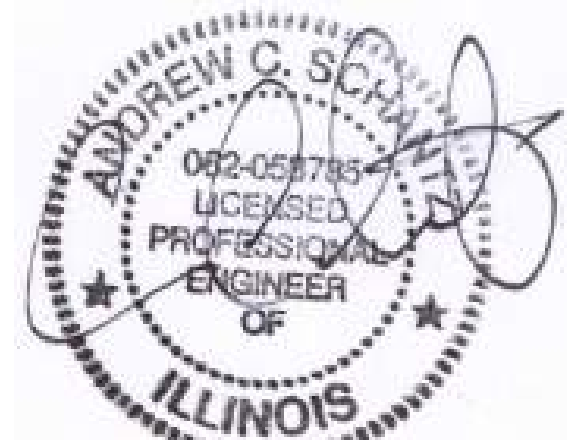

4/24/2026 EXP:11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED. © 2025 CORGAN ASSOCIATES, INC.

KEYNOTES


**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123

JOB 26136.0000

DATE 04/24/2026

KEYPLAN


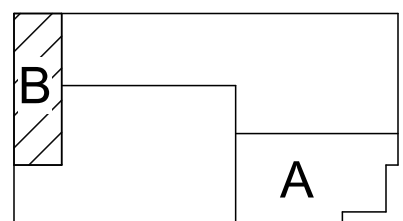


**POWER PLAN -
ROOF - SEGMENT B**

E03-02B

0 4 8 16
1/8" = 1'-0"
SCALE FEET



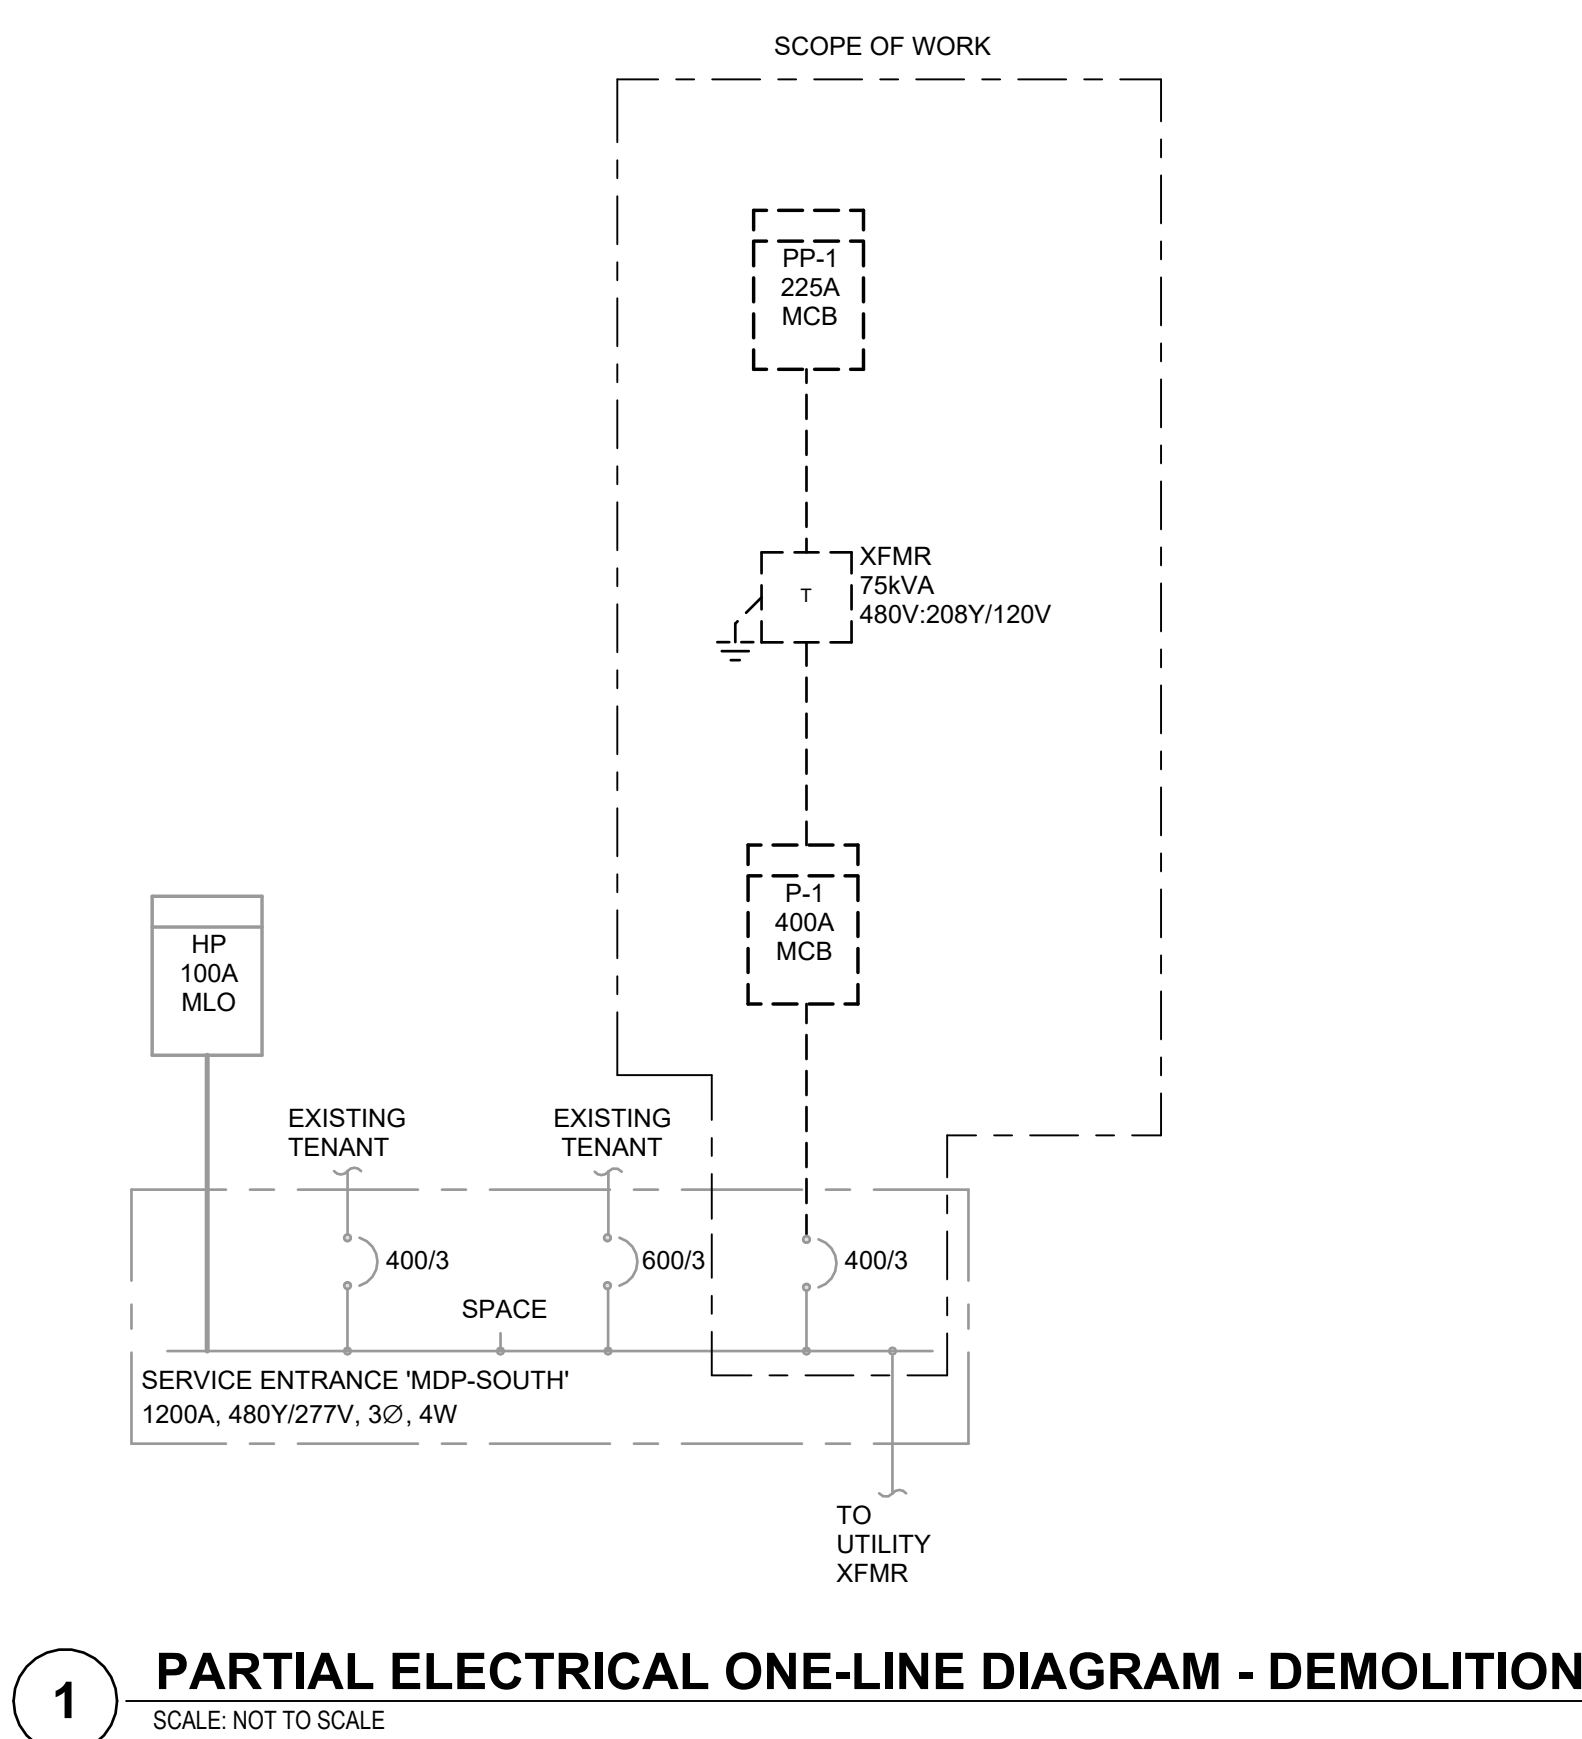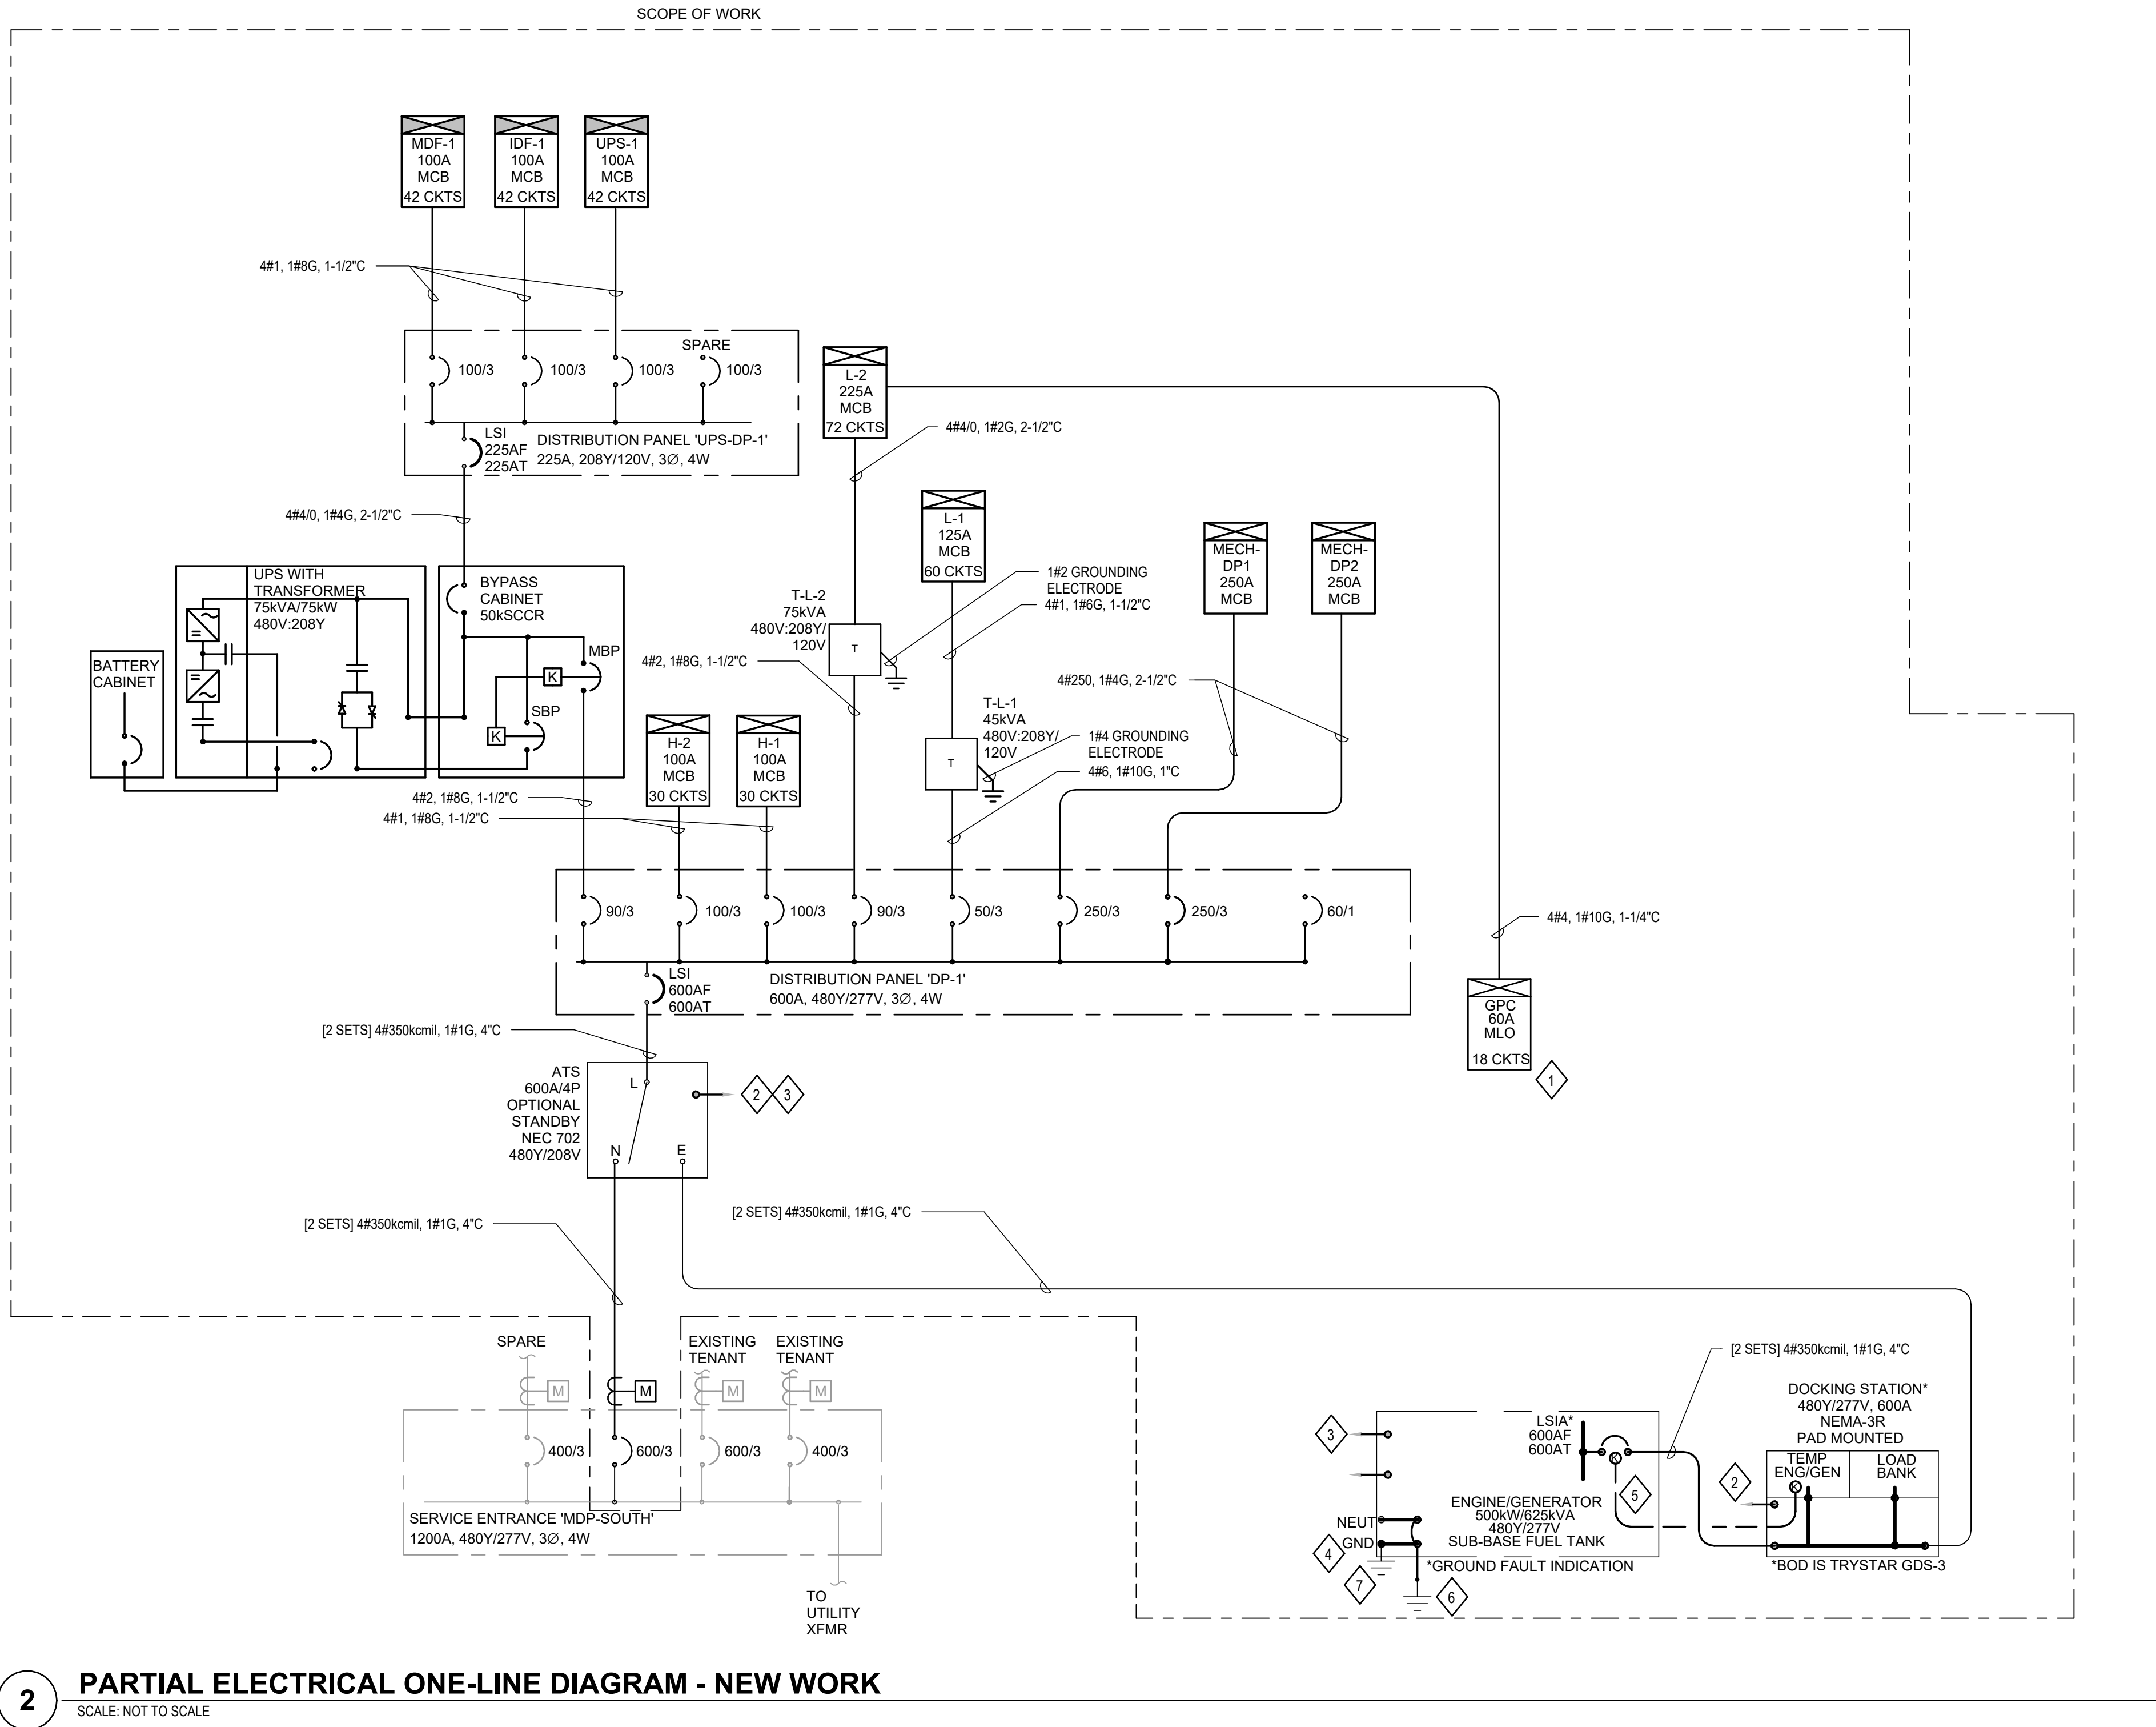

GENERAL NOTES

- ELECTRICAL EQUIPMENT IS EXISTING TO REMAIN UNLESS NOTED OTHERWISE.
- NO PIPING, DUCTS, OR EQUIPMENT FOREIGN TO ELECTRICAL EQUIPMENT PERMITTED TO BE LOCATED WITHIN DEDICATED SPACE ABOVE ELECTRICAL EQUIPMENT.
- SIZE FUSES FOR MECHANICAL EQUIPMENT PROVIDED BY OTHERS PER EQUIPMENT MANUFACTURER'S RECOMMENDATIONS.
- REFER TO FLOOR PLANS FOR LOCATIONS OF DISTRIBUTION EQUIPMENT, TRANSFORMERS, AND PANELBOARDS.

EVERNORTH
HEALTH SERVICES

CORGAN


CORGAN
401 North Houston Street, Dallas TX
75202
T: 972-852-1270

AEI Affiliated Engineers

Affiliated Engineers, Inc.
4742 N. 24th Street, Suite 100
Phoenix, AZ 85016
T: 602-429-5800
AEI Project No.: 27994-00

ISSUANCES

04/24/2026 ISSUE FOR PERMIT

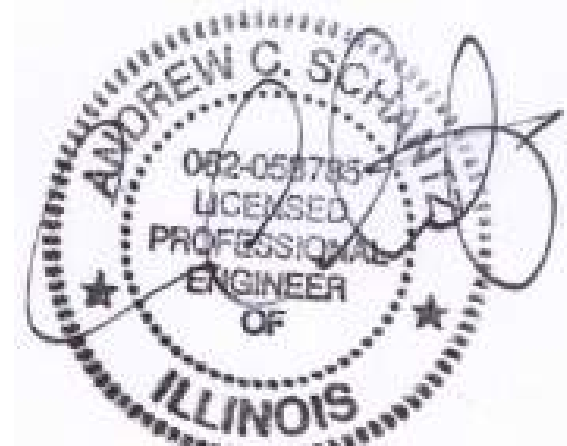

4/24/2026 EXP:11/30/2027

Date of Issue:

Issue Date

THESE DRAWINGS AND THE INFORMATION CONTAINED HEREIN ARE EXCLUSIVELY THE INTELLECTUAL PROPERTY OF CORGAN, EXCEPT AS OTHERWISE AGREED TO IN WRITING, AND ARE PROVIDED SOLELY FOR THE PURPOSE OF THE SPECIFIED PROJECT. REPRODUCTION, DISTRIBUTION, OR USE OF THESE DOCUMENTS FOR ANY OTHER PROJECT OR PURPOSE WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED. UNAUTHORIZED USE MAY RESULT IN LEGAL ACTION. ALL RIGHTS RESERVED.
© 2025 CORGAN ASSOCIATES, INC.

KEYNOTES

- PROVIDE 208V/1Ø LOAD CENTER IN GENERATOR ENCLOSURE.
- PROVIDE 4#14 IN (1) 1" CONDUIT FROM ATS TO DOCKING STATION FOR CONTROLS TO START/STOP ENGINE/GENERATOR AND SHUNT TRIP LOAD BANK.
- PROVIDE 4#14 IN (1) 1" CONDUIT FROM ATS TO ENGINE/GENERATOR FOR CONTROLS TO START/STOP ENGINE/GENERATOR.
- CONNECT GENERATOR GROUNDING ELECTRODE TO EXISTING BUILDING GROUNDING ELECTRODE SYSTEM.
- PROVIDE KIRK KEY INTERLOCK BETWEEN ENGINE/GENERATOR CIRCUIT BREAKER AND DOCKING STATION CIRCUIT BREAKER AS INDICATED.
- PROVIDE 20'-Ø" #3Ø CU CONCRETE ENCASED GROUNDING ELECTRODE CONDUCTOR (UGER) IN ENGINE/GENERATOR CONCRETE PAD.
- PROVIDE NEW #4 CU CONDUCTOR TO BOND NEW ENGINE/GENERATOR TO EXISTING BUILDING GROUNDING ELECTRODE SYSTEM.


**EVERNORTH -
ELGIN PHARMACY**

300 AIRPORT RD. SUITE 4
ELGIN, IL 60123


JOB 26136.0000
DATE 04/24/2026

ELECTRICAL
ONE-LINE
DIAGRAMS


E07-01

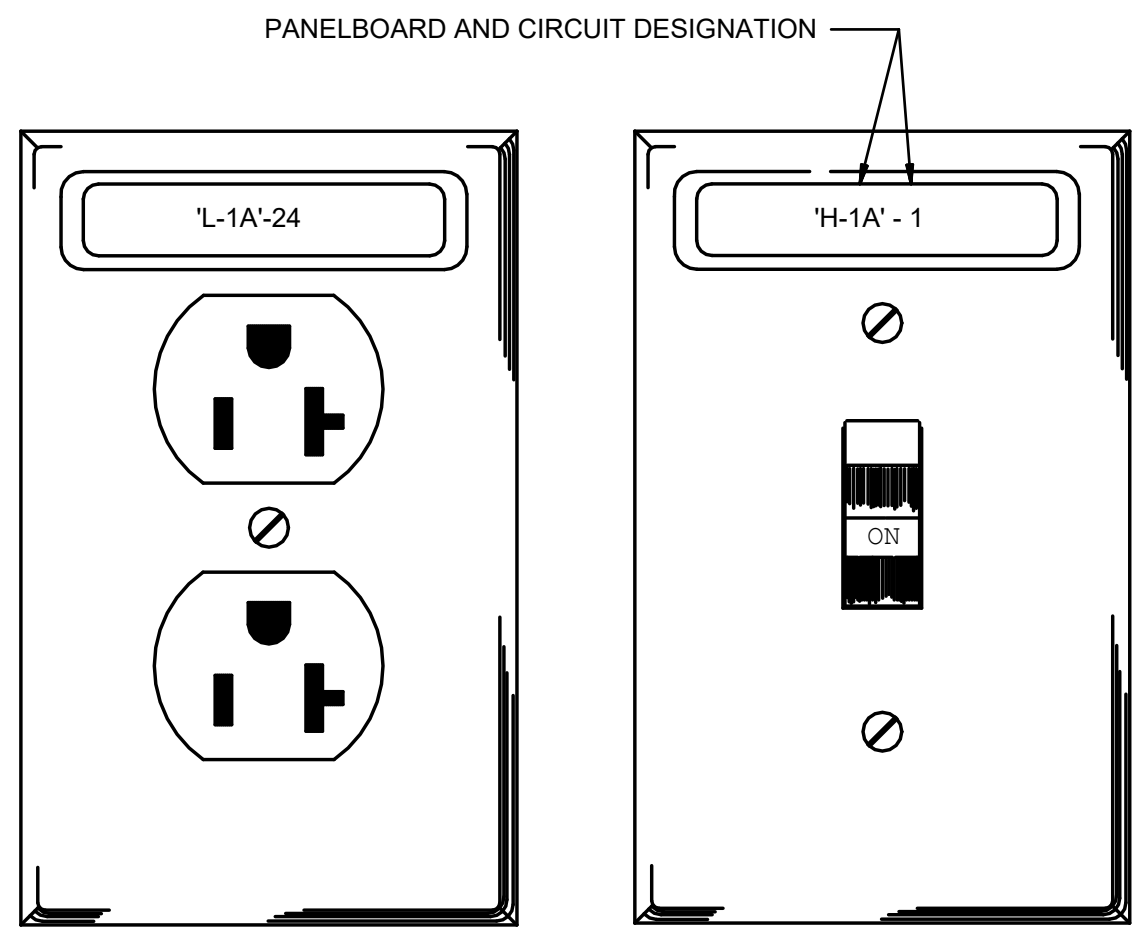

4 RECEPTACLE/SWITCH IDENTIFICATION
SCALE: NTS

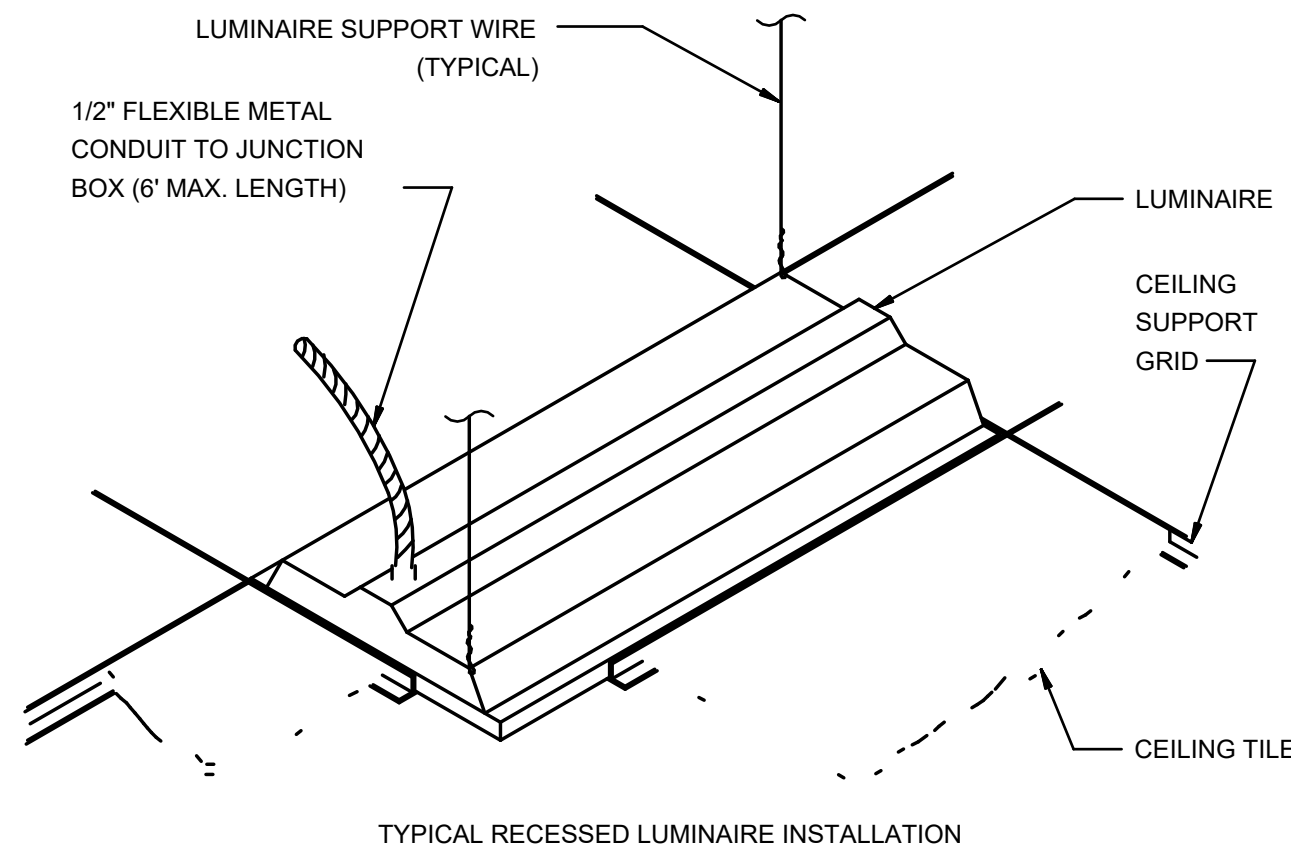


5 RECESSED LUMINAIRE SUPPORT
SCALE: NTS

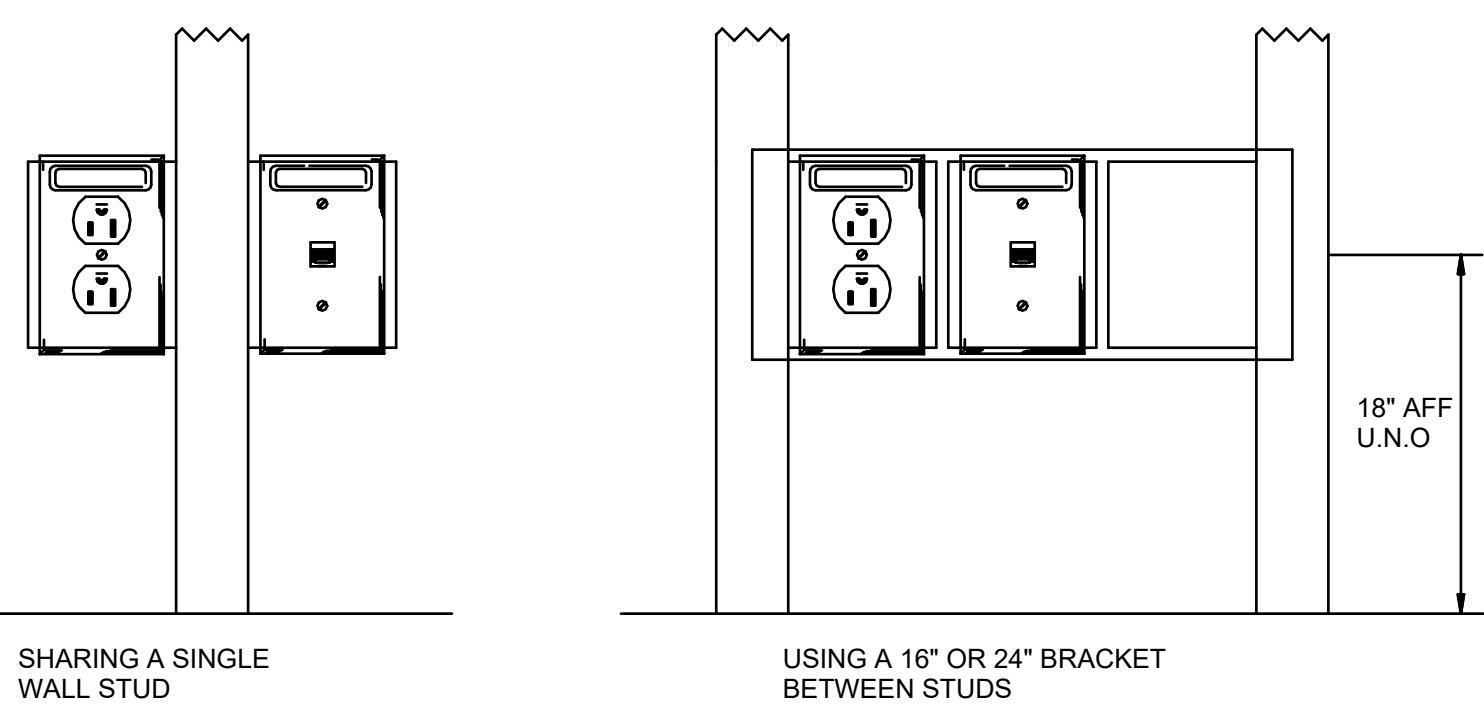

NOTES:


SPACING TO BE GOVERNED BY ARCHITECTURAL ELEVATIONS. SPACING STANDARD ABOVE TO BE UTILIZED IN ABSENCE OF ARCHITECTURAL ELEVATIONS OR SPECIFICATIONS. SPACING TO BE UNIFORM THROUGHOUT SCOPE OF PROJECT.

6 RECEPTACLE/DATA OUTLET SPACING
SCALE: NTS

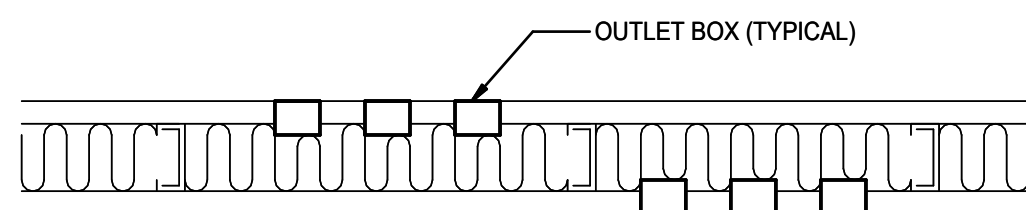**DETAIL NOTES**


- ELECTRICAL CONTRACTOR SHALL NOT INSTALL BACK TO BACK OUTLET BOXES WITHIN THE SAME WALL STUD SPACE TO PRESERVE SOUND ISOLATION AND INTEGRITY OF THE WALL.

1 TYPICAL WALLBOX INSTALLATIONS
SCALE: NTS

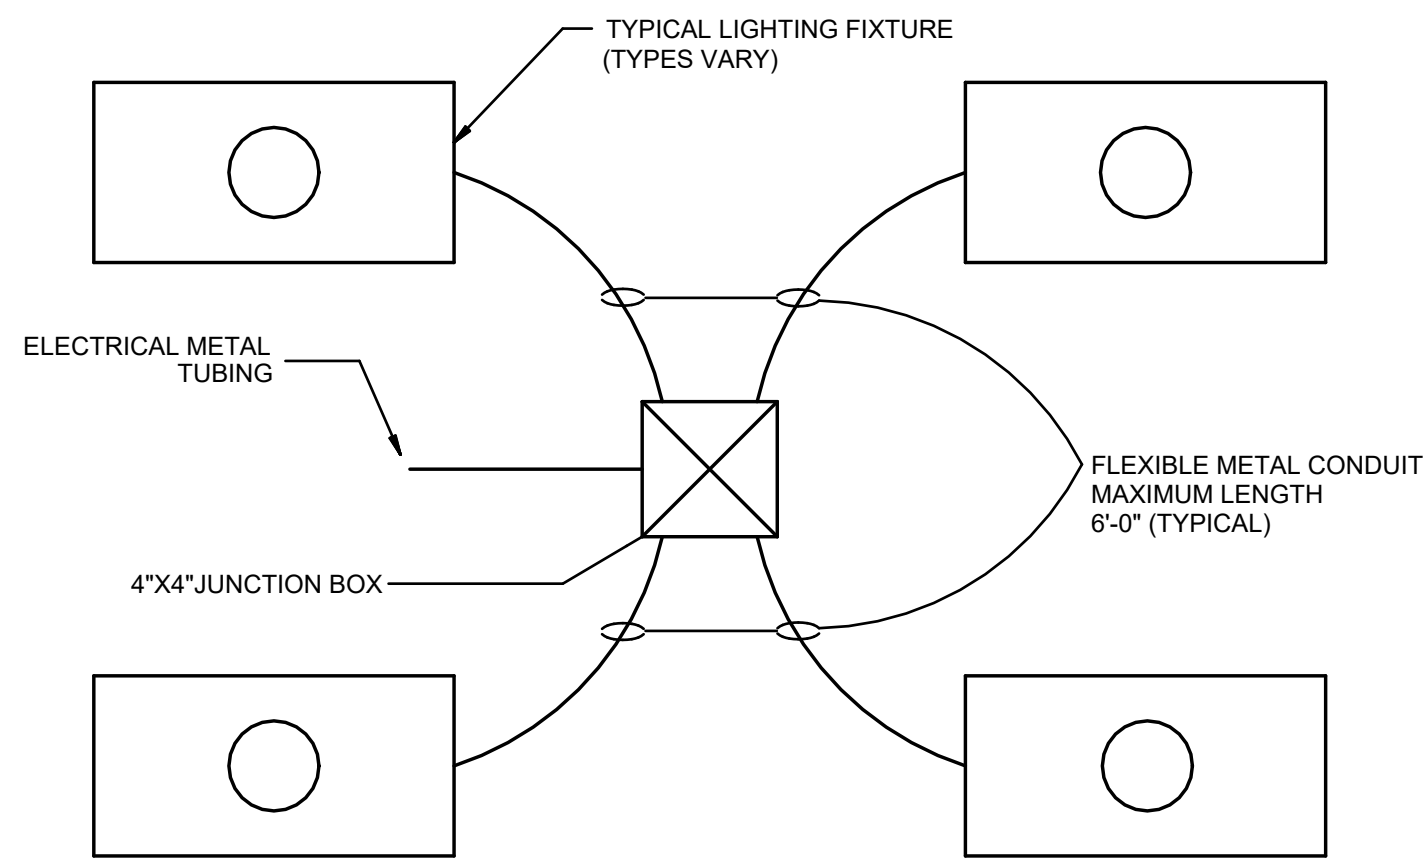
**DETAIL NOTES**

- FLEXIBLE METAL CONDUIT IS NOT TO BE USED TO RUN WIRING FROM FIXTURE TO FIXTURE. WIRING SHALL BE RUN IN FLEXIBLE METAL CONDUIT FROM JUNCTION BOX LOCATED ABOVE ACCESSIBLE CEILING TO INDIVIDUAL FIXTURES OR CONTINUOUS ROW OF FIXTURES. MAXIMUM LENGTH OF FLEXIBLE CONDUIT SHALL BE 6'-0\"/>

2 LIGHTING FIXTURE WIRING
SCALE: NTS

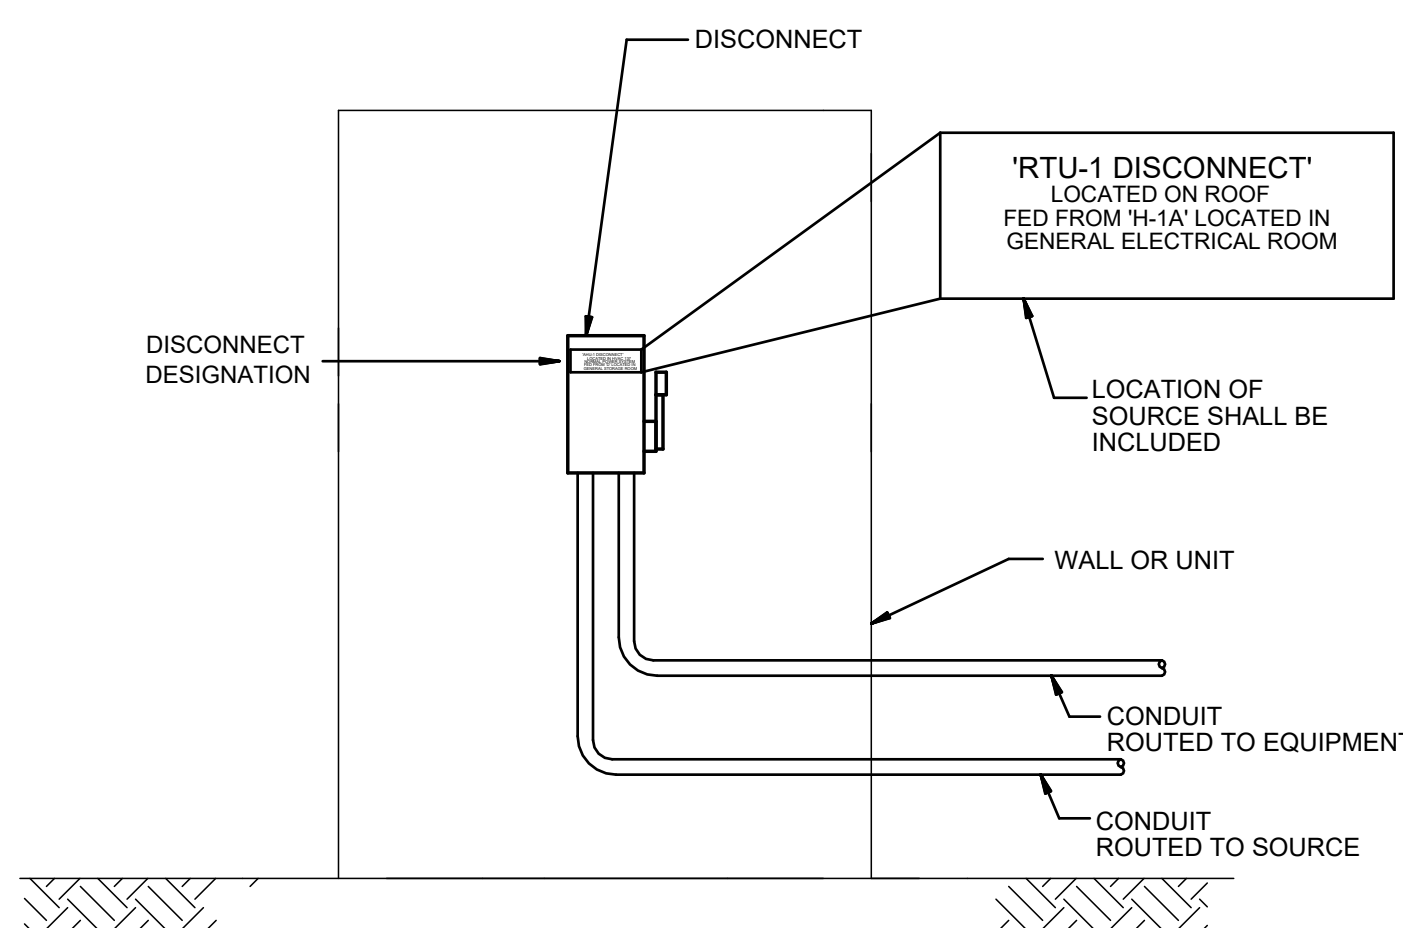

3 DISCONNECT IDENTIFICATION
SCALE: NTS

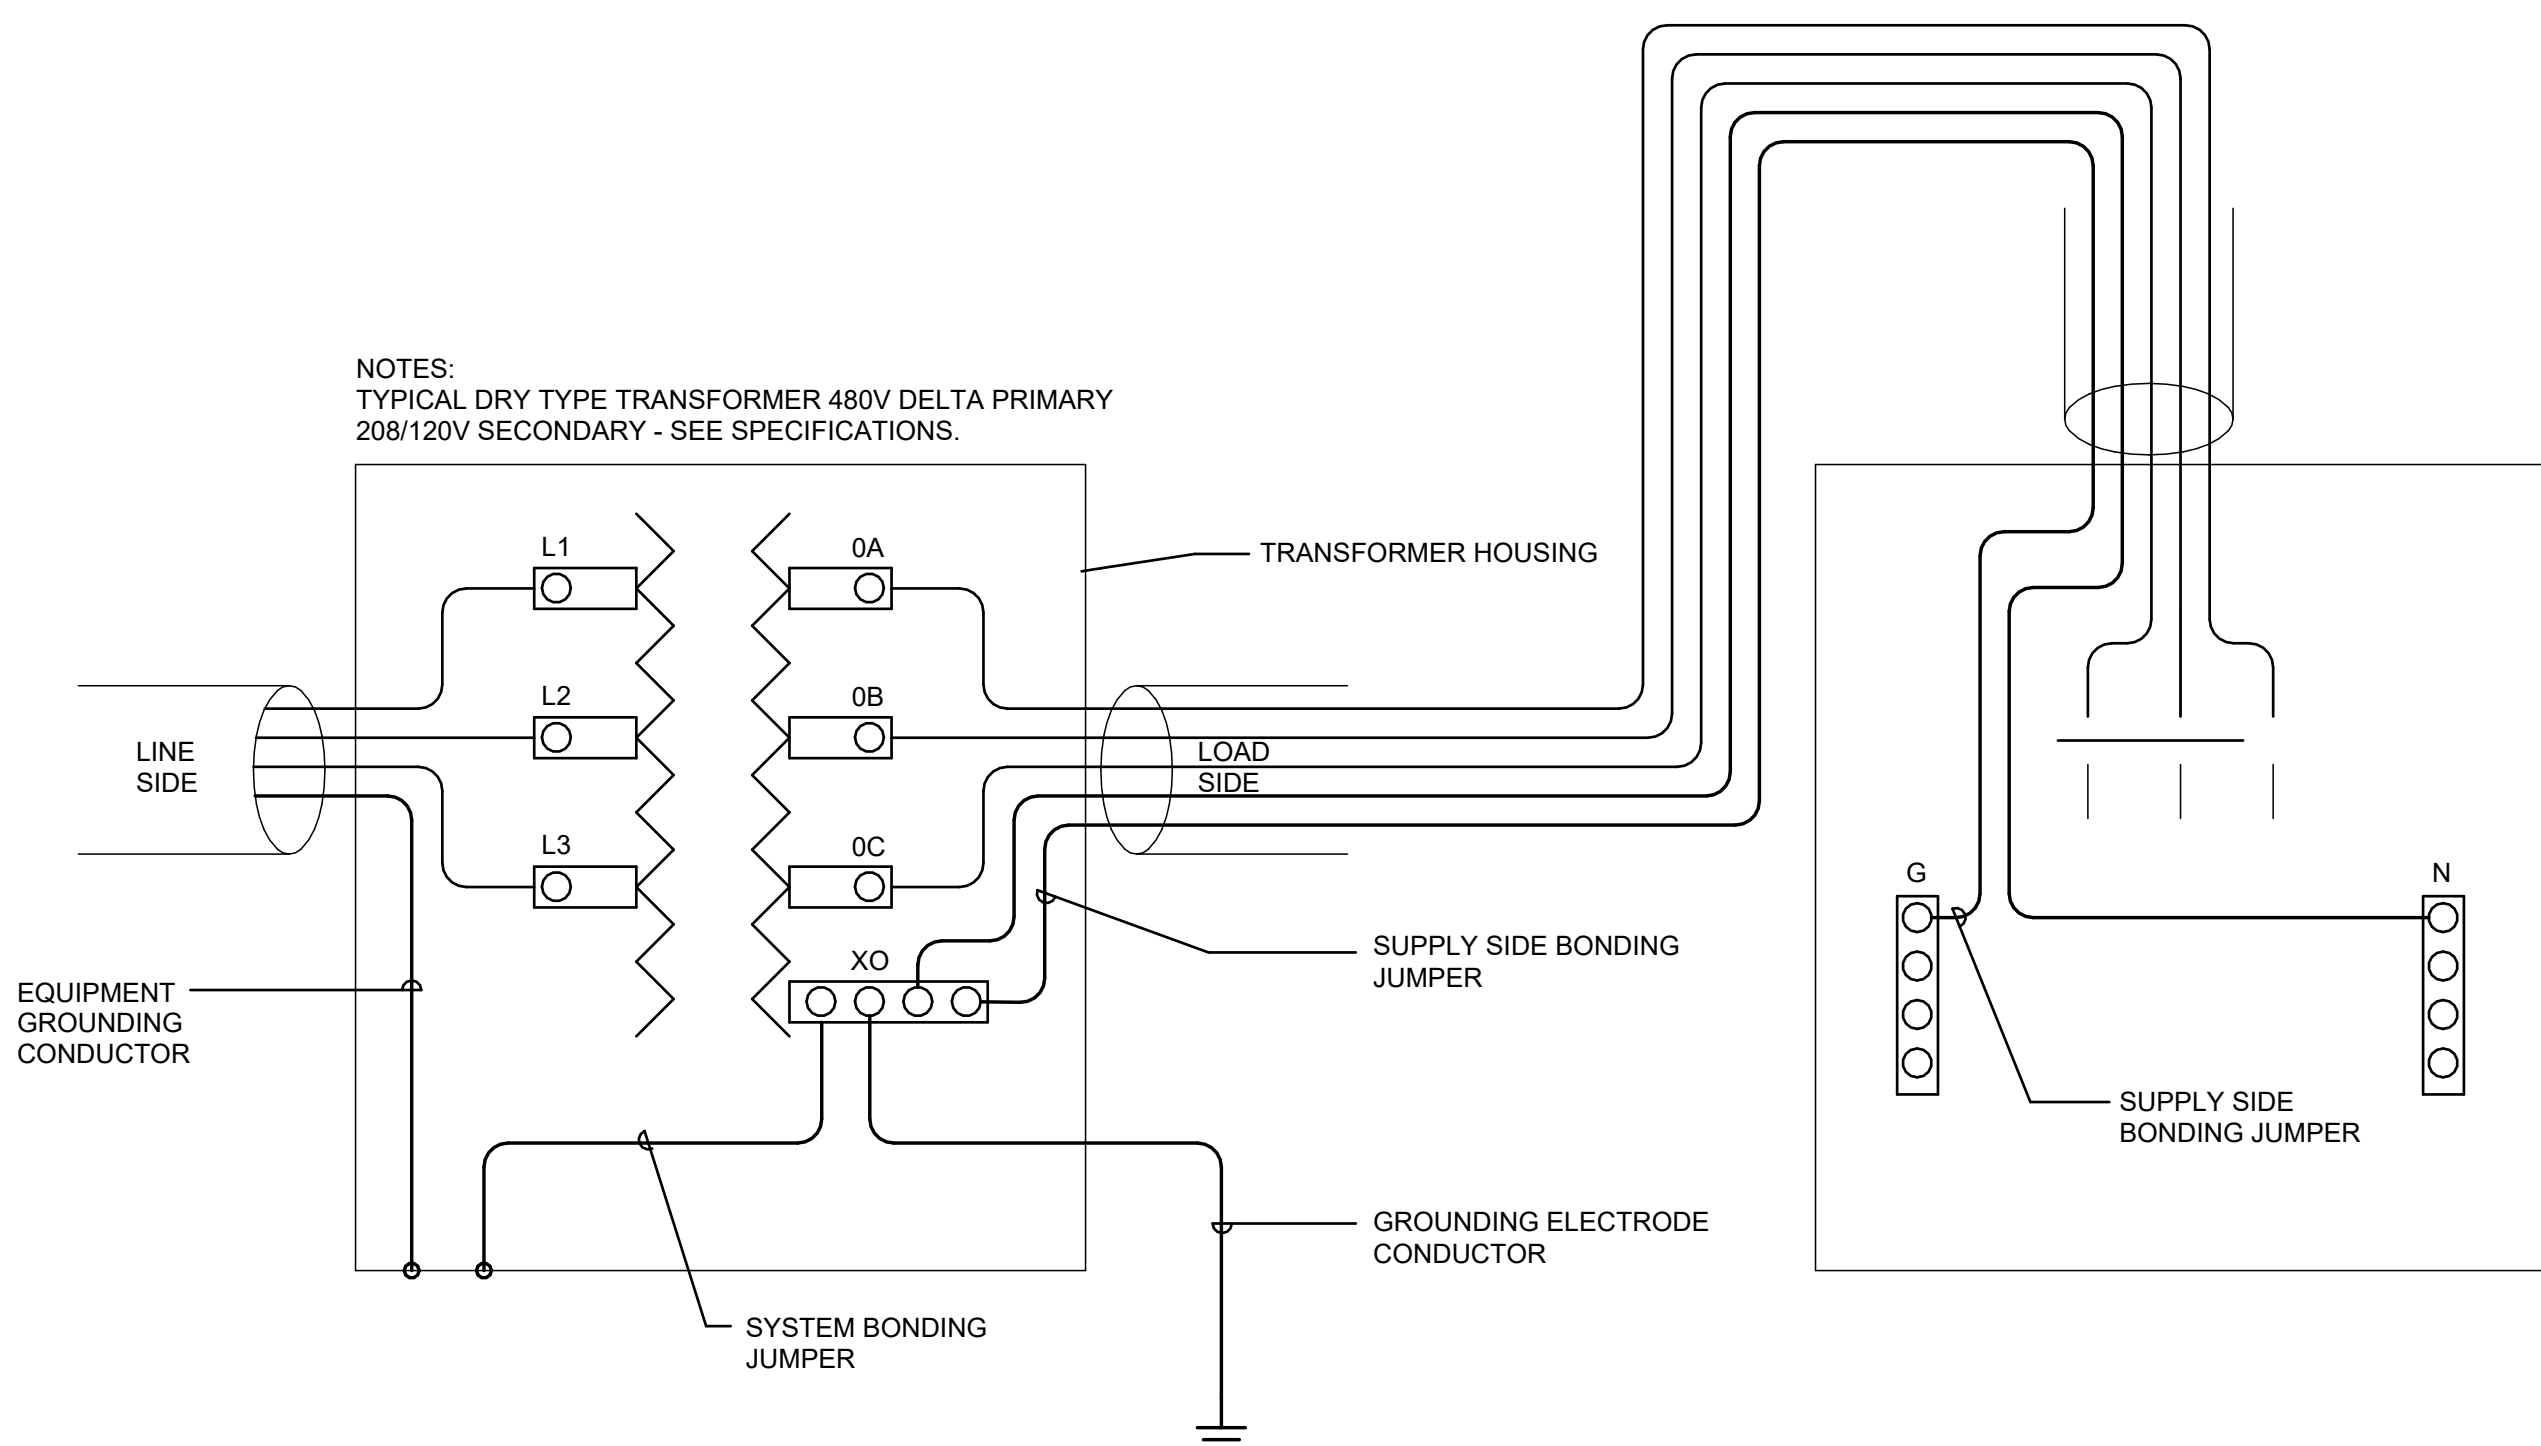

7 TRANSFORMER WIRING
SCALE: NTS

LIGHT FIXTURE SCHEDULE

TYPE	DESCRIPTION	MANUFACTURER	MODEL NO.	LAMP		REMARKS
				TYPE	WATTS	
D1	6\"/>	GOTHAM LIGHTING	EV06-40/20-AR-LSS-MD-MVOLT-G210	LED	20 W	
D1E	6\"/>	GOTHAM LIGHTING	EV06-40/20-AR-LSS-MD-MVOLT-G210-ELSD	LED	20 W	
D4	3\"/>	LIGHTOLIER	PS-01-LW-40-SA-U	LED	9 W	
L1	2X4 RECESSED CENTER BASKET LED TROFFER, MVOLT, 4800 LUMENS, 4000K WITH 0-10V DIMMING, MINIMUM 80 CRI	CREE LIGHTING	ZR-24-D-50L-840-AR-UNV-10V1	LED	38 W	
L1E	2X4 RECESSED CENTER BASKET LED TROFFER, MVOLT, 4800 LUMENS, 4000K WITH 0-10V DIMMING, MINIMUM 80 CRI, EMERGENCY BATTERY BACKUP	CREE LIGHTING	ZR-24-D-50L-840-AR-UNV-10V1-EB	LED	38 W	
L2	2X2 RECESSED CENTER BASKET LED TROFFER, MVOLT, 3000 LUMENS, 4000K WITH 0-10V DIMMING, MINIMUM 80 CRI	CREE LIGHTING	ZR-22-D-30L-840-AR-UNV-10V1	LED	30 W	
L2E	2X2 RECESSED CENTER BASKET LED TROFFER, MVOLT, 3000 LUMENS, 4000K WITH 0-10V DIMMING, MINIMUM 80 CRI, EMERGENCY BATTERY BACKUP	CREE LIGHTING	ZR-22-30L-840-AR-UNV-10V1-EB	LED	30 W	
L3	48\"/>	LITHONIA LIGHTING	IBE-L48-22000LM-ATC-MD-MVOLT-G210	LED	165 W	
L3E	48\"/>	LITHONIA LIGHTING	IBE-L48-22000LM-ATC-MD-MVOLT-G210-E15WCP	LED	165 W	
L4	LINER LED, RECESSED MOUNTED, MVOLT, 800 LUMENS PER FOOT 4000K, WITH 0-10V DIMMING, MINIMUM 80 CRI	FINELITE	HP2-840-TG-F-96LG-277-SC-FC-10%-FA50-SW	LED	9 W	WATTAGE FOR FIXTURE IS PER FOOT.
X1	EXIT SIGN, CEILING MOUNTED	BEGHELLI ISOLITE SIGNIFY CHLORIDE	OL2-SA-LR-1-M-CS-PLUS ELT-EM-R-1C-MT-AU-SD ER45VXL-SW-1-X-RC-XX	LED	5 W	
X2	EXIT SIGN, WALL MOUNTED	BEGHELLI ISOLITE SIGNIFY CHLORIDE	OL2-SA-LR-1-M-WS-PLUS ELT-EM-R-1M-AG-BA-MB OL2-SA-LR-1-M-CS-PLUS ELT-EM-R-1C-MT-AU-SD ER45VXL-SW-1-X-RC-XX	LED	5 W	

LIGHT FIXTURE SCHEDULE NOTES:

- COORDINATE EXACT LOCATION OF LIGHT FIXTURES WITH ARCHITECTURAL REFLECTED CEILING PLAN.
- LIGHT FIXTURE WITH CATALOG NUMBER TO SET MINIMUM LEVEL OF QUALITY. MATCH FIXTURES BASED ON CATALOG NUMBER FOR OTHER MANUFACTURERS.
- COORDINATE ELEVATIONS OF PENDANT, WALL MOUNTED, OR WALL RECESSED FIXTURES WITH ARCHITECTURAL DRAWINGS.

EQUIPMENT WIRING SCHEDULE

TAG	ID	DESCRIPTION	MOTOR/EQUIPMENT DATA				CIRCUIT INFORMATION		CONDUIT AND WIRE REQUIREMENTS							SEE NOTES
			VOLT	PHASE	kVA	FLA	PANEL	CIRCUIT #	CB SIZE	PARALLEL SET	#/C	SIZE	GROUND SIZE	CONDUIT SIZE	DISCONNECT SIZE	
ACU	1	INDOOR SPLIT UNIT	208 V	1	2.37 kVA	11 A			20 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	1,2
ACU	2	INDOOR SPLIT UNIT	208 V	1	2.37 kVA	11 A			20 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	1,2
ACU	3	INDOOR SPLIT UNIT	208 V	1	2.37 kVA	11 A			20 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	1,2
ACU	4	INDOOR SPLIT UNIT	208 V	1	2.37 kVA	11 A			20 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	1,2
ACU	5	INDOOR SPLIT UNIT	208 V	1	2.37 kVA	11 A			20 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	1,2
COND	1	AIR COOLED CONDENSING UNIT	208 V	1	5.54 kVA	27 A	'L-2'	42,44	40 A	1 SET	2	#8	#10 G	3/4\"/>	60 A	1,2
COND	2	AIR COOLED CONDENSING UNIT	208 V	1	5.54 kVA	27 A	'L-2'	50,52	40 A	1 SET	2	#8	#10 G	3/4\"/>	60 A	1,2
EF	1	EXHAUST FAN	120 V	1	1 kVA	8 A	'L-1'	58	15 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	
EF	2	EXHAUST FAN	120 V	1	1 kVA	8 A	'L-1'	60	15 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	
EF	3	EXHAUST FAN	208 V	1	2.37 kVA	10 A	'L-2'	54,58	15 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	
ELEC	5	AIR COOLED CONDENSING UNIT	208 V	1	2.37 kVA	11 A	'L-2'	46,48	20 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	1,2
HAC	1-1	HEATING AIR CURTAIN	480 V	3	17.46 kVA	21 A	'MECH-DP2'	1	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	
HAC	1-2	HEATING AIR CURTAIN	480 V	3	28.27 kVA	34 A	'MECH-DP2'	2	60 A	1 SET	3	#4	#10 G	3/4\"/>	60 A	
HAC	2-1	HEATING AIR CURTAIN	480 V	3	17.46 kVA	21 A	'MECH-DP2'	3	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	
HAC	2-2	HEATING AIR CURTAIN	480 V	3	28.27 kVA	34 A	'MECH-DP2'	4	60 A	1 SET	3	#4	#10 G	3/4\"/>	60 A	
HAC	3-1	HEATING AIR CURTAIN	480 V	3	17.46 kVA	21 A	'MECH-DP2'	5	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	
HAC	3-2	HEATING AIR CURTAIN	480 V	3	28.27 kVA	34 A	'MECH-DP2'	6	60 A	1 SET	3	#4	#10 G	3/4\"/>	60 A	
HAC	4-1	HEATING AIR CURTAIN	480 V	3	17.46 kVA	21 A	'MECH-DP2'	8	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	
HAC	4-2	HEATING AIR CURTAIN	480 V	3	28.27 kVA	34 A	'MECH-DP2'	7	60 A	1 SET	3	#4	#10 G	3/4\"/>	60 A	
HAC	5-1	HEATING AIR CURTAIN	480 V	3	64.18 kVA	77 A	'MECH-DP2'	9	125 A	1 SET	3	#10	#6 G	1-1/2\"/>	100 A	
HAC	5-2	HEATING AIR CURTAIN	480 V	3	55.04 kVA	66 A	'MECH-DP2'	10	100 A	1 SET	3	#1	#8 G	1-1/4\"/>	100 A	
HAC	6-1	HEATING AIR CURTAIN	480 V	3	17.46 kVA	21 A	'MECH-DP2'	11	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	
HAC	6-2	HEATING AIR CURTAIN	480 V	3	28.27 kVA	34 A	'MECH-DP2'	12	60 A	1 SET	3	#4	#10 G	3/4\"/>	60 A	
HAC	7-1	HEATING AIR CURTAIN	480 V	3	17.46 kVA	21 A	'MECH-DP2'	13	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	
HAC	7-2	HEATING AIR CURTAIN	480 V	3	28.27 kVA	34 A	'MECH-DP2'	14	60 A	1 SET	3	#4	#10 G	3/4\"/>	60 A	
HAC	8	HEATING AIR CURTAIN	480 V	3	14 kVA	17 A	'MECH-DP2'	15	30 A	1 SET	3	#10	#10 G	3/4\"/>	30 A	
IDF	1	AIR COOLED CONDENSING UNIT	208 V	1	2.37 kVA	11 A	'L-2'	62,64	20 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	1,2
IDF	2	AIR COOLED CONDENSING UNIT	208 V	1	2.37 kVA	11 A	'L-2'	58,60	20 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	1,2
IDF	3	AIR COOLED CONDENSING UNIT	208 V	1	2.37 kVA	11 A	'L-2'	34,36	20 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	1,2
IDF	4	AIR COOLED CONDENSING UNIT	208 V	1	2.37 kVA	11 A	'L-2'	38,40	20 A	1 SET	2	#12	#12 G	3/4\"/>	30 A	1,2
RTU	1	ROOFTOP UNIT	480 V	3	9.98 kVA	12 A	'MECH-DP1'	1	25 A	1 SET	3	#10	#10 G	3/4\"/>	30 A	1
RTU	2	ROOFTOP UNIT	480 V	3	15.3 kVA	18 A	'MECH-DP1'	2	30 A	1 SET	3	#10	#10 G	3/4\"/>	30 A	1
RTU	3	ROOFTOP UNIT	480 V	3	25.94 kVA	31 A	'MECH-DP1'	3	50 A	1 SET	3	#6	#10 G	3/4\"/>	60 A	1
RTU	4	ROOFTOP UNIT	480 V	3	25.94 kVA	31 A	'MECH-DP1'	4	50 A	1 SET	3	#6	#10 G	3/4\"/>	60 A	1
RTU	5	ROOFTOP UNIT	480 V	3	25.94 kVA	31 A	'MECH-DP1'	5	50 A	1 SET	3	#6	#10 G	3/4\"/>	60 A	1
RTU	6	ROOFTOP UNIT	480 V	3	25.94 kVA	31 A	'MECH-DP1'	6	50 A	1 SET	3	#6	#10 G	3/4\"/>	60 A	1
RTU	7	ROOFTOP UNIT	480 V	3	25.94 kVA	31 A	'MECH-DP1'	7	50 A	1 SET	3	#6	#10 G	3/4\"/>	60 A	1
RTU	8	ROOFTOP UNIT	480 V	3	25.94 kVA	31 A	'MECH-DP1'	8	50 A	1 SET	3	#6	#10 G	3/4\"/>	60 A	1
RTU	9	ROOFTOP UNIT	480 V	3	25.94 kVA	31 A	'MECH-DP1'	9	50 A	1 SET	3	#6	#10 G	3/4\"/>	60 A	1
RTU	10	ROOFTOP UNIT	480 V	3	16.63 kVA	20 A	'MECH-DP1'	10	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	1
RTU	11	ROOFTOP UNIT	480 V	3	16.63 kVA	20 A	'MECH-DP1'	11	35 A	1 SET	3	#8	#10 G	3/4\"/>	30 A	1
VAV	1	VARIABLE AIR UNIT	208 V	2	3.67 kVA	12 A	'L-2'	65,67	20 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	
VAV	2	VARIABLE AIR UNIT	208 V	2	3.06 kVA	10 A	'L-2'	61,63	20 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	
VAV	3	VARIABLE AIR UNIT	120 V	1	1 kVA	8 A	'L-1'	55	15 A	1 SET	2	#12	#12 G	3/4\"/>	0 A	
VAV	4	VARIABLE AIR UNIT	208 V	2	6.12 kVA	21 A	'L-1'	57,59	35 A	1 SET	2	#8	#10 G	3/4\"/>	0 A	
VAV	5	VARIABLE AIR UNIT	208 V	2	4.28 kVA	15 A	'L-2'	69,71	25 A	1 SET	2	#10	#10 G	3/4\"/>	0 A	

EQUIPMENT WIRING SCHEDULE NOTES:

- PROVIDE NEMA 3R DISCONNECT FUSED TO MANUFACTURER'S RECOMMENDATIONS.
- INTERIOR UNIT IS POWERED VIA EXTERIOR UNIT. PROVIDE CONDUIT/CONDUCTORS FROM INTERIOR UNIT TO EXTERIOR UNIT AS REQUIRED.

Interior Lighting Compliance Certificate

Project Information

Energy Code: 2021 IECG
Project Title: Pharmacy TT
Location: Elgin, Illinois
Climate Zone: 5a
Project Type: Alteration

Allowed Interior Lighting Power

A	B	C	D
Area Category	Floor Area (ft2)	Allowed Watts / ft2	Allowed Watts
1. Pharmacy Fulfillment (Manufacturing) High Bay (25-50 ft. Floor to Ceiling Height)	15800	1.24	
2. IDF (Common Space Types Electrical/Mechanical)	86	0.43	
3. Electrical (Common Space Types Electrical/Mechanical)	294	0.43	
4. Storage (Common Space Types Storage >=50 - <=1000 sq ft.)	983	0.38	
5. Lockers (Common Space Types Locker Room)	376	0.52	
6. Open Office (Common Space Types Office - Open Plan)	2216	0.61	
7. Offices (Common Space Types Office - Enclosed)	1096	0.74	
8. MDF (Common Space Types Electrical/Mechanical)	260	0.43	
9. Hall (Common Space Types Corridor/Transition >=8 ft wide)	186	0.41	
10. Break Room (Common Space Types Lounge/Breakroom)	711	0.59	
11. Conference (Common Space Types Conference/Meeting/Multi-purpose)	314	0.97	
Total Allowed Watts:			23399

Proposed Interior Lighting Power

A	B	C	D
Fixture ID : Description / Lamp / Wattage Per Lamp / Ballast	# of Fixture	Fixture Watt.	(B X C)
1. Pharmacy Fulfillment (Manufacturing) High Bay (25-50 ft. Floor to Ceiling Height)	23	165	3795
L2: L3: LED:			
2. IDF (Common Space Types Electrical/Mechanical)	1	38	38
L1: L1: LED:			
3. Electrical (Common Space Types Electrical/Mechanical)	3	38	114
L1: L1: LED:			
4. Storage (Common Space Types Storage >=50 - <=1000 sq ft.)	13	38	494
L1: L1: LED:			
5. Lockers (Common Space Types Locker Room)	2	20	40
D1: D1: LED:			
A	B	C	D
Fixture ID : Description / Lamp / Wattage Per Lamp / Ballast	# of Fixture	Fixture Watt.	(B X C)
L1: L1: LED:	4	38	152
6. Open Office (Common Space Types Office - Open Plan)			
L4: L4: LED:	5	96	480
D1: D1: LED:	25	20	500
7. Offices (Common Space Types Office - Enclosed)			
L1: L1: LED:	14	38	532
8. MDF (Common Space Types Electrical/Mechanical)	3	38	114
L1: L1: LED:			
9. Hall (Common Space Types Corridor/Transition >=8 ft wide)	3	30	90
L2: L2: LED:			
10. Break Room (Common Space Types Lounge/Breakroom)			
D4: D4: LED:	2	9	18
D1: D1: LED:	7	20	140
11. Conference (Common Space Types Conference/Meeting/Multi-purpose)			
L1: L1: LED:	3	38	114
Total Proposed Watts:			6621

Proposed Interior Lighting Controls

Fixture	Lighting Control
1. Pharmacy Fulfillment (Manufacturing) High Bay (25-50 ft. Floor to Ceiling Height)	
L2: L3: LED:	Occupancy Sensor, Manual Control
2. IDF (Common Space Types Electrical/Mechanical)	
L1: L1: LED:	Manual Control
3. Electrical (Common Space Types Electrical/Mechanical)	
L1: L1: LED:	Manual Control
4. Storage (Common Space Types Storage >=50 - <=1000 sq ft.)	
L1: L1: LED:	Occupancy Sensor, Manual Control
5. Lockers (Common Space Types Locker Room)	
D1: D1: LED:	Occupancy Sensor, Manual Control
L1: L1: LED:	Occupancy Sensor, Manual Control
6. Open Office (Common Space Types Office - Open Plan)	
L4: L4: LED:	Occupancy Sensor, Manual Control
D1: D1: LED:	Occupancy Sensor, Manual Control
7. Offices (Common Space Types Office - Enclosed)	
L1: L1: LED:	Occupancy Sensor, Manual Control
8. MDF (Common Space Types Electrical/Mechanical)	
L1: L1: LED:	Manual Control
9. Hall (Common Space Types Corridor/Transition >=8 ft wide)	
L2: L2: LED:	Occupancy Sensor, Manual Control
10. Break Room (Common Space Types Lounge/Breakroom)	
D4: D4: LED:	Occupancy Sensor, Manual Control
D1: D1: LED:	Occupancy Sensor, Manual Control
11. Conference (Common Space Types Conference/Meeting/Multi-purpose)	
L1: L1: LED:	Occupancy Sensor, Manual Control

Interior Lighting PASSES

Interior Lighting Compliance Statement

Compliance Statement: The proposed interior lighting design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed interior lighting systems have been designed to meet the 2021 IECG requirements in COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Ethan Fulton - Electrical 04/24/2026

Name - Title Signature Date

MAIN TYPE	MCB	VOLTAGE	480/277 Vwye	LOCATION	L1 ELECT ROOM 133
MAIN RATING	100 A	3 PHASE	4 WIRE	FED FROM	DP1
BUS RATING	100 A	MOUNTING SURFACE		SCCR	35 KA
		ENCLOSURE	NEMA 1	CALCULATED AVAILABLE FAULT...	0.848 KA
REMARKS:					
LEFT SIDE, KVA					
DESCRIPTION	BRKR NOTES	BRKR AMP, POLES	CKT NO	A	B
EAST OFFICE LTG		20 A	1	0.73	0.00
WEST OFFICE LTG		20 A	1	3	1.19
SPARE		20 A	1	5	0.00
SPARE		20 A	1	7	0.00
SPARE		20 A	1	9	0.00
SPARE		20 A	1	11	0.00
SPARE		20 A	1	13	0.00
SPARE		20 A	1	15	0.00
SPARE		20 A	1	17	0.00
SPARE		20 A	1	19	0.00
SPARE		20 A	1	21	0.00
SPARE		20 A	1	23	0.00
SPARE		20 A	1	25	0.00
SPARE		20 A	1	27	0.00
SPARE		20 A	1	29	0.00
TOTAL PHASE SUMMARY					
PHASE SUBTOTAL (KVA) 0.73... 1.19... 0.0...					
PHASE SUBTOTAL (AMPS) 3 A 5 A 0 A					
LOAD CLASSIFICATION					
POWER 0.00 KVA 100% 0.00 KVA					
LIGHTING 1.92 KVA 125% 2.40 KVA					
MOTOR 0.00 KVA 125% LARGEST, 100% OTHER 0.00 KVA					
RECEPTACLE 0.00 KVA 100% FIRST 10KVA, 50% OTHER 0.00 KVA					
HEATING 0.00 KVA 125% 0.00 KVA					
TOTAL LOAD 1.92 KVA 2.40 KVA					
TOTAL AMPS 2 A 3 A					

MAIN TYPE	MCB	VOLTAGE	480/277 Vwye	LOCATION	L1 ELECT ROOM 133
MAIN RATING	100 A	3 PHASE	4 WIRE	FED FROM	DP1
BUS RATING	100 A	MOUNTING SURFACE		SCCR	35 KA
		ENCLOSURE	NEMA 1	CALCULATED AVAILABLE FAULT...	0.848 KA
REMARKS:					
LEFT SIDE, KVA					
DESCRIPTION	BRKR NOTES	BRKR AMP, POLES	CKT NO	A	B
ELECTRICAL RM LTG		20 A	1	0.11	1.65
SPARE		20 A	1	3	2.15
SPARE		20 A	1	5	0.00
SPARE		20 A	1	7	0.00
SPARE		20 A	1	9	0.00
SPARE		20 A	1	11	0.00
SPARE		20 A	1	13	0.00
SPARE		20 A	1	15	0.00
SPARE		20 A	1	17	0.00
SPARE		20 A	1	19	0.00
SPARE		20 A	1	21	0.00
SPARE		20 A	1	23	0.00
SPARE		20 A	1	25	0.00
SPARE		20 A	1	27	0.00
SPARE		20 A	1	29	0.00
TOTAL PHASE SUMMARY					
PHASE SUBTOTAL (KVA) 1.78... 2.15... 1.5...					
PHASE SUBTOTAL (AMPS) 7 A 8 A 5 A					
LOAD CLASSIFICATION					
POWER 0.00 KVA 100% 0.00 KVA					
LIGHTING 5.45 KVA 125% 6.82 KVA					
MOTOR 0.00 KVA 125% LARGEST, 100% OTHER 0.00 KVA					
RECEPTACLE 0.00 KVA 100% FIRST 10KVA, 50% OTHER 0.00 KVA					
HEATING 0.00 KVA 125% 0.00 KVA					
TOTAL LOAD 5.45 KVA 6.82 KVA					
TOTAL AMPS 7 A 8 A					

FAULT ANALYSIS SUMMARY

BUS NAME	VOLTAGE	AVAILABLE FAULT CURRENT
L-L	3 PHASE	X/R LINE/GRND X/R
DP-UPS.	208.	780.7 8.0 780.67 8.0
DP1.	480.	847.9 6.8 408.35 7.6
H-1.	480.	847.9 6.8 408.35 7.6
H-2.	480.	847.9 6.8 408.35 7.6
L-1.	208.	1100.1 12.1 1353.09 14.7
L-2.	208.	1334.2 9.9 1725.95 11.5
MECH-DP1	480.	847.9 6.8 408.35 7.6
MECH-DP2	480.	847.9 6.8 408.35 7.6
T-L-1 SEC	208.	1100.1 12.1 1353.09 14.7
T-L-1-PRI	480.	847.9 6.8 408.35 7.6
T-L-2 SEC	208.	1334.2 9.9 1725.95 11.5
T-L-2-PRI	480.	847.9 6.8 408.35 7.6
UPS/XFMR PRI	480.	847.9 6.8 408.35 7.6
UPS/XFMR SEC	208.	780.7 8.0 780.67 8.0

FAULT ANALYSIS REPORT COMPLETED

LOAD CALCULATIONS -

'MDP-SOUTH' - 480Y/277V, 1200A -
'CONTRACTOR TO PERFORM LOAD STUDY PRIOR TO CONNECTION OF NEW LOADS

MAIN TYPE	MCB	VOLTAGE	480/277 Vwye	LOCATION	L1 ELECT ROOM 133
MAIN RATING	600 A	3 PHASE	4 WIRE	FED FROM	'MDP-SOUTH'
BUS RATING	600 A	MOUNTING SURFACE		SCCR	65KAIC KA
		ENCLOSURE	NEMA 1	CALCULATED AVAILABLE FAULT...	0.847 KA
REMARKS:					
SPACE	DESCRIPTION	CONNECTE D LOAD (KVA)	TRIP	POLES	BRKR NOTES
1	T-L-2	63.64 KVA	250 A	3	
2	'MECH-DP1'	247.62 KVA	250 A	3	
3	'MECH-DP2'	407.60 KVA	250 A	3	
4	'H-1'	1.92 KVA	100 A	3	
5	'H-2'	5.45 KVA	100 A	3	
6	'T-L-1'	31.24 KVA	20 A	3	
7	T-DP-UPS	0.00 KVA	20 A	3	
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
LOAD CLASSIFICATION					
POWER 169.13 KVA 100% 169.13 KVA					
LIGHTING 7.37 KVA 125% 9.22 KVA					
MOTOR 52.56 KVA 125% LARGEST, 100% OTHER 54.44 KVA					
RECEPTACLES 21.24 KVA 100% FIRST 10KVA, 50% OTHER 15.62 KVA					
HEATING 0.00 KVA 125% 0.00 KVA					
TOTAL LOAD 257.47 KVA 487.56 KVA					
TOTAL AMPS 911 A 586 A					

MAIN TYPE	MCB	VOLTAGE	480/277 Vwye	LOCATION	L1 ELECT ROOM 133
MAIN RATING	250 A	3 PHASE	4 WIRE	FED FROM	DP1
BUS RATING	250 A	MOUNTING SURFACE		SCCR	65KAIC KA
		ENCLOSURE	NEMA 1	CALCULATED AVAILABLE FAULT...	0.848 KA
REMARKS:					
SPACE	DESCRIPTION	CONNECTE D LOAD (KVA)	TRIP	POLES	BRKR NOTES
1	RTU-1	9.98 KVA	30 A	3	2
2	RTU-2	15.30 KVA	30 A	3	2
3	RTU-3	25.94 KVA	50 A	3	2
4	RTU-4	25.94 KVA	50 A	3	2
5	RTU-5	25.94 KVA	50 A	3	2
6	RTU-6	25.94 KVA	50 A	3	2
7	RTU-7	25.94 KVA	50 A	3	2
8	RTU-8	25.94 KVA	50 A	3	2
9	RTU-9	25.94 KVA	50 A	3	2
10	RTU-10	16.63 KVA	30 A	3	2
11	RTU-11	16.63 KVA	30 A	3	2
12	TRASH COMPACTOR	7.50 KVA	20 A	3	
13					
14					
15					
16					
17					
18					
19					
20					
LOAD CLASSIFICATION					
POWER 0.00 KVA 100% 0.00 KVA					
LIGHTING 7.50 KVA 125% 9.38 KVA					
MOTOR 0.00 KVA 100% FIRST 10KVA, 50% OTHER 0.00 KVA					
RECEPTACLES 0.00 KVA 100% FIRST 10KVA, 50% OTHER 0.00 KVA					
HEATING 0.00 KVA 125% 0.00 KVA					
TOTAL LOAD 247.62 KVA 242 A					
TOTAL AMPS 298 A					

MAIN TYPE

MCB

MAIN RATING

250 A

BUS RATING

250 A

VOLTAGE 480/277 Wye

3 PHASE

4 WIRE

LOCATION

ELECT ROOM 133

FED FROM

DP1

SCCR

65KAIC KA

CALCULATED AVAILABLE FAULT...

0.848 KA

REMARKS:

SPACE	DESCRIPTION	CONNECTE D LOAD (kVA)	TRIP	POLES	BRKR NOTES	NOTES
1	HAC-1	17.46 KVA	50 A	3		
2	HAC-1	28.27 KVA	50 A	3		
3	HAC-2	17.46 KVA	30 A	3	1	
4	HAC-2	28.27 KVA	50 A	3	1	
5	HAC-3	17.46 KVA	30 A	3	1	
6	HAC-3	28.27 KVA	50 A	3	1	
7	HAC-4	28.27 KVA	50 A	3	1	
8	HAC-4	17.46 KVA	30 A	3	1	
9	HAC-5	64.18 KVA	100 A	3		
10	HAC-5	55.04 KVA	70 A	3		
11	HAC-6	17.46 KVA	30 A	3	1	
12	HAC-6	28.27 KVA	50 A	3	1	
13	HAC-7	17.46 KVA	30 A	3	1	
14	HAC-7	28.27 KVA	50 A	3	1	
15	HAC-8	14.00 KVA	30 A	3	1	
16						
17						
18						
19						
20						

LOAD CLASSIFICATION	CONNECTED (KVA)	DEMAND FACTOR	DEMAND (KVA)
POWER	164.35 KVA	100%	164.95 KVA
LIGHTING	0.00 KVA	125%	0.00 KVA
MOTOR	0.00 KVA	125% LARGEST, 100% OTHER	0.00 KVA
RECEPTACLES	0.00 KVA	100% FIRST 10KVA, 50% OTHER	0.00 KVA
HEATING	0.00 KVA	125%	0.00 KVA
TOTAL LOAD	407.60 KVA		194.82 KVA
TOTAL AMPS	490 A		234 A

MAIN TYPE

MCB

MAIN RATING

100 A

BUS RATING

100 A

VOLTAGE

120/208 Wye

3 PHASE

4 WIRE

MOUNTING SURFACE

ENCLOSURE NEMA 1

LOCATION

L1 ELECT ROOM 133

FED FROM

'DP-UPS'

SCCR

10 kA

CALCULATED AVAILABLE FAULT...

0.781 kA

'UPS-1'

REMARKS:

LEFT SIDE, KVA														RIGHT SIDE, KVA													
DESCRIPTION	BRKR NOTES	BRKR AMP. POLES	CKT NO	A	B	C	A	B	C	CKT NO	BRKR AMP. POLES	BRKR NOTES	DESCRIPTION														
SECURITY/RECEPTION RCPT		20 A	1	0.18			0.50			2	1	20 A	PHARM PACK STATION														
BREAK RM FLAT PANEL RCPT		20 A	1	3	0.18			0.60		4	1	20 A	PHARM PACK STATION														
HUDDLE RM RCPT		20 A	1	5		0.36			0.50	6	1	20 A	PHARM RPH STATION														
OPEN OFFICE FURNITURE		20 A	2	7	0.90		0.50			8	1	20 A	PHARM PICK STATION														
	--	--	9	0.90				1.00		10	1	20 A	PHARM AT-PV STATION														
OFFICE RM 107 RCPT		20 A	1	11		0.18			1.00	12	1	20 A	PHARM PICK STATION														
OFFICE RM 108 RCPT		20 A	1	13	0.18		1.00			14	1	20 A	PHARM PICK STATION														
OFFICE RM 109 RCPT		20 A	1	15	0.18		1.00			16	1	20 A	PHARM PICK STATION														
CONF RM FLAT PANEL RCPT		20 A	1	17		0.18		1.00		18	1	20 A	PHARM PICK STATION														
CONF RM FLOORBOX		20 A	1	19		0.18		1.00		20	1	20 A	PHARM RPH STATION														
OPEN OFFICE FURNITURE		20 A	2	21	0.90			1.00		22	1	20 A	PHARM PACK STATION														
	--	--	23	0.90				1.00	24	1	20 A	PHARM RPH STATION															
PHARM FULFILL FURNITURE		20 A	2	25	0.60		1.00			26	1	20 A	PHARM PICK STATION														
	--	--	27	0.60				1.00		28	1	20 A	PHARM PACK STATION														
PHARM FULFILL FLAT PANEL		20 A	1	29		0.18		1.00	30	1	20 A	PHARM PICK STATION															
STORAGE WORKRM FURNITURE		20 A	2	31	0.60		1.00			32	1	20 A	PHARM PACK STATION														
	--	--	33	0.60				0.18	34	1	20 A	RECEIVING DESK RCPT															
STORAGE WORKRM RCPTS		20 A	1	35		0.72			0.18	36	1	20 A	RECEIVING DESK RCPT														
STORAGE WORKRM BUILD RACK		20 A	1	37	0.36		0.36			38	1	20 A	RECEIVING DESK RCPTS														
QA STATION		20 A	1	39	0.30			0.36		40	1	20 A	RETURNS CAGE RCPTS														
SPARE		20 A	1	41		0.00		0.00		42	1	20 A	SPARE														

TOTAL PHASE SUMMARY

A	B	C	
PHASE SUBTOTAL (KVA)	8.36	8.80	7.2
PHASE SUBTOTAL (AMPS)	71 A	75 A	60 A

LOAD CLASSIFICATION	CONNECTED (KVA)	DEMAND FACTOR	DEMAND (KVA)
POWER	0.00 kVA	100%	0.00 kVA
LIGHTING	0.00 kVA	125%	0.00 kVA
MOTOR	0.30 kVA	125% LARGEST, 100% OTHER	0.38 kVA
RECEPTACLE	3.78 kVA	100% FIRST 10KVA, 50% OTHER	3.78 kVA
HEATING	0.00 kVA	125%	0.00 kVA
TOTAL LOAD	24.36 kVA		19.30 kVA
TOTAL AMPS	88 A		54 A

MAIN TYPE		MCB	VOLTAGE				120/208 Wye				LOCATION				L1 IDF/ MDF 119				'MDF-1'																		
MAIN RATING		60 A	3 PHASE				4 WIRE				FED FROM				'DP-UPS'																						
BUS RATING		100 A	MOUNTING				SURFACE				SCCR				10 KA																						
			ENCLOSURE				NEMA 1				CALCULATED AVAILABLE FAULT...				0.781 KA																						
REMARKS:																																					
LEFT SIDE, KVA																			RIGHT SIDE, KVA																		
DESCRIPTION				BRKR NOTES	BRKR AMP. POLES	CKT NO	A	B	C	A	B	C	CKT NO	BRKR AMP. POLES	BRKR NOTES	DESCRIPTION																					
MDF WALL RCPTS					20 A	1	0.90			0.50			2	2	30 A		MDF RACK L6-30R RCPT																				
MDF WALL RCPTS					20 A	1	3		0.90			0.50	4	--	--		--																				
MDF SECURITY PANEL					20 A	1	5			1.00			0.18	6	1 20 A		MDF RACK QUAD RCPT																				
SPARE					20 A	1	7	0.00			0.50		8	2 30 A		MDF RACK L6-30R RCPT																					
SPARE					20 A	1	9		0.00			0.50	10	--	--		--																				
SPARE					20 A	1	11		0.00			0.18	12	1 20 A		MDF RACK QUAD RCPT																					
SPARE					20 A	1	13		0.00			0.50	14	2 30 A		MDF RACK L6-30R RCPT																					
SPARE					20 A	1	15		0.00			0.50	16	--	--		--																				
SPARE					20 A	1	17		0.00			0.50	18	2 30 A		MDF RACK L6-30R RCPT																					
SPARE					20 A	1	19		0.00			0.50	20	--	--		--																				
SPARE					20 A	1	21		0.00			0.00	22	1 20 A		SPARE																					
SPARE					20 A	1	23		0.00			0.00	24	1 20 A		SPARE																					
SPARE					20 A	1	25		0.00			0.00	26	1 20 A		SPARE																					
SPARE					20 A	1	27		0.00			0.00	28	1 20 A		SPARE																					
SPARE					20 A	1	29		0.00			0.00	30	1 20 A		SPARE																					
TOTAL PHASE SUMMARY																																					
A B C																																					
PHASE SUBTOTAL (KVA) 2.90 2.40 1.8																																					
PHASE SUBTOTAL (AMPS) 25 A 21 A 16 A																																					
LOAD CLASSIFICATION				CONNECTED (KVA)				DEMAND FACTOR				DEMAND (KVA)																									
POWER				0.00 kVA				100%				0.00 kVA																									
LIGHTING				0.00 kVA				125%				0.00 kVA																									
MOTOR				0.00 kVA				125% LARGEST, 100% OTHER				0.00 kVA																									
RECEPTACLE				6.16 kVA				100% FIRST 10KVA, 50% OTHER				6.16 kVA																									
HEATING				0.00 kVA				125%				0.00 kVA																									
TOTAL LOAD				7.16 kVA								7.16 kVA																									
TOTAL AMPS				20 A								20 A																									

MAIN TYPE

MCB

MAIN RATING

60 A

BUS RATING

100 A

VOLTAGE

120/208 Wye

3 PHASE

4 WIRE

MOUNTING

SURFACE

ENCLOSURE

NEMA 1

LOCATION

L1 IDF 138

FED FROM

'DP-UPS'

SCCR

10 kA

CALCULATED AVAILABLE FAULT...

0.781 kA

'IDF-1'

REMARKS:

				LEFT SIDE, KVA			RIGHT SIDE, KVA						
DESCRIPTION	BRKR NOTES	BRKR AMP. POLES	CKT NO	A	B	C	A	B	C	CKT NO	BRKR AMP. POLES	BRKR NOTES	DESCRIPTION
WAREHOUSE IDF WALL RCPTS		20 A	1	0.72		0.50				2	2	20 A	IDF RACK L6-30R RCPT
WAREHOUSE IDF SECURITY PNL		20 A	1	3	0.50			0.50	4	--	--	--	--
SPARE		20 A	1	5		0.00			0.36	6	1	20 A	IDF RACK QUAD RCPT
SPARE		20 A	1	7	0.00		0.00			8	1	20 A	SPARE
SPARE		20 A	1	9		0.00		0.50	10	2	20 A	IDF RACK L6-30R RCPT	
SPARE		20 A	1	11		0.00		0.50	12	--	--	--	--
SPARE		20 A	1	13	0.00		0.00		14	1	20 A	SPARE	
SPARE		20 A	1	15		0.00		0.00	16	1	20 A	SPARE	
SPARE		20 A	1	17		0.00		0.00	18	1	20 A	SPARE	
SPARE		20 A	1	19	0.00		0.00		20	1	20 A	SPARE	
SPARE		20 A	1	21		0.00		0.00	22	1	20 A	SPARE	
SPARE		20 A	1	23		0.00		0.00	24	1	20 A	SPARE	
SPARE		20 A	1	25	0.00		0.00		26	1	20 A	SPARE	
SPARE		20 A	1	27		0.00		0.00	28	1	20 A	SPARE	
SPARE		20 A	1	29		0.00		0.00	30	1	20 A	SPARE	

TOTAL PHASE SUMMARY

A

B

C

PHASE SUBTOTAL (KVA)

1.22 1.50 0.8

PHASE SUBTOTAL (AMPS)

11 A 13 A 7 A

LOAD CLASSIFICATION	CONNECTED (KVA)	DEMAND FACTOR	DEMAND (KVA)
POWER	0.00 kVA	100%	0.00 kVA
LIGHTING	0.00 kVA	125%	0.00 kVA
MOTOR	0.00 kVA	125% LARGEST, 100% OTHER	0.00 kVA
RECEPTACLE	3.08 kVA	100% FIRST 10KVA, 50% OTHER	3.08 kVA
HEATING	0.00 kVA	125%	0.00 kVA
TOTAL LOAD	3.08 kVA		3.08 kVA
TOTAL AMPS	10 A		10 A

NEC 700.12(F) CIRCUIT NAMING CONVENTION

1. BRANCH CIRCUITS SERVING EMERGENCY LIGHTING AND EXIT SIGNS SHALL BE CLEARLY IDENTIFIED ON THE PRINTED PANEL DIRECTORY.

NEC 408.4 - FIELD IDENTIFICATION REQUIRED

NEC 408.4(A) REQUIRES "EVERY CIRCUIT AND CIRCUIT MODIFICATION SHALL BE LEGIBLY IDENTIFIED AS TO ITS CLEAR, EVIDENT, AND SPECIFIC PURPOSE OR USE. THE IDENTIFICATION SHALL BE INCLUDED IN A CIRCUIT DIRECTORY THAT IS LOCATED ON THE FACE OR INSIDE OF THE PANEL DOOR IN THE CASE OF A PANELBOARD AND AT EACH SWITCH OR CIRCUIT BREAKER IN A SWITCHBOARD OR SWITCHGEAR." PANEL SCHEDULES INCLUDED IN THIS SET OF DRAWINGS ARE FOR LOAD CALCULATIONS AND CIRCUIT IDENTIFICATION AS REQUIRED FOR CONSTRUCTION PURPOSES ONLY. THE PANEL SCHEDULES ARE NOT TO BE USED AS THE FINAL CIRCUIT DIRECTORY WITHIN PANELBOARDS. INSTRUCTIONS FOR THE CONTRACTOR TO PROVIDE TYPEWRITTEN CIRCUIT DIRECTORIES IN ACCORDANCE WITH NEC 408.4 ARE COVERED WITHIN THE ELECTRICAL SPECIFICATIONS.

MAIN TYPE

MCB

MAIN RATING

125 A

BUS RATING

125 A

VOLTAGE

120/208 Wye

3 PHASE

4 WIRE

MOUNTING SURFACE

ENCLOSURE NEMA 1

LOCATION

FED FROM T-1-1

SCCR 10 KA

CALCULATED AVAILABLE FAULT... 1.10 KA

L1 ELECT ROOM 133

'L-1'

REMARKS:

		LEFT SIDE, KVA				RIGHT SIDE, KVA							
DESCRIPTION	BRKR NOTES	BRKR AMP. POLES	CKT NO	A	B	C	A	B	C	CKT NO	BRKR AMP. POLES	BRKR NOTES	DESCRIPTION
SECURITY/RECEPTION RCPTS		20 A	1	0.54		0.18				2	1	20 A	MOTHERS RM FRIDGE RCPT
BREAK RM RCPTS		20 A	1	3	0.54			0.90	4	1	20 A		MOTHERS, STORAGE RM RCPTS
BREAK RM ICE MCHN RCPT		20 A	1	5		0.18			3.00	6	2	40 A	WATER HEATER EWH-1
BREAK RM VENDING MCHN RCPT		20 A	1	7	0.18		3.00			8	--	--	--
BREAK RM ICE MCHN RCPT		20 A	1	9		0.18		0.54	10	1	20 A		RESTROOM, JAN RCPTS
BREAK RM COUNTER RCPTS		20 A	1	11		0.36			0.18	12	1	20 A	JANITOR CLOSET PUMP PP-1
BREAK RM COUNTER RCPTS		20 A	1	13	0.18		0.90			14	1	20 A	CORR. STORAGE RCPTS
BREAK RM MW RCPT		20 A	1	15	0.18			0.54	16	1	20 A		STORAGE WRKRM RCPTS
BREAK RM MW RCPT		20 A	1	17		0.18		0.54	18	1	20 A		STORAGE WRKRM RCPTS
BREAK RM MW RCPT		20 A	1	19	0.18		0.72		20	1	20 A		CORR. STORAGE RCPTS
BREAK RM MW RCPT		20 A	1	21				0.18	22	1	20 A		STORAGE WRKRM PRINTER
BREAK RM FRIDGE RCPT		20 A	1	23		0.18			0.18	24	1	20 A	OFFICE WATER FOUNTAIN
BREAK RM FRIDGE RCPT		20 A	1	25	0.18		0.36		26	1	20 A		TIME CLOCK
HUDDLE RM RCPTS		20 A	1	27	0.36			0.36	28	1	20 A		FACILITIES WRKSTN RCPTS
OFFICE RM 107 RCPTS		20 A	1	29		0.54			0.18	30	1	20 A	FACILITIES PRINTER
OFFICE RM 108 RCPTS		20 A	1	31	0.54		0.36		32	1	20 A		FACILITIES BENCH RCPTS
OFFICE RM 109 RCPTS		20 A	1	33		0.54		0.36	34	1	20 A		FACILITIES BENCH RCPTS
CONF RM RCPTS		20 A	1	35		0.54			0.00	36	1	20 A	SPARE
CONF RM RCPTS		20 A	1	37	0.54		0.50		38	2	20 A		FACILITIES 208V RCPT
OPEN OFFICE WALL RCPTS		20 A	1	39		0.72		0.50	40	--	--	--	--
OFFICE PRINTER RCPT		20 A	1	41			0.18		0.00	42	1	20 A	SPARE
OFFICE COUNTERTOP RCPTS		20 A	1	43	0.36			0.00	44	1	20 A		SPARE
EMPLOYEE KIOSK WRKSTN RCPTS		20 A	1	45	0.54				0.00	46	1	20 A	SPARE
TIME CLOCK		20 A	1	47		0.36			0.00	48	1	20 A	SPARE
E PHARM. PRINTER RCPT		20 A	1	49	0.18			0.00	50	1	20 A		SPARE
SPARE		20 A	1	51		0.00			0.00	52	1	20 A	SPARE
SPARE		20 A	1	53			0.00		0.00	54	1	20 A	SPARE
VAV-3		20 A	1	55	1.00			0.00		56	1	20 A	SPARE
VAV-4		30 A	2	57	3.06			1.00		58	1	20 A	EF-1
--	--	--	59			3.06			1.00	60	1	20 A	EF-2

TOTAL PHASE SUMMARY

A

B

C

PHASE SUBTOTAL (KVA)

9.90 10.6 10.00