

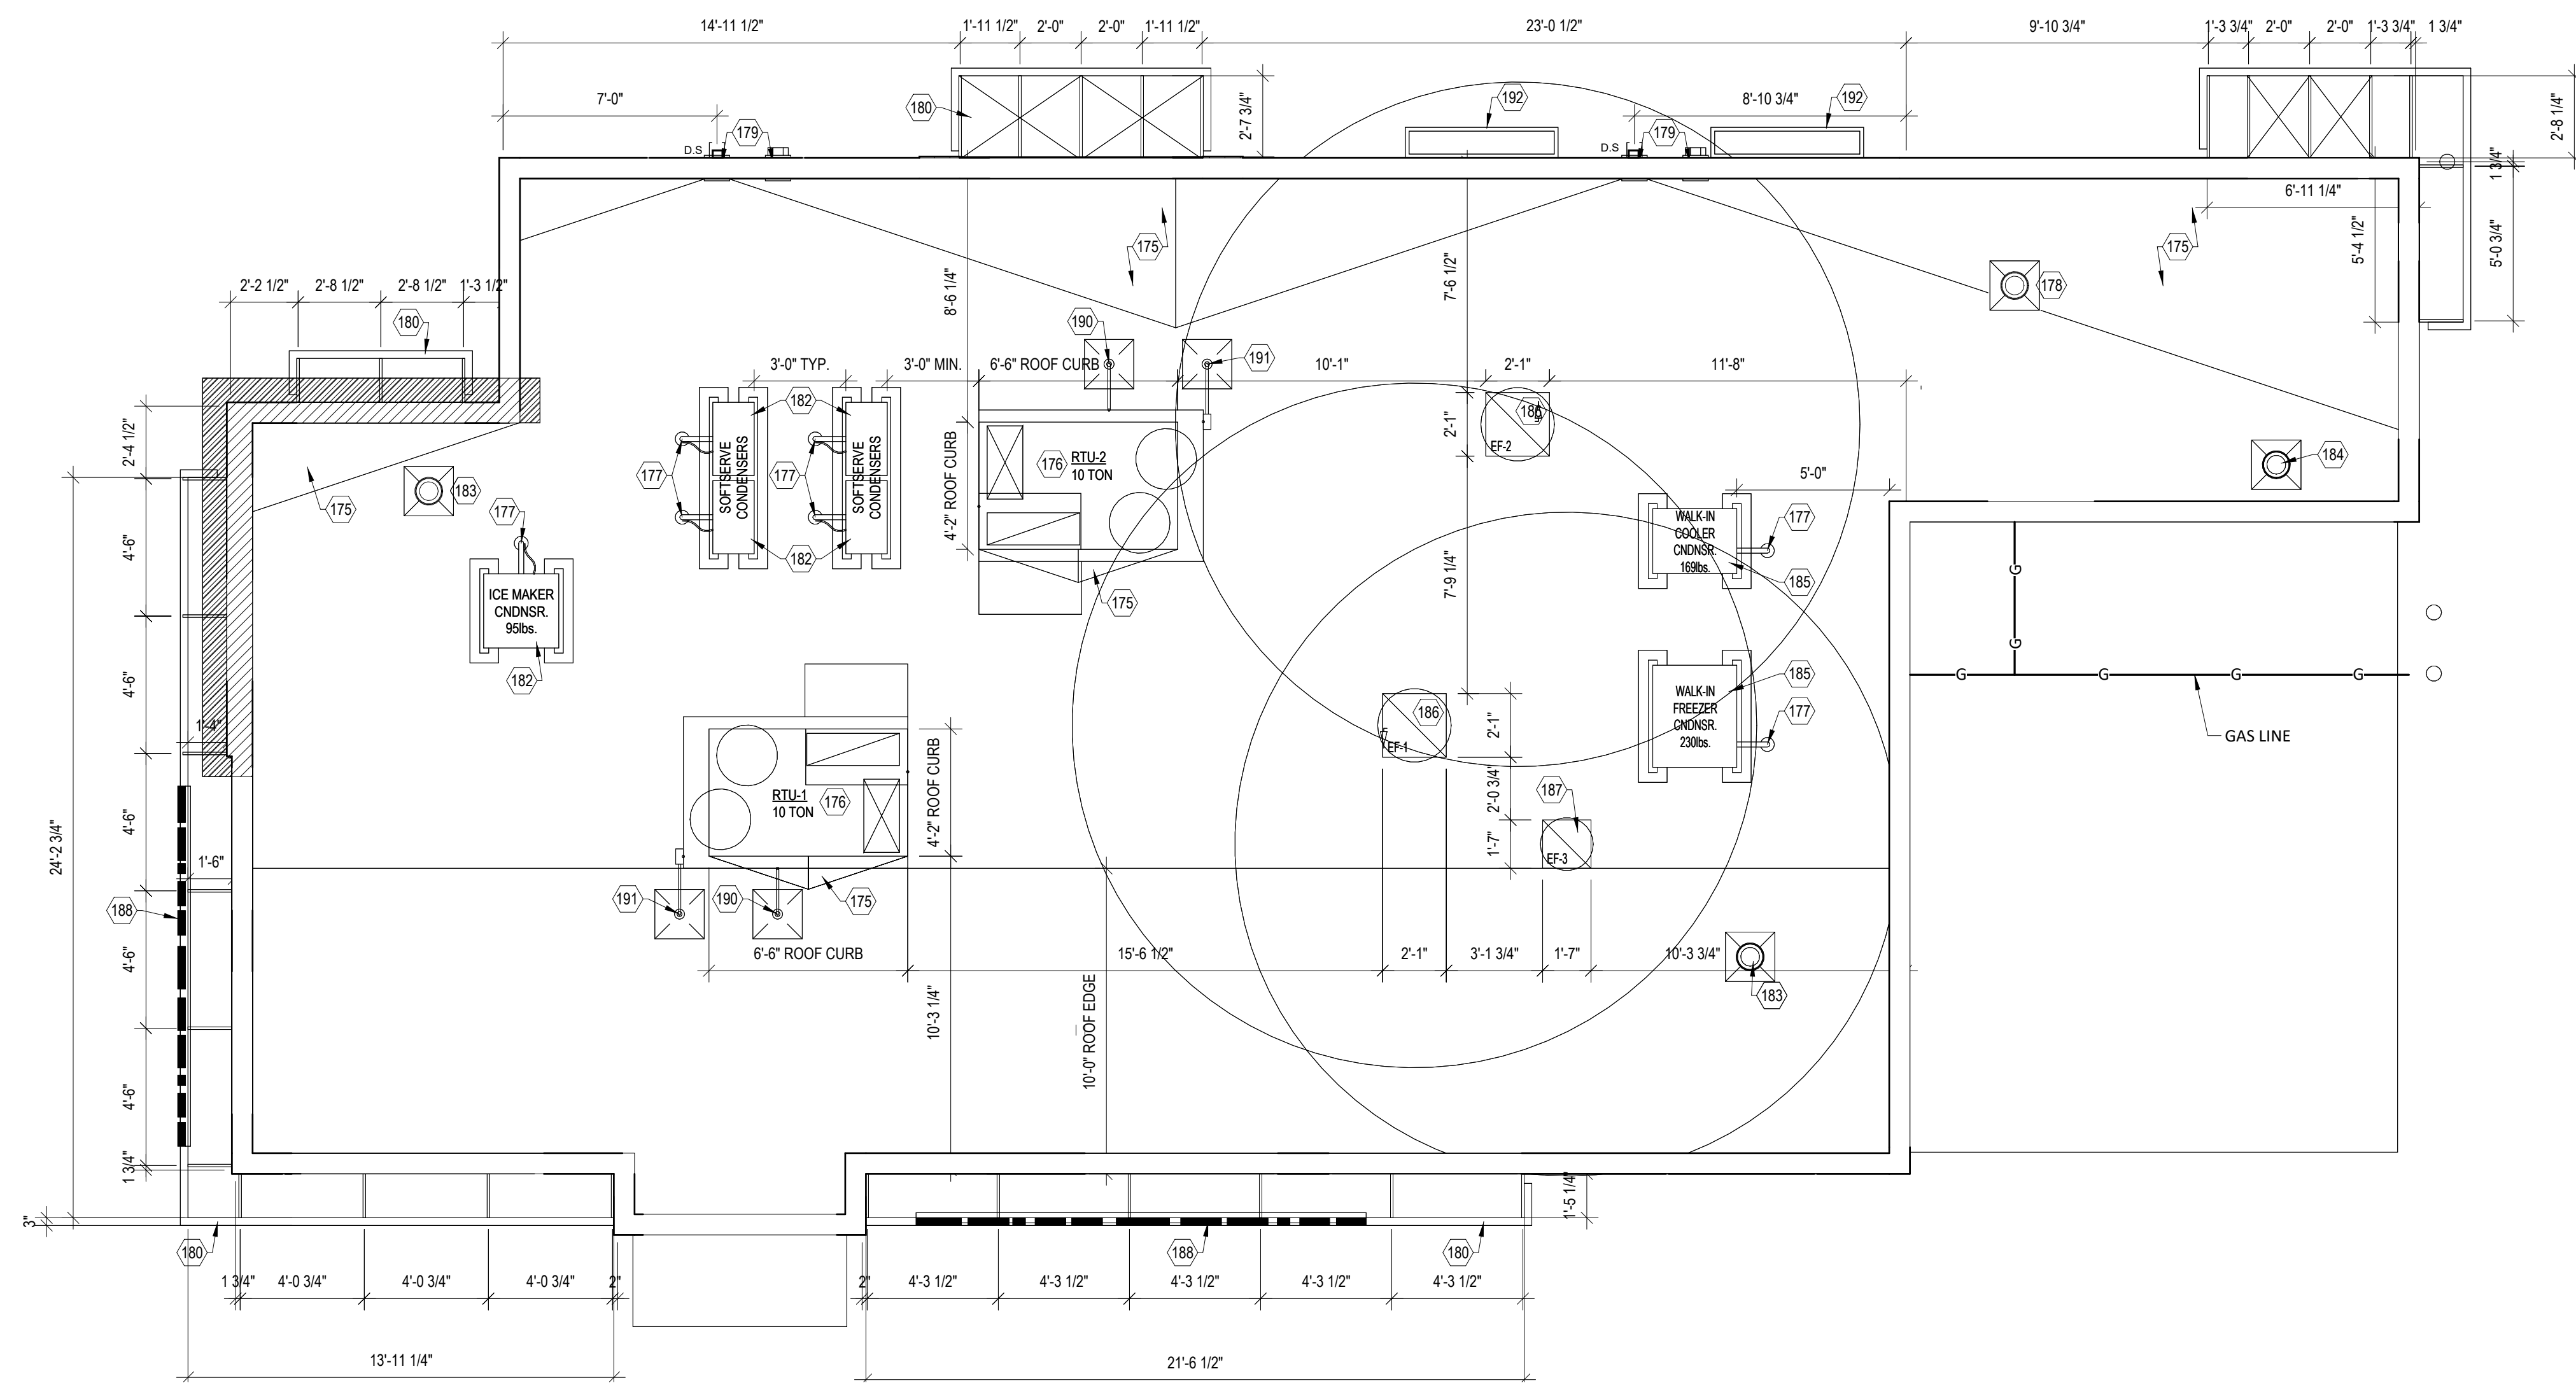




ROOF PLAN

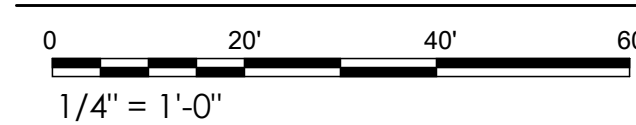

SCUPPER DETAIL

SCALE: 1 1/2" = 1'-0"

OVERFLOW SCUPPER DTL.

SCALE: 1 1/2" = 1'-0"

PIPE PENETRATION DTL.

SCALE: 1 1/2" = 1'-0"

CONDENSER CURB DTL.

SCALE: 1 1/2" = 1'-0"

MECH. CURB DETAIL

SCALE: 1 1/2" = 1'-0"

REF. PIPE PENETRATION DTL.

SCALE: 1 1/2" = 1'-0"

- ## ROOF PLAN GENERAL NOTES
- A. Unless noted otherwise, all dimensions are to face of exterior sheathing.
 - B. Roofing contractor shall be responsible for: all roof flashing and counter flashing. Providing and installing swales, scuppers, gutters, downspouts and any other roof drainage items as required.
 - C. Coordinate location and size of all roof top equipment with mechanical and structural.
 - D. RTU must be properly aligned on roof curb to ensure air supply and returns are not obstructed.
 - E. General Contractor to provide and install feasible walkway system on rooftop from point of roof access to all items that require service.
 - F. White 50 MIL P.V.C. roof system. National pricing available through Durafast, see National Vendor list.
 - G. White 50 MIL P.V.C. roof system at walk-in. Provided by walk-in supplier, installed by G.C.
 - H. Maintain 3" clear dimension from end of eyebrow/canopy to chimney or exterior wall finish.

ROOF PLAN - KEYNOTES

- 175 TAPERED ROOF INSULATION
176 HVAC EQUIPMENT & CURBS BY MECHANICAL
177 CONTRACTOR, SEE DETAIL #6-104.
178 REFRIGERATION LINE PENETRATION AS REQUIRED, SEE
179 DETAIL #7-104. SEE PUMPING DRAWINGS FOR
180 ADDITIONAL INFORMATION.
181 WATER HEATER EXHAUST AND COMBUSTION AIR INTAKE.
182 VERIFY ROOF PENETRATION REQUIREMENTS, SPACING,
183 AND HEIGHTS WITH MANUFACTURERS REQUIREMENTS
184 AND PREVAILING CODES. SEE PUMPING DRAWINGS FOR
185 ADDITIONAL INFORMATION.
186 THRU WALL SCUPPER TO DOWNSPOUT AND THRU WALL
187 OVERFLOW SCUPPER, SEE DETAIL #2-104 & DETAIL
188 #3-104. ROOFING CONTRACTOR TO COORDINATE WITH
189 EPPS AND ALOPAC INSTALLERS TO PROVIDE LEAKPROOF
190 ASSEMBLY. WRAP AND SEAL/PURGE IN STRICT
191 ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS.
192 PRE-FINISHED METAL EYEBROW AND CANOPY.
193 ROOF ACCESS. OPTIONAL ROOF LADDER, SEE ELEVATION.
194 CONDENSER, SEE DETAIL #5-104 & SEE MECHANICAL
195 DRAWINGS FOR INSTALLATION REQUIREMENTS & UNIT
196 WEIGHTS. SHIM AS REQUIRED TO ENSURE UNITS ARE
197 PLUMB AND LEVEL.
198 PLUMBING VENT, SEE DETAIL #4-104. SEE PUMPING
199 DRAWINGS FOR ADDITIONAL INFORMATION.
200 GREASE TRAP VENT, SEE PIPE PENETRATION DETAIL. SEE
201 PUMPING DRAWINGS FOR ADDITIONAL INFORMATION.
202 COOKING LINE EXHAUST FAN, SEE DETAIL #6-104 &
203 MECHANICAL DRAWINGS FOR INSTALLATION
204 REQUIREMENTS & UNIT WEIGHTS.
205 RESTROOM EXHAUST FAN, SEE DETAIL #6-104 &
206 MECHANICAL DRAWINGS FOR INSTALLATION
207 REQUIREMENTS & UNIT WEIGHTS.
208 EYEBROW MOUNTED "GRILL & CHILL" SIGN.
209 EACH EYEBROW BRACKET, PROVIDE 1X4X18" LONG
210 VERTICAL BLOCKING 24" ON 24".
211 NATURAL GAS PIPE ROOF PENETRATION, SEE
212 DETAIL #4-104.
213 ELECTRICAL CONDUIIT ROOF PENETRATION, SEE
214 DETAIL #4-104.
215 OUTDOOR POS VALUANCE SEE DETAIL #1-101. VALANCE IS
216 PART OF METALS PACKAGE. WALL WASH FURTER
217 "DOWN" PIPES OF LIGHTING PACKAGE.

REVISIONS:	
DELTA	DESCRIPTION
DATE	
DATE OF ISSUE:	04.13.2026
MA PROJECT NO:	0559-25
PROJECT PHASE:	CD
DRAWN BY:	RF

ROOF PLAN

A-104